



(51) International Patent Classification:

C09K 8/035 (2006.01) *C08G 69/10* (2006.01)
C09K 8/60 (2006.01)

(21) International Application Number:

PCT/EP2012/061408

(22) International Filing Date:

15 June 2012 (15.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11175680.5 28 July 2011 (28.07.2011) EP

(71) Applicant (for all designated States except US): **BASF SE**
[DE/DE]; 67056 Ludwigshafen (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LAFUENTE CERDA, Oscar** [ES/DE]; Schwedenweg 34, 85560 Ebersberg (DE). **BRUCHMANN, Bernd** [DE/DE]; Bahnhofstr. 58, 67251 Freinsheim (DE). **MAITRO-VOGEL, Sophie** [FR/DE]; Rheingoldstr. 157, 68199 Mannheim (DE). **REINOSO GARCIA, Marta** [ES/DE]; Am Rebgarten 29, 69221 Dossenheim (DE).

(74) Agent: **WITZ, Michael**; BASF Construction Chemicals GmbH, Dr.-Albert-Frank-Str. 32, 83308 Trostberg (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: USE OF HYPERBRANCHED POLYLYSINE AS SHALE INHIBITOR

Fig. 1

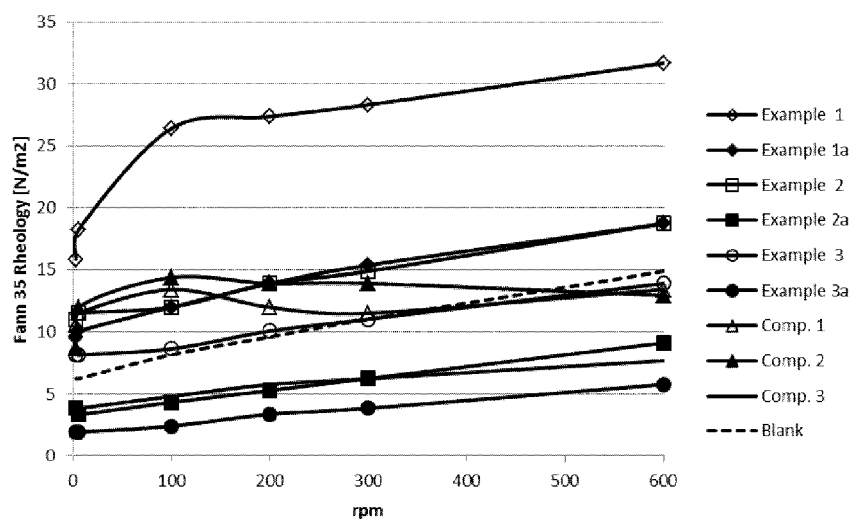

(57) Abstract: What is proposed is the use of hyperbranched polylysine in the development, exploitation and completion of underground mineral oil and natural gas deposits, and in deep wells, especially as a shale inhibitor in water-based drilling muds, completion fluids or stimulation fluids.

USE OF HYPERBRANCHED POLYLYSINE AS SHALE INHIBITOR

5 The present invention relates to the use of hyperbranched polylysine in the development, exploitation and completion of underground mineral oil and natural gas deposits, and in deep wells.

10 Shale is a fine impermeable sedimentary rock consisting of clay and other minerals. It is one of the most common rocks which have to be drilled through in oilfields to get to the oil layer. Due to its high proportion of ionically charged clay, shale has a great tendency to swell with water. This makes it a very problematic rock in deep wells with water-based drilling muds. A "shale inhibitor" has the function of preventing the shale from swelling with water.

15 EP 0634468 A1 describes additives for drilling muds and methods which prevent the swelling of clays in underground wells. In one embodiment, a trihydroxyalkylamine is reacted with an alkyl halide or a water-soluble quaternary amine to give a quaternized trihydroxyalkylamine. The reaction products may also include condensed reaction products of quaternized trihydroxyalkylamines. In a further embodiment, a choline derivative is used. The quaternized reaction products and the choline derivatives are
20 notable for low toxicity and good compatibility with anionic drilling mud components. There are reports of an improvement in rheological properties of the drilling muds and of an improvement in the environmental compatibility and compatibility with the drilling muds.

25 US 6,484,821 B1 describes a water-based drilling mud for drilling through formations comprising water-swellaable shale. This preferably comprises a water-based continuous phase, a weighting material and a shale hydration inhibition agent of the formula $H_2N-R-\{OR'\}_x-Y$ where R and R' are each alkylene groups having 1-6 carbon atoms and x corresponds to a value of about 1 to about 25. The Y group should be an amine or alkoxy group, preferably a primary amine or a methoxy group. The shale hydration inhibition agent should be present in a concentration sufficient for the reduction of the swelling of the shale. EP 1257610 B1, which is parallel to US 6,484,821 B1, more
30 precisely specifies a compound of the formula $H_2N-CH(CH_3)CH_2-\{OCH_2CH(CH_3)\}_x-NH_2$ as a shale inhibitor, where x has a value of less than 15.

35 WO 2008/031806 A1 describes neutral or salt-type condensation products of C_{4-10} -dicarboxylic acids with alkanolamines, diamines or polyalkyleneamines as shale inhibitors.

40 US 5,149,690 describes drilling mud additives which suppress the swelling of shale, in the form of polyamides and polyamino acids as reaction products of an aliphatic acid with an aliphatic polyamine. The "polyamino acids" mentioned therein are structurally

incomparable to polylysine, especially because they have free acid functions whereas polylysine has free amine functions.

Chemicals for offshore applications must meet strict environmental regulations. They must be nontoxic and biodegradable, and must not be bioaccumulable; see <http://www.cefass.defra.gov.uk>, especially <http://www.cefass.defra.gov.uk/industry-information/offshore-chemical-notification-scheme.aspx>, <http://www.cefass.defra.gov.uk/industry-information/offshore-chemical-notification-scheme/ocns-ecotoxicology-testing.aspx> and <http://www.cefass.defra.gov.uk/industry-information/offshore-chemical-notification-scheme/hazard-assessment.aspx> (retrieved 01.06.2011).


The problem underlying the present invention was that of providing a nontoxic biodegradable non-bioaccumulable advantageous shale inhibitor.

This object is achieved by the features of the independent claim. The dependent claims relate to preferred embodiments.

It has been found that, surprisingly, hyperbranched polylysine, especially quaternized hyperbranched polylysine, is a very good shale inhibitor and is also biodegradable.

The present invention provides for the use of hyperbranched polylysine in the development, exploitation and completion of underground mineral oil and natural gas deposits, and in deep wells, especially as a shale inhibitor in water-based drilling muds, completion fluids or stimulation fluids for stimulation of underground mineral oil and natural gas deposits.

In the context of the present invention, the generic term "polylysine" includes straight-chain, branched, hyperbranched and dendrimeric polylysines. Polylysine is a polycondensation product of the amino acid lysine. Polylysine may be of the following general formula (I), since the terminal ϵ -amino function of the molecule is more readily accessible to further condensation than the α -amino group.

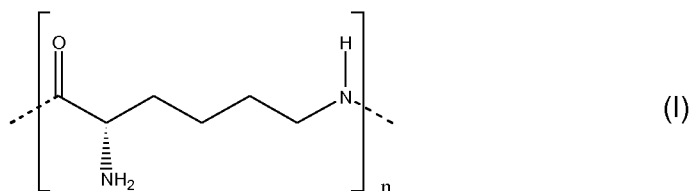

However, the α -amino group also exhibits a certain reactivity, and so branched, hyperbranched and even dendrimeric polylysines are obtainable. In our WO 2007/060119 A1 we describe syntheses which lead to hyperbranched polylysines.

For a definition of hyperbranched and dendrimeric polymers see also P.J. Flory, J. Am. Chem. Soc. 1952, 74, 2718 and H. Frey et al., Chemistry - A European Journal, 2000, 6, No. 14, 2499.

- 5 The term "hyperbranched" in the context of the present invention is to be understood to mean that the degree of branching (DB) is 10 to 99.9%, preferably 20 to 99%, more preferably 20 to 95%. "Dendrimeric", in contrast, is to be understood to mean that the degree of branching is 99.9 to 100%. These definitions correspond to the definitions according to WO 2007/060119 A1.

10

The degree of branching of the hyperbranched polylysine of the invention is defined as $DB [\%] = 100 * (T + Z) / (T + Z + L)$

where T is the mean number of terminal monomer units, Z is the mean number of branched monomer units and L is the mean number of linear monomer units. For the

- 15 definition of the degree of branching see also H. Frey et al., Acta Polym. 1997, 48, 30.

The molecular weight (M_w) of the hyperbranched polylysine of the invention is in the range of 500 to 10 000 g/mol, preferably in the range of 750 to 7 500 g/mol, particularly in the range of 750 to 5 000 g/mol and especially in the range of 750 to 1500 g/mol.

20

The nitrogen atoms of the polylysine are preferably quaternized with C_{1-4} -alkyl groups. The quaternizing agent used may, for example, be a C_{1-4} -haloalkane, especially a bromo- or iodoalkane, or dimethyl sulphate. Preference is given to virtually complete quaternization. This can be determined, for example, using the amine number of the quaternized polylysine, i.e. that amount of KOH in mg which is equivalent to the remaining amine content of 1 g of polylysine. More preferably, no free amine functions are present any longer in the quaternized polylysine.

25

The polylysine is appropriately used in a concentration of 1 to 30 g/l, preferably 3 to 25 g/l and especially 5 to 10 g/l of water. It is preferably used together with water retention agents, rheology modifiers, dispersants, thinners, lubricants and/or other compositions commonly used in drilling muds, completion fluids or stimulation fluids.

30

The biodegradability of the polylysine used in accordance with the invention, measured by the method described in "OECD Guidelines for Testing of Chemicals - 1992 OECD 306: Biodegradability in Seawater, Closed Bottle Method", is preferably at least 15% after 28 days and preferably at least 50% after 60 days.

35

The present invention is now illustrated in detail by the examples which follow with reference to the appended drawing. The drawing shows:

40

Fig. 1 a graphic representation of the Fann 35 values according to Table 2.

EXAMPLES

Preparation of the polylysines

5 Example 1:

A 4 l four-necked flask equipped with stirrer, internal thermometer, gas inlet tube and descending condenser with vacuum connection and collecting vessel was charged with 1000 g of L-lysine hydrochloride, 219.1 g of solid sodium hydroxide, 100 g of water and 10 0.02 g of dibutyltin dilaurate, and the mixture was heated gradually to an internal temperature of 130°C while stirring, in the course of which the mixture foamed slightly. After a reaction time of 5 hours, water was distilled off under reduced pressure (200 mbar), in the course of which the temperature was increased gradually to 160°C and the pressure reduced to 10 mbar after the majority of the water had distilled over. 15 After 8 hours, 260 g of water had been collected as distillate. The high-viscosity polymer was discharged while hot and poured into an aluminium dish.

To determine the molecular weight distribution, the product was dissolved in water, and the solution was filtered and analyzed by GPC. The GPC was conducted by means of 20 a column combination of OHpak SB-803 HQ and SB-804 HQ (from Shodex) with addition of 0.1 mol/l sodium hydrogencarbonate at 30°C with a flow rate of 0.5 ml/min and polyethylene oxide as a standard. For detection, a UV detector was used, which worked at a wavelength of 230 nm. The mean molecular weight was determined as $M_n = 1400$ g/mol and $M_w = 4300$ g/mol.

25

The degree of branching (DB) was 0.35 (i.e. 35%). It was determined by the method described in M. Scholl, T.Q. Nguyen, B. Bruchmann, H.-A Klok, J. Polym. Sci.: Part A: Polym. Chem. 45, 2007, 5494–5508.

30 The amine number (AN) was determined on the basis of DIN 53176. However, in contrast to the DIN method specified, this involved titration with a glacial acetic acid/trifluoromethanesulphonic acid mixture and potentiometric determination of the end point. The amine number was 278 mg KOH/g.

35 Example 2:

A 4 l four-necked flask equipped with stirrer, internal thermometer, gas inlet tube and descending condenser with vacuum connection and collecting vessel was charged with 1000 g of L-lysine hydrochloride, 219.1 g of solid sodium hydroxide, 150 g of water and 40 0.1 g of dibutyltin dilaurate, and the mixture was heated gradually to an internal temperature of 150°C while stirring, in the course of which the mixture foamed slightly and water distilled off at standard pressure. After a reaction time of 4 hours, distillative re-

moval continued under reduced pressure (400 mbar), in the course of which the temperature was increased gradually to 160°C. After 8 hours, 340 g of water had been collected as distillate. The high-viscosity polymer was discharged while hot and poured into an aluminium dish.

5

The mean molecular weight, the amine number and the degree of branching were determined according to the details of Example 1. $M_n = 1200$ g/mol and $M_w = 2800$ g/mol; the AN was 310 mg KOH/g and the DB was 0.41 (i.e. 41%).

10 Example 3:

A 4 l four-necked flask equipped with stirrer, internal thermometer, gas inlet tube and descending condenser with vacuum connection and collecting vessel was charged with 1000 g of L-lysine hydrochloride, 219.1 g of solid sodium hydroxide, 150 g of water and 15 0.02 g of dibutyltin dilaurate, and the mixture was heated gradually to an internal temperature of 130°C while stirring, and the temperature was increased gradually up to 150°C over the course of 5 hours. During this reaction time, 218 g of water were distilled off under reduced pressure. The pressure was then reduced to 200 mbar and the internal temperature increased to 160°C, in the course of which another 88 g of 20 water distilled over. The high-viscosity polymer was discharged while hot and poured into an aluminium dish.

The mean molecular weight, the amine number and the degree of branching were determined according to the details of Example 1. $M_n = 660$ g/mol and $M_w = 950$ g/mol; 25 the AN was 379 mg KOH/g and the DB was 0.57 (i.e. 57%).

Quaternization of the polylysines

Example 1a:

30

A 500 ml flask with stirrer is initially charged with the polylysine from Example 1 (100.9 g), which is diluted with water (100.9 g). Dimethyl sulphate (1 mol, 126.1 g) is metered in gradually. The reaction mixture is stirred at room temperature for two days. The conversion (degree of quaternization) is monitored via the amine number. After 35 two days, the amine number is 0.08 mmol/g and the degree of quaternization is 95%. The excess dimethyl sulphate is hydrolyzed at 80°C for 6 hours. A brown solution is obtained (280.9 g, solids content 67%).

Example 2a:

40

A 500 ml flask with stirrer is initially charged with the polylysine from Example 2 (90.5 g), which is diluted with water (90.5 g). Dimethyl sulphate (1 mol, 126.1 g) is

metered in gradually. The reaction mixture is stirred at room temperature for two days. The conversion (degree of quaternization) is monitored via the amine number. After two days, the amine number is 0.00 mmol/g and the degree of quaternization is 100%. The excess dimethyl sulphate is hydrolyzed at 80°C for 6 hours. A brown solution is
 5 obtained (242.5 g, solids content 70%).

Example 3a:

A 500 ml flask with stirrer is initially charged with the polylysine from Example 3
 10 (70.4 g), which is diluted with water (74.0 g). Dimethyl sulphate (1 mol, 126.1 g) is metered in gradually. The reaction mixture is stirred at room temperature for two days. The conversion (degree of quaternization) is monitored via the amine number. After two days, the amine number is 0.00 mmol/g and the degree of quaternization is 100%. The excess dimethyl sulphate is hydrolyzed at 80°C for 6 hours. A brown solution is
 15 obtained (287.7 g, solids content 64%).

Performance tests

350 ml of tap water are introduced into a beaker, 2.5 g of the shale inhibitor (calculated
 20 as dry mass - i.e. quaternized or non-quaternized polylysine or a prior art product) are added and the mixture is stirred for 20 min. The solution is transferred into an HB mixing cup. 30 g of Cebogel® NT (Bentonite, Cebo Holland B.V., The Netherlands) are added as a model substance for shale and the mixture is stirred at low speed for 10 min. Subsequently, the Fann rheology and the gel strength are determined.

25

The shale inhibitors (Examples 1-3 and Examples 1a-3a) according to the invention and Comparative shale inhibitors (Comparative 1-3) are listed in Table 1 below.

Table 1

Sample	Mn	Mw	AN	Solids [%]	Sample	Solids [%]
Example 1	1400	4300	278	100	Example 1a	67
Example 2	1150	2840	310	100	Example 2a	70
Example 3	660	948	379	100	Example 3a	64
Comp. 1	Basodril® 3200 (shale inhibitor from BASF SE)					
Comp. 2	Ultrahib® (shale inhibitor from M-I SWACO)					
Comp. 3	Cholinchlorid (BASF SE)					

30

The results are reproduced in Table 2 below and in graphic form in Fig. 1.

Table 2

7.14 g/l Shale Inhibitor and 85.7 g/l Bentonite											
Sample	Fann 35 values [Pa]						Gel strength [Pa]		PV	YP	pH
	600	300	200	100	6	3	10"	10'	[mPa*s]	[Pa]	
Example 1	32	28	27	26	18	16	12	11	7	25	9.0
Example 1a	19	15	14	12	10	10	9	18	7	12	9.0
Example 2	19	15	14	12	12	11	10	17	8	11	9.0
Example 2a	9	6	5	4	3	4	4	8	6	3	9.1
Example 3	14	11	10	9	8	8	9	15	6	8	9.0
Example 3a	6	4	3	2	2	2	2	4	4	2	9.1
Comp. 1	13	12	12	13	12	11	9	9	4	10	9.1
Comp. 2	13	14	14	14	12	9	6	5	-2	15	9.1
Comp. 3	8	6	6	5	4	4	3	3	3	5	9.1
Blank	15	11	10	8	6	6	10	19	8	7	9.2

Rheology at different pH values

5

The performance tests on the samples according to Example 2a and Comparative sample 2 are repeated at different pH values. The results are reproduced in Table 3. It is found that the pH value affects the inventive sample (Example 2a) much less than Comp. sample 2 (Ultrasib®).

10

Table 3

Sample	Fann 35 values [Pa]						Gel strength [Pa]		PV	YP	pH
	600	300	200	100	6	3	10"	10'	[mPa*s]	[Pa]	
Example 2a	9	6	5	4	3	4	4	8	6	3	9.0
	10	7	6	5	5	5	5	8	6	4	7.0
	12	9	8	7	6	7	7	12	6	6	5.0
	12	10	9	7	7	7	7	8	6	7	3.0
	12	8	7	6	7	7	6	13	7	5	0.0
Comp. 2	13	14	14	14	12	9	6	5	-2	15	9.0
	19	17	18	19	12	12	8	8	5	14	7.0
	13	10	10	9	10	9	6	7	6	7	5.0
	12	11	12	13	11	10	5	6	3	9	3.0
	22	22	22	23	11	10	9	7	1	21	0.0

Biodegradability

- 5 According to the method described in "OECD Guidelines for Testing of Chemicals - 1992 OECD 306: Biodegradability in Seawater, Closed Bottle Method", the biodegradability of the quaternized polylysine according to Example 3a, of Comp. sample 2 (Ultrahib®) and of a reference substance (sodium benzoate) was evaluated after 28 days and 60 days.

10 Table 4

Material	Day 28	Day 60
Example 3a	38%	52%
Comp. 2	<10%	-
Reference	80%	70%

- 15 The results indicate a much better biodegradability of the quaternized polylysine according to Example 3a than Ultrahib®, a commercial shale inhibitor. Moreover, the 28 day biodegradability of the quaternized polylysine according to Example 3a meets the regulatory requirements.

Claims

1. Use of hyperbranched polylysine in the development, exploitation and completion of underground mineral oil and natural gas deposits, and in deep wells, especially as a shale inhibitor in water-based drilling muds, completion fluids or stimulation fluids,

wherein the degree of branching (DB) as defined in

$$DB [\%] = 100 * (T + Z) / (T + Z + L)$$

where T is the mean number of terminal monomer units, Z is the mean number of branched monomer units and L is the mean number of linear monomer units, is from 10 to 99.9%, preferably from 20 to 99%, more preferably from 20 to 95%,

and the molecular weight (M_w) of the polylysine is in the range of 500 to 10 000 g/mol, preferably in the range of 750 to 7 500 g/mol, more preferably in the range of 750 to 5 000 g/mol, and particularly in the range of 750 to 1 500 g/mol.


2. Use according to Claim 1, characterized in that the nitrogen atoms of the polylysine are quaternized with C_{1-4} -alkyl groups.

3. Use according to Claim 1 or 2, characterized in that the polylysine is used in a concentration of 1 to 30 g/l, preferably 3 to 25 g/l and especially 5 to 10 g/l of water.

4. Use according to any of Claims 1 to 3, characterized in that the biodegradability of the polylysine, as measured by the method described in "OECD Guidelines for Testing of Chemicals - 1992 OECD 306: Biodegradability in Seawater, Closed Bottle Method", is at least 15% after 28 days and at least 50% after 60 days.

5. Use according to any of Claims 1 to 4, characterized in that the polylysine is used together with water retention agents, rheology modifiers, dispersants, thinners, lubricants and/or other compositions commonly used in drilling muds, completion fluids or stimulation fluids.

Fig. 1

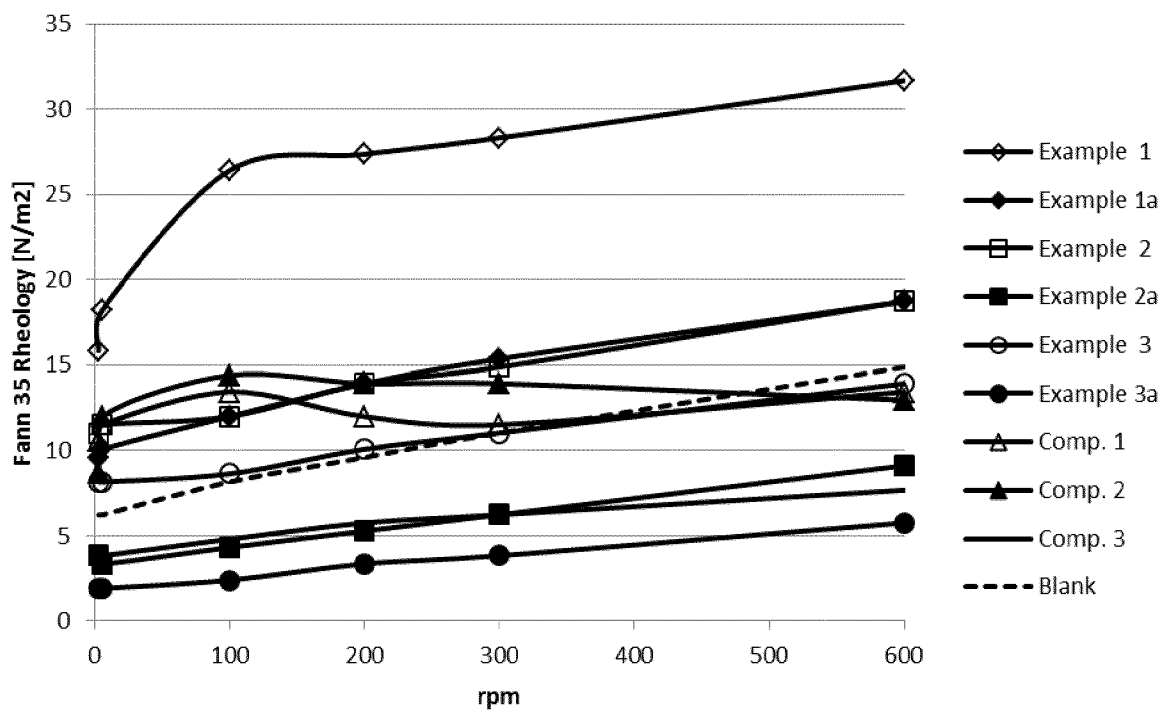

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/061408

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C09K8/035 C09K8/60 C08G69/10
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09K E21B C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/220058 A1 (EOFF LARRY S [US] ET AL) 4 November 2004 (2004-11-04) paragraphs [0033], [0034]; claims 36,48,40	1-5
A	US 2008/058229 A1 (BERKLAND CORY [US] ET AL) 6 March 2008 (2008-03-06) paragraph [0082]; claim 29; example 1	1-5
A	WO 2004/011771 A1 (CHAMPION SERVO [GB]; STATOIL ASA [NO]; MONTGOMERIE HARRY TRENOUTH RUS) 5 February 2004 (2004-02-05) page 1, line 31 - page 2, line 20; claims 1,3,4,6 page 3, line 11 - line 14	1-5
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 September 2012

Date of mailing of the international search report

20/09/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Redecker, Michael

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/061408

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 908 814 A (PATEL ARVIND D [US] ET AL) 1 June 1999 (1999-06-01) column 2, line 37 - column 5, line 10; claims 1,22,23 -----	1-5
A	RÉGIS D. GOUGEON ET AL: "Direct Observation of Polylysine Side-Chain Interaction with Smectites Interlayer Surfaces through 1 H- 27 Al Heteronuclear Correlation NMR Spectroscopy", LANGMUIR, vol. 18, no. 8, 1 April 2002 (2002-04-01), pages 3396-3398, XP055016005, ISSN: 0743-7463, DOI: 10.1021/la0115381 the whole document -----	1-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/061408

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004220058	A1	04-11-2004	AR 050504 A1 01-11-2006
		US 2004220058	A1 04-11-2004
		WO 2005119003	A1 15-12-2005

US 2008058229	A1	06-03-2008	AU 2007292452 A1 13-03-2008
		CA 2662493	A1 13-03-2008
		CN 101535594	A 16-09-2009
		EA 200900329	A1 28-08-2009
		EP 2059651	A1 20-05-2009
		US 2008058229	A1 06-03-2008
		US 2010056399	A1 04-03-2010
		WO 2008030758	A1 13-03-2008

WO 2004011771	A1	05-02-2004	AU 2003246977 A1 16-02-2004
		WO 2004011771	A1 05-02-2004

US 5908814	A	01-06-1999	NONE
