



- (51) **International Patent Classification:**
H04W 74/08 (2009.01) *H04W 84/12* (2009.01)
- (21) **International Application Number:**
PCT/US2013/044212
- (22) **International Filing Date:**
5 June 2013 (05.06.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95054 (US).
- (72) **Inventor; and**
- (71) **Applicant (for US only):** **CHOI, Yang-Seok** [KR/US]; 643 NW Hogan Street, Portland, OR 97229 (US).
- (74) **Agent:** **KACVINSKY, John**; c/o CPA Global, Po Box 52050, Minneapolis, MN 55402 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

- (54) **Title:** TECHNIQUES FOR SIMULTANEOUS TRANSMITTING AND RECEIVING OF PACKETS IN A WIRELESS LOCAL AREA NETWORK

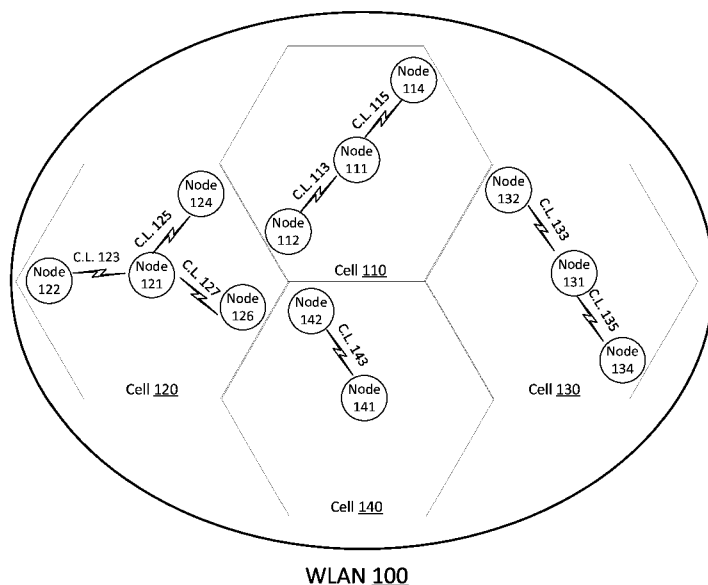


FIG. 1

(57) **Abstract:** Examples are disclosed for simultaneous transmitting and receiving packets in a wireless local access network (WLAN). In some examples, a source node in the WLAN may transmit a packet to a destination node in the WLAN and may receive an implicit acknowledgement (ACK) packet from the destination node. The source node may stop transmitting a remaining portion of the packet if the implicit ACK packet is not received within a defined time interval or if a dummy/packet payload for the implicit ACK packet is not successfully decoded. Also, the destination node may or may not include a data payload in an implicit ACK packet sent responsive to receiving the packet from the source node. Other examples are described and claimed.

TECHNIQUES FOR SIMULTANEOUS TRANSMITTING AND RECEIVING OF PACKETS IN A WIRELESS LOCAL AREA NETWORK

TECHNICAL FIELD

5 Examples described herein are generally related to transmitting and receiving packets in a wireless local access network.

BACKGROUND

A hidden node issue may be a possible cause of collisions or signal degradation in wireless local access networks (WLANs) that are capable of implementing packet transmitting schemes such as carrier sense multiple access (CSMA). Transmitting schemes such as CSMA may attempt to avoid nodes concurrently transmitting packets over a same wireless communication channel. For example, each respective node may sense whether another node is currently using the same wireless communication channel to transmit a packet and withhold transmitting packets until the other node's transmission can no longer be sensed. As a result of withholding transmission while the other node transmits, collisions and/or signal degradation may be reduced or eliminated.

10
15

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates an example of a wireless local access network.

FIG. 2 illustrates an example of a first collision free transmission.

FIG. 3 illustrates an example of a collision transmission.

20 **FIG. 4** illustrates an example of a second collision free transmission.

FIG. 5 illustrates an example block diagram for a first apparatus.

FIG. 6 illustrates an example of a first logic flow.

FIG. 7 illustrates an example of a first storage medium.

FIG. 8 illustrates an example block diagram for a second apparatus.

25 **FIG. 9** illustrates an example of a second logic flow.

FIG. 10 illustrates an example of a second storage medium.

FIG. 11 illustrates an example of a device.

DETAILED DESCRIPTION

Examples are generally directed to simultaneous transmit and receive (STR) systems or full duplex systems that may be deployed or used in wireless local access networks (WLANs) that also use collision avoidance schemes such as carrier sense multiple access (CSMA). These STR systems using CSMA may be included with or implemented by nodes in WLANs that may be configured to operate in accordance with various wireless network standards. These wireless network standards may include standards promulgated by the Institute of Electrical Engineers (IEEE). These wireless network standards may include Ethernet wireless standards (including

progenies and variants) associated with the IEEE 802.11-2012 Standard for Information technology – Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements Part 11: WLAN Media Access Controller (MAC) and Physical Layer (PHY) Specifications, published March 2012, and/or later versions of this standard (“IEEE 802.11”). The examples are not limited in this context.

According to some examples, multiple nodes may be included in a WLAN. For some examples, the multiple nodes may either be part of a single cell WLAN or part of a multi-cell WLAN. For a given cell in the WLAN, one or more nodes may wirelessly couple to the WLAN via a given node serving as an access point (AP) node for the given cell. In some examples, separate nodes (e.g., terminal nodes) in the given cell may be located such that each node can sense transmissions from the AP node but may not sense transmissions from each respective node to the AP node. Since the separate nodes may not sense each other’s transmissions, CSMA is not effectively implemented in this situation. The separate nodes not being able to sense each other’s transmissions when using CSMA is commonly referred to as a hidden node issue.

In some examples, STR systems may allow for the simultaneous transmitting and receiving of packets by a node in a WLAN at a same time and in a same frequency. A potential solution to CSMA-related hidden node issues is to have the AP node transmit a dummy packet back to a source node concurrent with receiving a packet from the source node. Possibly hidden nodes can sense the transmission of the dummy packet and may then withhold their respective transmissions to the AP. For single cell WLANs this solution works well and reduces and possibly eliminates collisions. However, WLANs having multiple cells may still have collisions if two nodes from separate cells simultaneously transmit packets to their respective AP nodes.

According to some examples, the probability of the types of collisions mentioned above may increase substantially as the number of cells and/or nodes increase. Further, potential solutions involving the dummy packet typically include the source node continuing to transmit a packet even if a packet having a dummy payload is not received from the destination AP node. As a result of continuing to transmit a packet other nodes in different cells may sense this continued transmission by the source node and may withhold their respective transmissions. Hence, the communication channel may be unnecessarily tied up for the packet duration. Also, the source node wastes transmission time as the source node still needs to retransmit the packet. Both the unnecessary tie up of the communication channel and transmitting the entire packet may have a negative impact on throughput for a WLAN having nodes that implement CSMA. It is with respect to these and other challenges that the examples described herein are needed.

According to some examples, a first method may be implemented at a source node in a WLAN. For these examples, a packet may be transmitted at the source node that has a first

header and a first data payload. The packet may be transmitted to a destination node in the WLAN. Also, for these examples, the first data payload may continue to be transmitted to the destination node based on whether at least a second header for an implicit acknowledgement (ACK) packet has been received from the destination node to indicate receipt of at least the first header by the destination node. Transmission of a remaining portion of the first data payload may be stopped if the second header for the implicit ACK packet has not been received within a defined time interval. In some examples, transmission of the remaining portion of the first data payload may also be stopped by the source node if a dummy/packet payload sent with the implicit ACK packet by the destination node is not successfully decoded.

In some other examples, a second method may be implemented at a destination node in a WLAN. For these other examples, a packet may be received at the destination node. The packet may include a first header and a first data payload and may have been transmitted from a source node in the WLAN. Also, for these other examples, an implicit ACK packet may be generated that has a second header and may include either a dummy payload if no data is awaiting transmission to the source node or a second data payload if data is awaiting transmission to the source node. The implicit ACK packet may be transmitted to the source node following successful decoding of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node.

FIG. 1 illustrates an example wireless local access network (WLAN) 100. In some examples, as shown in FIG. 1, WLAN 100 includes cells 110, 120, 130 and 140. Also, as shown in FIG. 1, cell 110 includes node 111 coupled to nodes 112 and 114 via communication links (c.l.s) 113 and 115, respectively. Also, cell 120 includes node 121 coupled to nodes 122, 124 and 126 via c.l.s 123, 125 and 127, respectively. Cell 130 includes node 131 coupled to nodes 132 and 134 via c.l.s 133 and 135, respectively. Cell 140 includes node 141 coupled to node 142 via c.l. 143.

In some examples, WLAN 100 may be capable of operating in compliance with at least one or more wireless communication standards or specifications associated with IEEE 802.11 standards. Also, for these examples, the nodes depicted in FIG. 1 may be capable of using CSMA to reduce transmission collisions when transmitting packets. According to some examples, nodes 111, 121, 131 and 141 may be access point (AP) nodes for cells 110, 120, 130 and 140, respectively. Also, nodes 112, 114, 122, 124, 126, 132, 134 and 142 may be terminal nodes that may separately transmit packets to their respective AP nodes via c.l.s 113, 115, 123, 125, 127, 133, 135 and 143, respectively.

According to some examples, the nodes of WLAN 100 shown in FIG. 1 may include logic and/or features to enable simultaneous transmit and receive (STR) of packets between nodes.

For example, nodes 112 and 111 may each include logic and/or features to enable STR of packets transmitted/received via c.l. 113.

In some examples, nodes located near either nodes 111 or 112 may include logic and/or features to use CSMA to avoid or reduce transmission collisions when sensing that other nodes are currently transmitting packets. For example, nodes 124, 126 or 142 from cells 120 and 140 may be able to sense when node 112 is transmitting packets to node 111 via c.l. 113. Also, nodes 114, 132 or 142 from cells 110, 140 and 130 may be able to sense when node 111 is transmitting packets to node 112 via c.l. 113. For both of these examples, nodes sensing transmission of a packet via c.l. 113 may withhold transmission of packets to their respective AP nodes until the transmission is no longer sensed or detectable.

As described more below, logic and/or features separately located at a source node such as node 112 or a destination node such as node 111 may implement techniques to quickly recognize whether a packet sent/transmitted from the source node has been received by the destination node (e.g., via receipt of an implicit ACK packet) and to either continue transmission of the packet or stop transmission to free up the channel so nodes withholding their transmissions can transmit. Also, as described more below, logic and/or features located at a destination node may implement STR such that a dummy payload or data payload (if data is available) is included in an implicit ACK packet transmitted responsive to successful receipt and decoding of at least a packet header for a packet transmitted from the source node. According to some examples, both of these techniques may improve cumulative data throughputs for WLAN 100.

FIG. 2 illustrates an example of a first collision free transmission. In some examples, as shown in FIG. 2, the first collision free transmission includes collision free transmission 200. In some examples, collision free transmission 200 may involve a source node 112 transmitting a packet 210 via c.l. 113 to a destination node 111.

5 According to some examples, as shown in FIG. 2, source node 112 may include an array 212. Array 212 may include one or more antennas that may couple to logic and/or features of source node 112 to enable a transmission of packet 210 while receiving an implicit ACK packet 220 transmitted from destination node 111 responsive to receipt of at least header 212 of packet 210. Also, destination node 111 may include an array 211. Array 211 may include one or more
10 antennas that may couple to logic and/or features of destination node 111 to enable receipt of packet 210 while transmitting implicit ACK packet 220 to source node 112. In other words, arrays 211 and 212 may separately include one or more antennas and/or other components coupled to the logic and/or features of respective destination node 111 and source node 112 to implement STR.

15 In some examples, a parameter “h” is shown in FIG. 2 to indicate a defined time interval

that may be a given time associated with an amount of time logic and/or features at source node 112 or destination node 111 needs to detect/receive and successfully decode a header in a packet transmitted via c.l. 113. For these examples, the given time for h may be defined as a fractional time of packet duration for detecting/receiving energy of a signal transmitted from source node 112 and successfully decoding at least the header. So as shown in FIG. 2, in some examples, header 212 of packet 210 may be received and decoded by destination node 111 in a given time represented by h.

According to some examples, responsive to receiving and successfully decoding header 212, destination node 111 may include logic and/or features to generate and transmit implicit ACK packet 220 having a header 222. For these examples, logic and/or features at source node 112 may receive and successfully decode header 222 in another given time represented by 2h. In other words, at least a total time of 2h may be needed before the logic and/or features of source node 112 may determine whether a collision free transmission has occurred to destination node 111 via c.l. 113. Also, for these examples, the total time of 2h assumes a relatively insubstantial delay between destination node 111 receiving and decoding header 212, generating and transmitting at least header 222 of implicit ACK packet 220 and source node 112 receiving and decoding header 222.

In some examples, as shown in FIG. 2, implicit ACK packet 220 may have a header 222 and a dummy/data payload 224. Dummy/data payload 224 indicates that logic and/or features at destination node 111 may include either a dummy payload if no data is awaiting transmission to source node 112 or a data payload if data is awaiting transmission to source node 112. For these examples, the inclusion of either a dummy or data payload recognizes the asynchronous nature of data scheduling in a WLAN. In other words, destination node 111 may or may not have data to transmit to source node 112 at the time implicit ACK packet 220 is generated. Also, as described more below, a combination of dummy payload and data payload may be transmitted should data become available during the transmission of an implicit ACK packet to source node 112.

According to some examples, destination node 111, source node 112 and other nodes in WLAN 100 may be capable of implementing CSMA for transmitting packets via c.l.s in WLAN 100. For these examples, the transmission of dummy/data payload 224 of implicit ACK packet 220 may indicate to the other nodes in WLAN 100 that a communication link is being used by source node 112 for a given time associated with source node 112 transmitting packet 210 to destination node 111 via c.l. 113. As a result of this indication, the other nodes may withhold transmission of packets for at least the given time. For example, node 114 of cell 110 may withhold transmission for at least the given time. Also, node 132 of cell 130 may withhold

transmission of packets for at least the given time.

Examples described herein are not limited to packets or implicit ACK packets having headers and payloads in a same or similar proportion as shown in FIG. 2. Headers of other sizes that may include a smaller or larger portion or fraction of a packet's overall size/length are contemplated.

5 **FIG. 3** illustrates an example collision transmission 300. In some examples, as shown in FIG. 3, packet 310 having a header 312 and a data payload 314 may be transmitted by source node 112 to destination node 111 via c.l. 113. For these examples, a collision may occur between the transmission of packet 310 by source node 112 and another node in WLAN such as
10 node 113. As a result of the collision, header 312 may be unreadable or even not received by destination node 111.

In some examples, as shown in FIG. 3, logic and/or features of source node 112 may determine that packet 310 was not received within a defined time interval such as a given time associated with source node 112 receiving and decoding a header for an implicit ACK packet sent or transmitted by destination node 111 responsive to receiving packet 310. As mentioned
15 previously and as shown in FIG. 3, the given time is represented by 2h. For these examples, the logic and/or features at source node 112 may then stop transmission of a remaining portion of data payload 314.

According to some examples, stopping transmission of the remaining portion of payload
20 314 may allow other nodes that were sensing source node 112's transmission and withholding their transmissions to now transmit packets. In some instances where packet 310 may have included a large data payload, cutting the transmission after a period of time equivalent to 2h may allow the other nodes to transmit substantially sooner than if they had to wait until the full packet was transmitted.

25 **FIG. 4** illustrates an example of a second collision free transmission. In some examples, as shown in FIG. 4, the second collision free transmission includes collision free transmission 400. In some examples, collision free transmission 400 may involve source node 112 transmitting a packet 410 via c.l. 113 to destination node 111.

According to some examples, as shown in FIG. 4, source node 112 may transmit packet
30 410 having a header 412 and a data payload 414 to destination node 111 via c.l. 113. Also, destination node 111 may transmit implicit ACK packet 420 responsive to receiving and successfully decoding at least header 412 for packet 410. For these examples, logic and/or features at destination node 111 may be capable of generating implicit ACK packet 420 to include a dummy payload 424 based on no data being available when implicit ACK packet 420
35 was first generated.

In some examples, data to be transmitted to source node 112 may become available during the time destination node 111 is transmitting implicit ACK packet 420. For these examples, the logic and/or features of destination node 111 may be capable of replacing a second portion of dummy payload 424 (shown as portion 424-b) with data payload 426. Although not shown in FIG. 4, data payload 426 may include a header for the data and at least a portion of the available data to be transmitted to source node 112. Source node 112 may include logic and/or features to recognize the switch from a dummy payload to actual data based on the header for data payload 426. Replacing at least a portion of the dummy payload with actual data destined for source node 112 may serve to increase data throughput in WLAN 100.

FIG. 5 illustrates a block diagram for a first apparatus. As shown in FIG. 5, the first apparatus includes an apparatus 500. Although apparatus 500 shown in FIG. 5 has a limited number of elements in a certain topology or configuration, it may be appreciated that apparatus 500 may include more or less elements in alternate configurations as desired for a given implementation.

The apparatus 500 may include a computer and/or firmware implemented apparatus 500 having circuitry 520 arranged to execute one or more components 522-a. It is worthy to note that “a” and “b” and “c” and similar designators as used herein are intended to be variables representing any positive integer. Thus, for example, if an implementation sets a value for a = 3, then a complete set of components 522-a may include modules 522-1, 522-2, 522-3 or 522-4.

The examples are not limited in this context.

According to some examples, apparatus 500 may be included in a source node in a WLAN. The source node and the WLAN may be capable of operating in compliance with one or more wireless technologies such as those described in or associated with the IEEE 802.11 standards. For example, the source node having apparatus 500 may be arranged or configured to wirelessly couple to other nodes such as AP nodes in a WLAN operated in compliance with one or more IEEE 802.11 standards. The examples are not limited in this context.

In some examples, as shown in FIG. 5, apparatus 500 includes circuitry 520. Circuitry 520 may be generally arranged to execute one or more components 522-a. Circuitry 520 can be any of various commercially available processors, including without limitation an AMD® Athlon®, Duron® and Opteron® processors; ARM® application, embedded and secure processors; IBM® and Motorola® DragonBall® and PowerPC® processors; IBM and Sony® Cell processors; Qualcomm® Snapdragon®; Intel® Celeron®, Core (2) Duo®, Core i3, Core i5, Core i7, Itanium®, Pentium®, Xeon®, Atom® and XScale® processors; and similar processors. Dual microprocessors, multi-core processors, and other multi-processor architectures may also be employed as circuitry 520. According to some examples circuitry 520 may also be an

application specific integrated circuit (ASIC) and components 522-a may be implemented as hardware elements of the ASIC.

According to some examples, apparatus 500 may include a transmit component 522-1. Circuitry 520 may execute transmit component 522-1 to transmit a packet having a first header and a first data payload to a destination node in a WLAN via which a source node having apparatus 500 may be wirelessly coupled. For these examples, data 510 may be included in the first data payload of packet 530 having the first header.

In some examples, apparatus 500 may also include a received component 522-2. Circuitry 520 may execute receive component 522-2. Receive component 522-2 may be capable of receiving and decoding an implicit ACK packet having a second header from the destination node. The implicit ACK may indicate receipt of at least the first header by the destination node. For these examples, the second header may be associated with implicit ACK packet 540 received from the destination node responsive to the destination node's receiving and decoding of at least the first header for packet 530.

According to some examples, apparatus 500 may also include an STR component 522-3. Circuitry 520 may execute STR component 522-3 to enable transmit component 522-1 to transmit at least portions of the packet to the destination node while receive component 522-2 receives the implicit ACK packet from the destination node. STR component 522-3 may be coupled to one or more antennas for the source node to enable the simultaneous transmitting and receiving of the respective second header and portions of the packet. For these examples, the at least portions transmitted by transmit component 522-1 may include at least a portion of the first data payload for packet 530 while receive component 522-2 is receiving the second header associated with implicit ACK packet 540.

In some examples, apparatus 500 may also include a stop component 522-4. Circuitry 520 may execute stop component 522-4 to cause transmit component 522-1 to stop transmission of any remaining portion of the first data payload awaiting transmission if stop component 522-2 has determined that the second header for the implicit ACK packet has not been received within a defined time interval such as a given time associated with receive component 522-2 receiving and successfully decoding at least the second header. For these examples, stop component 522-4 may cause transmit component 522-1 to stop transmission of any remaining portion of the first data payload for packet 530. The remaining portion may be stopped if receive component 522-2 has not received and/or decoded the second header for implicit ACK packet 540 within a given time that represents the time to generate and transmit the first header for packet 530 and then detect/receive the second header for the responsive implicit ACK packet 540 (e.g., parameter 2h).

According to some examples, stop component 522-4 may also cause transmit component 522-1 to stop transmission of any remaining portion of the first data payload for packet 530 if stop component 522-4 has determined that receive component 522-2 has not received and successfully decoded at least a portion of a dummy/data payload for implicit ACK packet 540.

- 5 Not receiving and successfully decoding the portion of the dummy/data payload for implicit ACK packet 540 may indicate possible collision of the transmission of the first data payload for packet 530. Hence, packet 530 may need to be retransmitted to the destination node.

Included herein is a set of logic flows representative of example methodologies for performing novel aspects of the disclosed architecture. While, for purposes of simplicity of
10 explanation, the one or more methodologies shown herein are shown and described as a series of acts, those skilled in the art will understand and appreciate that the methodologies are not limited by the order of acts. Some acts may, in accordance therewith, occur in a different order and/or concurrently with other acts from that shown and described herein. For example, those skilled in the art will understand and appreciate that a methodology could alternatively be represented as a
15 series of interrelated states or events, such as in a state diagram. Moreover, not all acts illustrated in a methodology may be required for a novel implementation.

A logic flow may be implemented in software, firmware, and/or hardware. In software and firmware embodiments, a logic flow may be implemented by computer executable instructions stored on at least one non-transitory computer readable medium or machine readable medium,
20 such as an optical, magnetic or semiconductor storage. The embodiments are not limited in this context.

FIG. 6 illustrates an example of a first logic flow. As shown in FIG. 6, the first logic flow includes a logic flow 600. Logic flow 600 may be representative of some or all of the operations executed by one or more logic, features, or devices described herein, such as apparatus 500.
25 More particularly, logic flow 600 may be implemented by transmit component 522-1, receive component 522-2, STR component 522-3 or stop component 522-4.

In the illustrated example shown in FIG. 6, logic flow 600 at block 602 may include transmitting, at source node in a WLAN, a packet having a first header and a first data payload to a destination node in the WLAN. For these examples, transmit component 522-1 may transmit
30 packet 530 that has the first header and the first data payload to the destination node.

According to some examples, logic flow 600 at block 604 may include continuing to transmit the first data payload to the destination node based on whether at least a second header for an implicit ACK packet has been received from the destination node to indicate receipt of at least the first header by the destination node. For these examples, transmit component 522-1

may continue to transmit packet 530 based on receive component 522-2 receiving the second header for implicit ACK packet 540.

According to some examples, logic flow 600 at block 606 may include stopping transmission of a remaining portion of the first data payload awaiting transmission if the second header for the implicit ACK packet has not been received within a defined time interval. For these examples, stop component 522-4 may stop transmission of the remaining portion of the first data payload for packet 530 if the second header for implicit ACK packet 540 has not been received within a defined time interval such as a given time represented by the parameter 2h as mentioned above for FIG. 5.

FIG. 7 illustrates an embodiment of a first storage medium. As shown in FIG. 7, the first storage medium includes a storage medium 700. Storage medium 700 may comprise an article of manufacture. In some examples, storage medium 700 may include any non-transitory computer readable medium or machine readable medium, such as an optical, magnetic or semiconductor storage. Storage medium 700 may store various types of computer executable instructions, such as instructions to implement logic flow 600. Examples of a computer readable or machine readable storage medium may include any tangible media capable of storing electronic data, including volatile memory or non-volatile memory, removable or non-removable memory, erasable or non-erasable memory, writeable or re-writeable memory, and so forth. Examples of computer executable instructions may include any suitable type of code, such as source code, compiled code, interpreted code, executable code, static code, dynamic code, object-oriented code, visual code, and the like. The examples are not limited in this context.

FIG. 8 illustrates a block diagram for a second apparatus. As shown in FIG. 8, the second apparatus includes an apparatus 800. Although apparatus 800 shown in FIG. 8 has a limited number of elements in a certain topology or configuration, it may be appreciated that apparatus 800 may include more or less elements in alternate configurations as desired for a given implementation.

The apparatus 800 may comprise a computer-implemented apparatus 800 having circuitry 820 arranged to execute one or more components 822-a. Similar to apparatus 500 for FIG. 5, “a” and “b” and “c” and similar designators may be variables representing any positive integer.

According to some examples, apparatus 500 may be included in a destination node in a WLAN. The destination node and the WLAN may be capable of operating in compliance with one or more wireless technologies such as those described in or associated with the IEEE 802.11 standards. For example, the destination node having apparatus 800 may be arranged or configured to wirelessly couple to other nodes such as terminal nodes in a WLAN operated in compliance with one or more IEEE 802.11 standards. The examples are not limited in this

context.

In some examples, as shown in FIG. 8, apparatus 800 includes circuitry 820. Circuitry 820 may be generally arranged to execute one or more components 822-a. The circuitry 820 can be any of various commercially available processors to include, but not limited to, those previously mentioned for circuitry 520 for apparatus 500. Dual microprocessors, multi-core processors, and other multi-processor architectures may also be employed as circuitry 820. According to some examples circuitry 820 may also be an application specific integrated circuit (ASIC) and components 822-a may be implemented as hardware elements of the ASIC.

According to some examples, apparatus 800 may include a receive component 822-1.

Circuitry 820 may execute receive component 822-1 to receive a packet including a first header and a first data payload from a source node in the WLAN. For these examples, packet 810 may be received by receive component 822-1 from the source node.

In some examples, apparatus 800 may also include a generate component 822-2. Circuitry 820 may execute generate component 822-2 to generate an implicit ACK packet having a second header. The implicit ACK packet may also include either a dummy payload if no data is awaiting transmission to the source node or a second data payload if data is awaiting transmission to the source node. For these examples, generate component 822-2 may generate implicit ACK packet 840 having the second header. Also if data 830 includes data awaiting transmission to the source node, at least some of the data may be added to the second data payload. Otherwise the dummy payload is added to implicit ACK packet 840. In some examples, should data later become available, a portion of the dummy payload may be replaced with the newly available data.

According to some examples apparatus 800 may also include a transmit component 822-3. Circuitry 820 may execute transmit component 822-3 to transmit the implicit ACK packet to the source node following successful decoding of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node. For these examples, transmit component 822-3 may transmit implicit ACK packet 840 following successful decoding of the first header for packet 810 by receive component 822-1. Also, transmit component 822-3 may transmit implicit ACK packet 840 concurrent with receive component 822-1 receiving the first data payload for packet 830.

According to some examples, apparatus 800 may also include an STR component 822-4. Circuitry 820 may execute STR component 822-4 to enable receive component 822-1 to receive the packet from the source node while transmit component 822-3 transmits the implicit ACK packet to the source node. STR component 822-4 may be coupled to one or more antennas for

the destination node to enable the simultaneous transmitting and receiving of the respective packet and implicit ACK packet.

Various components of apparatus 800 and a device implementing apparatus 800 may be communicatively coupled to each other by various types of communications media to coordinate operations. The coordination may involve the uni-directional or bi-directional exchange of information. For instance, the components may communicate information in the form of signals communicated over the communications media. The information can be implemented as signals allocated to various signal lines. In such allocations, each message is a signal. Further embodiments, however, may alternatively employ data messages. Such data messages may be sent across various connections. Example connections include parallel interfaces, serial interfaces, and bus interfaces.

Included herein is a set of logic flows representative of example methodologies for performing novel aspects of the disclosed architecture. While, for purposes of simplicity of explanation, the one or more methodologies shown herein are shown and described as a series of acts, those skilled in the art will understand and appreciate that the methodologies are not limited by the order of acts. Some acts may, in accordance therewith, occur in a different order and/or concurrently with other acts from that shown and described herein. For example, those skilled in the art will understand and appreciate that a methodology could alternatively be represented as a series of interrelated states or events, such as in a state diagram. Moreover, not all acts illustrated in a methodology may be required for a novel implementation.

A logic flow may be implemented in software, firmware, and/or hardware. In software and firmware embodiments, a logic flow may be implemented by computer executable instructions stored on at least one non-transitory computer readable medium or machine readable medium, such as an optical, magnetic or semiconductor storage. The embodiments are not limited in this context.

FIG. 9 illustrates an example of a second logic flow. As shown in FIG. 9, the second logic flow includes a logic flow 900. Logic flow 900 may be representative of some or all of the operations executed by one or more logic, features, or devices described herein, such as apparatus 800. More particularly, logic flow 900 may be implemented by receive component 822-1, generate component 822-2, transmit component 822-3 or STR component 822-4.

In the illustrated example shown in FIG. 9, logic flow 900 at block 902 may include receiving, at a destination node for a WLAN, a packet including a first header and a first data payload from a source node in the WLAN. For these examples, receive component 822-1 may receive packet 830 that includes the first header and first data payload.

According to some examples, logic flow 900 at block 904 may include generating an implicit ACK packet having a second header. The implicit ACK packet may also include either a dummy payload if no data is awaiting transmission to the source node or a second data payload if data is awaiting transmission to the source node. For these examples, generate component 822-2 may generate implicit ACK packet 840 having the second header. Implicit ACK packet 840 may include a dummy payload if data 830 does not include data awaiting transmission to the source node. If data 830 does include data to be transmitted to the source node, then a data payload is added to implicit ACK packet 840.

According to some examples, logic flow 900 at block 906 may include transmitting the ACK packet to the source node following successful decoding of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node. For these examples, STR component 822-4 may enable transmit component 822-3 to transmit implicit ACK packet 840 to the source node following successful decoding of the first header for packet 810 by receive component 822-1 and concurrent with receive component 822-2 receiving and decoding the first payload included in packet 810.

In some examples, logic flow 900 at block 908 may include determining that data has become available after at least a first portion of the dummy payload has been transmitted. For these examples, generate component 822-2 may determine that data 830 now includes data to transmit to the source node.

According to some examples, logic flow 900 at block 910 may include replacing a second portion of the dummy payload awaiting transmission with a third header associated with the available data and a third data payload including at least some of the available data. For these examples, generate component 822-2 may replace a portion of the dummy payload for implicit ACK packet 840 that has yet to be transmitted to the source node by transmit component 822-3 with the third header and at least some of the data included in data 830 that is now available for transmission to the source node.

In some examples, logic flow 900 at block 910 may include transmitting the second portion to the source node. For these examples, transmit component 822-3 may then transmit the second portion of what was originally the dummy payload of implicit ACK packet 840 and now includes the third header and the data payload having at least some of the newly available data.

FIG. 10 illustrates an embodiment of a first storage medium. As shown in FIG. 10, the first storage medium includes a storage medium 1000. Storage medium 1000 may comprise an article of manufacture. In some examples, storage medium 1000 may include any non-transitory computer readable medium or machine readable medium, such as an optical, magnetic or semiconductor storage. Storage medium 1000 may store various types of computer executable

instructions, such as instructions to implement logic flow 900. Examples of a computer readable or machine readable storage medium may include any tangible media capable of storing electronic data, including volatile memory or non-volatile memory, removable or non-removable memory, erasable or non-erasable memory, writeable or re-writeable memory, and so

5 forth. Examples of computer executable instructions may include any suitable type of code, such as source code, compiled code, interpreted code, executable code, static code, dynamic code, object-oriented code, visual code, and the like. The examples are not limited in this context.

FIG. 11 illustrates an embodiment of a device 1100. In some examples, device 1100 may be configured or arranged for wireless communications in a wireless network such as a WLAN.
10 Device 1100 may implement, for example, apparatus 500/800, storage medium 700/1000 and/or a logic circuit 1170. The logic circuit 1170 may include physical circuits to perform operations described for apparatus 500/800. As shown in FIG. 11, device 1100 may include a radio interface 1110, baseband circuitry 1120, and computing platform 1130, although examples are not limited to this configuration.

15 The device 1100 may implement some or all of the structure and/or operations for apparatus 500/800, storage medium 700/1000 and/or logic circuit 1170 in a single computing entity, such as entirely within a single device. The embodiments are not limited in this context.

 Radio interface 1110 may include a component or combination of components adapted for transmitting and/or receiving single carrier or multi-carrier modulated signals (e.g., including
20 complementary code keying (CCK) and/or orthogonal frequency division multiplexing (OFDM) symbols and/or single carrier frequency division multiplexing (SC-FDM symbols) although the embodiments are not limited to any specific over-the-air interface or modulation scheme. Radio interface 1110 may include, for example, a receiver 1112, a transmitter 1116 and/or a frequency synthesizer 1114. Radio interface 1110 may include bias controls, a crystal oscillator and/or one
25 or more antennas 1118-f. In another embodiment, radio interface 1110 may use external voltage-controlled oscillators (VCOs), surface acoustic wave filters, intermediate frequency (IF) filters and/or RF filters, as desired. Due to the variety of potential RF interface designs an expansive description thereof is omitted.

 Baseband circuitry 1120 may communicate with radio interface 1110 to process receive
30 and/or transmit signals and may include, for example, an analog-to-digital converter 1122 for down converting received signals, a digital-to-analog converter 1124 for up converting signals for transmission. Further, baseband circuitry 1120 may include a baseband or physical layer (PHY) processing circuit 1126 for PHY link layer processing of respective receive/transmit signals. Baseband circuitry 1120 may include, for example, a processing circuit 1128 for
35 medium access control (MAC)/data link layer processing. Baseband circuitry 1120 may include

a memory controller 1132 for communicating with MAC processing circuit 1128 and/or a computing platform 1130, for example, via one or more interfaces 1134.

In some embodiments, PHY processing circuit 1126 may include a frame construction and/or detection module, in combination with additional circuitry such as a buffer memory, to construct and/or deconstruct communication frames (e.g., containing subframes). Alternatively or in addition, MAC processing circuit 1128 may share processing for certain of these functions or perform these processes independent of PHY processing circuit 1126. In some embodiments, MAC and PHY processing may be integrated into a single circuit.

Computing platform 1130 may provide computing functionality for device 1100. As shown, computing platform 1130 may include a processing component 1140. In addition to, or alternatively of, baseband circuitry 1120 of device 1100 may execute processing operations or logic for apparatus 500/800, storage medium 700/1000, and logic circuit 1170 using the processing component 1130. Processing component 1140 (and/or PHY 1126 and/or MAC 1128) may comprise various hardware elements, software elements, or a combination of both.

Examples of hardware elements may include devices, logic devices, components, processors, microprocessors, circuits, processor circuits, circuit elements (e.g., transistors, resistors, capacitors, inductors, and so forth), integrated circuits, application specific integrated circuits (ASIC), programmable logic devices (PLD), digital signal processors (DSP), field programmable gate array (FPGA), memory units, logic gates, registers, semiconductor device, chips, microchips, chip sets, and so forth. Examples of software elements may include software components, programs, applications, computer programs, application programs, system programs, software development programs, machine programs, operating system software, middleware, firmware, software modules, routines, subroutines, functions, methods, procedures, software interfaces, application program interfaces (API), instruction sets, computing code, computer code, code segments, computer code segments, words, values, symbols, or any combination thereof. Determining whether an example is implemented using hardware elements and/or software elements may vary in accordance with any number of factors, such as desired computational rate, power levels, heat tolerances, processing cycle budget, input data rates, output data rates, memory resources, data bus speeds and other design or performance constraints, as desired for a given example.

Computing platform 1130 may further include other platform components 1150. Other platform components 1150 include common computing elements, such as one or more processors, multi-core processors, co-processors, memory units, chipsets, controllers, peripherals, interfaces, oscillators, timing devices, video cards, audio cards, multimedia input/output (I/O) components (e.g., digital displays), power supplies, and so forth. Examples of

memory units may include without limitation various types of computer readable and machine readable storage media in the form of one or more higher speed memory units, such as read-only memory (ROM), random-access memory (RAM), dynamic RAM (DRAM), Double-Data-Rate DRAM (DDRAM), synchronous DRAM (SDRAM), static RAM (SRAM), programmable ROM (PROM), erasable programmable ROM (EPROM), electrically erasable programmable ROM (EEPROM), flash memory, polymer memory such as ferroelectric polymer memory, ovonic memory, phase change or ferroelectric memory, silicon-oxide-nitride-oxide-silicon (SONOS) memory, magnetic or optical cards, an array of devices such as Redundant Array of Independent Disks (RAID) drives, solid state memory devices (e.g., USB memory, solid state drives (SSD) and any other type of storage media suitable for storing information.

Computing platform 1130 may further include a network interface 1160. In some examples, network interface 1160 may include logic and/or features to support network interfaces operated in compliance with one or more wireless broadband technologies such as those described in one or more standards associated with IEEE 802.11 such as IEEE 802.11u or with technical specification such as WFA Hotspot 2.0.

Device 1100 may be part of a source or destination node in a WLAN and may be include in various types of computing devices to include, but not limited to, user equipment, a computer, a personal computer (PC), a desktop computer, a laptop computer, a notebook computer, a netbook computer, a tablet computer, an ultra-book computer, a smart phone, embedded electronics, a gaming console, a server, a server array or server farm, a web server, a network server, an Internet server, a work station, a mini-computer, a main frame computer, a supercomputer, a network appliance, a web appliance, a distributed computing system, multiprocessor systems, processor-based systems, or combination thereof. Accordingly, functions and/or specific configurations of device 1100 described herein, may be included or omitted in various embodiments of device 1100, as suitably desired. In some embodiments, device 1100 may be configured to be compatible with protocols and frequencies associated with IEEE 802.11 Standards or Specification for WLANs, although the examples are not limited in this respect.

Embodiments of device 1100 may be implemented using single input single output (SISO) architectures. However, certain implementations may include multiple antennas (e.g., antennas 1118-f) for transmission and/or reception using adaptive antenna techniques for beamforming or spatial division multiple access (SDMA) and/or using multiple input multiple output (MIMO) communication techniques.

The components and features of device 1100 may be implemented using any combination of discrete circuitry, application specific integrated circuits (ASICs), logic gates and/or single

chip architectures. Further, the features of device 1100 may be implemented using microcontrollers, programmable logic arrays and/or microprocessors or any combination of the foregoing where suitably appropriate. It is noted that hardware, firmware and/or software elements may be collectively or individually referred to herein as “logic” or “circuit.”

5 It should be appreciated that the exemplary device 1100 shown in the block diagram of FIG. 11 may represent one functionally descriptive example of many potential implementations. Accordingly, division, omission or inclusion of block functions depicted in the accompanying figures does not infer that the hardware components, circuits, software and/or elements for implementing these functions would be necessarily be divided, omitted, or included in
10 embodiments.

 Some examples may be described using the expression “in one example” or “an example” along with their derivatives. These terms mean that a particular feature, structure, or characteristic described in connection with the example is included in at least one example. The appearances of the phrase “in one example” in various places in the specification are not
15 necessarily all referring to the same example.

 Some examples may be described using the expression “coupled”, “connected”, or “capable of being coupled” along with their derivatives. These terms are not necessarily intended as synonyms for each other. For example, descriptions using the terms “connected” and/or “coupled” may indicate that two or more elements are in direct physical or electrical
20 contact with each other. The term “coupled,” however, may also mean that two or more elements are not in direct contact with each other, but yet still co-operate or interact with each other.

 In some examples, an example first apparatus for a source node in a WLAN may include circuitry. The example first apparatus may also include a transmit component for execution by the circuitry to transmit a packet having a first header and a first data payload to a destination node in the WLAN. The example first apparatus may also include a receive component for execution by the circuitry, the receive component may wait for receipt of an implicit ACK packet having a second header from the destination node. The implicit ACK packet to indicate receipt of at least the first header by the destination node. . The example first apparatus may also include a stop component for execution by the circuitry to cause the transmit component to stop transmission of any remaining portion of the first data payload awaiting transmission when the stop component has determined that the second header for the implicit ACK packet has not been received within a defined time interval.

 According to some examples, the example first apparatus may also include one or more antennas and a STR component coupled to the antenna array. The STR component may be

executed by the circuitry of the first apparatus to enable the transmit component to transmit at least portions of the packet to the destination node while the receive component receives the implicit ACK packet from the destination node.

In some examples for the example first apparatus, receipt of the implicit ACK packet by the receive component may include the receive component capable of receiving and successfully decoding at least the second header and determining that the implicit ACK packet was transmitted from the destination node.

According to some examples for the example first apparatus, the defined time may include a given time interval associated with the receive component receiving and successfully decoding at least the second header.

In some examples for the example first apparatus, the source node, the destination node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN.

According to some examples for the example first apparatus, the implicit ACK packet may also have a dummy payload. The implicit ACK packet also having the dummy payload may indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the transmit component transmitting the packet to the destination node.

In some examples for the example first apparatus, the stop component may cause the transmit component to stop transmission of any remaining portion of the first data payload awaiting transmission if/when the stop component has determined that at least a portion of the dummy payload has not been received and successfully decoded by the receive component.

According to some examples for the example first apparatus, the source and the destination nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes may include at least one node from a second cell from among the multiple cells.

In some examples for the example first apparatus, the implicit ACK packet may also have a second data payload that includes data destined for the source node. The implicit ACK packet may have the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the transmit component transmitting the packet to the destination node.

According to some examples for the example first apparatus, the stop component may cause the transmit component to stop transmission of any remaining portion of the first data payload awaiting transmission if the stop component has determined that at least a portion of the second data payload has not been received and successfully decoded by the receive component.

In some examples for the example first apparatus, the source and the destination nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes may include at least one node from a second cell from among the multiple cells.

According to some examples for the example first apparatus, the first WLAN may be capable of operating in compliance with one or more wireless communication standards or specifications associated with IEEE 802.11 standards.

In some examples for the example first apparatus, the source node may be a terminal node and the destination node may be an access point.

In some examples, example first methods implemented at a source node in a WLAN may include transmitting, at the source node, a packet having a first header and a first data payload to a destination node in the WLAN. The example first methods may also include continuing to transmit the first data payload to the destination node based on whether at least a second header for an ACK packet has been received from the destination node to indicate receipt of at least the first header by the destination node. The example first methods may also include stopping transmission of a remaining portion of the first data payload awaiting transmission if the second header for the implicit ACK packet has not been received within a defined time interval.

According to some examples for the example first methods, successfully decoding at least the second header may include the source node capable of determining that the implicit ACK packet was transmitted from the destination node and the defined time interval associated with a given time interval for the source node to make the determination.

In some examples for the example first methods, the source node, the destination node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN.

According to some examples for the example first methods, the implicit ACK packet may also have a dummy payload. The implicit ACK packet having the dummy payload may indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

In some examples for the example first methods, the source and the destination nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes may include at least one node from a second cell from among the multiple cells.

In some examples for the example first methods, the implicit ACK packet may also have a second data payload that includes data destined for the source node. The implicit ACK packet having the second data payload may indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

According to some examples for the example first methods, the source and the destination nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes including at least one node from a second cell from among the multiple cells.

In some examples for the example first methods, the implicit ACK packet may also have a combination of a dummy payload and a second data payload that includes data destined for the source node. The implicit ACK packet having the combination of the dummy payload and the second data payload may indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

According to some examples for the example first methods, the source and the destination nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes may include at least one node from a second cell from among the multiple cells.

In some examples for the example first methods, the WLAN may be capable of operating in compliance with one or more wireless communication standards or specifications associated with the IEEE 802.11 standards.

According to some examples for the example first methods, the source node may be a terminal node and the destination node may be an access point.

In some examples, a first at least one machine readable medium comprising a plurality of instructions that in response to being executed on a system at a source node in a WLAN may cause the system to transmit a packet having a first header and a first data payload to a destination node in the WLAN. The instructions may also cause the system to determine whether at least a second header for an implicit ACK packet has been received from the destination node to indicate receipt of at least the first header by the destination node. The instructions may also cause the system to stop transmission of any remaining portion of the first data payload awaiting transmission if determined that the second header for the implicit ACK packet has not been received within a defined time interval.

According to some examples for the first at least one machine readable medium, receiving and successfully decoding at least the second header may include the source node capable of determining that the implicit ACK packet was transmitted from the destination node and the defined time interval associated with a given time interval for the source node to make the determination.

In some examples for the first at least one machine readable medium, the source node, the destination node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN.

According to some examples for the first at least one machine readable medium, the implicit ACK packet may also have a dummy payload. For these examples, the implicit ACK packet having the dummy payload may indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

In some examples for the first at least one machine readable medium, the implicit ACK packet may also have a second data payload that includes data destined for the source node. The implicit ACK packet having the second data payload may indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

According to some examples for the first at least one machine readable medium, the implicit ACK packet may also have a combination of a dummy payload and a second data payload that includes data destined for the source node. The implicit ACK packet having the combination of the dummy payload and the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

In some examples for the first at least one machine readable medium, the WLAN may be capable of operating in compliance with one or more wireless communication standards or specifications associated with IEEE 802.11 standards.

According to some examples for the first at least one machine readable medium, the source node may be a terminal node and the destination node may be an access point.

In some examples, an example second apparatus for a destination node in a WLAN may include circuitry. The example second apparatus may also include a generate component for execution by the circuitry to generate an implicit ACK packet having a second header. The implicit ACK packet may include either a dummy payload if no data is awaiting transmission to the source node or a second data payload if data is awaiting transmission to the source node. The example second apparatus may also include a transmit component for execution by the circuitry to transmit the implicit ACK packet to the source node following successful decoding of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node.

According to some examples, the example second apparatus may also include one or more antennas and an STR component coupled to the one or more antennas. For these example, the STR component may be executed by the circuitry to enable the receive component to receive the packet from the source node while the transmit component transmits the implicit ACK packet to the source node.

In some examples for the example second apparatus, the destination node, the source node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the dummy payload or the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

According to some examples for the example second apparatus, the destination and the source nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes may include at least one node from a second cell from among the multiple cells.

In some examples for the example second apparatus, the generate component may determine that data has become available after at least a first portion of the dummy payload has been transmitted by the transmit component and replace a second portion of the dummy payload awaiting transmission with a third header associated with the available data and a third data payload including at least some of the available data. For these examples, the transmit component may then transmit the second portion to the source node that includes the third header and the third data payload.

According to some examples for the example second apparatus, the destination node, the source node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the first portion of the dummy payload, the third header, and the third data payload may indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

In some examples for the example second apparatus, the WLAN may be capable of operating in compliance with one or more wireless communication standards or specifications associated with Institute of Electrical and Electronic Engineers (IEEE) 802.11 standards.

According to some examples for the example second apparatus, the destination node may be an access point and the source node may be a termination node.

In some examples, example second methods implemented at a destination node in a WLAN may include receiving, at the destination node, a packet including a first header and a first data payload from a source node in the WLAN. The example second methods may also include generating an implicit ACK packet having a second header. The implicit ACK packet may also include either a dummy payload if no data is awaiting transmission to the source node or a second data payload if data is awaiting transmission to the source node. The example second methods may also include transmitting the implicit ACK packet to the source node

following successful decoding of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node.

According to some examples for the example second methods, the destination node, the source node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the dummy payload or the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

In some examples for the example second methods, the destination and the source nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes may include at least one node from a second cell from among the multiple cells.

According to some examples, the example second methods may also include determining that data has become available after at least a first portion of the dummy payload has been transmitted and replacing a second portion of the dummy payload awaiting transmission with a third header associated with the available data and a third data payload including at least some of the available data. The example second methods may also include transmitting the second portion to source node.

In some examples for the example second methods, the destination node, the source node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the first portion of the dummy payload, the third header, and the third payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

According to some examples for the example second methods, the WLAN may be capable of operating in compliance with one or more wireless communication standards or specifications associated with the IEEE 802.11 standards.

In some examples for the example second methods, the destination node may be an access point and the source node may be a termination node.

In some examples, a second at least one machine readable medium comprising a plurality of instructions that in response to being executed on a system at a destination node in a WLAN may cause the system to receive a packet including a first header and a first data payload from a source node in the WLAN. The instructions may also cause the instruction to generate an implicit ACK packet having a second header. The implicit ACK packet may include a dummy payload if no data is awaiting transmission to the source node. The instructions may also cause the system to transmit the implicit ACK packet to the source node following successful decoding

of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node.

According to some examples for the second at least one machine readable medium, the destination node, the source node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the dummy payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

In some examples for the second at least one machine readable medium, the destination and the source nodes may belong to a first cell of multiple cells included in the WLAN and the other nodes may include at least one node from a second cell from among the multiple cells.

According to some examples for the second at least one machine readable medium, the instructions to also cause the system to determine that data has become available after at least a first portion of the dummy payload has been transmitted. The instructions may also cause the system to replace a second portion of the dummy payload awaiting transmission with a third header associated with the available data and a second data payload including at least some of the available data and transmit the second portion to the source node that includes the third header and the second data payload.

In some examples for the second at least one machine readable medium, the destination node, the source node and other nodes in the WLAN may be capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the first portion of the dummy payload, the third header, and the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

According to some examples for the second at least one machine readable medium, the WLAN may be capable of operating in compliance with one or more wireless communication standards or specifications associated with IEEE 802.11 standards.

In some examples for the second at least one machine readable medium, the destination node may be an access point and the source node may be a termination node.

It is emphasized that the Abstract of the Disclosure is provided to comply with 37 C.F.R. Section 1.72(b), requiring an abstract that will allow the reader to quickly ascertain the nature of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing Detailed Description, it can be seen that various features are grouped together in a single example for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as

reflecting an intention that the claimed examples require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed example. Thus the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate example. In the
5 appended claims, the terms "including" and "in which" are used as the plain-English equivalents of the respective terms "comprising" and "wherein," respectively. Moreover, the terms "first," "second," "third," and so forth, are used merely as labels, and are not intended to impose numerical requirements on their objects.

CLAIMS:

What is claimed is:

1. An apparatus for a source node in a wireless local area network (WLAN) comprising:
 - circuitry;
 - a transmit component for execution by the circuitry to transmit a packet having a first header and a first data payload to a destination node in the WLAN;
 - a receive component for execution by the circuitry, the receive component to wait for receipt of an implicit acknowledgement (ACK) packet having a second header from the destination node, the implicit ACK packet to indicate receipt of at least the first header by the destination node; and
 - a stop component for execution by the circuitry to cause the transmit component to stop transmission of any remaining portion of the first data payload awaiting transmission when the stop component has determined that the second header for the implicit ACK packet has not been received within a defined time interval.
2. The apparatus of claim 1, comprising:
 - one or more antennas; and
 - a simultaneous transmit and receive (STR) component coupled to the one or more antennas, the STR component for execution by the circuitry to enable the transmit component to transmit at least portions of the packet to the destination node while the receive component receives the implicit ACK packet from the destination node.
3. The apparatus of claim 1, receipt of the implicit ACK packet by the receive component comprises the receive component capable of receiving and successfully decoding at least the second header and determining that the implicit ACK packet was transmitted from the destination node.
4. The apparatus of claim 3, the defined time comprising a given time interval associated with the receive component receiving and successfully decoding at least the second header.
5. The apparatus of claim 1, comprising the source node, the destination node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN, the implicit ACK packet also having a dummy payload, the

implicit ACK packet having the dummy payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the transmit component transmitting the packet to the destination node.

6. The apparatus of claim 5, comprising the stop component to cause the transmit component to stop transmission of any remaining portion of the first data payload awaiting transmission if the stop component has determined that at least a portion of the dummy payload has not been received and successfully decoded by the receive component.

7. The apparatus of claim 1, comprising the source node, the destination node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN, the implicit ACK packet also having a second data payload including data destined for the source node, the implicit ACK packet having the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the transmit component transmitting the packet to the destination node.

8. The apparatus of claim 7, comprising the stop component to cause the transmit component to stop transmission of any remaining portion of the first data payload awaiting transmission if the stop component has determined that at least a portion of the second data payload has not been received and successfully decoded by the receive component.

9. A method implemented at a source node in a wireless local area network (WLAN) comprising:

transmitting, at the source node, a packet having a first header and a first data payload to a destination node in the WLAN;

continuing to transmit the first data payload to the destination node based on whether at least a second header for an implicit acknowledgement (ACK) packet has been received from the destination node to indicate receipt of at least the first header by the destination node; and

stopping transmission of a remaining portion of the first data payload awaiting transmission if the second header for the implicit ACK packet has not been received within a defined time interval.

10. The method of claim 9, successfully decoding at least the second header comprises the source node capable of determining that the implicit ACK packet was transmitted from the

destination node and the defined time interval associated with a given time interval for the source node to make the determination.

11. The method of claim 9, comprising the source node, the destination node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN, the implicit ACK packet also having a dummy payload, the implicit ACK packet having the dummy payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

12. The method of claim 11, comprising the source and the destination nodes belonging to a first cell of multiple cells included in the WLAN and the other nodes including at least one node from a second cell from among the multiple cells.

13. The method of claim 9, comprising the source node, the destination node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN, the implicit ACK packet also having a second data payload including data destined for the source node, the implicit ACK packet having the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

14. The method of claim 13, comprising the source and the destination nodes belonging to a first cell of multiple cells included in the WLAN and the other nodes including at least one node from a second cell from among the multiple cells.

15. The method of claim 8, comprising the source node, the destination node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN, the implicit ACK packet also having a combination of a dummy payload and a second data payload including data destined for the source node, the implicit ACK packet having the combination of the dummy payload and the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

16. The method of claim 15, comprising the source and the destination nodes belonging to a first cell of multiple cells included in the WLAN and the other nodes including at least one node from a second cell from among the multiple cells.

17. The method of claim 9, comprising the WLAN capable of operating in compliance with one or more wireless communication standards or specifications associated with the Institute of Electrical and Electronic Engineers (IEEE) 802.11 standards.

18. The method of claim 17, comprising the source node is a terminal node and the destination node is an access point.

19. An apparatus for a destination node in a wireless local area network (WLAN) comprising:

circuitry;

a receive component for execution by the circuitry to receive a packet including a first header and a first data payload from a source node in the WLAN;

a generate component for execution by the circuitry to generate an implicit acknowledgement (ACK) packet having a second header, the implicit ACK packet to include either a dummy payload if no data is awaiting transmission to the source node or a second data payload if data is awaiting transmission to the source node; and

a transmit component for execution by the circuitry to transmit the implicit ACK packet to the source node following successful decoding of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node.

20. The apparatus of claim 19, comprising:

one or more antennas; and

a simultaneous transmit and receive (STR) component coupled to the one or more antennas, the STR component for execution by the circuitry to enable the receive component to receive the packet from the source node while the transmit component transmits the implicit ACK packet to the source node.

21. The apparatus of claim 19, comprising the destination node, the source node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the dummy payload or the second data payload to

indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

22. The apparatus of claim 19, comprising:

the generate component to determine that data has become available after at least a first portion of the dummy payload has been transmitted by the transmit component and replace a second portion of the dummy payload awaiting transmission with a third header associated with the available data and a third data payload including at least some of the available data; and

the transmit component to transmit the second portion to the source node that includes the third header and the third data payload.

23. The apparatus of claim 22, comprising the destination node, the source node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the first portion of the dummy payload, the third header, and the third data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

24. At least one machine readable medium comprising a plurality of instructions that in response to being executed on a system a destination node in a wireless local area network (WLAN) cause the system to:

receive a packet including a first header and a first data payload from a source node in the WLAN;

generate an implicit acknowledgement (ACK) packet having a second header, the implicit ACK packet to include a dummy payload if no data is awaiting transmission to the source node; and

transmit the implicit ACK packet to the source node following successful decoding of the first header and concurrent with receiving and decoding the first data payload included in the packet received from the source node.

25. The at least one machine readable medium of claim 24, comprising the destination node, the source node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the dummy payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

26. The at least one machine readable medium of claim 25, comprising the destination and the source nodes belonging to a first cell of multiple cells included in the WLAN and the other nodes including at least one node from a second cell from among the multiple cells.


27. The at least one machine readable medium of claim 24, comprising the instructions to also cause the system to:

determine that data has become available after at least a first portion of the dummy payload has been transmitted;

replace a second portion of the dummy payload awaiting transmission with a third header associated with the available data and a second data payload including at least some of the available data; and

transmit the second portion to the source node that includes the third header and the second data payload.

28. The at least one machine readable medium of claim 27, comprising the destination node, the source node and other nodes in the WLAN capable of implementing carrier sense multiple access (CSMA) for transmitting packets via the WLAN and the first portion of the dummy payload, the third header, and the second data payload to indicate to the other nodes in the WLAN a communication link is being used by the source node for a given time associated with the source node transmitting the packet to the destination node.

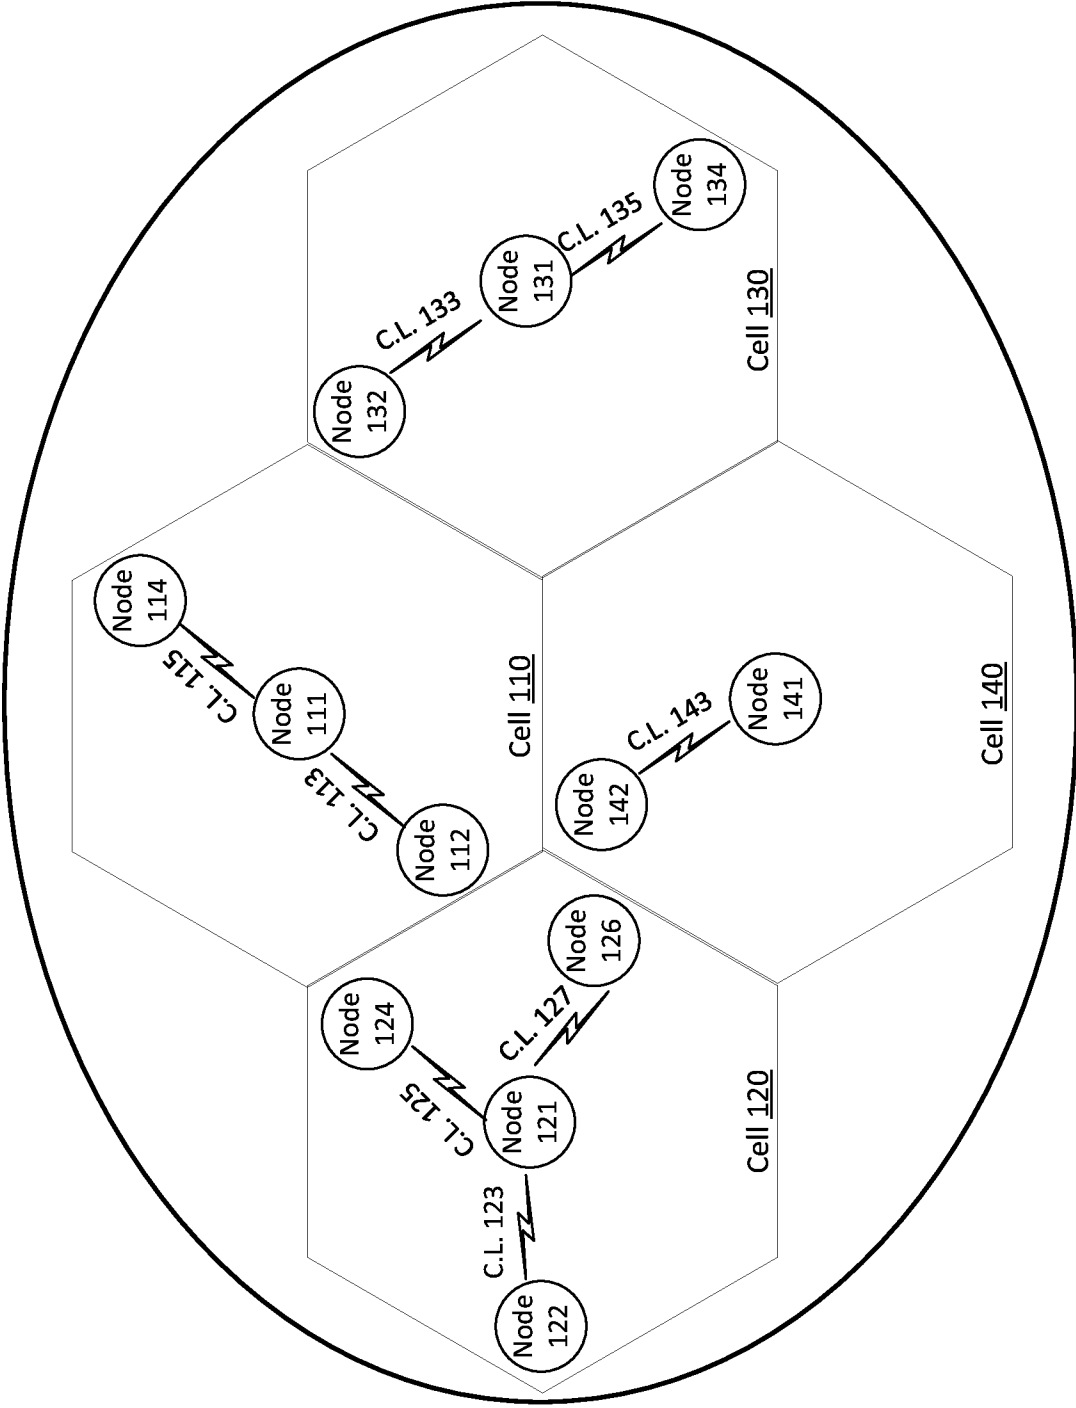

WLAN 100

FIG. 1

Collision Free Transmission 200

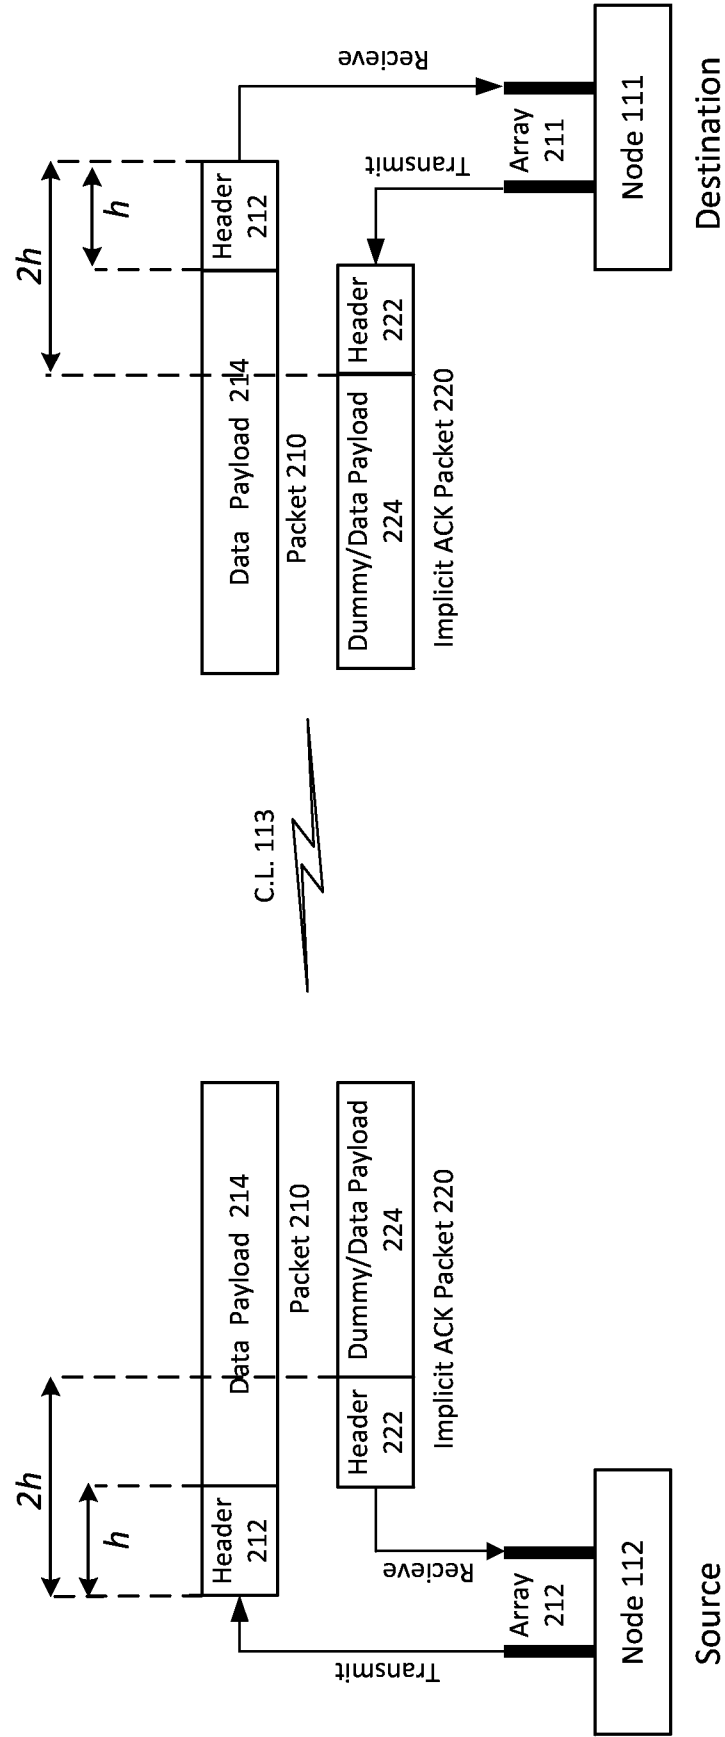


FIG. 2

Collision Transmission 300

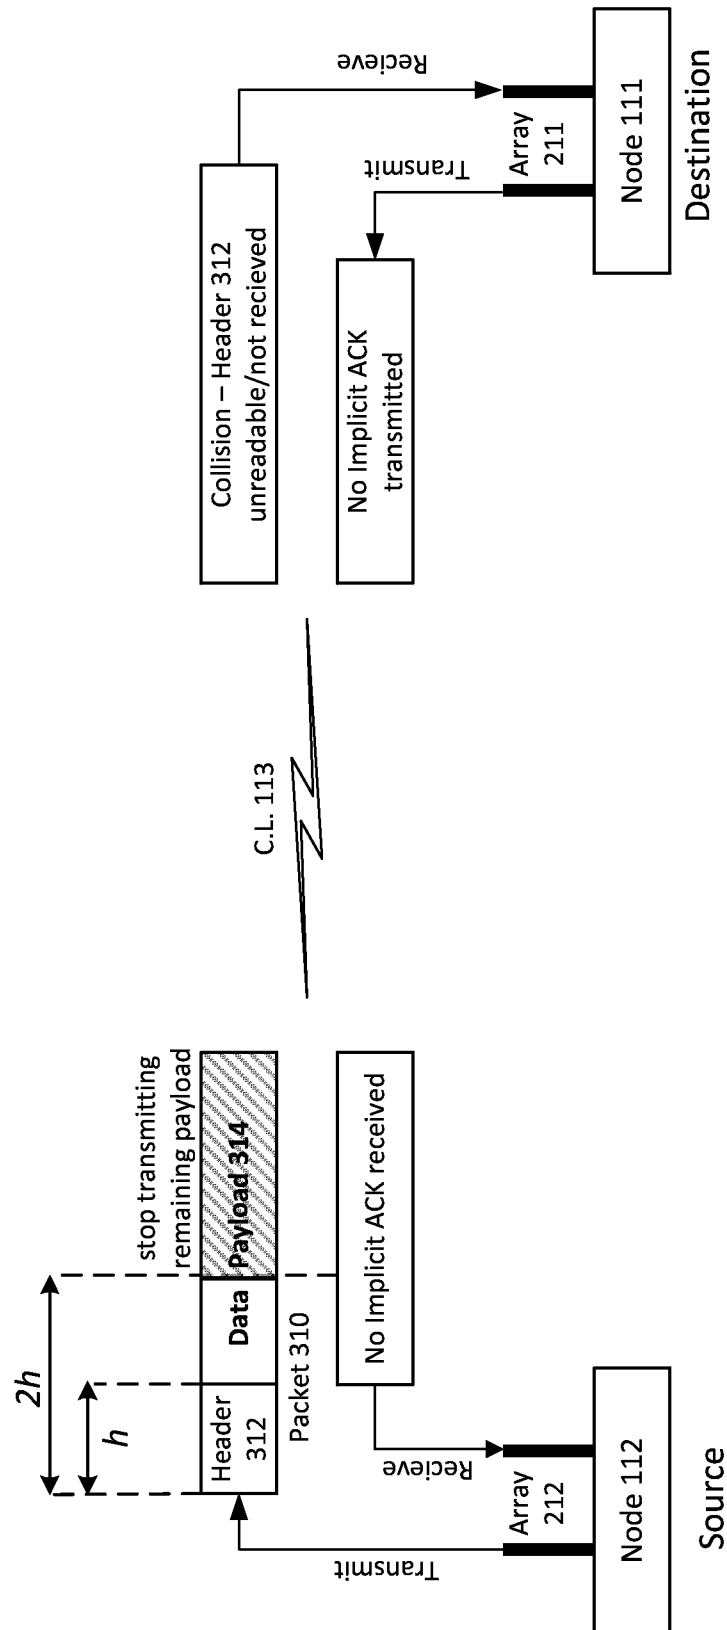


FIG. 3

Collision Free Transmission 400

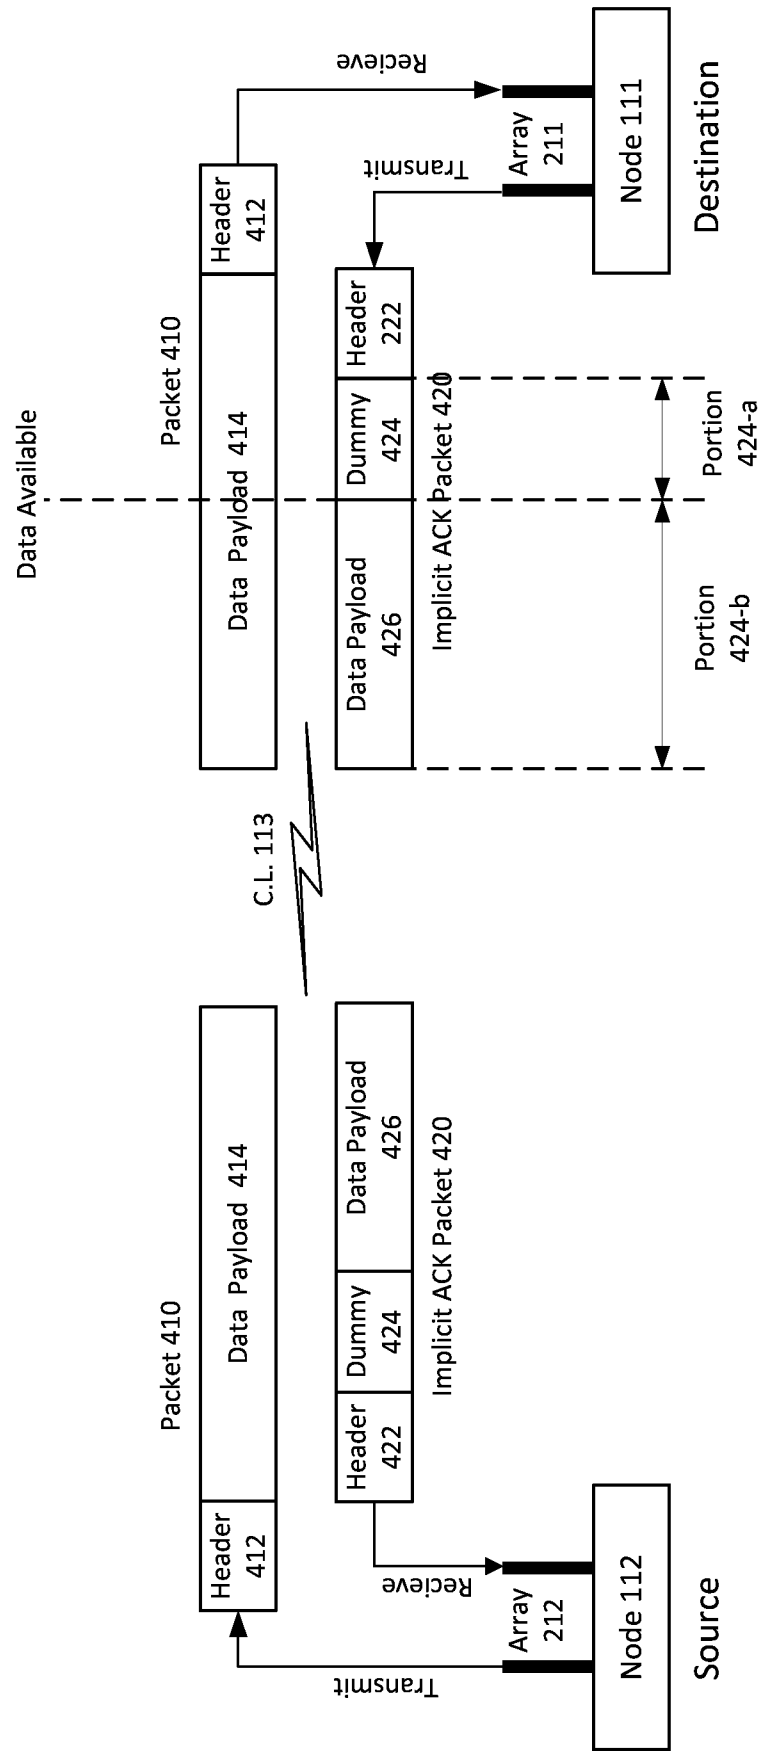


FIG. 4

Apparatus 500

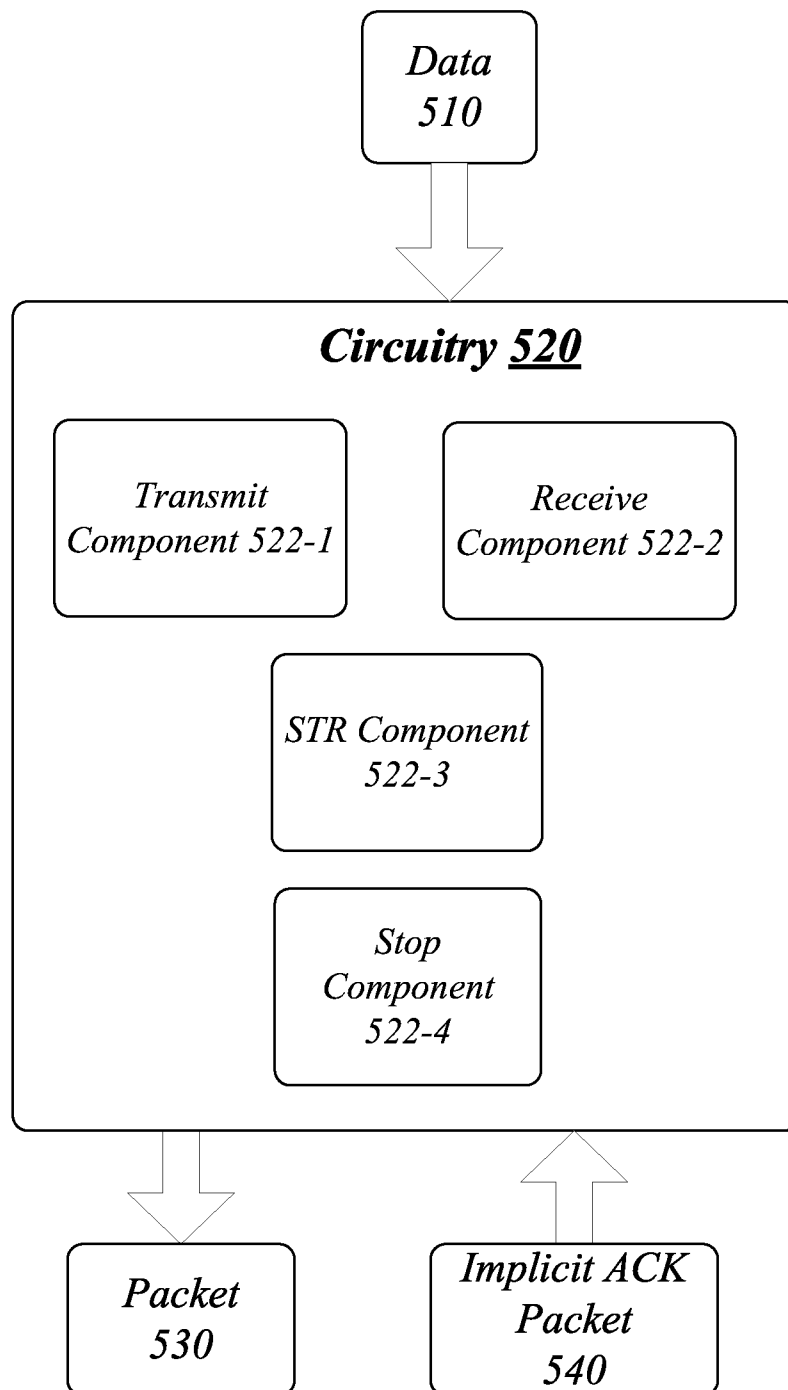


FIG. 5

600

TRANSMITTING, AT A SOURCE NODE IN A WLAN, A PACKET HAVING A FIRST HEADER AND A FIRST DATA PAYLOAD TO A DESTINATION NODE IN THE WLAN

602

CONTINUING TO TRANSMIT THE FIRST DATA PAYLOAD TO THE DESTINATION NODE BASED ON WHETHER AT LEAST A SECOND HEADER FOR AN IMPLICIT ACK PACKET HAS BEEN RECEIVED FROM THE DESTINATION NODE TO INDICATE RECEIPT OF AT LEAST THE FIRST HEADER BY THE DESTINATION NODE

604

STOPPING TRANSMISSION OF A REMAINING PORTION OF THE FIRST DATA PAYLOAD AWAITING TRANSMISSION IF THE SECOND HEADER FOR THE IMPLICIT ACK PACKET HAS NOT BEEN RECEIVED WITHIN A DEFINED TIME INTERVAL

606

FIG. 6

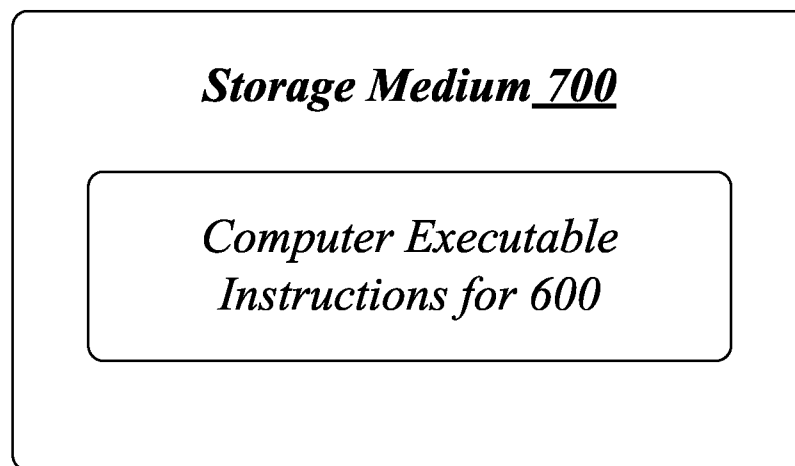


FIG. 7

Apparatus 800

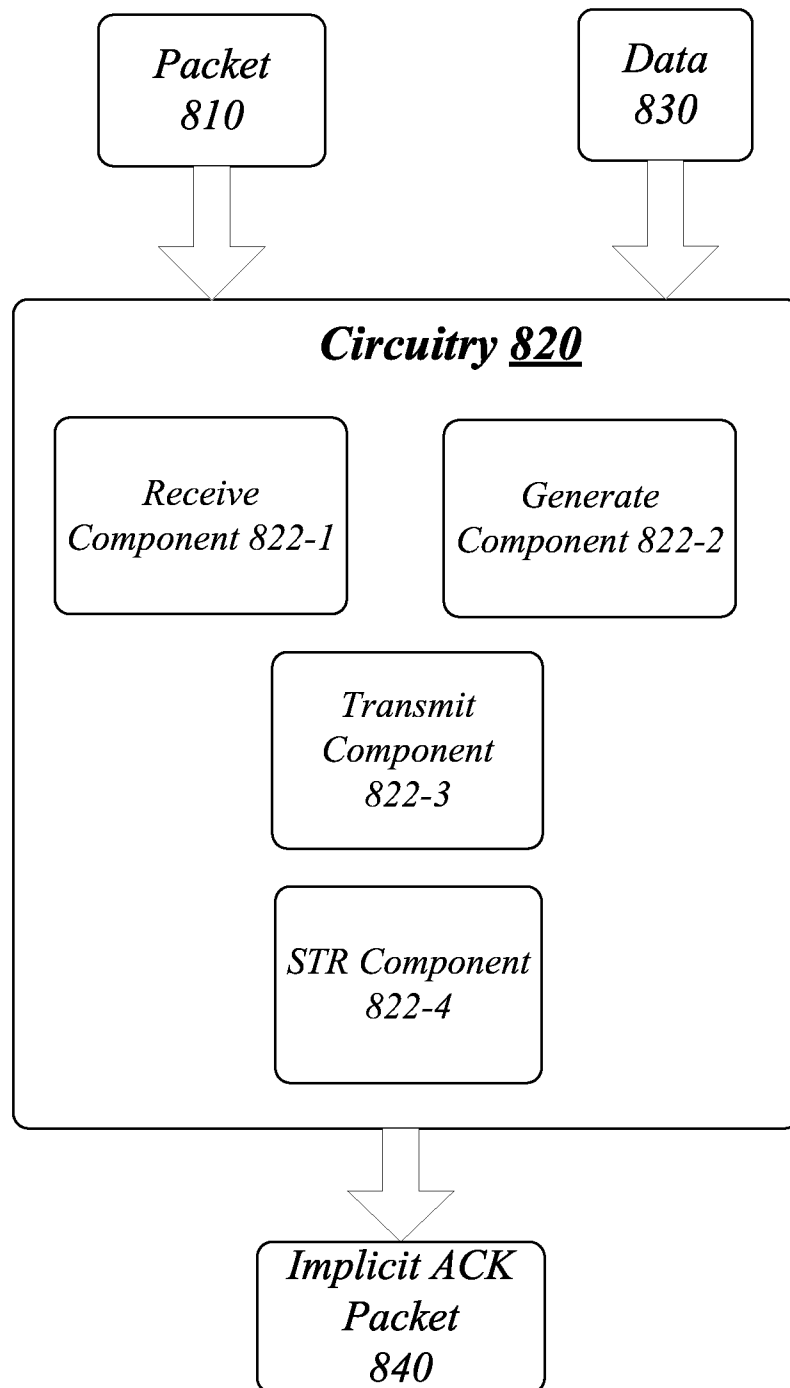
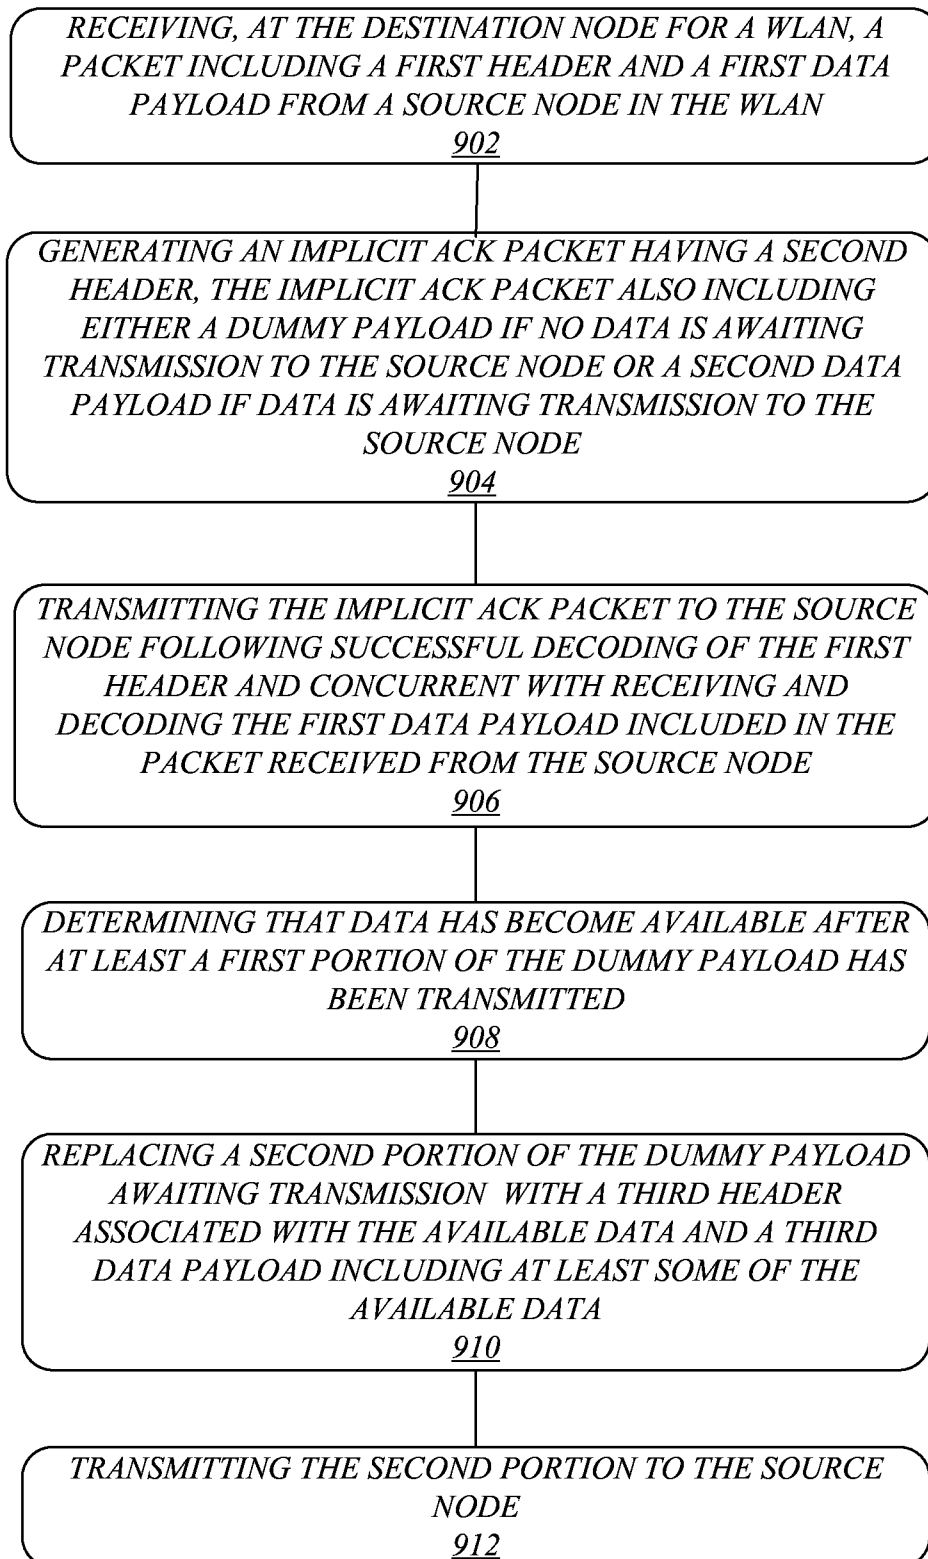


FIG. 8

900**FIG. 9**

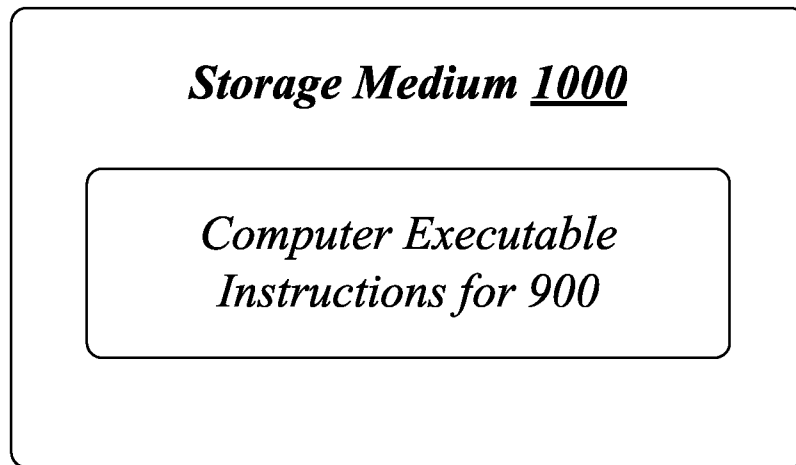


FIG. 10

Device 1100

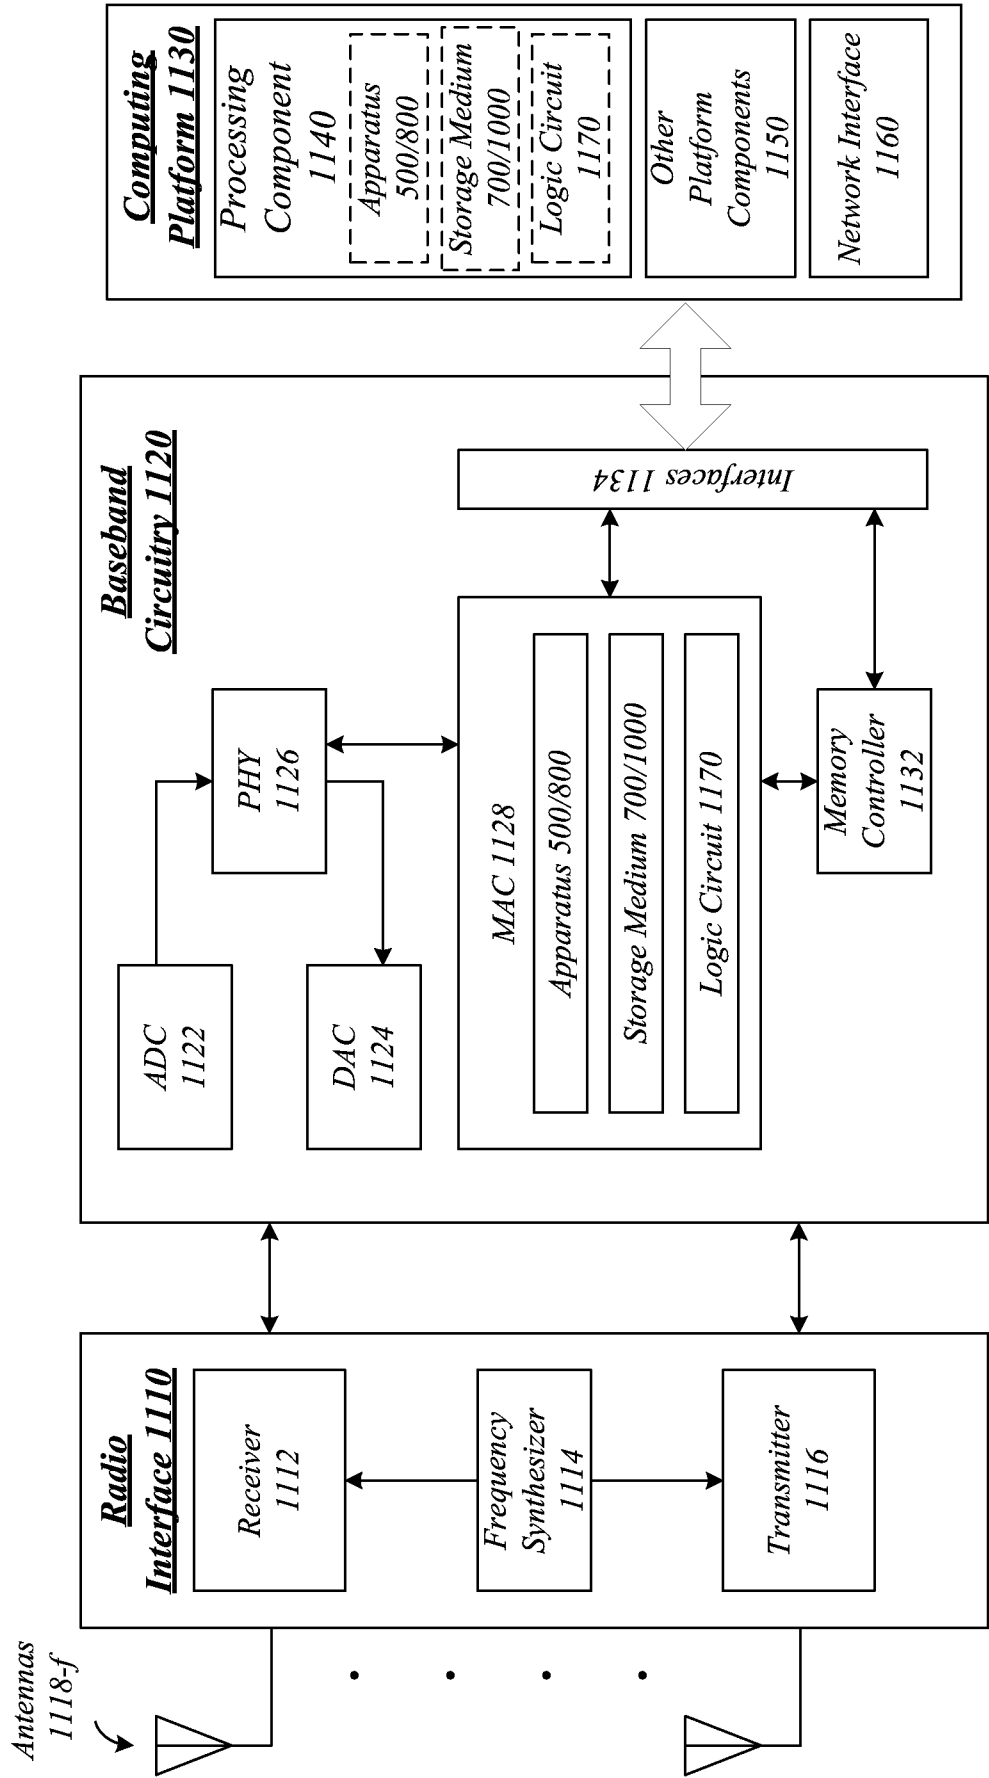


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/044212**A. CLASSIFICATION OF SUBJECT MATTER****H04W 74/08(2009.01)i, H04W 84/12(2009.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W 74/08; H04B 7/26; H04J 1/02; H04J 3/14; H04J 3/07; H04L 12/26; H04L 29/06; H04L 12/56; H04W 84/12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: WLAN, STR(simultaneous transmit and receive), ACK packet, collision free transmission

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 7649911 B2 (MICHAEL JOHN V. MORETON) 19 January 2010 See column 1, lines 17-48; column 2, lines 55-57; claims 1, 2, 16; and figure 2.	1-28
A	US 2010-0165869 A1 (ZHANFENG JIA et al.) 01 July 2010 See paragraphs [0020], [0027]; and figure 2.	1-28
A	US 7965632 B2 (SHIGERU SUGAYA) 21 June 2011 See column 12, lines 18-24; claim 2; and figure 8.	1-28
A	US 2012-0281699 A (ZHANFENG JIA et al.) 08 November 2012 See paragraphs [0043], [0048]; and figure 5A.	1-28
A	US 2011-0128973 A1 (LAWRENCE W. YONGE, III et al.) 02 June 2011 See paragraphs [0003], [0010]; and figure 1.	1-28



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 February 2014 (28.02.2014)

Date of mailing of the international search report

28 February 2014 (28.02.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

YANG, Jeong Rok

Telephone No. +82-42-481-5709



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/044212

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7649911 B2	19/01/2010	GB 0322132 D0 US 2006-0268881 A1 WO 2005-029774 A2 WO 2005-029774 A3	22/10/2003 30/11/2006 31/03/2005 02/06/2005
US 2010-0165869 A1	01/07/2010	CN 102160317 A EP 2353246 A1 JP 2012-503422 A JP 2013-128274 A JP 5231647 B2 KR 10-1241274 B1 KR 10-2011-0056549 A TW 201014255 A US 2010-0074366 A1 US 8306032 B2 WO 2010-033260 A1	17/08/2011 10/08/2011 02/02/2012 27/06/2013 10/07/2013 15/03/2013 30/05/2011 01/04/2010 25/03/2010 06/11/2012 25/03/2010
US 7965632 B2	21/06/2011	AU 2003-289274 A1 CN 1692605 A CN 1692605 B EP 1583282 A1 EP 1583282 A4 EP 1583282 B1 ES 2403050 T3 JP 2004-221681 A JP 4407126 B2 KR 10-1027437 B1 KR 10-2005-0090316 A MX PA04008194 A US 2005-0147112 A1 WO 2004-064331 A1	10/08/2004 02/11/2005 26/05/2010 05/10/2005 29/12/2010 06/03/2013 13/05/2013 05/08/2004 03/02/2010 11/04/2011 13/09/2005 26/11/2004 07/07/2005 29/07/2004
US 2012-0281699 A1	08/11/2012	WO 2012-154601 A1	15/11/2012
US 2011-0128973 A1	02/06/2011	AU 2004-310448 A1 AU 2004-310448 B2 AU 2006-272469 A1 AU 2006-272469 B2 AU 2006-272582 A1 AU 2006-272582 B2 AU 2006-336351 A1 CA 2546574 A1 CA 2546574 C CA 2616610 A1 CA 2616855 A1 CA 2617148 A1 CA 2806708 A1 CN 101026411 A CN 101026411 B	09/06/2005 04/11/2010 01/02/2007 31/03/2011 01/02/2007 14/07/2011 02/08/2007 09/06/2005 12/11/2013 01/02/2007 02/08/2007 01/02/2007 09/06/2005 29/08/2007 23/05/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/044212

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 101273550 A	24/09/2008
		CN 101273580 A	24/09/2008
		CN 101273580 B	02/01/2013
		CN 101317391 A	03/12/2008
		CN 101317391 B	05/09/2012
		CN 101326768 A	17/12/2008
		CN 101542961 A	23/09/2009
		CN 101542961 B	10/10/2012
		CN 1918558 A	21/02/2007
		CN 1918558 B	26/05/2010
		EP 1690191 A2	16/08/2006
		EP 1690191 A4	29/12/2010
		EP 1748574 A1	31/01/2007
		EP 1908189 A2	09/04/2008
		EP 1908222 A2	09/04/2008
		EP 1908223 A2	09/04/2008
		EP 1913734 A2	23/04/2008
		EP 1915822 A2	30/04/2008
		EP 1915822 B1	27/03/2013
		EP 1922635 A2	21/05/2008
		EP 2611040 A2	03/07/2013
		EP 2631811 A2	28/08/2013
		JP 2007-037154 A	08/02/2007
		JP 2007-515113 A	07/06/2007
		JP 2009-504015 A	29/01/2009
		JP 2009-504016 A	29/01/2009
		JP 2009-504017 A	29/01/2009
		JP 2009-504023 A	29/01/2009
		JP 2009-504025 A	29/01/2009
		JP 2009-504034 A	29/01/2009
		JP 2013-102502 A	23/05/2013
		JP 4877979 B2	15/02/2012
		JP 4920332 B2	18/04/2012
		JP 4981802 B2	25/07/2012
		JP 5068262 B2	07/11/2012
		JP 5106394 B2	26/12/2012
		KR 10-1084419 B1	21/11/2011
		KR 10-1247294 B1	25/03/2013
		KR 10-1247529 B1	26/03/2013
		KR 10-1269036 B1	29/05/2013
		KR 10-2006-0126518 A	07/12/2006
		KR 10-2008-0038366 A	06/05/2008
		KR 10-2008-0040732 A	08/05/2008
		US 2005-0114489 A1	26/05/2005
		US 2007-0025383 A1	01/02/2007
		US 2007-0025391 A1	01/02/2007
		US 2007-0025398 A1	01/02/2007
		US 2007-0064788 A1	22/03/2007
		US 2007-0112972 A1	17/05/2007
		US 2009-0207865 A1	20/08/2009

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/044212

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2010-0111099 A1	06/05/2010
		US 7558294 B2	07/07/2009
		US 7684568 B2	23/03/2010
		US 7729372 B2	01/06/2010
		US 7756152 B2	13/07/2010
		US 7822059 B2	26/10/2010
		US 7894487 B2	22/02/2011
		US 8089901 B2	03/01/2012
		US 8090857 B2	03/01/2012
		US 8175190 B2	08/05/2012
		US 8654635 B2	18/02/2014
		WO 2005-053208 A2	09/06/2005
		WO 2005-053208 A3	10/11/2005
		WO 2007-014319 A2	01/02/2007
		WO 2007-014319 A3	15/11/2007
		WO 2007-014377 A2	01/02/2007
		WO 2007-014377 A3	06/12/2007
		WO 2007-016031 A2	08/02/2007
		WO 2007-016031 A3	07/06/2007
		WO 2007-016032 A2	08/02/2007
		WO 2007-016032 A3	18/05/2007
		WO 2007-016034 A2	08/02/2007
		WO 2007-016034 A3	15/11/2007
		WO 2007-086934 A2	02/08/2007
		WO 2007-086934 A3	30/04/2009