

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2008 (24.12.2008)

PCT

(10) International Publication Number
WO 2008/155014 A1

(51) International Patent Classification:
H04L 29/06 (2006.01)

(74) Agents: SARUP, David, Alexander et al.; Alcatel-Lucent Telecom Ltd., Unit 18, Core 3, Workzone, Innova Business Park, Electric Avenue, Enfield EN3 7XU (GB).

(21) International Application Number:
PCT/EP2008/004393

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 30 May 2008 (30.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07290771.0 21 June 2007 (21.06.2007) EP

(71) Applicant (for all designated States except US): ALCA-TEL LUCENT [FR/FR]; 54, rue La Boétie, F-75008 Paris (FR).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KISEL, Andrey [GB/GB]; 4 In the Ray, Maidenhead, Berkshire SL6 8DH (GB). ROBINSON, David [GB/GB]; Christmas Cottage, Woodsend, Aldbourne, Wiltshire SN8 2NP (GB).

Published:
— with international search report

(54) Title: CONTENT-ON-DEMAND METHOD AND NETWORK THEREFOR

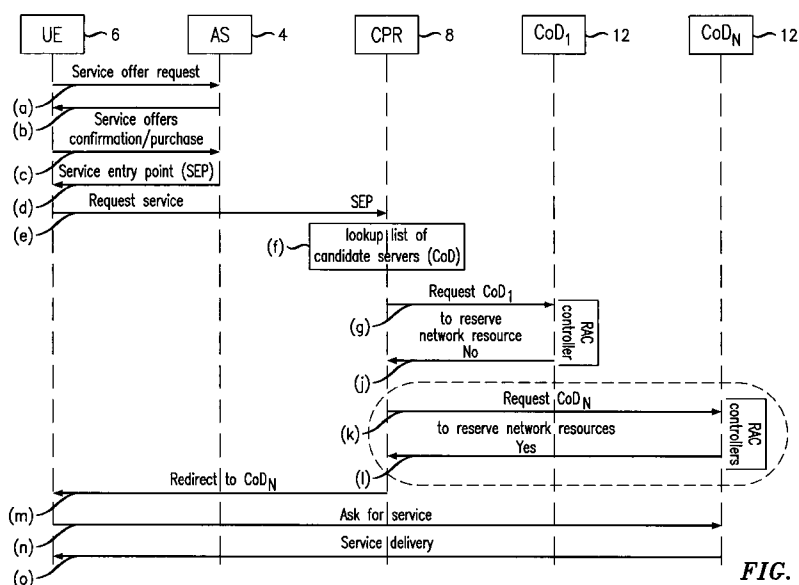


FIG. 3

(57) Abstract: A method is provided of providing a content-on-demand service to a user terminal in a system comprising a plurality of content-on-demand servers and a packet-switched network. The method comprises the steps of: a first of the content-on-demand servers seeking to reserve packet-switched network resources to enable service delivery to the user terminal, said first server sending a message that resource reservation was insufficient, a further of the content-on-demand servers seeking to reserve packet-switched network resources to enable service provision to the user terminal, said further server sending a message that resource reservation is sufficient, and said further server providing the content to the user terminal via the packet-switched network.

CONTENT-ON-DEMAND METHOD AND NETWORK THEREFOR

Field of the Invention

The present invention relates to telecommunications, in particular to delivery systems of content such as video.

Description of the Related Art

- 5 As shown in Figure 1, in a known network for providing video services such as interactive Internet Protocol Television, IPTV, an application server AS is connected, via that interface, to a central Resource and Admission Control Subsystem (RACS) server. The application server includes a Resource and Admission Control (RAC) interface via which the application server is connected to the RACS server.
- 10 The application server is also connected to Content-on-Demand (CoD) servers, only one of which is shown in Figure 1 for simplicity.

- In use, the application server receives a Content-on-Demand (CoD) service request from a user terminal (denoted User Equipment, UE, such as a set top box attached to a television set or a digital mobile handset including a screen display).
- 15 The request is passed to the RACS server which then seeks to reserve appropriate resources of the Internet Protocol network. If resources can be reserved, the RACS server then sends a resource reservation acknowledgement to the application server which then forwards both an acknowledgment of the service request and an identifying address of the CoD server selected to supply the service. This information
- 20 enables the user terminal to then seek to establish the content-on-demand session. It will thus be seen that the RACS server handles both resource reservation and admission control functions.

- In known approaches, the interface to the RACS server may be in the application server, or alternatively in the CoD server, but in either case a central
- 25 RACS server is contacted. The central RACS server requires detailed knowledge of network topology so as to be effective in reserving appropriate IP network resources.

- 2 -

Summary of the Invention

The reader is referred to the appended independent claims. Some preferred features are laid out in the dependent claims.

An example of the present invention is a method of providing a content-on-demand service to a user terminal in a system comprising a plurality of content-on-demand servers and a packet-switched network. The method comprises the steps of:

5 a first of the content-on-demand servers seeking to reserve packet-switched network resources to enable service delivery to the user terminal,

said first server sending a message that resource reservation was insufficient,

10 a further of the content-on-demand servers seeking to reserve packet-switched network resources to enable service provision to the user terminal,

said further server sending a message that resource reservation is sufficient,

and

said further server providing the content to the user terminal via the packet-switched network.

15

In its preferred embodiments, CoD servers are adapted to make resource reservations. If one CoD server cannot make the reservation then another CoD server is instead requested to make the reservation. The content is preferably video.

20 The order in which the servers are requested to make the reservation can be according to a priority list. The list can be adaptive to take account of operational histories of servers.

In its preferred embodiments, the present invention provides a resilient and adaptive mechanism for resource reservation for interactive Internet Protocol television (IPTV) services, such as video content-on-demand (CoD) services.

25

As compared to the prior art, the inventor realised that preferred embodiments would be advantageous as they avoid use of a central RACS server and instead distribute resource reservation control functionality. This removed a central point of possible failure and avoided a requirement of the centralised server, namely that if

30 have exact knowledge of network topology.

Brief Description of the Drawings

An embodiment of the present invention will now be described by way of example and with reference to the drawings, in which:

5 Figure 1 is a diagram illustrating a known network for interactive IPTV services (PRIOR ART),

 Figure 2 is a diagram illustrating a network for interactive IPTV services according to a first embodiment of the present invention,

 Figure 3 is a message sequence diagram illustrating reserving network
10 resources so as to provide a requested service in the network shown in Figure 2,

 Figure 4 is a further message sequence diagram showing more detail of how resources are reserved in the network shown in Figure 2, and

 Figure 5 is a diagram illustrating a network for interactive IPTV services according to a second embodiment of the present invention.

15

Detailed Description

When considering a known system, the inventor realised that it would be useful to remove the central RACS server and instead adapt the Content-on-Demand CoD servers to handle the relevant functionality.

20

A network

As shown in Figure 2, a network 2 for interactive IPTV services consists of an application server, AS, 4 connectable to a user terminal, UE, 6. The user terminal is also connectable to a Control Protocol Redirector 8 that includes a Resource and
25 Admission Control (RAC) interface 10. That interface 10 is connected to a series of Content-on-Demand CoD servers, CoD1,...CoDn, 12. In this example, each CoD server provides digital multimedia content e.g. video content and may be referred to as a video content-on-demand server or a video-on-demand server. Each CoD server 12 includes a Resource and Admission Control (RAC) controller 14. Each Control

- 4 -

Protocol Redirector 8 is also connected to a Relational DataBase Management System (RDBMS) 16 in which a list of CoD servers is stored. The user terminal UE 6 is connected to the CoD servers 12 via an Internet Protocol network 18.

5 Operation

As shown in Figure 3, the network 2 operates as follows.

The user terminal 6 first sends (step a) to the application server 4 a request for a particular video stream, such as a video-film, recording of a sports event or other multimedia content. The application server 4 responds by sending (step b) a service request authorisation to the mobile terminal 6, which then sends (step c) a further confirmation back to the application server 4 that the selected content is that desired by the user.

The application server 4 then sends (step d) a service entry point (SEP) to the mobile terminal 6. The SEP identifies the Control Protocol Redirector 8 to which the mobile terminal 6 is to then send the authorised request for service. Accordingly, the mobile terminal 6 sends (step e) that request.

Upon receiving that request, which identifies the user terminal, the control protocol redirector 8 looks up (step f) , in real time in the RDBMS (which can be considered a meta-data store), a list of candidate CoD servers 12 to provide the service to the user terminal, and selects the apparently most suitable.

Selection of CoD server

A simple approach used to select which CoD server to request to address a particular service request, is to assume that more than one CoD server can possibly provide the requested service to a user terminal 6, but that each CoD server has an associated weighting as to its desirability for handling requests from particular geographical locations. For example, a list is stored of the order in which servers might preferably serve the user terminal 6, based on e.g. proximity of server to user terminal's current location. The control protocol redirector 8 works down the list until

- 5 -

a CoD server is identified that currently has the resources available to provide the requested service.

In particular, the first server on the list is requested (step g) to reserve the network resources required to provide the service. This request is received by the
5 Resource and Admission Controller, RAC, 14 in the addressed server 12.

As shown in Figure 4, the RAC controller 14 seeks to create a labelled path using known Resource reSerVation Protocol – Traffic Engineering (RSVP-TE protocol) so as to reserve the appropriate resources of the Internet Protocol network 18 via which the content is sent to the user terminal 6. As shown in that Figure, this is
10 done by the selected CoD server 12 sending (step h) an RSVP-TE reservation request message into the IP network 18 where corresponding PATH and RES messages between hops between the user terminal 6 and server 12 are sought to be set up. If successful resource reservation occurs, a reservation acknowledgement message (PATH message) in reply (step i) to the RAC controller 14 in the server 12.

15 Referring back to Figure 3, imagine say that reservation was not successful for the first server on the list. Accordingly, the control protocol redirector 8 is informed (step j) that that particular server was unable to make the network resource reservation. Accordingly, the control protocol redirector 8 sends (step k) to the next CoD server in the list a request to reserve the network resources required.

20 This process is repeated, working down the list of servers, until a server successfully effects the network resource reservation. Imagine it is for the nth server on the list (where n is a positive integer, e.g. 2) that a successful resource reservation occurs. A reservation acknowledgement message (PATH message) is sent (step i) from the IP network 18 to the RAC controller 14 in the server 12. The RAC
25 controller 14 in this nth server 12 then sends (step l) a positive acknowledgement that resources were reserved to the control protocol redirector 8.

The control protocol redirector 8 then sends (step m) an instruction to the user terminal 6 to request service from the particular server 12 which successfully reserved the resources. In other words, the control protocol redirector 8 returns the address of
30 the CoD server, which will deliver the content to the user terminal 8.

- 6 -

The user terminal 12 then sends (step n) a request for service to the CoD server which will deliver the content. That CoD server responds (step o) to the user terminal 12 by delivering the requested video service, such as a data stream of a selected movie.

5

Another example system

In an alternative embodiment, otherwise similar to that described in relation to Figures 2 to 4 above, the list of CoD servers to be considered for a service request is adaptively reordered to additionally take into account, for each CoD server, the time since last failure and time taken to rectify the failure. A failure is a failure of the CoD server itself or the network connection between that CoD server and the user terminal. For example, a CoD server for which it is quick to rectify a failure and has not experienced a failure recently may be preferred over another. In mathematical terms, if

$$\sum_{k=1}^N w_k = 1$$

15 , where w_k is a weight denoting a preference (i.e. probability) for selecting k -th CoD server, then the next CoD server l is, for example, selected according to the following equation:

$$l = \underset{k}{MAX} \left\{ \frac{w_k}{\sum_{n=1}^{n \in (\Delta t_n < \Delta T)} \frac{\Delta T - \Delta t_n}{\Delta T}} \right\}$$

20 , where w_k - is a weight for selecting k -th CoD server, ΔT – average time to rectify failure, Δt_n - time from the n -th recoded failure on the k -th CoD server.

For example, let's say we have three video servers CoD1, CoD2 and CoD3 currently available with associated weights of 0.5 for CoD1, 0.3 for CoD2, and 0.2 for CoD3. This means that ignoring other factors, the highest preference is for CoD1 and the lowest preference is for CoD3, among the CoD servers on the list, and
25 accordingly, CoD1 will be selected if it has sufficient resources. However, in addition to consideration of these weights, the number of intermittent network failures is

- 7 -

monitored and considered as part of CoD server selection. We know that it takes on average ΔT to rectify a genuine failure. However, let's assume that there are a number of intermittent short term failures due to network glitches all resolve in less than ΔT . For example, let's say $\Delta T = 5$ hours, and three intermittent short term failures for CoD1 have been reported, with times since failure of 1h, 2h and 3 hours.

Then using the equation, the initial weight for CoD1 is adjusted following:

$$l = \text{MAX}_k \left\{ \frac{w_k}{\sum_{n \in (\Delta t_n < \Delta T)} \frac{\Delta T - \Delta t_n}{\Delta T}} \right\}, \text{ the weight for CoD1 becoming}$$

$$\frac{0.5}{\left(\frac{5-1}{5}\right) + \left(\frac{5-2}{5}\right) + \left(\frac{5-3}{5}\right)} = 0.27$$

This means that in the presence of those intermittent failures, server CoD1 no longer has the highest weight and server CoD2, which has a weight of 0.3, would be selected instead.

Another example system

As shown in Figure 5, another embodiment, otherwise similar to that shown in Figure 2, includes a load balancer stage 30 connected between the user terminal and control protocol redirector 8'. Also there are multiple instances of the control protocol redirector 8', which are distributed over different locations or, in an alternative embodiment, localized near the load balancer 30 stage. The redirectors 8' each include a RAC interface 10' for connection to RAC controllers 14' in CoD servers 12'. The redirectors need no specific knowledge of the location of CoD servers. The CoD servers 12' automatically and adaptively register or de-register in the CoD list in RDBMS storage 16'.

- 8 -

Some further options

In some other embodiments, other techniques for reserving resources in networks instead of RSVP- TE protocol can be used, for example MultiProtocol Label Switching MPLS.

5

General

The example embodiments detailed above can be considered as dedicated IPTV sub-systems of a network (such as a so-called Next Generation Network, NGN). Some alternative embodiments are Internet protocol Multimedia Subsystem (IMS)-
10 based IPTV systems in which resource reservation and admission control is instead done by call setup control functions. Video can be for example films, clips, pictures or slide shows. In some embodiments content other than video, for example audio, or other multimedia can be provided.

The present invention may be embodied in other specific forms without
15 departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

Claims:

1. A method of providing a content-on-demand service to a user terminal in a system comprising a plurality of content-on-demand servers and a packet-switched network, the method comprising the steps of:
- 5 a first of the content-on-demand servers seeking to reserve packet-switched network resources to enable service delivery to the user terminal,
- said first server sending a message that resource reservation was insufficient,
- a further of the content-on-demand servers seeking to reserve packet-switched
- 10 network resources to enable service provision to the user terminal,
- said further server sending a message that resource reservation is sufficient,
- and
- said further server providing the content to the user terminal via the packet-switched network.
- 15 2. A method according to claim 1, in which the content comprises video.
3. A method according to claim 1, in which each server has an associated coverage area, and the first server is selected dependent upon in which coverage area the user terminal requesting the service currently resides.
4. A method according to claim 1, in which a controller uses a list of candidate
- 20 content-on-demand servers, to determine the sequence in which servers are to be requested to seek to reserve resources, the controller requesting in turn the servers to reserve resources and to send a message whether resource reservation was sufficient, until one reports that resource reservation is sufficient.
5. A method according to claim 4, in which the list is selected dependent upon in
- 25 which coverage area the user terminal requesting the service currently resides.

- 10 -

6. A method according to claim 4, in which the sequence is dependent on information as to previous failures associated with CoD servers referred to in the list.
7. A method according to claim 6, in which the sequence is dependent on time since last failure.
- 5 8. A system for content-on-demand services,
the system comprising a plurality of content-on-demand servers and a packet-switched network;
at least two of the content-on-demand servers being candidates to provide content addressed to a user terminal in response to a request for that content from the
10 user terminal;
wherein each candidate content-on-demand server includes a resource reservation stage operative to seek to reserve resources of the network so as to enable content delivery by that content-on-demand-server.
9. A system according to claim 8, in which the content comprises video.
- 15 10. A system according to claim 8, further comprising a controller operative to inspect a list of candidate content-on-demand servers, to determine the sequence in which servers are to be requested to seek to reserve resources, the controller in use requesting in turn the servers to reserve resources and to send a message whether resource reservation was sufficient, until one of the servers reports that resource
20 reservation is sufficient.
11. A system according to claim 10, in which the controller is also operative to select the list, from among a plurality of lists, dependent upon in which coverage area the user terminal requesting the service currently resides.
12. A system according to claim 10, in which the controller is a control protocol
25 redirector to which the user terminal sends an authorised service request.

- 11 -

13. A system according to claim 10, further comprising a Relational DataBase Management System in which the list is stored.

1/4

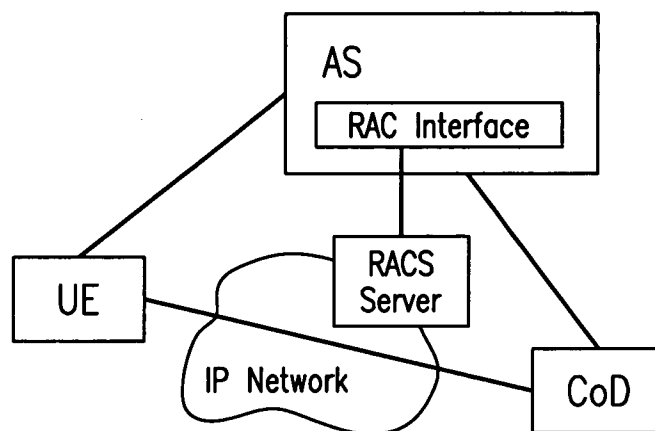


FIG. 1
PRIOR ART

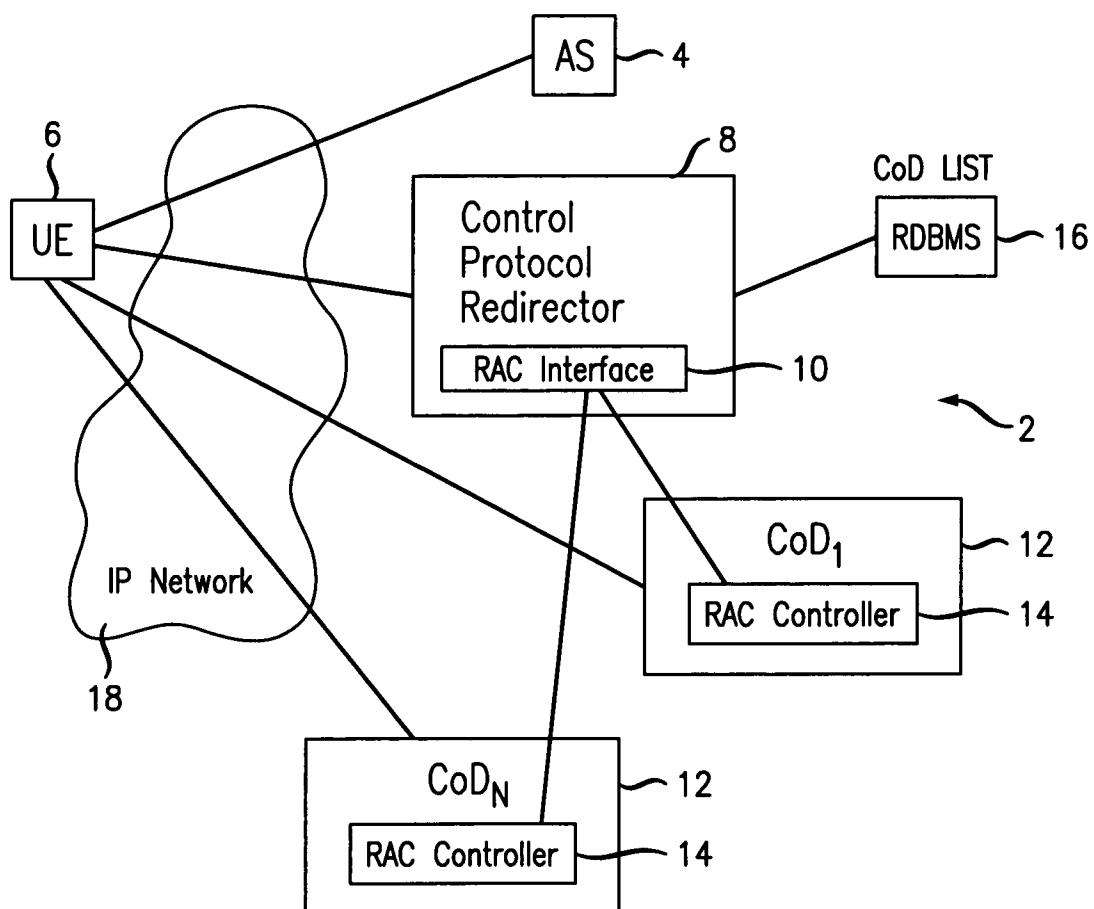


FIG. 2

2/4

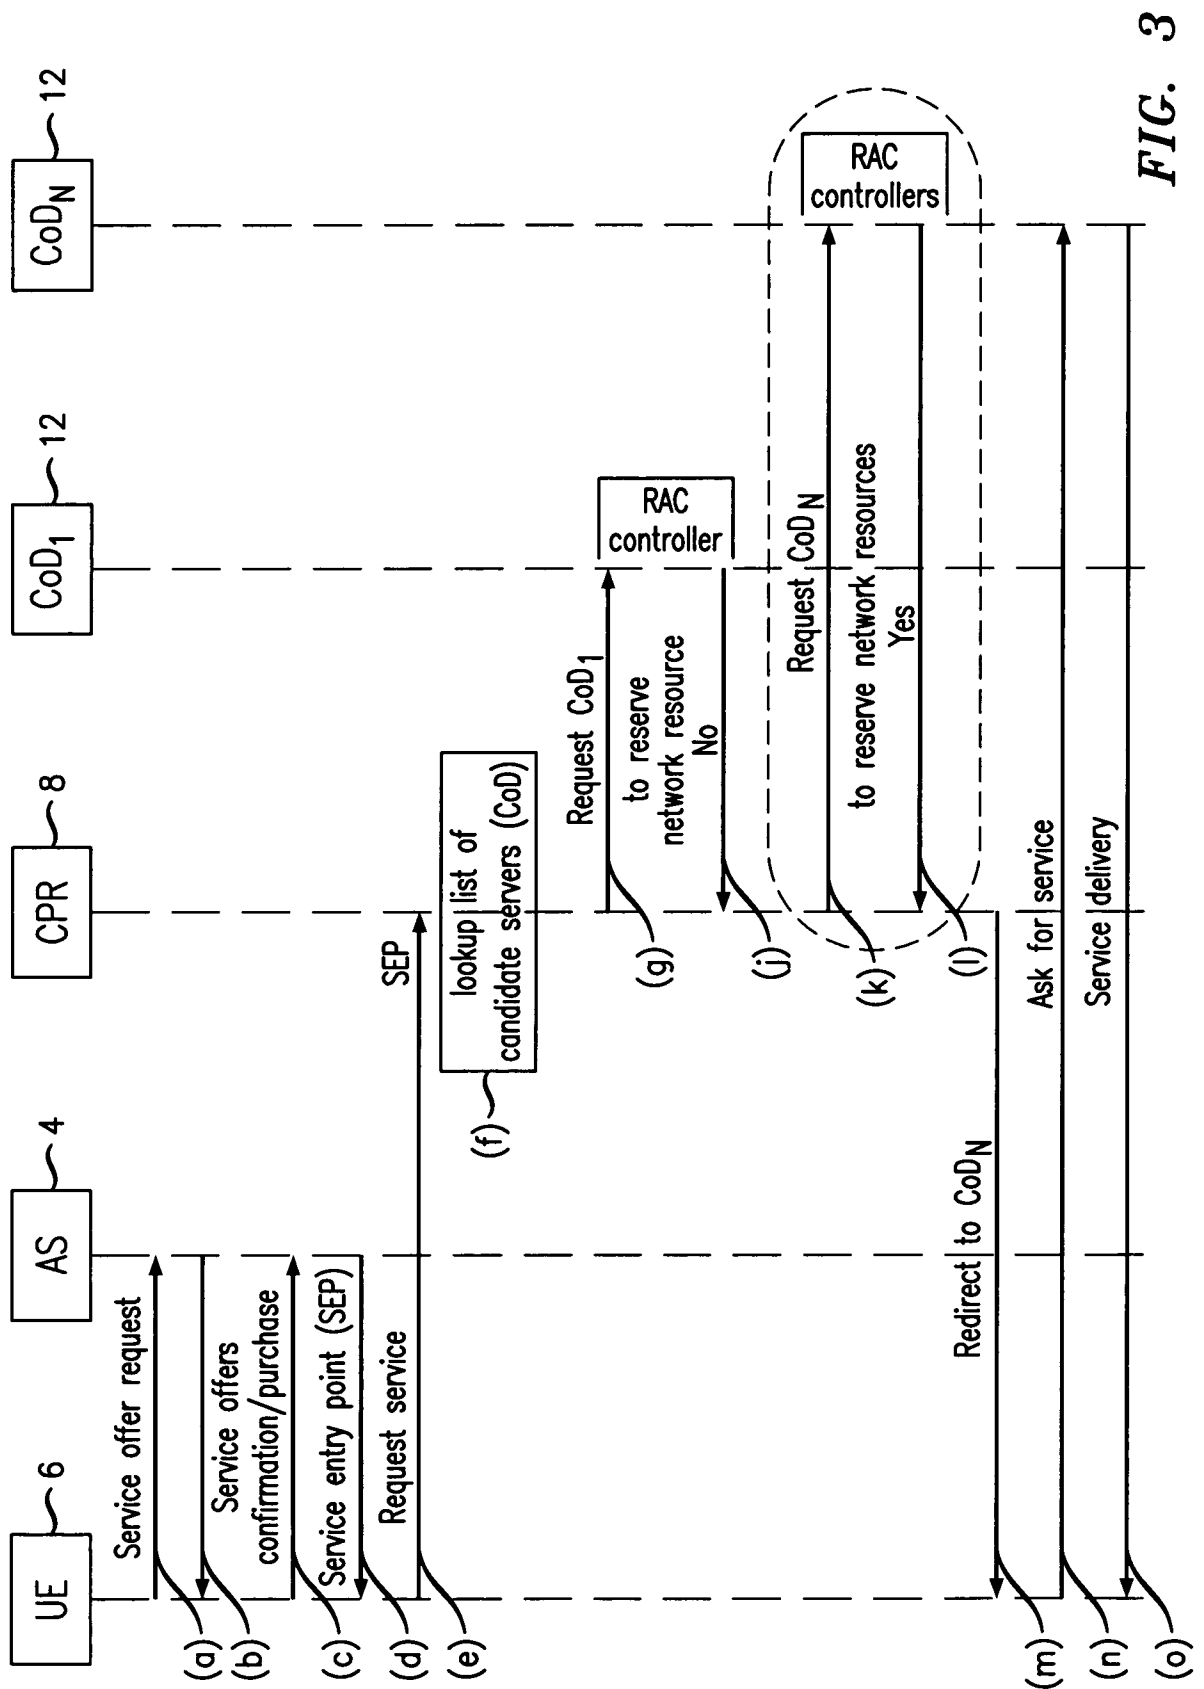
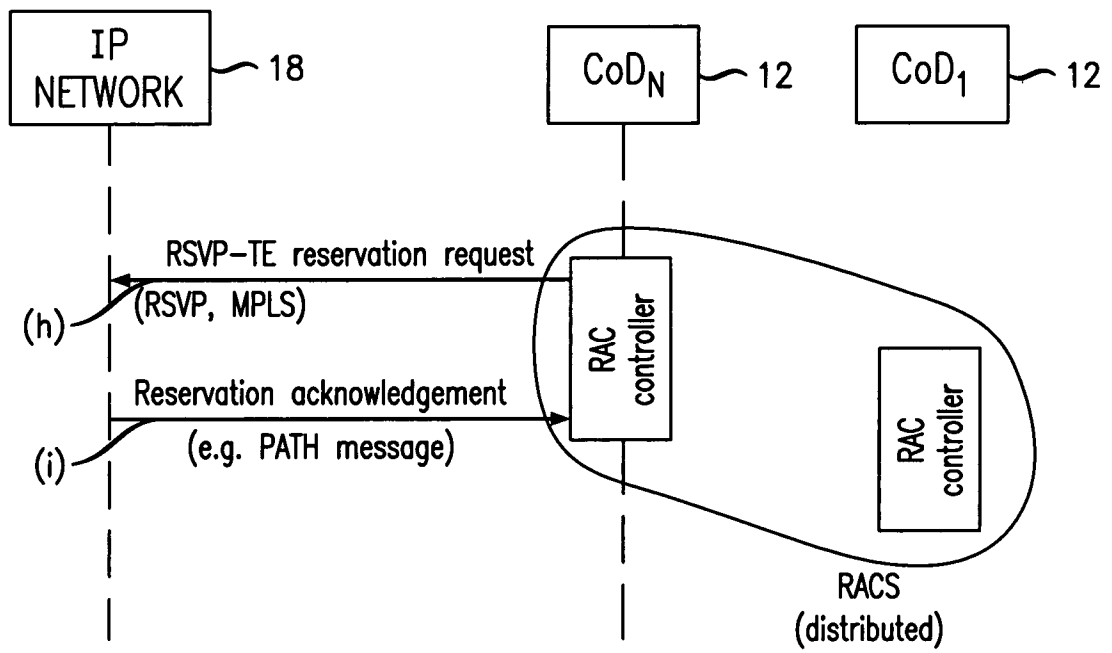


FIG. 3

3/4

**FIG. 4**

4/4

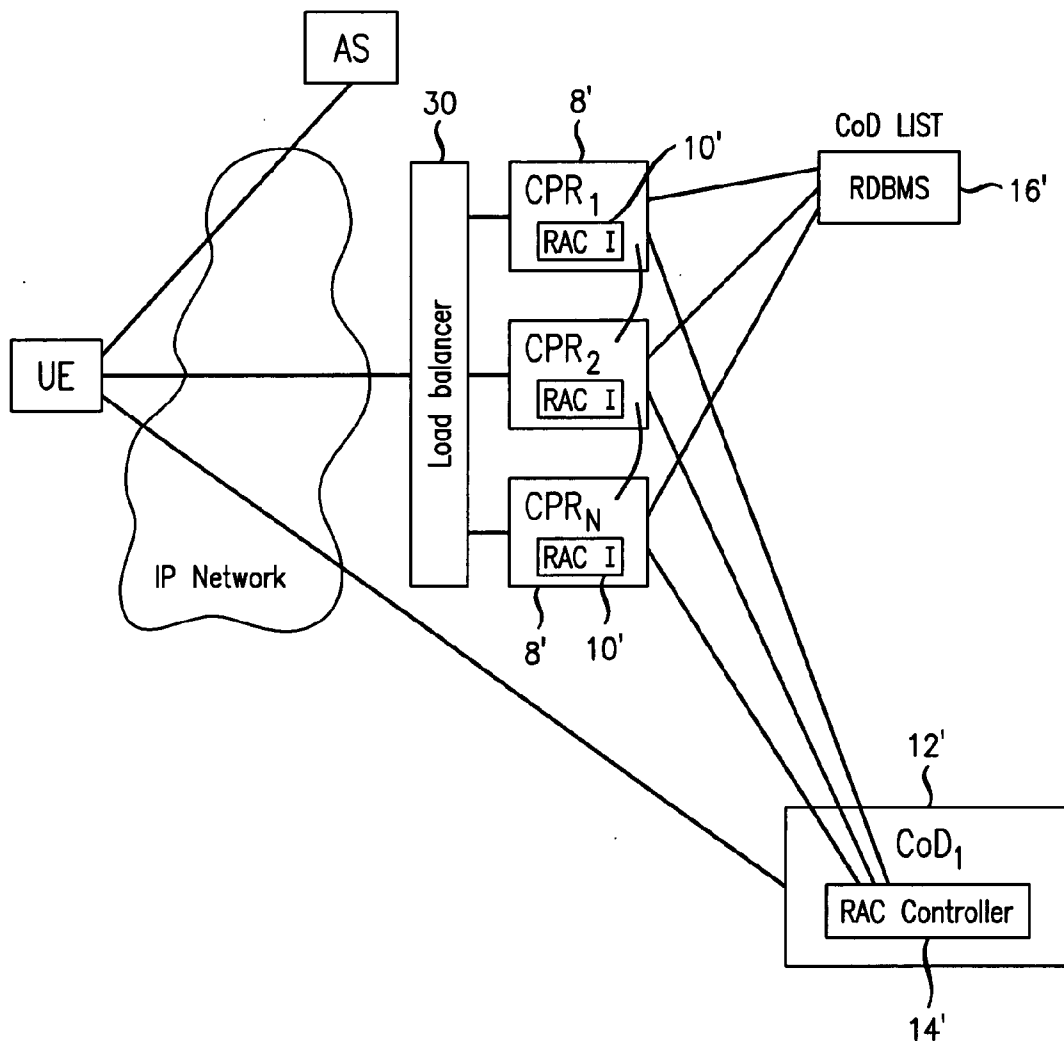


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2008/004393

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/046405 A1 (LAHR NILS B [US]) 18 April 2002 (2002-04-18) paragraphs [0006], [0042], [0047], [0062], [0063], [0073], [0074]	1-13
A	US 2007/011260 A1 (CHIU FU-SHENG [TW]) 11 January 2007 (2007-01-11) paragraph [0002]; claim 1; figure 2a	1-13
A	US 2003/021282 A1 (HOSPODOR ANDREW D [US]) 30 January 2003 (2003-01-30) the whole document	1-13
	----- -/-	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

16 July 2008

Date of mailing of the international search report

24/07/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5918 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mannekens, Jan

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2008/004393

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EUROPEAN TELECOMMUNICATIONS STANDARDS INSTITUTE 2007: "Telecommunications and Internet Converged Services and Protocols for Advanced Networking (TISPAN); Resource and Admission Control Sub-system (RACS); Functional Architecture; Release 2" DRAFT ETSI TS 182 019 V0.5.2 (2007-04), April 2007 (2007-04), pages 1-84, XP014037071 the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/EP2008/004393

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002046405 A1	18-04-2002	NONE	
US 2007011260 A1	11-01-2007	CN 1893429 A	10-01-2007
US 2003021282 A1	30-01-2003	WO 03012667 A1	13-02-2003