

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Process for recovering liquid chemical products in chemical production facility

(51)⁶ International Patent Classification(s)
C07C 051/00

(21) Application No: **2004242544** (22) Application Date: **2004.09.28**

(30) Priority Data

(31) Number (32) Date (33) Country
2003-348024 2003.10.07 JP
7

(43) Publication Date : **2005.04.21**

(43) Publication Journal Date : **2005.04.21**

(71) Applicant(s)
Mitsubishi Chemical Corporation

(72) Inventor(s)
Suzuki, Yoshiro; Ogawa, Yasushi; Yada, Shuhei; Sakakura, Yasuyuki

(74) Agent/Attorney
Griffith Hack, 509 St Kilda Road, Melbourne, VIC, 3004

ABSTRACT OF THE DISCLOSURE

The present invention provides a process for recovering liquid chemical products, in which the residual liquid chemical products remaining in respective handling devices in a chemical production facility can be efficiently and safely recovered therefrom without leakage thereof out of the system.


In the process for recovering liquid chemical products in a chemical production facility according to the present invention, the chemical products are withdrawn from the handling devices through bottom discharge pipes (14), (15), (16) and (17) thereof, directly collected by the gravity thereof into a common inclined collection pipe (13) located at a position lower than the bottom discharge pipes and connected to the bottom discharge pipes, and then delivered by the gravity thereof through the inclined collection pipe (13) to a recovery tank (1) located at a position lower than the inclined collection pipe and connected to a lower end of the inclined collection pipe.

VERIFICATION OF TRANSLATION

I, Toshisada YAMAMURO of 170, Mamashita, Minamiashigara-shi, Kanagawa-ken, Japan, do solemnly declare that I, a translator of the document attached, am well acquainted with the English and Japanese languages and certify that the following is a true translation to the best of my knowledge and belief of International Application No. PCT/JP2004/ 14153 filed September 28, 2004.

Dated this 22nd day of December 2004.

Signature of Translator:

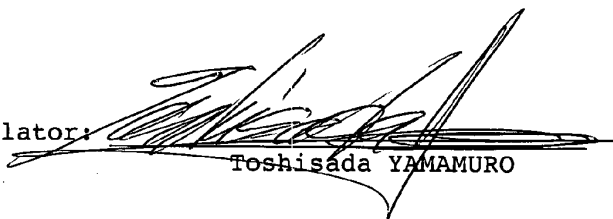

Toshisada YAMAMURO

PCT REQUEST

0	For receiving Office use only	
0-1	International Application No.	
0-2	International Filing Date	
0-3	(Receipt seal)	
0-4	Form-PCT/RO/101 Request	
0-4-1	Prepared by	JPO-PAS 0321
0-5	Petition The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	Japan Patent Office (RO/JP)
0-7	Applicant's or agent's file reference	A4064WO
I	Title of invention	PROCESS FOR RECOVERING LIQUID CHEMICAL PRODUCTS IN CHEMICAL PRODUCTION FACILITY
II	Applicant	
II-1	This person is:	applicant only
II-2	Applicant for	all designated States except US
II-4	Name	MITSUBISHI CHEMICAL CORPORATION
II-5	Address	33-8, Shiba 5-chome, Minato-ku, Tokyo 1080014 Japan
II-6	State of nationality	JP
II-7	State of residence	JP
II-8	Telephone No.	03-6414-3900
II-9	Facsimile No.	03-6414-3939

PCT REQUEST

III-1	Applicant and/or inventor	
III-1-1	This person is:	applicant and inventor
III-1-2	Applicant for	US only
III-1-4	Name (LAST, First)	SAKAKURA Yasuyuki
III-1-5	Address:	c/o Mitsubishi Chemical Engineering Corporation, 34-6, Shiba 5-chome, Minato-ku, Tokyo 1080014 Japan
III-1-6	State of nationality	JP
III-1-7	State of residence	JP
III-2	Applicant and/or inventor	
III-2-1	This person is:	applicant and inventor
III-2-2	Applicant for	US only
III-2-4	Name (LAST, First)	YADA Shuhei
III-2-5	Address:	c/o Mitsubishi Chemical Corporation, 1, Toho-cho, Yokkaichi-shi, Mie 5108530 Japan
III-2-6	State of nationality	JP
III-2-7	State of residence	JP
III-3	Applicant and/or inventor	
III-3-1	This person is:	applicant and inventor
III-3-2	Applicant for	US only
III-3-4	Name (LAST, First)	OGAWA Yasushi
III-3-5	Address:	c/o Mitsubishi Chemical Corporation, 1, Toho-cho, Yokkaichi-shi, Mie 5108530 Japan
III-3-6	State of nationality	JP
III-3-7	State of residence	JP

PCT REQUEST

III-4	Applicant and/or inventor	
III-4-1	This person is:	applicant and inventor
III-4-2	Applicant for	US only
III-4-4	Name (LAST, First)	SUZUKI Yoshiro
III-4-5	Address:	c/o Mitsubishi Chemical Corporation, 1, Toho-cho, Yokkaichi-shi, Mie 5108530 Japan
III-4-6	State of nationality	JP
III-4-7	State of residence	JP

PCT REQUEST

IV-1	Agent or common representative; or address for correspondence The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name	OKADA Kazuhiko
IV-1-2	Address:	Okada & Associates, 6F, Kudan Kangyo Bldg., 10-1, Kudan-Kita 1-chome, Chiyoda-ku, Tokyo 1020073 Japan
IV-1-3	Telephone No.	03-5275-3533
IV-1-4	Facsimile No.	03-5210-7189
IV-1-5	Agent's identification No.	100097928
V	Designation of States	
V-1	In the international application filed with this Request, all members of PCT at the filing stage are designated, all obtainable kinds are protected and both regional and national patent are protected when coming under based on Rule 4.9.	
VI-1	Priority claim of earlier national application	
VI-1-1	Filing date	07.10.2003
VI-1-2	Number	2003-348024
VI-1-3	Country	JP

PCT REQUEST

VI-2	Priority document request The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) identified above as item(s):	VI-1	
VII-1	International Searching Authority Chosen	(ISA/JP)	
VIII	Declarations		
VIII-1	Declaration as to the identify of the inventor	-	
VIII-2	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent	-	
VIII-3	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application	-	
VIII-4	Declaration inventorship (only for the purposes of the designation of the United States of America)	-	
VIII-5	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty	-	

PCT REQUEST

IX	Check list	Number of sheets	electronic file(s) attached
IX-1	Request (including declaration sheets)	4	X
IX-2	Description (excluding sequence listing part)	8	X
IX-3	Claims	1	X
IX-4	Abstract	1	X
IX-5	Drawing	1	X
IX-7	Total	15	
	Accompanying items	Paper document(s) attached	electronic file(s) attached
IX-8	Fee calculation sheet	-	X
IX-17	PCT-SAFE electronic application	-	-
IX-19	Figure of the drawings which should accompany the abstract		
IX-20	Language of filing of the international application	Japanese	
X-1	Signature (seal) of applicant, agent or common representative	/100097928/	
X-1-1	Name (LAST, First)	OKADA Kazuhiko	
X-1-2	Name of signer		
X-1-3	Title		

PCT REQUEST

FOR RECEIVING OFFICE USE ONLY

10-1	Date of actual receipt of the purported international application	
10-2	Drawings:	
10-2-1	Received	
10-2-2	Not received	
10-3	Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application	
10-4	Date of timely receipt of the required corrections under PCT Article 11(2)	
10-5	International Searching Authority	ISA/JP
10-6	Transmittal of search copy delayed until search fee is paid	

FOR INTERNATIONAL BUREAU USE ONLY

11-1	Date of receipt of the record copy by the International Bureau	
------	--	--

DESCRIPTION

PROCESS FOR RECOVERING LIQUID CHEMICAL PRODUCTS IN CHEMICAL
PRODUCTION FACILITY

TECHNICAL FIELD

The present invention relates to a process for recovering liquid chemical products in a chemical production facility, and more particularly, to a process for efficiently and safely recovering residual chemical products from respective handling devices in a chemical production facility for dealing with liquid chemical products such as acrolein and acrylic acid at a preparatory stage before operation of the facility as well as during or after the operation thereof.

BACKGROUND ARTS

Chemical production facilities for dealing with liquid chemical products such as acrylic acid, include various handling devices such as reactors, distillation columns, storage tanks and other equipments fitted thereto such as pumps (refer to Japanese Patent Application Laid-open (KOKAI) No. 2003-146936). In the chemical production facilities, the liquid chemical products have been sampled from the respective handling devices during operation

thereof, and subjected to inspection and analysis to check results of reaction in the operating reactors as well as qualities of distillates and bottom liquids obtained from the distillation columns. Also, in the case where the chemical production facilities are stopped for inspection and repair thereof, the chemical products are discharged from the respective devices into containers, etc., by means of a pump. In particular, if (meth)acrolein, (meth)acrylic acid, (meth)acrylic acid esters, etc., remain even in a very small amount in the handling devices or conduits, these substances tends to be polymerized and form solids therein, resulting in clogging of the devices or conduits. Therefore, these substances must be surely removed from the handling devices or conduits after stopping the operation of the facilities.

DISCLOSURE OF THE INVENTION

PROBLEM TO BE SOLVED BY THE INVENTION

Meanwhile, in the chemical production facilities, the liquid chemical products are individually withdrawn from the respective handling devices into containers, etc. For this reason, in some operating procedures, there is caused such a risk that the chemical products are exposed to atmospheric air, resulting in environmental pollution due to scattering of vapor thereof as well as contamination of working

environment due to scattering of the toxic or malodor substances. In addition, in the case where the chemical products have a flashing point lower than a liquid temperature within the respective handling devices, there is also caused such a risk that a detonating gas is formed upon discharging the liquid chemical products therefrom into containers, etc.

The present invention has been made in view of the above conventional problems. An object of the present invention is to provide a process for recovering liquid chemical products as residues remaining in respective handling devices of a chemical production facility which is capable of efficiently and safely recovering the liquid chemical products without leakage thereof out of the system.

MEANS FOR SOLVING THE PROBLEM

In the present invention, upon recovering liquid chemical products from respective handling devices in a chemical production facility, in order to prevent contamination of ambient environment and working environment, the liquid chemical products are discharged from the handling devices through respective bottom discharge pipes and directly collected by the gravity thereof into a common inclined collection pipe, and then delivered by the gravity thereof through the inclined collection pipe toward a

recovery tank located at a lowermost position of the chemical production facility.

That is, according to the aspect of the present invention, there is provided a process for recovering liquid chemical products in a chemical production facility including a plurality of handling devices therefor, in which the residual chemical products are recovered from the respective handling devices, comprising:

withdrawing the chemical products from the respective handling devices through bottom discharge pipes thereof;

collecting the thus withdrawn chemical products into a common inclined collection pipe located at a position lower than the bottom discharge pipes and connected to the bottom discharge pipes; and

delivering the chemical products through the inclined collection pipe to a recovery tank located at a position lower than the inclined collection pipe and connected to a lower end of the inclined collection pipe.

EFFECT OF THE INVENTION

According to the present invention, upon recovering chemical products remaining as residues in respective handling devices in a chemical production facility for dealing with liquid chemical products, a common inclined collection pipe is provided so that the chemical products

are directly collected by the gravity thereof into the inclined collection pipe from the respective handling devices and then recovered therethrough into a recovery tank. Therefore, it is possible to efficiently and safely recover the liquid chemical products without leakage thereof out of the system and occurrence of malodor.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is a flow diagram showing a chemical production facility suitably used in a process for recovering liquid chemical products according to the present invention.

EXPLANATION OF REFERENCE NUMERALS

1: Recovery tank; 10: Blower; 11: Waste (gas) treatment device; 12: Feed line for incombustible gas; 13: Inclined collection pipe; 14: Bottom discharge pipe; 15: Bottom discharge pipe; 16: Bottom discharge pipe; 17: Bottom discharge pipe; 2: Distillation column; 3: Sight glass; 4: Strainer; 5: Pump; 6: Sampling box; 7: Storage tank; 8: Drain pot; 9: Tank

PREFERRED EMBODIMENT FOR CARRYING OUT THE INVENTION

The preferred embodiments of the present invention will be explained below by referring to the accompanying drawing. Fig. 1 is a flow diagram showing a chemical production

facility suitably used in the process for recovering liquid chemical products according to the present invention. In the following descriptions, the process for recovering liquid chemical products in a chemical production facility is referred to merely as a "recovery process".

The recovery process of the present invention is such a process wherein in a chemical production facility including a plurality of handling devices for dealing with liquid chemical products, the residual chemical products are efficiently and safely recovered from the respective handling devices. In the present invention, examples of the liquid chemical products may include liquid organic chemical products exhibiting a vapor pressure at ordinary temperature (25°C), in particular, such organic chemical products exhibiting a vapor pressure of 0.01 to 50 kPa at the ordinary temperature. In addition, examples of the chemical products suitably handled by the process of the present invention may include combustible liquid organic chemical products, more specifically, toxic substances such as acrolein as well as combustible substances having a strong odor and a low threshold concentration as to odor such as (meth)acrylic acid and (meth)acrylic acid esters. In the present invention, examples of the handling devices may include devices or equipments capable of performing various treatments such as reactors, distillation columns,

absorption columns, stripping columns, rectifying columns, separators, extraction columns, adsorption columns, collection columns and storage tanks.

The recovery process of the present invention can be applied, for example, to the chemical production facility as shown in Fig. 1. The chemical production facility illustrated in Fig. 1 is a facility for production of acrylic acid, in which an aqueous acrylic acid solution obtained by oxidation reaction of propylene or propane is purified, and includes various handling devices mainly constituted by a distillation column (2) for distilling the aqueous acrylic acid solution, a pump (5) for withdrawing a bottom liquid from the distillation column, a strainer (4) for separating polymers of acrylic acid (solids) produced in the distillation column (2), a storage tank (7) for storing distillates obtained from the distillation column (2), etc.

More specifically, the distillation column (2) may be an azeotropic separation column for distilling the aqueous acrylic acid solution with an azeotropic solvent such as toluene, methyl isobutyl ketone and acetic acid esters which is provided at a bottom thereof with a discharge pipe connected to the strainer (4) and the pump (5) for withdrawing a bottom liquid therefrom. The bottom liquid withdrawn through the discharge pipe is delivered to a facility for the subsequent step (not shown) by means of the

pump (5). The storage tank (7) may be a tank for storing the distillates obtained from the distillation column (2). The distillates stored in the storage tank may be fed as reflux or effluent to the distillation column (2) or the other facilities.

The distillation column (2) is further provided at the bottom thereof with a drain nozzle for withdrawing distillation residues therefrom, which is connected at a tip end thereof to a bottom discharge pipe (14) through a sight glass (3). The strainer (4) is provided for separating solids which tend to be produced upon heating the easy-polymerizable substances such as (meth) acrylic acid and (meth)acrylic acid esters in the distillation column (2). The strainer (4) may be, for example, of a bucket type, in particular, preferably such a type having a large-volume wire-netting portion. The strainer (4) and the pump (5) are respectively connected at the bottom thereof with drainpipes for discharging residues therefrom. These drainpipes are connected with a drain pot (8) that is provided inside thereof with a perforated plate for separating solids from the residues. The drain pot (8) may be such a device for observing and ascertaining the condition of waste water discharged therethrough by opening a lid thereof. The drain pot (8) is provided at a bottom thereof with a bottom discharge pipe (15) for discharging the residues from the

drain pot.

Also, the pump (5) is connected at an outlet side thereof to a sampling box (6) through a branched pipe for sampling a part of the bottom liquid fed from the distillation column (2). Thus, the liquid chemical products are sampled during the operation of the facility into the sampling box (6) to inspect and analyze a quality thereof as well as a concentration of impurities therein, so that it becomes possible to ascertain whether or not the distillation column (2) is suitably operated. Upon sampling, the sampling box (6) is opened at its door to receive a container therein, and then a sample is extracted into the container through a sampling nozzle by actuating a valve located on an upstream side thereof. The sampling box (6) is provided at a bottom thereof with a bottom discharge pipe (16) for discharging residues remaining in the branched pipe connected to the outlet side of the pump (5) and the sampling box.

The storage tank (7) for storing the distillates is fitted at a bottom thereof with a drainpipe for discharging the residual distillates. The drainpipe is connected to a drain pot (8) for ascertaining discharge of the liquid. The drain pot (8) is provided at a bottom thereof with a bottom discharge pipe (17) for discharging residues from the drain pot. In addition, the drainpipe of the storage tank (7) may

also be provided with a sight glass as mentioned above.

Meanwhile, if any chemical products such as (meth)acrolein, (meth)acrylic acid and (meth)acrylic acid esters remain in the handling devices or conduits, these substances tend to be polymerized to form solids therein, resulting in clogging of the handling devices or conduits. Therefore, after stopping the operation of the facility, the residual chemical products must be surely removed from the respective handling devices or conduits. Also, upon inspection or repair of the handling devices, the above chemical products must be surely removed therefrom.

For these reasons, in the above chemical production facility, in order to efficiently and safely recover the chemical products, the bottom discharge pipes (14), (15), (16) and (17) of the respective handling devices are connected to a common inclined collection pipe (13) which is installed at a position lower than the bottom discharge pipes, and serves for collecting the chemical products discharged and delivering the same therethrough. Further, at a position still lower than the inclined collection pipe (13), there is installed a recovery tank (1) connected to a lower end of the inclined collection pipe for recovering the chemical products delivered through the inclined collection pipe together. In the chemical production facility as shown in Fig. 1, from the standpoints of ensuring safety and

preventing environmental pollution, the withdrawal of the chemical products to the inclined collection pipe (13) from the bottom discharge pipes (14), (15), (16) and (17) as well as the delivery of the chemical products to the recovery tank (1) through the inclined collection pipe (13) may be conducted in a closed system.

The flashing point of acrolein is -18°C , the flashing point of methyl acrylate is -2.8°C , the flashing point of ethyl acrylate is 15.5°C and the flashing point of methyl methacrylate is 10°C . (Meth)acrylic acid itself has a flashing point of not lower than 50°C . However, since (meth)acrylic acid is produced using a solvent having a low flashing point such as toluene, methyl isobutyl ketone, acetic acid esters or the like during the production process, the resultant reaction mixture exhibits a flashing point lower than that of (meth)acrylic acid solely. For example, among the above solvents, toluene has a flashing point of 5°C . In addition, (meth)acrolein and (meth)acrylic acid esters have a very strong odor, and the odor is sensed even at a very low concentration thereof. The threshold concentrations of these substances as to sensible odor are, for example, 0.07 ppm for acrolein, 0.4 ppb for methyl acrylate, 0.21 ppm for methyl methacrylate, and 0.016 ppm for butyl methacrylate.

Therefore, in order to ensure safety and prevent

environmental pollution, it is important to directly connect the inclined collection pipe (13) to the bottom discharge pipes (14), (15), (16) and (17). The inclined collection pipe (13) is installed in a trench (groove) formed on the ground, and inclined toward the recovery tank (1) with a descending slope of about 1/100 to 3/100 to deliver the chemical products by the gravity therethrough. As mentioned above, since the inclined collection pipe (13) is located at a position lower than the bottom discharge pipes (14), (15), (16) and (17), the liquid chemical products can be collected by the gravity thereof from the respective handling devices into the inclined collection pipe.

Also, in order to prevent the chemical products from being polymerized or fired in the inclined collection pipe (13) and the recovery tank (1), the inclined collection pipe (13) is constructed such that an incombustible gas can be fed thereinto through an incombustible gas feed line (12). As the incombustible gas, there may be used inert gases such as nitrogen gas or oxygen-containing inert gases containing oxygen at a concentration of not more than 10% by volume. For example, in the facilities for production of acrylic acid, a mixed gas composed of air and nitrogen whose oxygen concentration is controlled to 10% by volume may be fed to the inclined collection pipe (13). Meanwhile, a plurality of the inclined collection pipes (13) may be installed so as

to cover a whole portion of the chemical production facility.

It is required that the recovery tank (1) is installed at a position still lower than the inclined collection pipe (13). More specifically, the recovery tank (1) is located below the ground level, for example, within a pit formed under the ground. As the recovery tank (1), there may be usually used a vertical-type storage tank as shown in Fig. 1. Further, there may also be used a horizontal-type storage tank or a pit-type storage tank made of concrete, etc., which is directly constructed under the ground. Meanwhile, a plurality of the recover tanks (1) may be installed depending upon conditions of arrangement of the handling devices or installation sites thereof.

The recovery tank (1) is provided with a liquid discharging means for discharging the liquid chemical products as recovered to a regeneration step or a waste (gas) treatment device and a gas discharging means for discharging gases generated from the recover tank to an effective ingredient recovery step or the waste (gas) treatment device. In the chemical production facility as shown in Fig. 1, from the standpoints of ensuring safety and preventing environmental pollution, the discharge of the chemical products and gases from the recovery tank (1) may be conducted in a closed system.

The above liquid discharging means may be usually

constituted by a pump inserted into the recovery tank (1). As the pump, there may be used not only a submerged type pump as illustrated in Fig. 1, but also an ordinary centrifugal pump. The pump may be operated on or off in response to signals generated from a level gauge such that the chemical products are fed to a tank (9) when the liquid level in the recovery tank (1) is raised to a predetermined height. In the above chemical production facility, the chemical products recovered in the recovery tank (1) are temporarily collected in the tank (9) by means of the pump, and then fed again to the regeneration step, i.e., the distillation column (2) in the case of the facility as shown in Fig. 1, to separate and recover effective ingredients therefrom, or fed to the purification device (not shown) for disposal treatment thereof. Meanwhile, as the liquid discharging means, a pressure feeding means using pressurized nitrogen or air may be used instead of the pump.

The above gas discharging means may be constituted by a gas discharge conduit extending from an upper portion (gas-phase portion) of the recovery tank (1) toward a waste (gas) treatment device (11) and a blower (10) fitted to the gas discharge conduit. When an inside pressure of the recovery tank (1) exceeds an ordinary pressure, gases in the recovery tank tend to be leaked therefrom. For this reason, the inside of the recovery tank (1) may be sucked or evacuated

by the blower (10) to control the inside pressure of the recovery tank to usually not more than ordinary pressure, preferably not more than -10 kPa. In order to maintain a constant inside pressure of the recovery tank (1), the amount of gases discharged therefrom is preferably controlled by detecting the inside pressure of the recovery tank at real time. From the viewpoint of simplicity, there may be used a method of fitting a restricted orifice, etc., to the above gas discharge conduit to establish a flow resistance therein, or a method of sucking or evacuating the gases when the pressure becomes a predetermined value. In the above chemical production facility, the gases discharged from the recovery tank (1) is fed to the waste (gas) treatment device (11) where the gases are converted into harmless ones, and then discharged to atmosphere.

Alternatively, in the above chemical production facility, the gases discharged from the recovery tank (1) may be fed back to the effective ingredient recovery step (not shown) provided on the production facility side to recover effective ingredients therefrom. For example, in the facilities for production of (meth)acrolein or (meth)acrylic acid, an absorption column capable of absorbing (meth)acrolein or (meth)acrylic acid with water from oxidation reaction gases may be provided, and the gases discharged from the recovery tank may be flowed back to the

absorption column to recover effective ingredients therefrom. Meanwhile, in the above chemical production facility, by providing the gas discharging means in the recovery tank (1), it becomes possible to suck or absorb gases partially vaporized in the sampling box (6), etc., during the sampling, into the recovery tank (1) through the inclined collection pipe (13), thereby preventing contamination of ambient environment.

As described above, the recovery process of the present invention which can be carried out in the chemical production facility as illustrated in Fig. 1, is such a process for recovering chemical products in which the chemical products are withdrawn through the bottom discharge pipes (14), (15), (16) and (17) of the respective handling devices, collected into the common inclined collection pipe (13) which is located at a position lower than the bottom discharge pipes and connected to the bottom discharge pipes, and delivered through the inclined collection pipe (13) to the recovery tank (1) which is located at a position lower than the inclined collection pipe (13) and connected to a lower end of the inclined collection pipe. In such a process, the chemical products are directly collected by the gravity thereof through the bottom discharge pipes (14), (15), (16) and (17) of the respective handling devices into the inclined collection pipe (13), and delivered by the

gravity thereof through the inclined collection pipe (13) to the recovery tank (1) located at the lowermost position in the chemical production facility. Therefore, according to the recovery process of the present invention, the chemical products remaining as residues in the respective handling devices can be efficiently and safely recovered without leakage thereof out of the system and occurrence of malodor.

Further, according to the recovery process of the present invention, when the chemical products are delivered through the inclined collection pipe (13) to the recovery tank (1), an incombustible gas is fed through the inclined collection pipe (13). As a result, it is possible to effectively prevent polymerization of the chemical products or formation of a detonating gas in the inclined collection pipe (13) and the recovery tank (1). In addition, in the recovery process, after delivering the chemical products to the recovery tank (1), the chemical products are discharged from the recovery tank (1) to the regeneration step or the waste (gas) treatment device by the liquid discharging means, and the gases generated therein are discharged from the recovery tank (1) to the effective ingredient recovery step or the waste (gas) treatment device (11) by the gas discharging means. With this arrangement, even such chemical products having a low flashing point can be treated safely, and ambient environment can be prevented from being

contaminated. As described above, the recovery process of the present invention can be suitably applied to facilities for production of (meth)acrolein, (meth)acrylic acid or (meth)acrylic acid esters, which tend to be readily polymerized and have a low flashing point.

CLAIMS

1. A process for recovering liquid chemical products in a chemical production facility including a plurality of handling devices therefor, in which the residual chemical products are recovered from the respective handling devices, comprising:

withdrawing the chemical products from the respective handling devices through bottom discharge pipes thereof;

collecting the thus withdrawn chemical products into a common inclined collection pipe located at a position lower than the bottom discharge pipes and connected to the bottom discharge pipes; and

delivering the chemical products through the inclined collection pipe to a recovery tank located at a position lower than the inclined collection pipe and connected to a lower end of the inclined collection pipe.

2. A process according to claim 1, wherein the recovery tank is located at a position below ground level.

3. A process according to claim 1 or 2, wherein an incombustible gas is fed to the inclined collection pipe upon delivering the chemical products to the recovery tank through the inclined collection pipe.

4. A process according to any of claims 1 to 3, wherein the withdrawal of the chemical products through the bottom discharge pipes and the delivery of the chemical products to the recovery tank are conducted in a closed system.

5. A process according to any of claims 1 to 4, wherein after delivering the chemical products to the recovery tank, the chemical products are discharged from the recovery tank to a regeneration step or a waste treatment device by a liquid discharging means, and gases generated in the recovery tank are discharged therefrom to an effective ingredient recovery step or the waste treatment device by a gas discharging means.

6. A process according to claim 5, wherein the discharge of the chemical products and the gases from the recovery tank is conducted in a closed system.

7. A process according to any of claims 1 to 6, wherein the chemical products are (meth)acrolein, (meth)acrylic acid or (meth)acrylic acid esters.

Fig. 1

