



(22) Date de dépôt/Filing Date: 2020/04/08

(41) Mise à la disp. pub./Open to Public Insp.: 2020/10/10

(45) Date de délivrance/Issue Date: 2022/07/26

(30) Priorité/Priority: 2019/04/10 (US16/380014)

(51) Cl.Int./Int.Cl. *C09D 11/30* (2014.01)

(72) Inventeurs/Inventors:
RESETCO, CHRISTINA, CA;
ALI, SYED, CA;
BROWN, CARLA, CA

(73) Propriétaire/Owner:
XEROX CORPORATION, US

(74) Agent: AIRD & MCBURNEY LP

(54) Titre : COMPOSITION D'ENCRE AQUEUSE POUR L'IMPRESSION JET D'ENCRE SUR DES SUBSTRATS NON POREUX

(54) Title: AQUEOUS INK COMPOSITIONS FOR INKJET PRINTING ON NON-POROUS SUBSTRATES

(57) **Abrégé/Abstract:**

An aqueous ink composition for inkjet printing on non-porous substrates and a method for forming the same are disclosed. For example, the method includes preparing a primary polymer latex with an aromatic functional group, a hydrogen-bonding group, a flexible side-chain, and an ionic functional group and mixing the primary polymer latex with a secondary latex binder and one or more co-solvents.



ABSTRACT

An aqueous ink composition for inkjet printing on non-porous substrates and a method for forming the same are disclosed. For example, the method includes preparing a primary polymer latex with an aromatic functional group, a hydrogen-bonding group, a flexible side-chain, and an ionic functional group and mixing the primary polymer latex with a secondary latex binder and one or more co-solvents.

AQUEOUS INK COMPOSITIONS FOR INKJET PRINTING ON NON-POROUS SUBSTRATES

5 **[0001]** The present disclosure relates generally to an ink composition and, more particularly, to an aqueous ink composition with components that have low toxicity for inkjet printing on non-porous substrates and methods for producing the same.

BACKGROUND

10 **[0002]** Digital printing, specifically inkjet printing of inks, can be done on porous paper substrates. The ink may dry and hold onto the porous paper substrates without smearing. Inks used in ink jet printing may have certain properties to allow the ink to be controlled and jetted through printheads used in ink jet printers. The ink jet printers may be digitally controlled to dispense or eject the ink from nozzles of the
15 printheads.

[0003] Printing on non-porous substrates may be desirable as plastic films are used in packaging. For certain packaging, such as food packaging, the inks must have low toxicity to prevent potential health issues that can be caused by migration of ink components. However, inkjet inks that can be printed on non-porous
20 substrates, such as UV-cured inks, have chemical components that can migrate from packaging into products and pose concerns for consumers. Alternatively, currently available aqueous inks with low toxicity cannot be effectively printed on non-porous substrates.

SUMMARY

25 **[0004]** According to aspects illustrated herein, there are provided an aqueous ink composition with low toxicity for inkjet printing on non-porous substrates and a method for forming the same. One disclosed feature of the embodiments is a method that comprises preparing a primary polymer latex with an aromatic functional
30 group, a hydrogen-bonding group, a flexible side-chain, and an ionic functional group and mixing the primary polymer latex with a secondary latex binder and one or more co-solvents.

[0005] Another disclosed feature of the embodiments is a low toxicity aqueous ink composition on non-porous substrates. In one embodiment, the low toxicity aqueous
35 ink composition comprises a functionalized low toxicity primary latex in 5-40 weight

per cent, a secondary latex binder in 5-20 weight per cent, and one or more co-solvents. The functionalized low toxicity primary latex comprises an aromatic functional group, a hydrogen-bonding group, a flexible side-chain, and an ionic functional group. The low toxicity aqueous ink composition comprises a viscosity
5 below 10 millipascal-seconds (mPa·s) at 25 degrees Celsius.

[0005a] According to an aspect, there is provided a method for forming an aqueous ink composition for inkjet printing on non-porous substrates, comprising:

preparing a surfactant free primary polymer latex with an aromatic functional group, a hydrogen-bonding group, a flexible side-chain, and an ionic functional group
10 to enable self-emulsification of the surfactant free primary polymer latex, wherein the primary polymer latex that is prepared comprises 5-40 weight percent of solids in the aqueous ink composition; and

mixing the primary polymer latex with a secondary latex binder and one or more co-solvents and additives to form the aqueous ink composition having a
15 viscosity below 10 millipascal-seconds (mPa·s) at 25 degrees Celsius, wherein the secondary latex binder comprises 5-20 weight percent of solids in the aqueous ink composition.

[0005b] According to an aspect, there is provided an aqueous ink composition for inkjet printing on non-porous substrates, comprising:

20 a surfactant free functionalized primary latex in 5-40 weight per cent, wherein the functionalized primary latex comprises:

an aromatic functional group;

a hydrogen-bonding group;

a flexible side-chain; and

25 an ionic functional group to enable self-emulsification of the surfactant free functionalized primary latex;

a secondary latex binder in 5-20 weight per cent; and

one or more co-solvents, wherein the aqueous ink composition comprises a viscosity below 10 millipascal-seconds (mPa·s) at 25 degrees Celsius.

30

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The teaching of the present disclosure can be readily understood by considering the following detailed description in conjunction with the accompanying

drawings, in which:

[0007] FIG. 1 illustrates an example structure of a functionalized latex of the present disclosure;

[0008] FIG. 2 illustrates an example functional group with strong hydrogen

5 bonding of the present disclosure;

[0009] FIG. 3 illustrates an example of an ionically-stabilized surfactant-free latex of the present disclosure; and

[0010] FIG. 4 illustrates a flowchart of an example method for forming an aqueous ink composition for inkjet printing on non-porous substrates of the present

10 disclosure; and

[0011] To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

DETAILED DESCRIPTION

15 [0012] The present disclosure provides an aqueous ink composition containing components with low toxicity for inkjet printing on non-porous substrates and methods for producing the same. As discussed above, it may be desirable to use ink jet printing on a non-porous substrate, such as plastic. However, currently available inks used for ink jet printing contain potentially harmful chemical components or are

20 not usable on non-porous substrates as the ink may smear or not adhere to the non-porous substrates.

[0013] The present disclosure provides an aqueous based ink composition that has a low toxicity. The aqueous based ink composition may be used to print on non-porous substrates, such as plastic packaging, used in food applications. In addition,

25 the aqueous based ink composition has properties, such as low viscosity and desired particle sizes that allow the ink to be used in ink jet printheads or printers.

[0014] Embodiments of the present disclosure provide an aqueous ink composition that contains several latexes and/or binders that provide reinforcement of the ink on plastic substrates. As a result, these inks have good film formation on

30 plastic substrates, good adhesion to plastic films, and are rub resistant.

[0015] In one embodiment, the low toxicity aqueous ink composition may include a low toxicity functionalized primary latex and a secondary latex or binder. The aqueous ink composition may be combined with one or more co-solvents and additives in a water based solution.

[0016] In one embodiment, the primary latex may be a low toxicity latex that can be used in non-porous or plastic packaging material that can have indirect food contact. An example of a low toxicity primary latex may include copolymers of polystyrene that is stabilized with ammonia having a particle size of 100-300 nanometers (nm). The low toxicity primary latex may be composed of a polymer that is on the list of Indirect Additives used in Food Contact Substances according to Code of Federal Regulations 175.330. An example polystyrene copolymer may include poly(maleic anhydride-co-styrene).

[0017] In addition, the primary latex may have low toxicity because the latex may be water-based and free from any catalysts or (photo)-initiators that are typically employed in ultraviolet (UV) cured inks. In addition, the overall aqueous ink composition may use co-solvents that have low toxicity (e.g., propylene glycols such as propylene glycol methyl ether, propylene glycol n-propyl ether, dipropylene glycol methyl ether).

[0018] The primary latex may be functionalized to have certain characteristics to allow the aqueous ink composition to be used in inkjet printers and to be printed onto non-porous substrates. The non-porous substrates may include plastic films including flexible and/or stretchable plastic films. The plastic types may include polyolefin materials that are ubiquitous in packaging, such as polyethylene terephthalate, polystyrene, polyethylene, and polypropylene. Other non-porous substrates may include metals (e.g., steel, aluminum, and the like) or glass.

[0019] In one embodiment, the primary latex may be functionalized or processed to contain four main chemical functionalities. For example, the primary latex may be mixed or chemically modified with different molecules that provide different chemical functionalities. The functionalities may include aromatic functional groups, hydrogen-bonding groups, flexible side-chains, and ionic functional groups. The aromatic functional group may be for film-forming. The aromatic functional groups may include styrenes, phthalates, pyrrolidones, and the like.

[0020] The hydrogen-bonding groups may provide mechanical reinforcement of the inks on the non-porous substrates. In other words, the hydrogen-bonding groups may help the aqueous based ink composition to be rub resistant when printed onto the non-porous substrates and provide good adhesion to the non-porous substrates.

[0021] The primary latex may be functionalized with molecules that contain strong

hydrogen-bonding groups, such as hydroxyl, amine, and amide. The molecules may include amide functional groups coupled to cyclic and/or aromatic molecules.

Example molecules may include urea, allantoin, tyramine, glucose, acryloyl glucofuranose (MAGP), N-[tris(hydroxymethyl)methyl]acrylamide,

5 acrylamidophenylboronic acid, aminoethylmethacrylamide, acryloylmorpholine, acetoxypheethyl acrylate and the like.

[0022] The flexible side-chains in the polymer latex may be incorporated for better compatibility with flexible substrates such as plastic films. Examples of the flexible side-chains may include alkyl containing molecules (e.g., butyl, hexyl, octyl, decyl, 10 and the like, and associated isomers, such as iso-, sec-, or tert-alkyls). Examples of such alkyls may include isobutyl acrylate, (iso)-octyl acrylate, isodecyl acrylate, and the like).

[0023] The ionic functional groups in the polymer latex may impart stability of the polymer latex particles in aqueous solution and a low viscosity due to electrostatic 15 repulsion between latex particles. For example, the viscosity of the functionalized primary latex at 30 weight percent (wt%) in water may be below 20 millipascal-seconds (mPa·s) at 25 degrees Celsius (°C). In one example, the viscosity may be below 10 Cps at 25 °C. Furthermore, the ionic functional groups in the primary latex may enable self-emulsification of the polymer without surfactants, which enhances 20 the stability of the primary latex since typically used surfactants cannot be desorbed and/or destabilized.

[0024] The ionic functional groups may ensure that the primary latex remains stable in water and aqueous solutions. The ionic functional groups may prevent aggregation, flocculation, creaming, sedimentation, and/or precipitation in water.

25 [0025] In one embodiment, the ionic functional groups that can be incorporated into to the primary latex may include carboxylic acid, sulfonic acid and associated salts, such as ammonium. Additional examples of starting monomers with ionic functional groups may include acrylic acid, ethyl acrylic acid, methyl acrylic acid, methacrylic acid, sulfopropyl acrylate, [2-(acryloyloxy)ethyl]trimethylammonium 30 chloride, and the like.

[0026] The different molecules for the different functionalities described above may be incorporated via nucleophilic addition of amine-containing molecules to poly(maleic anhydride-co-styrene). Examples of different aqueous ink compositions

are described in further details below.

[0027] In one embodiment, the molecular weight of the functionalized primary latex may be between approximately 1,000 to 100,000 Daltons (Da). In one example, polymers with a lower weight (e.g., approximately 2,000 Da) may allow the latex to be more easily dispersed in water and form small particles (e.g., approximately 150-200 nm) with low polydispersity index (e.g., < 0.2). On the other hand, polymers with a higher molecular weight may provide better mechanical properties due to greater chain entanglements.

[0028] In one embodiment, the content of each functional group in the polymer latex may range between 5-80 wt%. In one embodiment, the styrene content in the polymer latex may be at least 50 wt% or greater to achieve sufficient robustness and mechanical properties of the final aqueous ink compositions on substrates. In one embodiment, the content of the ionic monomer (e.g., the ionic functional group) in the polymer latex may be approximately 5-10 wt%. The content of the hydrogen bonding monomer (e.g., the hydrogen-bonding group in the polymer latex may be approximately 5-10 wt%).

[0029] In one embodiment, the secondary latex and/or binder may also have a strong hydrogen-bonding group. Examples of the secondary latexes may include polyurethane, polyamides, polyester, polyoxyethylene, poly(vinyl alcohol), poly(vinyl pyrrolidone), poly(ethylene glycol), hydroxyethyl cellulose, and the like, having a molecular weight of 30-100 kDa. In another embodiment, the secondary latex may be an acrylic copolymer resin with a molecular weight of approximately 200 kDa or higher. Examples of acrylic copolymer resin dispersions may include products known by the trade names such as Joncryl FLX 5201™, Joncryl FLX 5100™, Joncryl DFC 3040™, and Joncryl ECO 2177™.

[0030] In one embodiment, the aqueous ink composition may include 5-40 wt% of the functionalized primary latex and 5-20 wt% of the secondary latex or binder in terms of solids content in the ink. In one embodiment, the ratio of the secondary latex or binder to the functionalized primary latex may be between 5-100 wt%. In one embodiment, the ratio may be approximately 20 wt%.

[0031] As noted above, at a ratio of approximately 20 wt% of the secondary latex to the functionalized primary latex, a co-solvent system and additives may be added to provide good wetting and adhesion of the aqueous based ink composition on the

non-porous substrate. In one embodiment, propylene glycols, such as propylene glycol methyl ether, propylene glycol n-propyl ether, and dipropylene glycol methyl ether, may be used. In one embodiment, the additives may include pH adjusters (e.g., triethanolamine), surfactants (e.g., Surfynol 420™), or adhesion promoters (e.g., BYK 4500™).

[0032] FIG. 1 illustrates an example chemical structure of the functionalized primary latex. For example, the functionalized primary latex may include “x” number of monomers of styrene as the aromatic functional group. The functionalized primary latex may include “y” number of hydrogen-bonding groups. The functionalized primary latex may include “z” number of carboxylic acid ammonium salt containing monomers to provide the ionic functional group. The functionalized primary latex may include “n” number of flexible side-chains.

[0033] FIG. 2 illustrates different examples of the “R” group from FIG. 1. For example, the “R” group may be different hydroxyl and amide containing molecules such as urea or allantoin.

[0034] FIG. 3 illustrates an example of the latex particle that is created when the functionalized primary latex illustrated in FIG. 1 is dispersed in water. The latex particle may then be added to a water-based ink and used for ink jet printers that can be jetted through ink jet printheads.

[0035] FIG. 4 illustrates a flowchart of an example method 400 for forming an aqueous ink composition with low toxicity for inkjet printing on non-porous substrates. At block 402, the method 400 begins. At block 404, the method 400 prepares a primary polymer latex with an aromatic functional group, a hydrogen-bonding group, a flexible side-chain, and an ionic functional group. As discussed, above, different molecules may be added to a low toxicity polymer to functionalize the polymer (e.g., poly(maleic anhydride-co-styrene)). Each functional group may provide a different function for the functionalized primary polymer latex that allows the aqueous ink composition to have a low viscosity with good wetting and adhesion to non-porous substrates and good rub-resistance that can be used for ink jet printers.

[0036] At block 406, the method 400 mixes the primary latex that is functionalized with a secondary latex binder and one or more co-solvents and additives. In one

embodiment, the secondary latex binder and the one or more co-solvents and additives may be added to the functionalized primary latex and stirred.

[0037] In one embodiment, the combination of the functionalized primary latex, the secondary latex binder, and the one or more co-solvents may be added to an aqueous based ink. The ink may then be used to print on non-porous substrates using an ink jet printer. The ink may also provide low toxicity to allow the ink to be printed on plastic films used in the food industry. At block 408, the method 400 ends.

[0038] Below are examples of functionalized primary latexes that were prepared in accordance with the methods described above.

EXAMPLE 1

[0039] Poly(styrene-alt-maleic anhydride), number average molecular weight (M_n) 2,300, 10 g in 50 milliliters (mL) acetone was modified with octylamine, 32 millimoles (mmol), 3.9 g by stirring the mixture at room temperature for 24 hours, resulting in poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid). In order to introduce ionic functional groups into the polymer, 1.25 g of NH_4OH (29 wt%) was added to the polymer solution and stirred for 30 minutes. To prepare the latex, the poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) solution in acetone was further diluted with 100 mL of acetone and heated to 50°C. The polymer solution in acetone was added dropwise to 75 mL of water at 60°C under mechanical stirring. The latex was condensed to 30 wt% solids by evaporation of solvents by heating at 40°C and stirring.

EXAMPLE 2

[0040] Poly(styrene-alt-maleic anhydride), M_n 2,300, 10 g in 50 mL acetone was modified with octylamine, 32 mmol, 3.9 g by stirring the mixture at room temperature for 24 hours. In order to introduce hydrogen-bonding allantoin functionality, 9.6 mmol, 1.5 g of allantoin was dissolved in dimethyl sulfoxide and added to the polymer solution and stirred at room temperature for 24 hours. The solvents were evaporated under reduced pressure and then the functionalized polymer was dissolved in 150 mL of acetone at 50°C. To prepare the latex, the polymer solution was further diluted with 100 mL of acetone and heated to 50°C. The polymer

solution was added dropwise to 75 mL of water at 60°C under mechanical stirring. The latex was condensed to 30 wt% solids by evaporation of solvents by heating at 40°C and stirring.

5 EXAMPLE 3

[0041] Poly(styrene-alt-maleic anhydride), M_n 2,300, 10 g in 50 mL acetone was modified with octylamine, 32 mmol, 3.9 g by stirring the mixture at room temperature for 24 hours. In order to introduce hydrogen-bonding urea functionality, 9.6 mmol, 0.58 g of urea was dissolved in dimethyl sulfoxide and added to the polymer solution and stirred at room temperature for 24 hours. The solvents were evaporated under reduced pressure and then the functionalized polymer was dissolved in 150 mL of acetone at 50°C. To prepare the latex, the polymer solution was further diluted with 100 mL of acetone and heated to 50°C. The polymer solution was added dropwise to 75 mL of water at 60°C under mechanical stirring. The latex was condensed to 30 wt% solids by evaporation of solvents by heating at 40°C and stirring.

PROPERTIES OF FUNCTIONALIZED PRIMARY LATEXES

[0042] The particle size of latexes and inks is low, in the range of 150-250 nm and remains unchanged when samples are stored at room temperature for approximately 1 month. This confirms that the ionic functionalities in the latex are effectively stabilizing the latex particles in water.

Particle Size

Example #	Sample Description	Particle Size (nm), Zetasizer Nano	Polydispersity Index
1	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex	240	0.12
2	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex, allantoin functionalized	133	0.10
3	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex, urea functionalized	162	0.13

25

[0043] The viscosity of the functionalized latexes at 30 wt% is low, which makes them amenable to a variety of printing processes, especially inkjet printing. The low viscosity of the latexes may be attributed to the low intermolecular interactions between particles due to strong electrostatic repulsion and stabilization by the ionic functional groups on the surface of the latex particles.

Viscosity of Functionalized Polymer Latexes

Example #	Sample Description	Viscosity (mPa·s), 25°C, Shear rate 1 s ⁻¹	Viscosity (mPa·s), 25°C, Shear rate 400 s ⁻¹
1	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex	2.85	2.55
2	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex, allantoin functionalized	12.48	5.98
3	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex, urea functionalized	4.21	4.17

[0044] Below are tables with examples of aqueous ink formulations containing functionalized primary latexes with different compositions of secondary latexes and co-solvent systems. Table 1 illustrated below after the examples, provides properties of the inks with the functionalized primary latexes including rub resistance and adhesion characteristics.

[0045] Example 4. Aqueous ink with functionalized poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) latex.

Component	Mass (g)	% Weight
poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) latex (30 wt. %)	50	73.1
Clariant Colanyl Black N500-MX	3	4.4
Dipropylene glycol methyl ether	4	5.8
Diethylene glycol ethyl ether	4	5.8
Triethylene glycol	4	5.8
Surfynol 420	0.2	0.3
BYK4500	0.2	0.3
Poly(vinyl alcohol-co-ethylene), ethylene 32 mol. %	3	4.4

Total	68.4	100.0
-------	------	-------

[0046] Example 5. Aqueous ink with poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) latex and polyurethane latex (Bayhydrol UH2606™).

Component	Mass (g)	% Weight
poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) latex (30 wt. %)	40	58.3
Clariant Colanyl Black N500-MX	1.7	2.5
Dipropylene glycol methyl ether	4	5.8
Diethylene glycol ethyl ether	4	5.8
Triethylene glycol	4	5.8
Surfynol 420	0.2	0.3
BYK4500	1	1.5
Bayhydrol UH2606	13.7	20.0
Total	68.6	100.0

5

[0047] Example 6. Aqueous ink with poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) allantoin functionalized latex and polyurethane latex (Bayhydrol UH2606).

Component	Mass (g)	% Weight
poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) allantoin functionalized latex (30 wt. %)	40	58.3
Clariant Colanyl Black N500-MX	1.7	2.5
Dipropylene glycol methyl ether	4	5.8
Diethylene glycol ethyl ether	4	5.8
Triethylene glycol	4	5.8
Surfynol 420	0.2	0.3
BYK4500	1	1.5
Bayhydrol UH2606	13.7	20.0
Total	68.6	100.0

10

[0048] Example 7. Comparative ink without functionalized latex.

Component	Mass (g)	% Weight
Bayhydrol UH2606	50	76.0
Clariant Colanyl Black N500-MX	4	6.1
Dipropylene glycol methyl ether	3.8	5.8

Diethylene glycol ethyl ether	3.8	5.8
Triethylene glycol	3.8	5.8
Surfynol 420	0.2	0.3
BYK4500	0.2	0.3
Total	65.8	100.0

[0049] Example 8. Comparative aqueous ink with Joncryl FLX 5201 latex.

Component	Mass (g)	% Weight
Joncryl FLX 5201 (40 wt.%)	75	59.9
Water	25	20.0
Clariant Colanyl Black N500-MX	3	2.4
Dipropylene glycol methyl ether	7.3	5.8
Diethylene glycol ethyl ether	7.3	5.8
Triethylene glycol	7.3	5.8
Surfynol 420	0.2	0.2
BYK4500	0.2	0.2
Total	125.3	100.0

- 5 [0050] Example 9. Aqueous ink with Joncryl FLX 5201 latex and poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) latex.

Component	Mass (g)	% Weight
poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) latex (30 wt.%)	90	46.4
Clariant Colanyl Black N500-MX	24	12.4
Dipropylene glycol methyl ether	11	5.7
Diethylene glycol ethyl ether	11	5.7
Triethylene glycol	11	5.7
Surfynol 420	1	0.5
BYK4500	1	0.5
Joncryl FLX 5201 (40 wt.%)	45	23.2
Total	194	100.0

- 10 [0051] Example 10. Aqueous ink with Joncryl FLX 5201 latex and poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) latex functionalized with urea.

Component	Mass (g)	% Weight
-----------	----------	----------

poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid)-urea functionalized latex (30 wt.%)	90	46.4
Clariant Colanyl Black N500-MX	24	12.4
Dipropylene glycol methyl ether	11	5.7
Diethylene glycol ethyl ether	11	5.7
Triethylene glycol	11	5.7
Surfynol 420	1	0.5
BYK4500	1	0.5
Joncryl FLX 5201 (40 wt.%)	45	23.2
Total	194	100.0

Properties of aqueous inks with functionalized latexes on plastic films

Table 1. Properties of aqueous inks with different latex types on PET plastic films

Example #	Polymer Latex	Additional Binder/Latex	Rub resistance (Kimwipe dry double-rubs)	Adhesion to PET, cross-hatch tape test
4.	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex	Poly(vinyl alcohol-co-ethylene)	70	2
5.	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex	Bayhydrol UH2606	70	3
6.	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid) allantoin functionalized latex	Bayhydrol UH2606	50	4
7. (comparative)	none	Bayhydrol UH2606	30	0
8. (comparative)	none	Joncryl FLX 5201	20	0
9.	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid)	Joncryl FLX 5201	30	3

10.	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid)-urea functionalized	Joncryl FLX 5201	70	4
11. (comparative)	poly(styrene-co-maleic anhydride-co-N-octyl maleamic acid latex	none	10	3

[0052] The aqueous inks containing latexes were applied on untreated polyethylene terephthalate (PET) plastic films and dried at 60°C. The mechanical properties of the inks were evaluated by testing rub resistance via double rubs across the ink surface with a dry paper fiber optic wipe. The adhesion was tested by cross-hatch adhesion tape test with adhesive tape, using a scale of 0-5, where 0 indicates that all of the ink came off the substrate and 5 indicates that all of the ink remains on the substrate.

[0053] The functionalized latexes are particularly effective in combination with other binders and latexes that have strong hydrogen bonding, such as poly(vinyl alcohol-co-ethylene), and polyurethane latexes, such as Bayhydrol UH2606, Joncryl FLX 5201. Compared to the inks that contain only the polyurethane latexes, the addition of functionalized latexes significantly increases rub resistance up to 70 double rubs and adhesion to PET plastic films up to rating 4.

[0054] The comparative examples demonstrate the synergistic benefits of combining two types of latexes (e.g., the functionalized primary latex and the secondary latexes described above), as opposed to a single type of latex in the ink formulation. The enhancement in the properties of the inks prepared with two different latexes is expected to arise from strong hydrogen bonding that reinforces the polymer films. The single functionalized latex (Example 11) can be used to prepare inks and films on PET substrates; however, the mechanical properties are poor, especially low rub resistance. These latexes typically have low molecular weight (< 10 kDa), which is not sufficient to form robust films. On the other hand, latexes with high molecular weight (> 200 kDa), (Example 7 and Example 8) produce inks with better rub resistance but poor adhesion to the plastic PET substrate.

Therefore, the combination of two latexes offers synergistic benefits in terms of good film formation, rub resistance, and adhesion to plastic (Examples 5,6,9,10).

[0055] The viscosity of the aqueous inks is low, which makes them amenable to a variety of printing processes, especially inkjet printing. The low viscosity of the latexes can be attributed to the low intermolecular interactions between particles due to strong electrostatic repulsion and stabilization by the ionic functional groups on the surface of the latex particles.

Viscosity of Aqueous Inks

Example #	Viscosity (mPa·s), 25°C, Shear rate 1 s ⁻¹	Viscosity (mPa·s), 25°C, Shear rate 400 s ⁻¹
5	4.10	2.54
6	2.88	2.88

[0056] It will be appreciated that variants of the above-disclosed and other features and functions, or alternatives thereof, may be combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

What is claimed is:

1. A method for forming an aqueous ink composition for inkjet printing on non-porous substrates, comprising:
 - 5 preparing a surfactant free primary polymer latex with an aromatic functional group, a hydrogen-bonding group, a flexible side-chain, and an ionic functional group to enable self-emulsification of the surfactant free primary polymer latex, wherein the primary polymer latex that is prepared comprises 5-40 weight percent of solids in the aqueous ink composition; and
 - 10 mixing the primary polymer latex with a secondary latex binder and one or more co-solvents and additives to form the aqueous ink composition having a viscosity below 10 millipascal-seconds (mPa·s) at 25 degrees Celsius, wherein the secondary latex binder comprises 5-20 weight percent of solids in the aqueous ink composition.
- 15 2. The method of claim 1, wherein preparing the primary polymer latex with the hydrogen-bonding group, comprises:
 - chemically modifying a primary polymer with molecules that include one or more of a hydroxyl group, an amine group, or an amide group.
- 20 3. The method of claim 2, wherein the molecules comprise a functional group coupled to a cyclic molecule or an aromatic molecule.
4. The method of claim 3, wherein the molecules comprise at least one of: urea,
25 allantoin, or tyramine.
5. The method of claim 1, wherein preparing the primary polymer latex with the flexible side-chain, comprises:
 - chemically modifying the primary polymer latex with a branched alkyl having a
30 side chain of at least one of: butyl, hexyl, octyl, or decyl.
6. The method of claim 1, wherein preparing the primary polymer latex with the ionic functional group comprises:

chemically modifying the primary polymer latex with at least one of: carboxylic acid, sulfonic acid, or ammonium.

7. The method of claim 1, wherein the primary polymer latex comprises a
5 copolymer of styrene.
8. The method of claim 1, wherein the secondary latex binder comprises at least one of: polyurethane, polyamide, polyester, polyoxyethylene, or polyvinyl alcohol.
- 10 9. The method of claim 1, wherein the one or more co-solvents comprises a propylene glycol.
10. The method of claim 9, wherein the propylene glycol comprises at least one of: propylene glycol methyl ether, propylene glycol n-propyl ether, or dipropylene
15 glycol methyl ether.
11. An aqueous ink composition for inkjet printing on non-porous substrates, comprising:
a surfactant free functionalized primary latex in 5-40 weight per cent, wherein
20 the functionalized primary latex comprises:
an aromatic functional group;
a hydrogen-bonding group;
a flexible side-chain; and
an ionic functional group to enable self-emulsification of the surfactant
25 free functionalized primary latex;
a secondary latex binder in 5-20 weight per cent; and
one or more co-solvents, wherein the aqueous ink composition comprises a viscosity below 10 millipascal-seconds (mPa·s) at 25 degrees Celsius.
- 30 12. The aqueous ink composition of claim 11, wherein the functionalized primary latex comprises a low toxicity copolymer of styrene with ammonia having a particle size of 100-300 nanometers (nm).

13. The aqueous ink composition of claim 11, wherein the secondary latex binder comprises at least one of: polyurethane, polyamide, polyester, polyoxyethylene, or polyvinyl alcohol.
- 5 14. The aqueous ink composition of claim 11, wherein the one or more co-solvents comprises a propylene glycol.
15. The aqueous ink composition of claim 13, wherein the propylene glycol comprises at least one of: propylene glycol methyl ether, propylene glycol n-propyl
10 ether, or dipropylene glycol methyl ether.
16. The aqueous ink composition of claim 11, wherein the hydrogen-bonding group comprises a molecule that includes a functional group coupled to a cyclic molecule or an aromatic molecule.
- 15 17. The aqueous ink composition of claim 11, wherein the flexible side-chain comprises a branched alkyl having a side chain of at least one of: butyl, hexyl, octyl, or decyl.

1/2

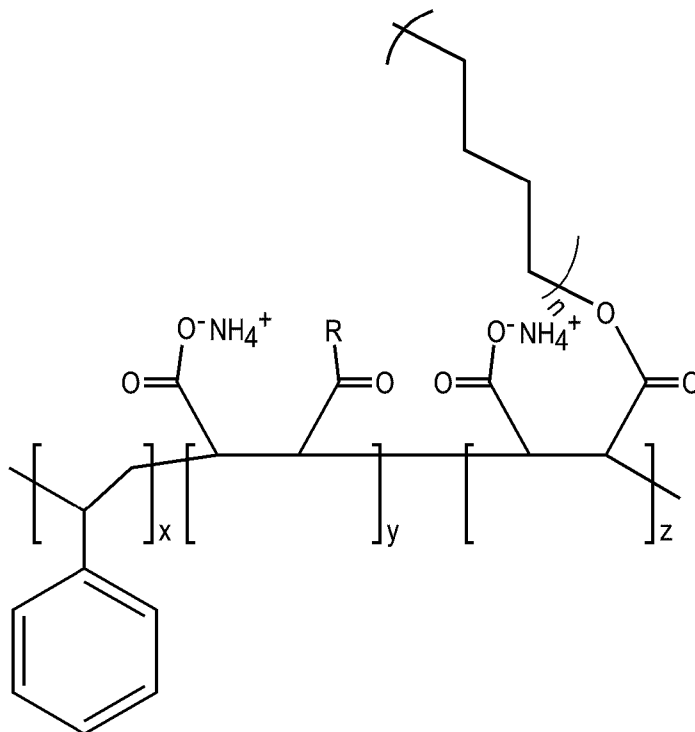


FIG. 1

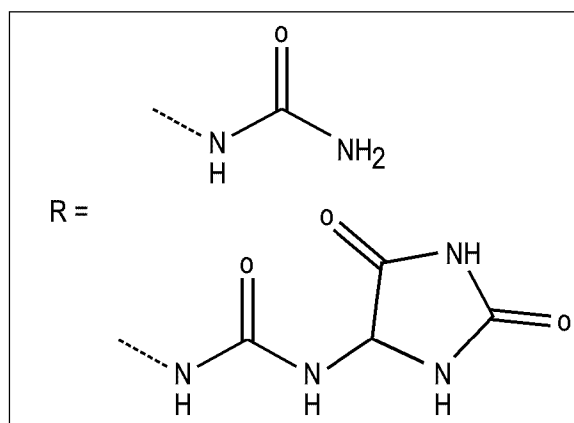


FIG. 2

2/2

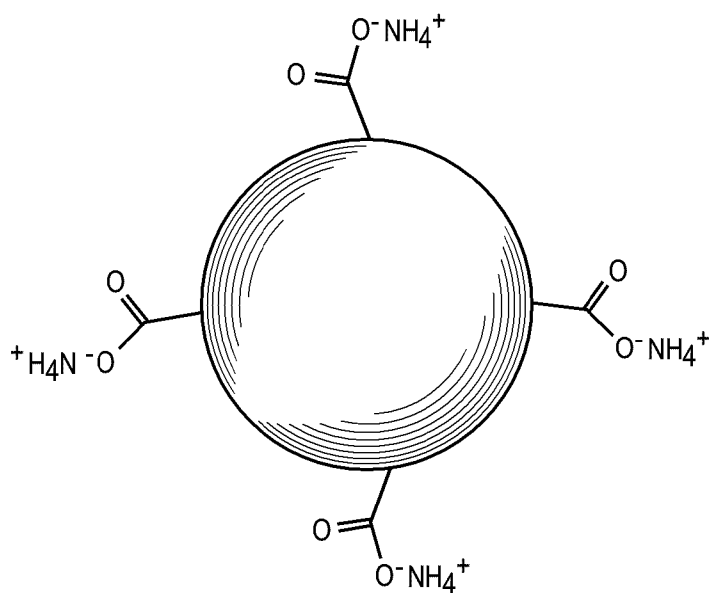


FIG. 3

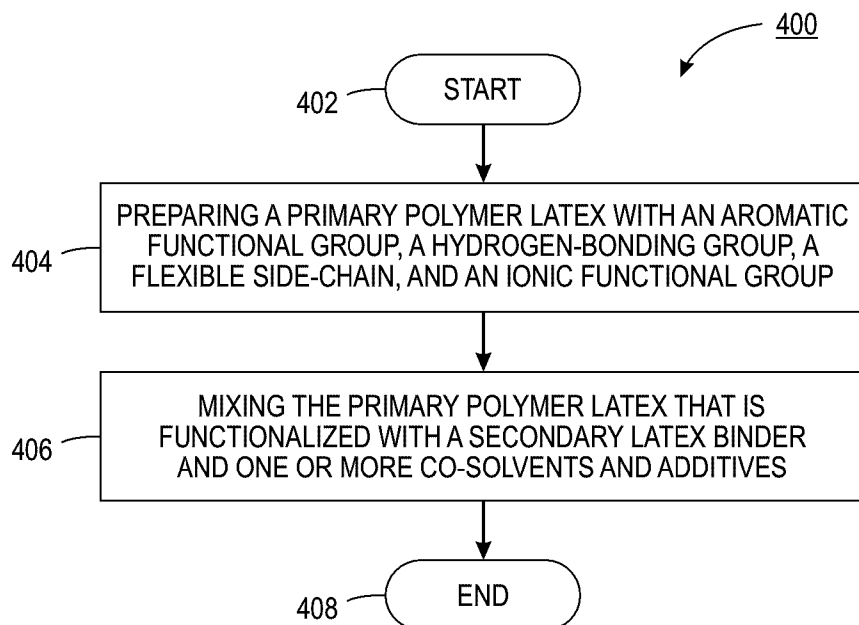


FIG. 4