




(86) Date de dépôt PCT/PCT Filing Date: 2011/12/08
 (87) Date publication PCT/PCT Publication Date: 2012/06/21
 (45) Date de délivrance/Issue Date: 2019/10/22
 (85) Entrée phase nationale/National Entry: 2013/06/10
 (86) N° demande PCT/PCT Application No.: GB 2011/001703
 (87) N° publication PCT/PCT Publication No.: 2012/080692
 (30) Priorité/Priority: 2010/12/14 (GB1021230.6)

(51) Cl.Int./Int.Cl. *E21B 47/04* (2012.01),
E21B 47/12 (2012.01), *G01V 3/20* (2006.01)
 (72) Inventeurs/Inventors:
HUDSON, STEVEN MARTIN, GB;
BROMWICH, ROBERT CHARLES, GB;
ROGACHEVA, ALEXANDRA VASIL'EVNA, GB;
WESTON, BRIDGET MARY, GB
 (73) Propriétaire/Owner:
EXPRO NORTH SEA LIMITED, GB
 (74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : SURVEILLANCE DE PUIITS
 (54) Title: WELL MONITORING

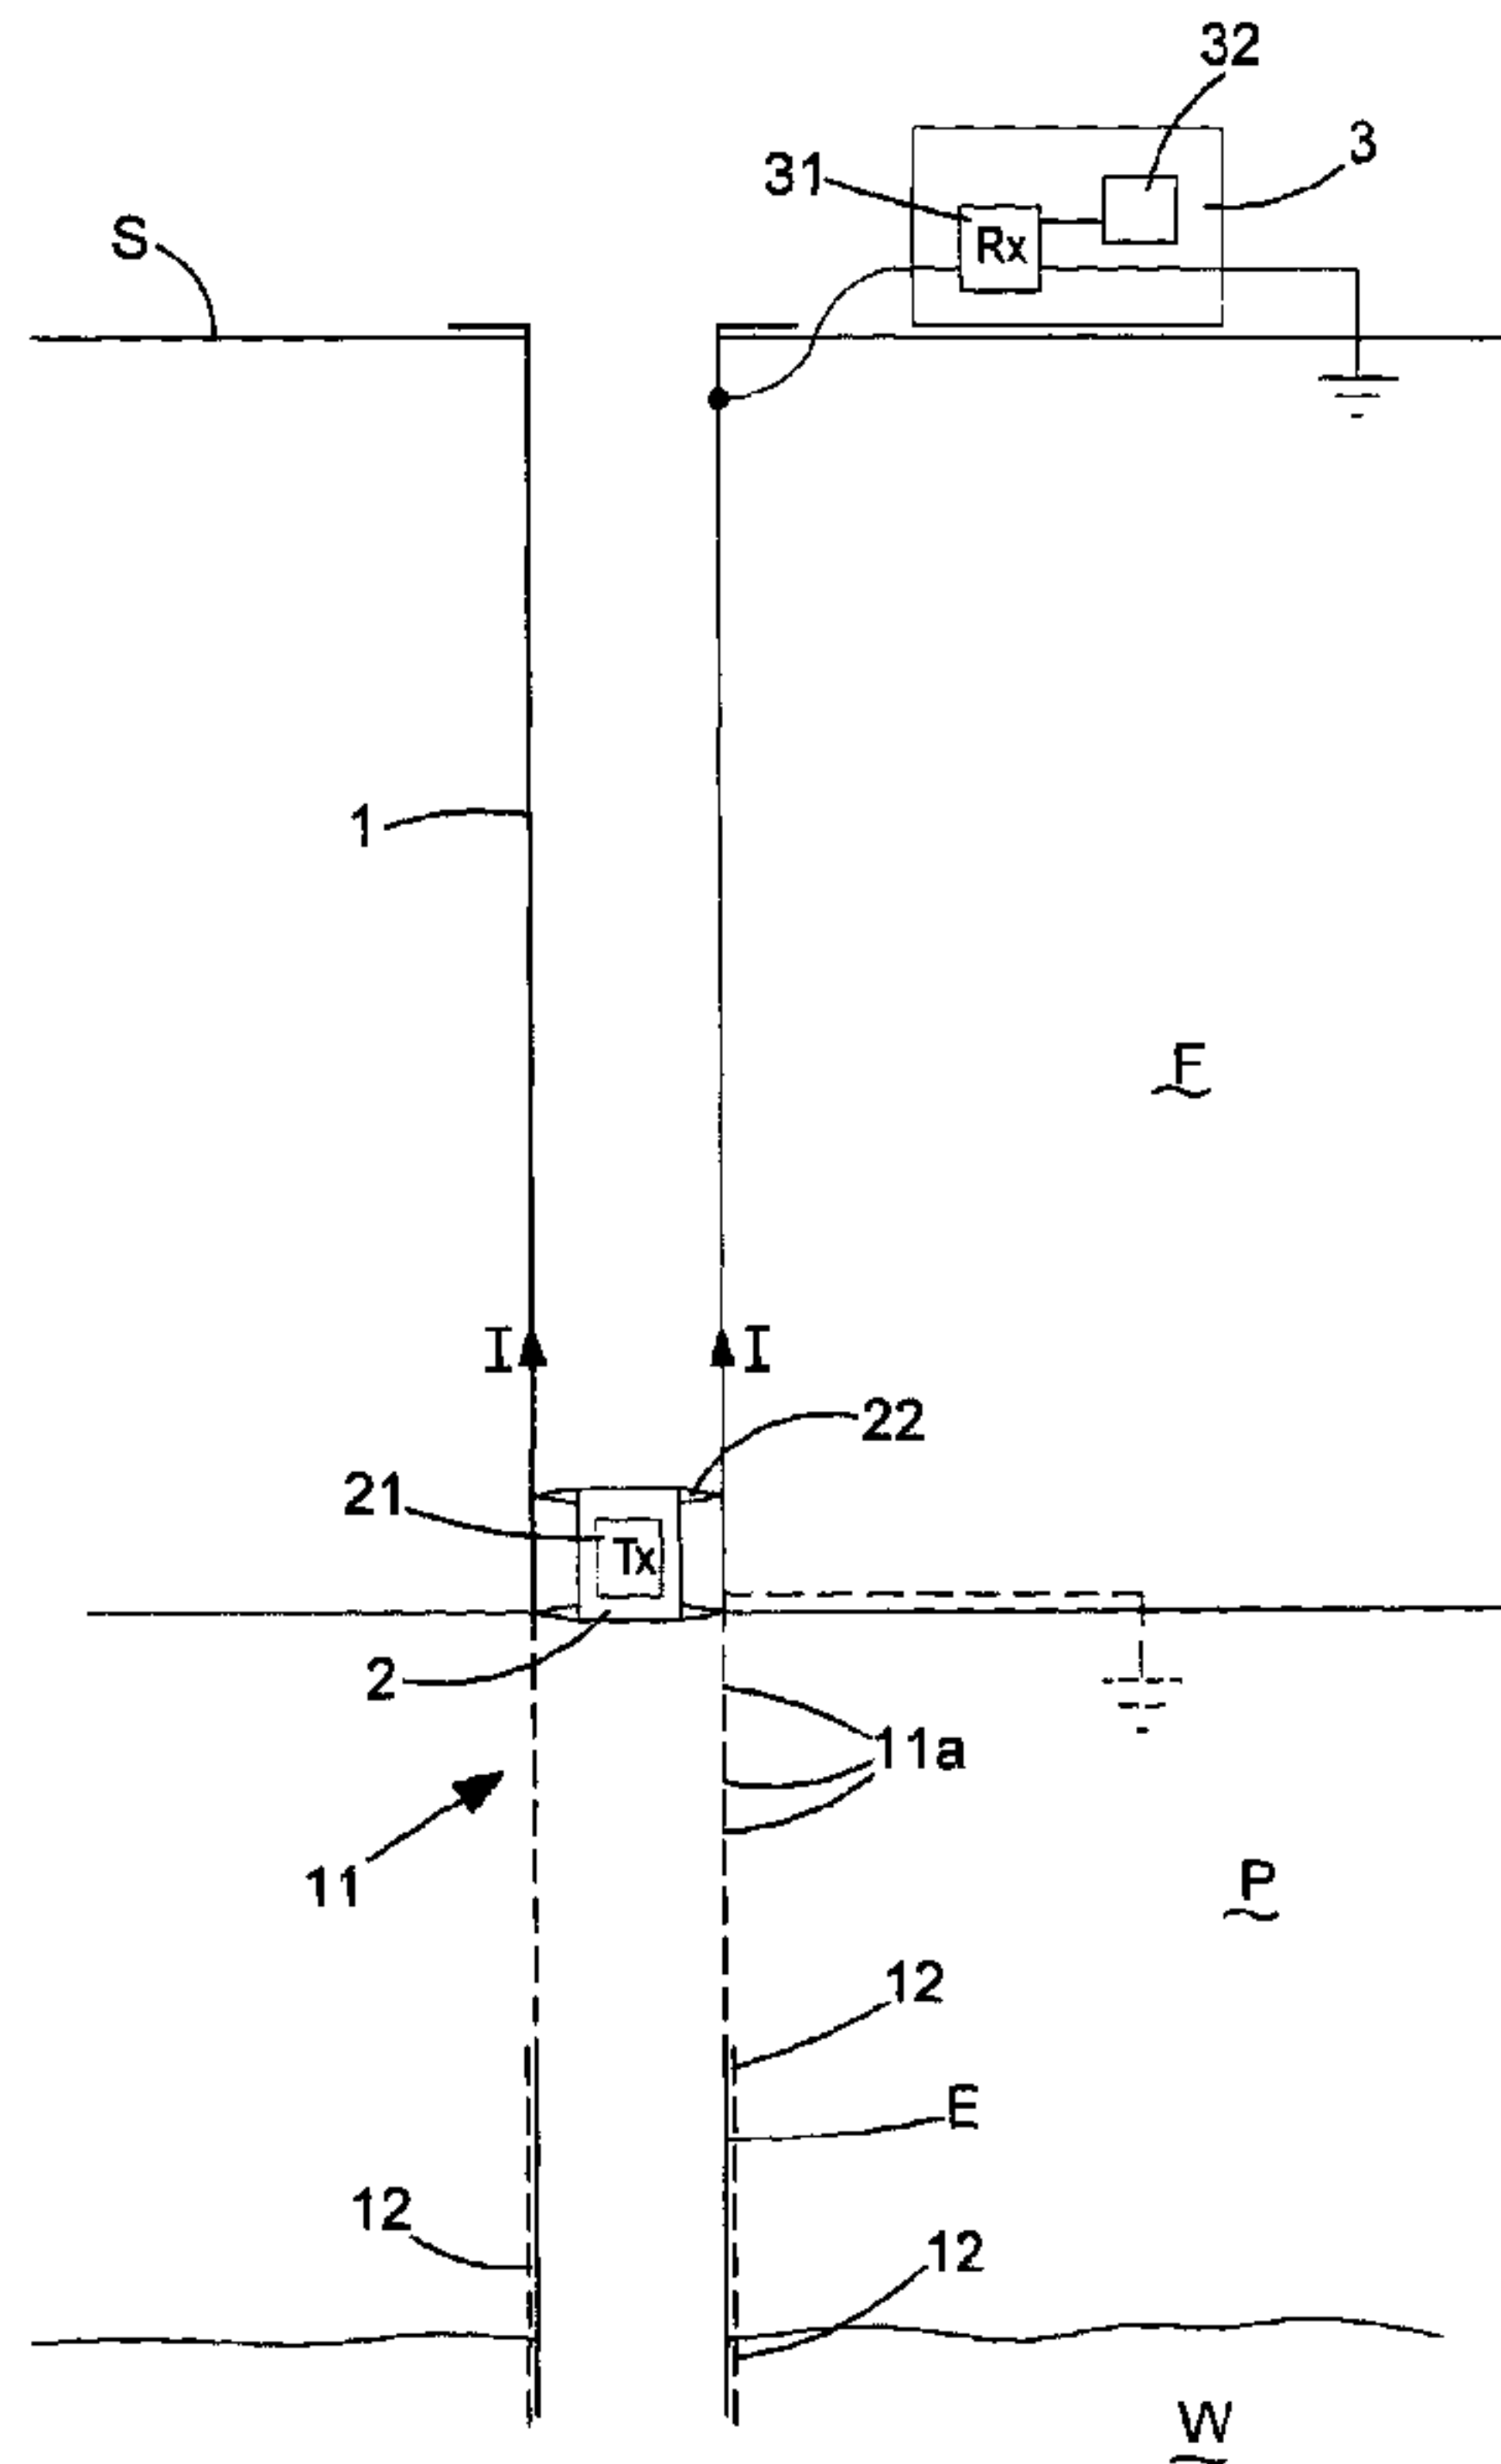

(57) **Abrégé/Abstract:**

Downhole water level detecting apparatus for detecting the level of water in a formation in the region of a well installation. The detecting apparatus comprises a transmitter (21) for applying electrical signals to a signalling loop at a first location. The signalling loop comprises downhole metallic structure of the well installation (1) and an earth return. The detecting apparatus also includes a detector (31) for monitoring electrical signals in the signalling loop, and an evaluation unit (32) arranged for determining a level of water in the formation relative to the downhole metallic structure in dependence on the monitored signals.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
21 June 2012 (21.06.2012)(10) International Publication Number
WO 2012/080692 A3

(51) International Patent Classification:

E21B 47/04 (2012.01) *G01V 3/20* (2006.01)
E21B 47/12 (2012.01)

(21) International Application Number:

PCT/GB2011/001703

(22) International Filing Date:

8 December 2011 (08.12.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1021230.6 14 December 2010 (14.12.2010) GB

(71) Applicant (for all designated States except US): **EXPRO NORTH SEA LIMITED** [GB/GB]; First Floor Davidson House, Forbury Square, Reading, Berkshire RG1 3EU (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **HUDSON, Steven Martin** [GB/GB]; Frekes Cottage, Moorside, Sturminster Newton, Dorset DT10 8HQ (GB). **BROMWICH, Robert****Charles** [GB/GB]; 12 Millbrook Close, Child Okeford, Blandford, Dorset DT11 8HA (GB). **ROGACHEVA, Alexandra Vasil'evna** [RU/GB]; Flat 7 Beaulieu Court, 35 Winn Road, Southampton SO17 1EL (GB). **WESTON, Bridget Mary** [GB/GB]; The Rectory, Portnells Lane, Zeals, Warminster BA12 6PG (GB).(74) Agents: **FAULKNER, Thomas John** et al.; Cleveland, 10 Fetter Lane, London EC4A 1BR (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: WELL MONITORING

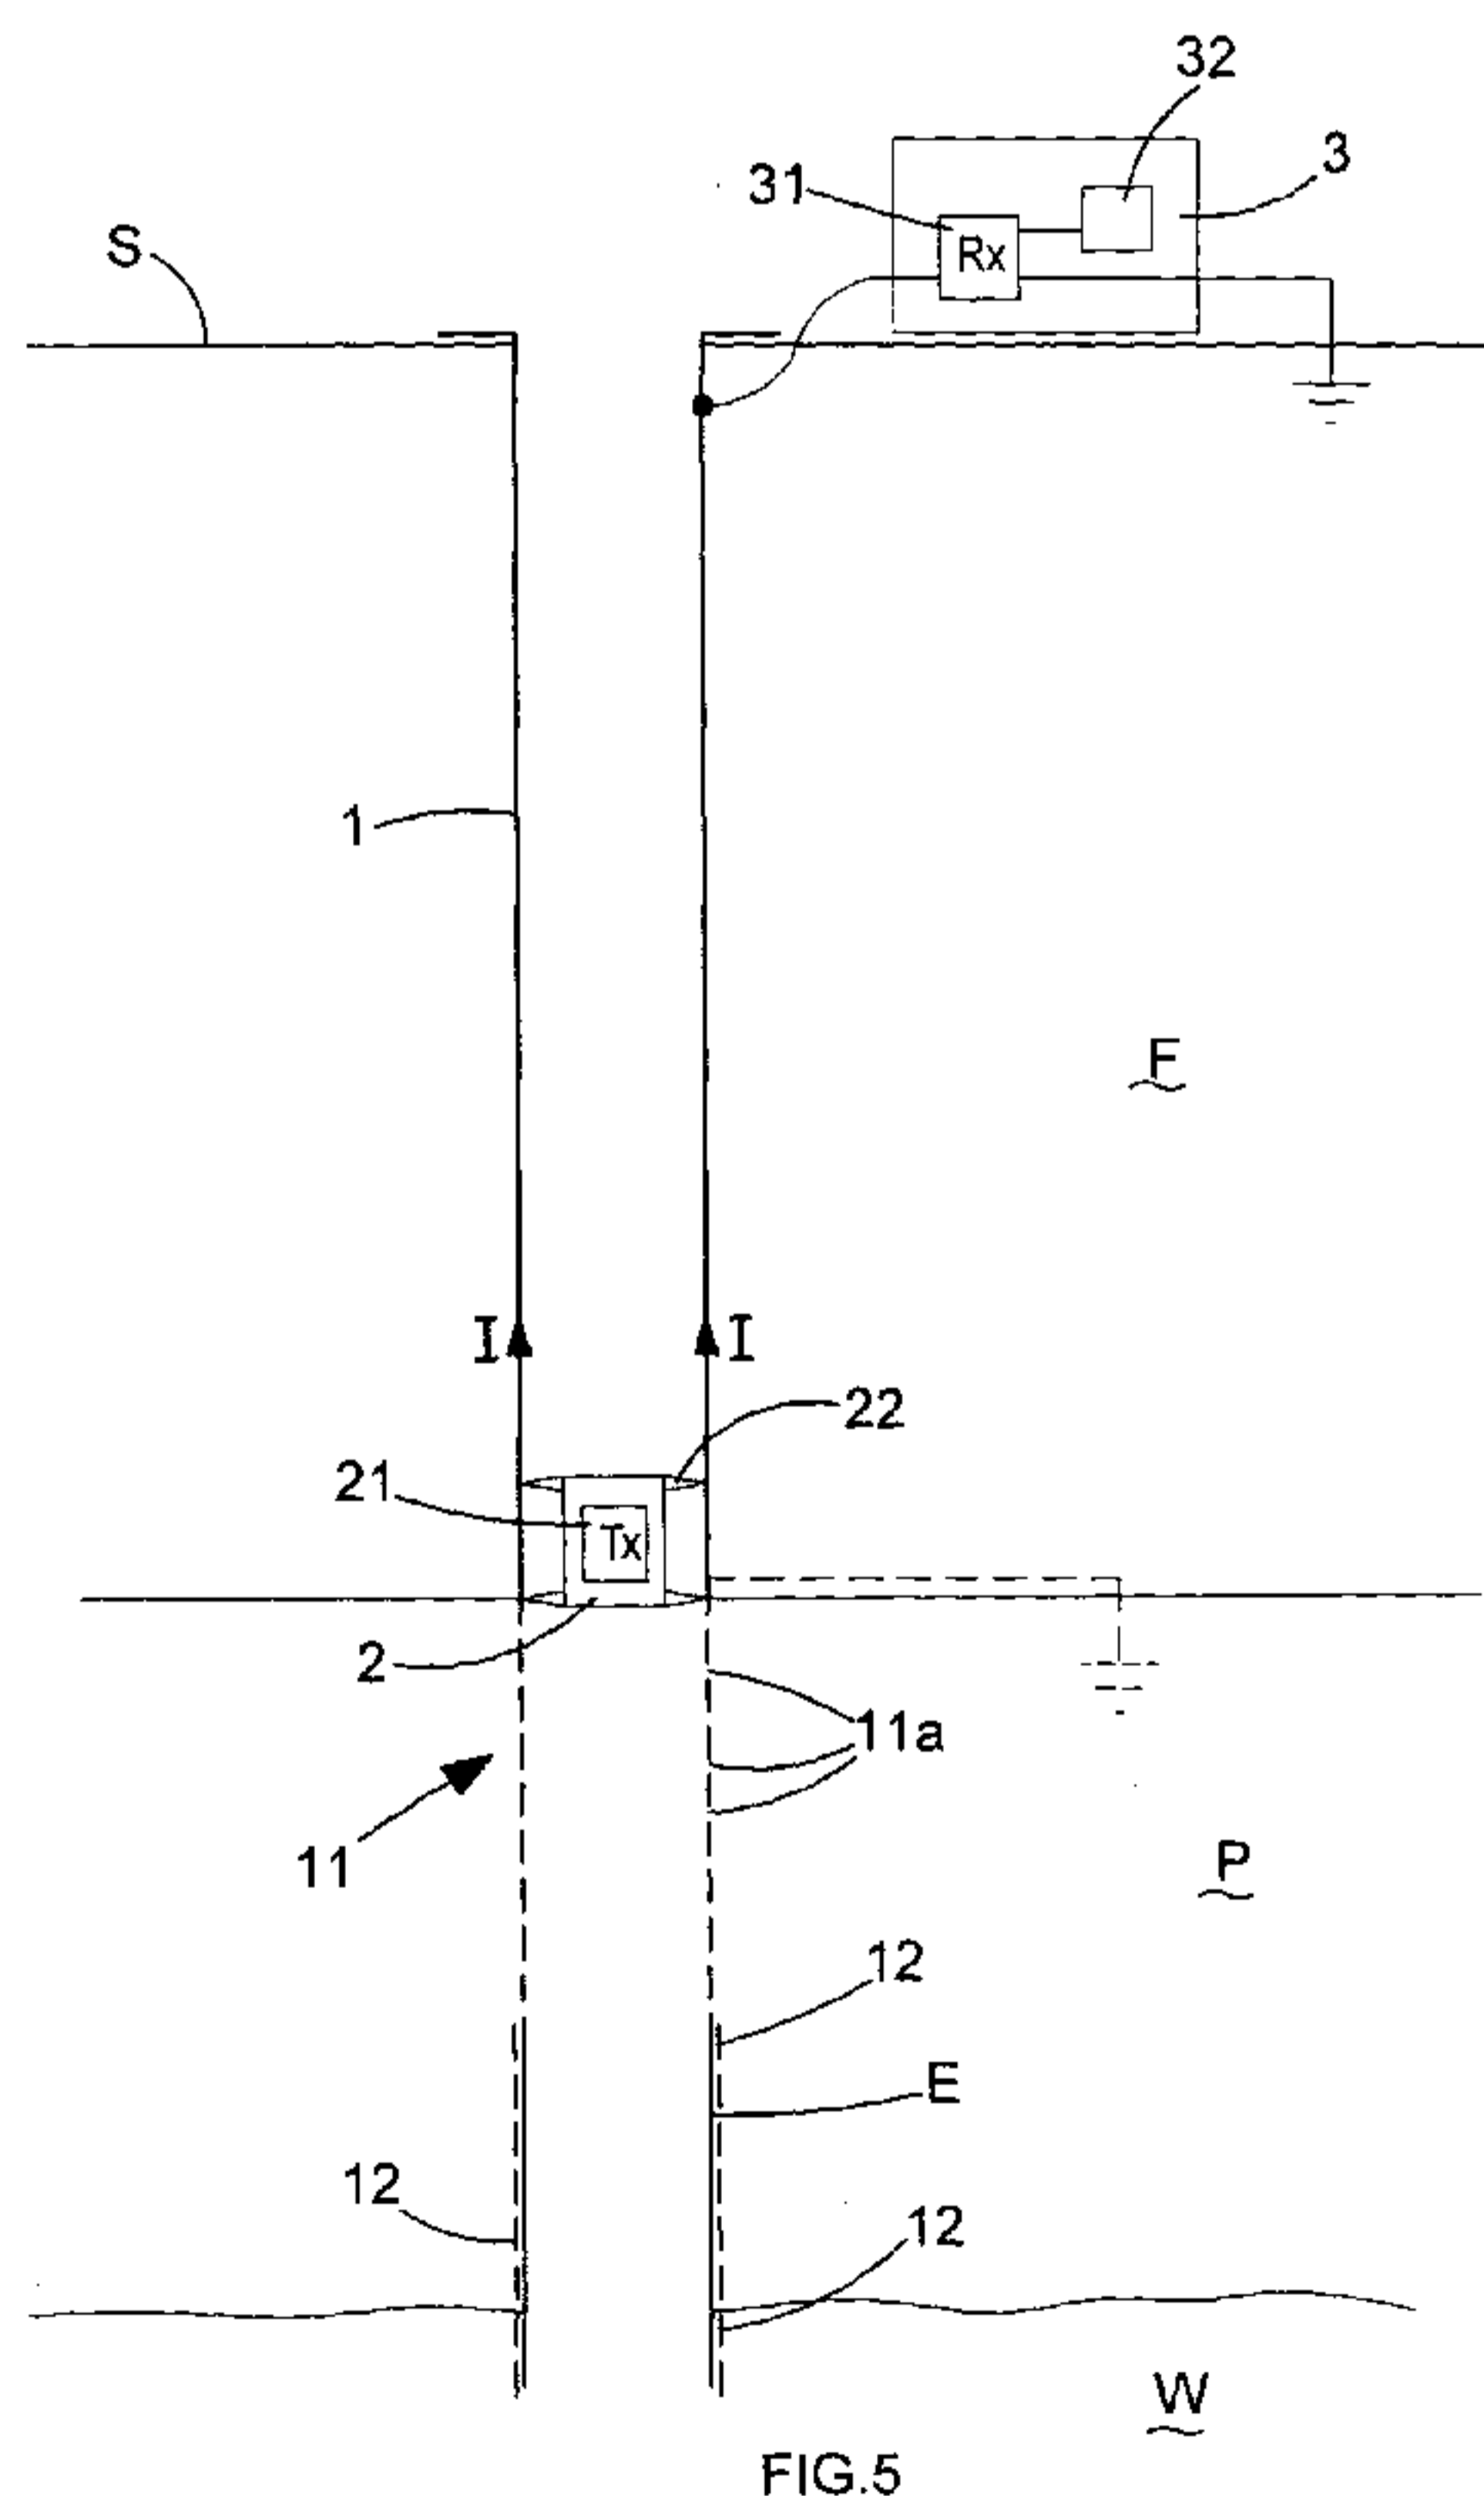

(57) Abstract: Downhole water level detecting apparatus for detecting the level of water in a formation in the region of a well installation. The detecting apparatus comprises a transmitter (21) for applying electrical signals to a signalling loop at a first location. The signalling loop comprises downhole metallic structure of the well installation (1) and an earth return. The detecting apparatus also includes a detector (31) for monitoring electrical signals in the signalling loop, and an evaluation unit (32) arranged for determining a level of water in the formation relative to the downhole metallic structure in dependence on the monitored signals.



WO 2012/080692 A3

WO 2012/080692 A3

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
30 May 2013

Published:

— *with international search report (Art. 21(3))*

WELL MONITORING

This invention relates to well monitoring methods apparatus and arrangements.

5 There are various pieces of information which it is desirable to have in relation to any given oil and/or gas well. One of these pieces of information is some indication of the level of water in the formation from which product (i.e. oil and/or gas) is being extracted. Typically, in a producing formation there will be a layer of product and below this a layer of water. This water may be naturally
10 present or may be present as a result of it being used to drive the product out of the formation. It is desirable to know where this water level is in relation to the producing portion of the well. This can for example, allow appropriate action to be taken as the water approaches a level such that it would begin to be produced from the well.

15 The present invention is directed at providing methods, apparatus, and arrangements which may be used for detecting the level of water in a formation associated with a well.

20 According to one aspect of the present invention there is provided downhole water level detecting apparatus for detecting the level of water in a formation in the region of a well installation, the detecting apparatus comprising a transmitter for applying electrical signals to a signalling loop at a first location, which signalling loop comprises downhole metallic structure of the well installation and an earth
25 return, a detector for monitoring electrical signals in the signalling loop, and an evaluation unit arranged for determining a level of water in the formation relative to the downhole metallic structure in dependence on the monitored signals.

In some embodiments, the detector may comprise a receiver for receiving signals
30 from the signalling loop at a second location and the evaluation unit may be arranged for determining a level of water in the formation relative to the downhole metallic structure in dependence on the received signal strength.

In other embodiments the detector may be arranged to measure signals, for example current flowing, in the metallic structure between two spaced contacts. At least one of the two spaced contacts may be disposed at or in the region of the
5 first location.

The first location may be downhole in the well installation. In some embodiments, this location may be close to the level at which water can be expected to be found.

10 In other embodiments the first location may be above a production packer.

The transmitter may be arranged to inject signals into tubing of the well installation. The transmitter may be arranged to inject signals into the tubing across an insulation joint provided in the tubing.

15

The transmitter may be arranged to inject signals into the tubing across a break in the tubing created by milling out a portion of the tubing whilst downhole.

20 In some embodiments, the apparatus may comprise a downhole tool of which the transmitter is a part and which is arranged to be disposed within the tubing.

The downhole tool may be moveable within the tubing. This can allow the tool to be located at a position chosen to maximise performance.

25 In other embodiments the transmitter may be located at the surface and/or powered from the surface. In such a case the signals to be applied to the metallic structure or the necessary power to generate such signals may be conducted downhole via a cable to the first location.

30 The receiver may be arranged to extract signals from tubing of the well installation. The receiver may be arranged to extract signals from the tubing across an insulation joint provided in the tubing.

The second location may be in the region of the surface of the well.

In an alternative both the first and second locations may be downhole.

- 5 The apparatus may comprise a relay station comprising the receiver and an additional transmitter for transmitting signals relating to a level of water in the formation towards the surface. Said signals may be indicative of signal strength detected at the receiver. Said signals may be indicative of a determined water level. The relay station may comprise the evaluation unit.

10

The apparatus may comprise at least one further relay station comprising an additional receiver for receiving signals from a respective previous relay station and another additional transmitter for onward transmission of signals.

- 15 The, each, or at least one of the relay stations may comprise a downhole tool, which is arranged to be disposed within the tubing and which may be moveable relative to the tubing.

- 20 The, each, or at least one of the relay stations may be arranged to transmit and receive across an insulation joint.

- 25 According to another aspect of the present invention there is provided a downhole water level detecting arrangement comprising a detecting apparatus as defined above installed in a well installation in relation to which a water level is to be determined.

- 30 The well installation may have tubing extending further into the formation than is required for product (oil and/or gas) extraction. This can aid in the detection of the water level as changes in received signal strength with water level are greater when the tubing extends into the part of the formation below the water level. An extended tubing can also help improve signalling range up towards the surface.

The well tubing may comprise a non-perforated section below a perforated section.

5 The well tubing may be provided with at least one circumferential band of ceramic insulation around its inner and/or outer surface. Preferably a plurality of axially spaced bands are provided. Preferably the band or bands are provided on a non-perforated section of tubing below a perforated section. The provision of such bands can aid in the detection of the water level as it rises to and past each band.

10

According to a further aspect of the present invention there is provided a method for detecting the level of water in a formation in the region of a well installation, comprising the steps of:

15 applying an electrical signal to a signalling loop at a first location, which signalling loop comprises downhole metallic structure of the well installation and an earth return;

monitoring electrical signals in the signalling loop; and

determining a level of water in the formation relative to the downhole metallic structure in dependence on the monitored signals.

20

The step of monitoring signals may comprise the step of receiving an electrical signal from the signalling loop at a second location; and the step of determining a level of water in the formation may be carried out in dependence on received signal strength.

25

The method may comprise the step of ensuring that tubing is provided in the well installation to a depth beyond that required for extraction of product. This may include ensuring that the tubing extends at least to a depth which corresponds to a maximum desirable water level. The maximum desirable water level may vary
30 with time and the depth to which the tubing extends may, in some circumstances, be varied within the life of the well in response to the maximum desirable water level.

The method may be carried out in a well installation having any or all of the features defined above.

According to another aspect of the present invention there is provided a downhole water level detecting apparatus for detecting a level of water in a formation in a region of a well installation, the detecting apparatus comprising: a transmitter for applying alternating current electrical signals to a signalling loop at a first location, the signalling loop comprising a downhole metallic structure of the well installation and an earth return; a detector for monitoring electrical signals in the signalling loop; and an evaluation unit arranged to determine a level of water in the formation relative to the downhole metallic structure in dependence on the monitored electrical signals, wherein the detector comprises a receiver for receiving signals from the signalling loop at a second location, and the evaluation unit is arranged to determine the level of water in the formation relative to the downhole metallic structure in dependence on a received signal strength, and wherein the transmitter is arranged to inject signals into tubing of the well installation and the receiver is arranged to extract signals from the tubing of the well installation.

According to another aspect of the present invention there is provided a method for detecting the level of water in a formation in a region of a well installation, comprising the steps of: monitoring electrical signals in a signalling loop by receiving electrical signals from the signalling loop at a second location, the signalling loop comprising downhole metallic structure of the well installation and an earth return, and the received signals having been injected into tubing of the well installation at a first location of the signalling loop and extracted from the tubing of the well installation at the second location; and determining a level of water in the formation in the region of the well installation relative to the downhole metallic structure in dependence on the signal strength of the monitored signals.

According to another aspect of the present invention there is provided a downhole water level detecting apparatus comprising: a detector arranged to monitor electrical signals in a signalling loop, the signalling loop comprising downhole metallic structure of a well installation and an earth return; and an evaluation unit arranged to determine a level of water in a formation relative to the downhole metallic structure in dependence on monitored signals, wherein the detector

comprises a receiver for receiving signals having been extracted from tubing of the well installation at a second location of the signalling loop, the received signals having been injected into the tubing of the well installation at a first location of the signalling loop, and wherein the evaluation unit is arranged to
5 determine the level of water in a formation relative to the downhole metallic structure in dependence on the received signal strength.

According to another aspect of the present invention there is provided a well installation for detecting a downhole location level of a water bearing region in a formation associated with a well, the well installation comprising: tubing
10 comprising an extension portion, the extension portion extending to a depth beyond that required for extraction of product; and a receiver configured to receive signals from the tubing so as to detect the downhole location level of the water bearing region in the formation in dependence on a strength of the received signals influenced by a distributed connection to Earth comprising the extension
15 portion, the received signals having been influenced by the downhole location level of the water bearing region influencing an impedance seen by signals that propagate to Earth via the extension portion.

According to another aspect of the present invention there is provided a method for detecting a downhole location level of a water bearing region in a formation
20 associated with a well, comprising: using signals received from a well installation, the well installation comprising tubing having an extension portion extending within the well to a depth beyond that required for extraction of product; and detecting, in dependence on a strength of the received signals influenced by a distributed connection to Earth comprising the extension portion, the downhole
25 location level of the water bearing region in the formation associated with the well, the signal strength of received signals having been influenced by the downhole location level of the water bearing region influencing an impedance seen by signals that propagate to Earth via the extension portion.

According to another aspect of the present invention there is provided a surface
30 unit for detecting a downhole location level of a water bearing region in a formation associated with a well, which well includes a well head, the surface unit comprising: a receiver configured to receive signals from tubing, the tubing comprising an extension portion extending to a depth within the well beyond that

required for extraction of at least one product from the well; and an evaluation unit configured to detect the downhole location level of the water bearing region in the formation in dependence on a strength of the received signals influenced by a distributed connection to Earth comprising the extension portion having been
 5 received at the receiver and having been influenced by the downhole location level of the water bearing region influencing an impedance seen by signals that propagate to Earth via the extension portion.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

- 10 Figure 1 schematically shows a downhole water level detecting arrangement; Figure 2 schematically shows a downhole water level detecting arrangement which is similar to that shown in Figure 1 but in which use is made of insulation joints in the tubing;
- Figure 3 schematically shows a downhole water level detecting arrangement
 15 which is similar to that shown in Figures 1 and 2 but in which a relay station is included;
- Figure 4 shows a further alternative downhole water level detecting arrangement similar to those shown in Figures 1 to 3 but in this instance including two relay stations;
- 20 Figure 5 schematically shows a further downhole water level detecting arrangement which is similar to that shown in Figure 1 but which includes a modified form of well tubing;
- Figure 6 shows a schematic plot of impedance against time which may be seen in a downhole water level detecting arrangement of the type shown in Figure 5 as
 25 water rises within the well; and
- Figure 7 shows a further alternative downhole water level detecting arrangement.
- Figure 1 shows a downhole water level detecting arrangement comprising water level detecting apparatus installed in a well installation.

The well installation comprises production tubing 1, extending from the surface S
 30 down through the formation F to a producing region P where product (i.e. oil/gas) exists within the formation. In the producing region P the production tubing 1 has a perforated section 11 with perforations 11 a to allow the product to flow into the

production tubing 1 and towards the surface. Below the producing region P there exists water W within the formation. Typically the tubing 1 will not extend down into this water bearing region of the formation during the typical operation of a producing well.

5

However, in some implementations, to give enhanced performance in the water level detecting arrangement to which this specification relates, the production tubing 1 may be provided with an extension portion E which extends beyond the perforated section 11 further than would normally be the case. Where the production tubing 1 extends in such a way, the extension portion E would be provided without perforations and can extend into the water bearing part W of the formation at least as the water level rises towards the perforated section 11 of the production tubing 1.

10

15 There would normally be no reason to have the production tubing 1 extending any significant distance beyond the perforated section 11, but in the present techniques such an extension portion E can be of use as will become clearer following a more detailed explanation of the present techniques below.

20 In the present water level detecting arrangement, the detecting apparatus comprises a downhole tool 2 which is disposed within the production tubing 1 at a region close to the perforated section 11 of the production tubing 1 and a surface unit 3 located in the region of the well head.

25 The downhole tool 2 is arranged for injecting electrical signals into the metallic tubing 1 at the downhole location. These signals are extremely low frequency alternating current signals having a high current. In a typical implementation the frequency of the signals may be in the order of 0.1 Hertz and the applied current may be in the region of 70 Amps.

30

The downhole tool 2 comprises a transmitter 21 and conductive centralisers 22 which are arranged to mechanically and electrically contact with the production

tubing 1 to allow signals from the transmitter 21 to be fed into the production tubing 1. Of course, the downhole tool 2 may comprise other components such as a receiver, sensors, and so on, but these are not of particular pertinence to the present invention.

5

Once signals have been applied to the metallic structure 1, a signal I propagates away from the tool 2 towards the surface S. Considering the position in the other direction, ie, downwards from the tool 2, then in effect there is a distributed connection to Earth via the metallic structure of the tubing 1 residing in the formation. The strength of the signal I propagated towards the surface is influenced by how good this distributed connection to Earth is. That is to say it is influenced by the impedance seen between the downhole tool 2 and Earth.

The present techniques use this fact in the detection of the level of water within the formation because the level of water within the formation influences the impedance between the tool 2 and Earth and thus influences the magnitude of the signal I which propagates towards the surface along the production tubing 1.

The surface unit 3 comprises a receiver 31 which is connected between the production tubing 1 in the region of the well head and Earth for extracting the signal I from the tubing 1. The signal strength seen by this receiver 31 varies as the impedance of the signalling loop changes and in particular as the impedance to Earth from the tool 2 changes. Thus, the received signal strength at the receiver 31 varies as the water level within the formation changes. The surface unit 3 comprises an evaluation unit 32 which is calibrated and arranged for giving an indication of the water level relative to the metallic structure 1 of the well in dependence on the signal strength received at the receiver 31.

As mentioned above, the production tubing 1 may be provided with an extension portion E which extends further beyond the perforated section 11, i.e. producing region of the production tubing 1, than would normally be the case. This is useful in the present techniques as the degree of change in signal strength that will be

30

seen at the receiver 31 changes much more rapidly as the water level progresses up through the formation in a region where the metallic production tubing 1 is present than when it is progressing up through the formation at a level below which the production tubing stops.

5

An extension portion E can assist in signalling range towards the surface.

Figure 2 schematically shows a downhole water level detecting arrangement which is similar to that shown in Figure 1. In this case insulation joints IJ are provided in the production tubing 1 at the region of the downhole tool 2 and the surface unit 3. As such the transmitter 21 of the downhole tool can be connected across an insulation joint as can the receiver 31 of the surface unit 3. It will be appreciated that an insulation joint is provided to electrically insulate one portion of tubing from another.

10

The principles of operation of such an arrangement are the same as that described above with relation to Figure 1, but the provision of insulation joints IJ in the production tubing 1 where this is feasible, can provide a convenient way of enhancing the performance of the system particularly the provision of a downhole insulation joint IJ at the downhole tool 2.

15

Of course the provision of an insulation joint IJ is only possible where such a joint is included in the tubing 1 during completion or recompletion of a well.

Furthermore, the inclusion of such a physical insulation joint between sections of the metallic tubing is not always possible or desirable.

20

The arrangement shown in Figure 1 is more suitable for retro-fitting operations as the downhole tool 2 in that arrangement can be deployed within the tubing 1 in an already completed well. Further it can be used where the inclusion of an insulation joint IJ is not feasible.

25

30

In non-retro fit situations it may be possible to provide a tool which is external to the production tubing 1. Such a situation is schematically illustrated in the arrangement shown in Figure 2. However, of course, a internally disposed downhole tool 2 of the type shown in Figure 1 may also be used, where insulation joints IJ are provided.

As a further alternative in some situations it will be possible to mill away tubing in the intended region of the downhole tool (whilst the tubing is in situ in an existing well). This can create a partial or complete break in the tubing which can be signalled across in the same way as an insulation joint. This of course increases the options of retro-fitted systems.

Figure 3 schematically shows a further downhole water level detecting arrangement which is similar to that shown in Figure 1 and described above. Here, however, as well as the downhole tool 2 located close to the perforated section 11 of the production tubing 1, there is provided a downhole relay station 4 having a receiver 41 for receiving the signals transmitted by the downhole tool 2 and a transmitter 42 for transmitting signals onwards up to the surface unit 3.

The provision of a relay station 4 downhole can help improve the sensitivity of the system whilst giving the desired range. Where a downhole tool 2 of the present type is located close to the end of the production tubing 1 as is desirable in the present case, its range for upward transmission is smaller than when the tool 2 is spaced further from the end of the production tubing 1. On the other hand, placing the tool 2 close to the end of the production tubing 1 helps in giving good sensitivity for detecting the water level in the formation. Thus, the provision of a relay station 4 helps provide an improved system. In the present arrangement the relay station 4 is arranged for receiving the signal transmitted by the transmitter 21 of the downhole tool 2 and then transmitting, using the transmitter 42, a signal which is indicative of the received signal strength as seen by the receiver 41. This signal which is indicative of the received signal strength at the receiver 41 of the

relay station is then received by the surface unit 3 and used by the evaluating unit 32 to provide an indication of the water level.

In an alternative implementation the evaluation unit may be provided in the relay station 4 such that a determination of the water level is made in the relay station 4 and a signal which is representative of this water level is transmitted by the relay station 4 onwards towards the surface unit 3.

Figure 4 shows yet another alternative downhole water level detecting arrangement which is similar to that shown in Figure 3 and described above. Here, however, two relay stations 4 and 5 are included each with a receiver, 41, 51 and transmitter 42, 52. The functioning and operation of each relay station 4,5 is the same as described above in relation to the relay station 4 of Figure 3, but the provision of two relay stations allows one of these to be disposed close to the downhole tool 2 to further increase the sensitivity of the detection system whilst still allowing an extended range to the surface.

It will, of course, be appreciated that which of the arrangements is chosen between those shown in Figures 1 to 4 will depend on the circumstances in a particular well installation ie for example, most obviously dependent on the depth of the well. Clearly, the provision of more downhole tools as relay stations will tend to give the best performance, but this has to be weighed against the cost involved and the obstructions that these cause in the flow line.

Of course, in principle there is no reason why the number of relay stations needs to be limited to two and a choice may be made as to where the water level determination is made, ie whether this is in one of the relay stations or at the surface.

Figure 5 shows a further alternative downhole water level detecting arrangement which in this case is similar to that shown in Figure 1. In fact the water level detecting apparatus installed in the well installation of Figure 5 is the same as that

installed in the well installation of Figure 1. However the structure of the well installation itself is different. In this instance an extension portion E is provided to the production tubing. This extension portion E is a solid walled portion of tubing which extends further down into the well than the perforated portion 11.

5 This extension portion E of the production tubing 1 has provided around its external surface a series of axial spaced insulating portions 12. In the present embodiment each of these insulating portions comprise an insulating ceramic coating. These insulating bands 12, change the impedance characteristics of the tubing in terms of conduction to earth. This in turn leads to a modification of the

10 change in signals which will be received at the receiving unit 3 as the water level progresses up the tubing.

Figure 6 schematically shows a plot of impedance Z seen between the downhole tool 2 and earth against time t as the water level rises within the well. As the

15 water level approaches the end of the tubing, the impedance will be steadily decreasing as shown by portion a of the plot. However as the water reaches the bottom of the metallic tubing the impedance will begin to much more rapidly decrease as the water progresses up the tubing and more and more of the tubing is immersed in water – this is shown by portion b of the plot. However, when the

20 water reaches an insulated portion 12 of the tubing there will be a slower decrease in impedance as the insulated portion of the tubing does not offer such a good direct conduction path between the water and the tubing. This is shown as part c of the plot. Once the first band of insulation material 12 is passed (corresponding to the position of the water level shown in Figure 5), the impedance will begin to

25 drop more rapidly again as the water rises, illustrated by another portion of the plot labelled d. There will then be a slower decrease as the next band is reached.

These statements of course rely on the fact that the water level is rising at a steady rate. However, whether or not this is true, what is true is that a difference in

30 behaviour will be seen as each insulation band is traversed which gives an indication of the water level. Further, a time period which traversing each band 12 takes, indicated as T in the plot of Figure 6, will give a measure of the speed at

which the water level is rising. The point to make here is that it should generally be easier to spot (say computationally determine) a change in behaviour as one of the bands of insulation is passed, than it is to directly determine the water level or the rate of change of water level directly from the received signal strength itself.

5

Whilst this idea of providing insulating bands of material 12 on an extension portion E of the production tubing 1 has been described here in relation to the water level detecting arrangement of Figure 1, it will be appreciated that this technique is equally applicable to the other water level detecting arrangements
10 described in the present specification.

Figure 7 shows a further alternative downhole water detecting arrangement which operates on a slightly different basis than those described above.

15 The downhole water level detecting arrangement again comprises water level detecting apparatus installed in a well insulation. Again there is production tubing 1 within the well and signals I are applied to this tubing which in turn is connected to earth by virtue of progressing through the formation and production region as in the arrangements described above. Furthermore, this arrangement relies on the
20 fact that the characteristics of the signal path including the production tubing 1 and the formation F will be influenced by the level of water in the formation. In the present arrangement however, power for applying a signal I to the production tubing is provided from the surface S.

25 The water level detecting apparatus of the present embodiment comprises a modified downhole tool 2' and a modified surface unit 3'. The downhole tool 2' is arranged for injecting the signal I at an injection point 100 into the production string 1 and is arranged to be disposed above a packer 101 in a producing well. The modified downhole tool 2' comprises spaced contacts 102 for contacting with
30 the production tubing 1 and is connected via a cable (for example a tubing encapsulated cable – TEC) 103 to the surface unit 3'.

The modified downhole tool 2' is arranged for detecting the current I injected into the string and in particular flowing in a portion of conductor – ie the tubing 1 – disposed between the locations at which the spaced contacts 102 are located. In
5 the present embodiment the level of current flowing between these two contacts 102 will be dependent on the impedance between the injection point 100 and earth as via the distributed earth provided by the production tubing. Hence this current level will be dependent on the water level.

10 Because downhole tool 2' is connected via the electrical cable 103 to the surface unit 3', the surface unit 3' may supply power to the downhole tool 2 which is then used to generate the signal for injection at the injection point 100. Alternatively, the cable 103 may be used to conduct the signal to be injected directly from the surface unit 3' to the injection point 100.

15 Furthermore, readings taken at the downhole tool 2' based on the signals detected by the spaced contacts 101, may be transmitted back to the surface unit 3' via the cable 103.

20 The water level detecting arrangement of Figure 7 has the advantage that it is powered from the surface such that a larger number of readings may be taken and/or the system may be operated over a longer time than the systems which make use of a downhole power source, particularly where such a downhole power source would be batteries.

25 Typically the modified downhole tool 2' would be arranged for sending back readings along the cable 103 to the surface unit 3' for processing in order to determine the current water level. In alternatives however, processing can take place at the downhole tool 2' and a processed signal (such as a signal indicative of
30 the current water level) can be passed back via the cable 103 to the surface unit 3'.

In order to improve performance of the system of this embodiment, the tubing portion in the region of, and between, the two spaced contacts 102 may be of a corrosion resistant alloy.

- 5 This again, is a technique which is more suited for use in a new completion than as a retro-fit option.

A benefit of this system is that it avoids having to install components deep into the well where this can cause issues by restricting flow.

What is claimed is:

1. A downhole water level detecting apparatus for detecting a level of water in a formation in a region of a well installation, the detecting apparatus comprising:

a transmitter for applying alternating current electrical signals to a signalling loop at a first location, the signalling loop comprising a downhole metallic structure of the well installation and an earth return;

a detector for monitoring electrical signals in the signalling loop; and
an evaluation unit arranged to determine a level of water in the formation relative to the downhole metallic structure in dependence on the monitored electrical signals,

wherein the detector comprises a receiver for receiving signals from the signalling loop at a second location, and the evaluation unit is arranged to determine the level of water in the formation relative to the downhole metallic structure in dependence on a received signal strength, and

wherein the transmitter is arranged to inject signals into tubing of the well installation and the receiver is arranged to extract signals from the tubing of the well installation.

2. The downhole water level detecting apparatus according to claim 1 wherein the detector is arranged to measure signals, in the metallic structure between two spaced contacts, where at least one of the two spaced contacts is disposed at or in the region of the first location.

3. The downhole water level detecting apparatus according to claim 1 or 2 further comprising a downhole tool of which the transmitter is a part, the downhole tool arranged to be disposed within the tubing.

4. The downhole water level detecting apparatus according to claim 3 wherein the downhole tool is moveable within the tubing.

5. The downhole water level detecting apparatus according to any one of claims 1 to 4 wherein the transmitter is at least one of located at the surface and powered from the surface.

6. The downhole water level detecting apparatus according to claim 5 wherein at least one of the signals to be applied to the metallic structure and the power to generate the signals is conducted downhole via a cable to the first location.
7. The downhole water level detecting apparatus according to any one of claims 1 to 6 wherein the receiver is arranged to extract signals from the tubing across an insulation joint provided in the tubing.
8. The downhole water level detecting apparatus according to any one of claims 1 to 7 further comprising a relay station comprising the receiver and an additional transmitter for transmitting signals relating to the level of water in the formation towards the surface.
9. The downhole water level detecting apparatus according to claim 8 further comprising at least one further relay station comprising an additional receiver for receiving signals from a respective previous relay station and another additional transmitter for onward transmission of signals.
10. A downhole water level detecting arrangement comprising the detecting apparatus according to any one of claims 1 to 9 installed in a well installation in relation to which the level of water is to be determined.
11. The downhole water level detecting arrangement according to claim 10 wherein the well installation has tubing extending further into the formation than is required for product extraction.
12. The downhole water level detecting arrangement according to claim 11 wherein the tubing that extends further into the formation than is required for product extraction comprises an extension portion that is below a producing region associated with the tubing.
13. The downhole water level detecting arrangement according to any one of claims 10 to 12 wherein the well installation has tubing that comprises a non-perforated section below a perforated section.

14. The downhole water level detecting arrangement according to any one of claims 10 to 12 wherein the well installation has tubing that is provided with at least one circumferential band of ceramic insulation around at least one of an inner surface and an outer surface of the tubing on a non-perforated section of tubing below a perforated section.

15. The downhole water level detecting arrangement according to any one of claims 10 to 14 wherein the transmitter is arranged to inject signals into the tubing across a milled out section of tubing.

16. A method for detecting the level of water in a formation in a region of a well installation, comprising the steps of:

monitoring electrical signals in a signalling loop by receiving electrical signals from the signalling loop at a second location, the signalling loop comprising downhole metallic structure of the well installation and an earth return, and the received signals having been injected into tubing of the well installation at a first location of the signalling loop and extracted from the tubing of the well installation at the second location; and

determining a level of water in the formation in the region of the well installation relative to the downhole metallic structure in dependence on the signal strength of the monitored signals.

17. A method according to claim 16 comprising the step of ensuring that tubing is provided in the well installation to a depth beyond that required for extraction of product.

18. A method according to claim 17 comprising the step of ensuring that the tubing extends at least to a depth which corresponds to a maximum desirable water level.

19. A method according to claim 17 or 18 wherein the tubing that is provided in the well installation to the depth beyond that required for extraction of product comprises an extension portion that is below a producing region associated with the tubing.

20. The method according to any one of claims 16 to 19 further comprising applying an electrical signal to the signalling loop at the first location.
21. A downhole water level detecting apparatus comprising:
a detector arranged to monitor electrical signals in a signalling loop, the signalling loop comprising downhole metallic structure of a well installation and an earth return; and
an evaluation unit arranged to determine a level of water in a formation relative to the downhole metallic structure in dependence on monitored signals, wherein the detector comprises a receiver for receiving signals having been extracted from tubing of the well installation at a second location of the signalling loop, the received signals having been injected into the tubing of the well installation at a first location of the signalling loop, and wherein the evaluation unit is arranged to determine the level of water in a formation relative to the downhole metallic structure in dependence on the received signal strength.
22. A well installation for detecting a downhole location level of a water bearing region in a formation associated with a well, the well installation comprising:
tubing comprising an extension portion, the extension portion extending to a depth beyond that required for extraction of product; and
a receiver configured to receive signals from the tubing so as to detect the downhole location level of the water bearing region in the formation in dependence on a strength of the received signals influenced by a distributed connection to Earth comprising the extension portion, the received signals having been influenced by the downhole location level of the water bearing region influencing an impedance seen by signals that propagate to Earth via the extension portion.
23. The well installation according to claim 22 wherein the extension portion extends at least to a depth that corresponds to a maximum desired downhole location level of the water bearing region.

24. The well installation according to claim 22 or 23 wherein the extension portion comprises a non-perforated section below a perforated section of tubing.
25. The well installation according to any one of claims 22 to 24 wherein the extension portion has impedance characteristics and an outer surface, and wherein the extension portion is provided with at least one insulation portion disposed around the outer surface, the insulation portion configured to change the impedance characteristics of the extension portion in terms of conduction to earth.
26. The well installation according to claim 25 wherein the extension portion comprises a plurality of axially spaced bands of insulating portions.
27. The well installation according to claim 26 wherein the plurality of axially spaced bands of insulating portions comprise an insulating ceramic coating.
28. The well installation according to any one of claims 22 to 27 wherein the well installation comprises a transmitter configured to apply signals to the tubing, the well installation configured such that the downhole location level of the water bearing region in the formation can be determined from a signal strength of signals communicated between the transmitter and the receiver, having been influenced by signals in the extension portion.
29. The well installation according to any one of claims 22 to 28 wherein the tubing comprises production tubing.
30. A method for detecting a downhole location level of a water bearing region in a formation associated with a well, comprising:
using signals received from a well installation, the well installation comprising tubing having an extension portion extending within the well to a depth beyond that required for extraction of product; and
detecting, in dependence on a strength of the received signals influenced by a distributed connection to Earth comprising the extension portion, the downhole location level of the water bearing region in the formation associated with the well, the signal strength of received signals having been influenced by the

downhole location level of the water bearing region influencing an impedance seen by signals that propagate to Earth via the extension portion.

31. The method of claim 30 wherein the extension portion extends at least to a depth that corresponds to a maximum desired downhole location level of the water bearing region.

32. The method of claim 30 or 31 wherein the extension portion comprises a non-perforated section below a perforated section of tubing.

33. The method according to any one of claims 30 to 32 wherein the extension portion has impedance characteristics and an outer surface, and the extension portion is provided with at least one insulation portion around the outer surface, and the insulation portion configured to change the impedance characteristics of the extension portion in terms of conduction to earth.

34. The method according to claim 33 wherein the extension portion comprises a plurality of axially spaced bands of insulating portions.

35. The method according to claim 34 wherein the plurality of axially spaced bands of insulating portions comprise an insulating ceramic coating.

36. The method according to any one of claims 30 to 35 further comprising applying signals to the tubing of the well installation and subsequently receiving signals in order to allow detection of the downhole location level of the water bearing region.

37. The method according to any one of claims 30 to 36 wherein the well includes a well head, the method further comprising receiving the signals at a receiver of a surface unit, the surface unit being connected between the tubing in a region of the well head and Earth.

38. The method according to claim 37 wherein the tubing is production tubing.

39. A surface unit for detecting a downhole location level of a water bearing region in a formation associated with a well, which well includes a well head, the surface unit comprising:

a receiver configured to receive signals from tubing, the tubing comprising an extension portion extending to a depth within the well beyond that required for extraction of at least one product from the well; and

an evaluation unit configured to detect the downhole location level of the water bearing region in the formation in dependence on a strength of the received signals influenced by a distributed connection to Earth comprising the extension portion having been received at the receiver and having been influenced by the downhole location level of the water bearing region influencing an impedance seen by signals that propagate to Earth via the extension portion.

40. The surface unit according to claim 39 wherein the surface unit is connected between the tubing in a region of the well head and Earth.

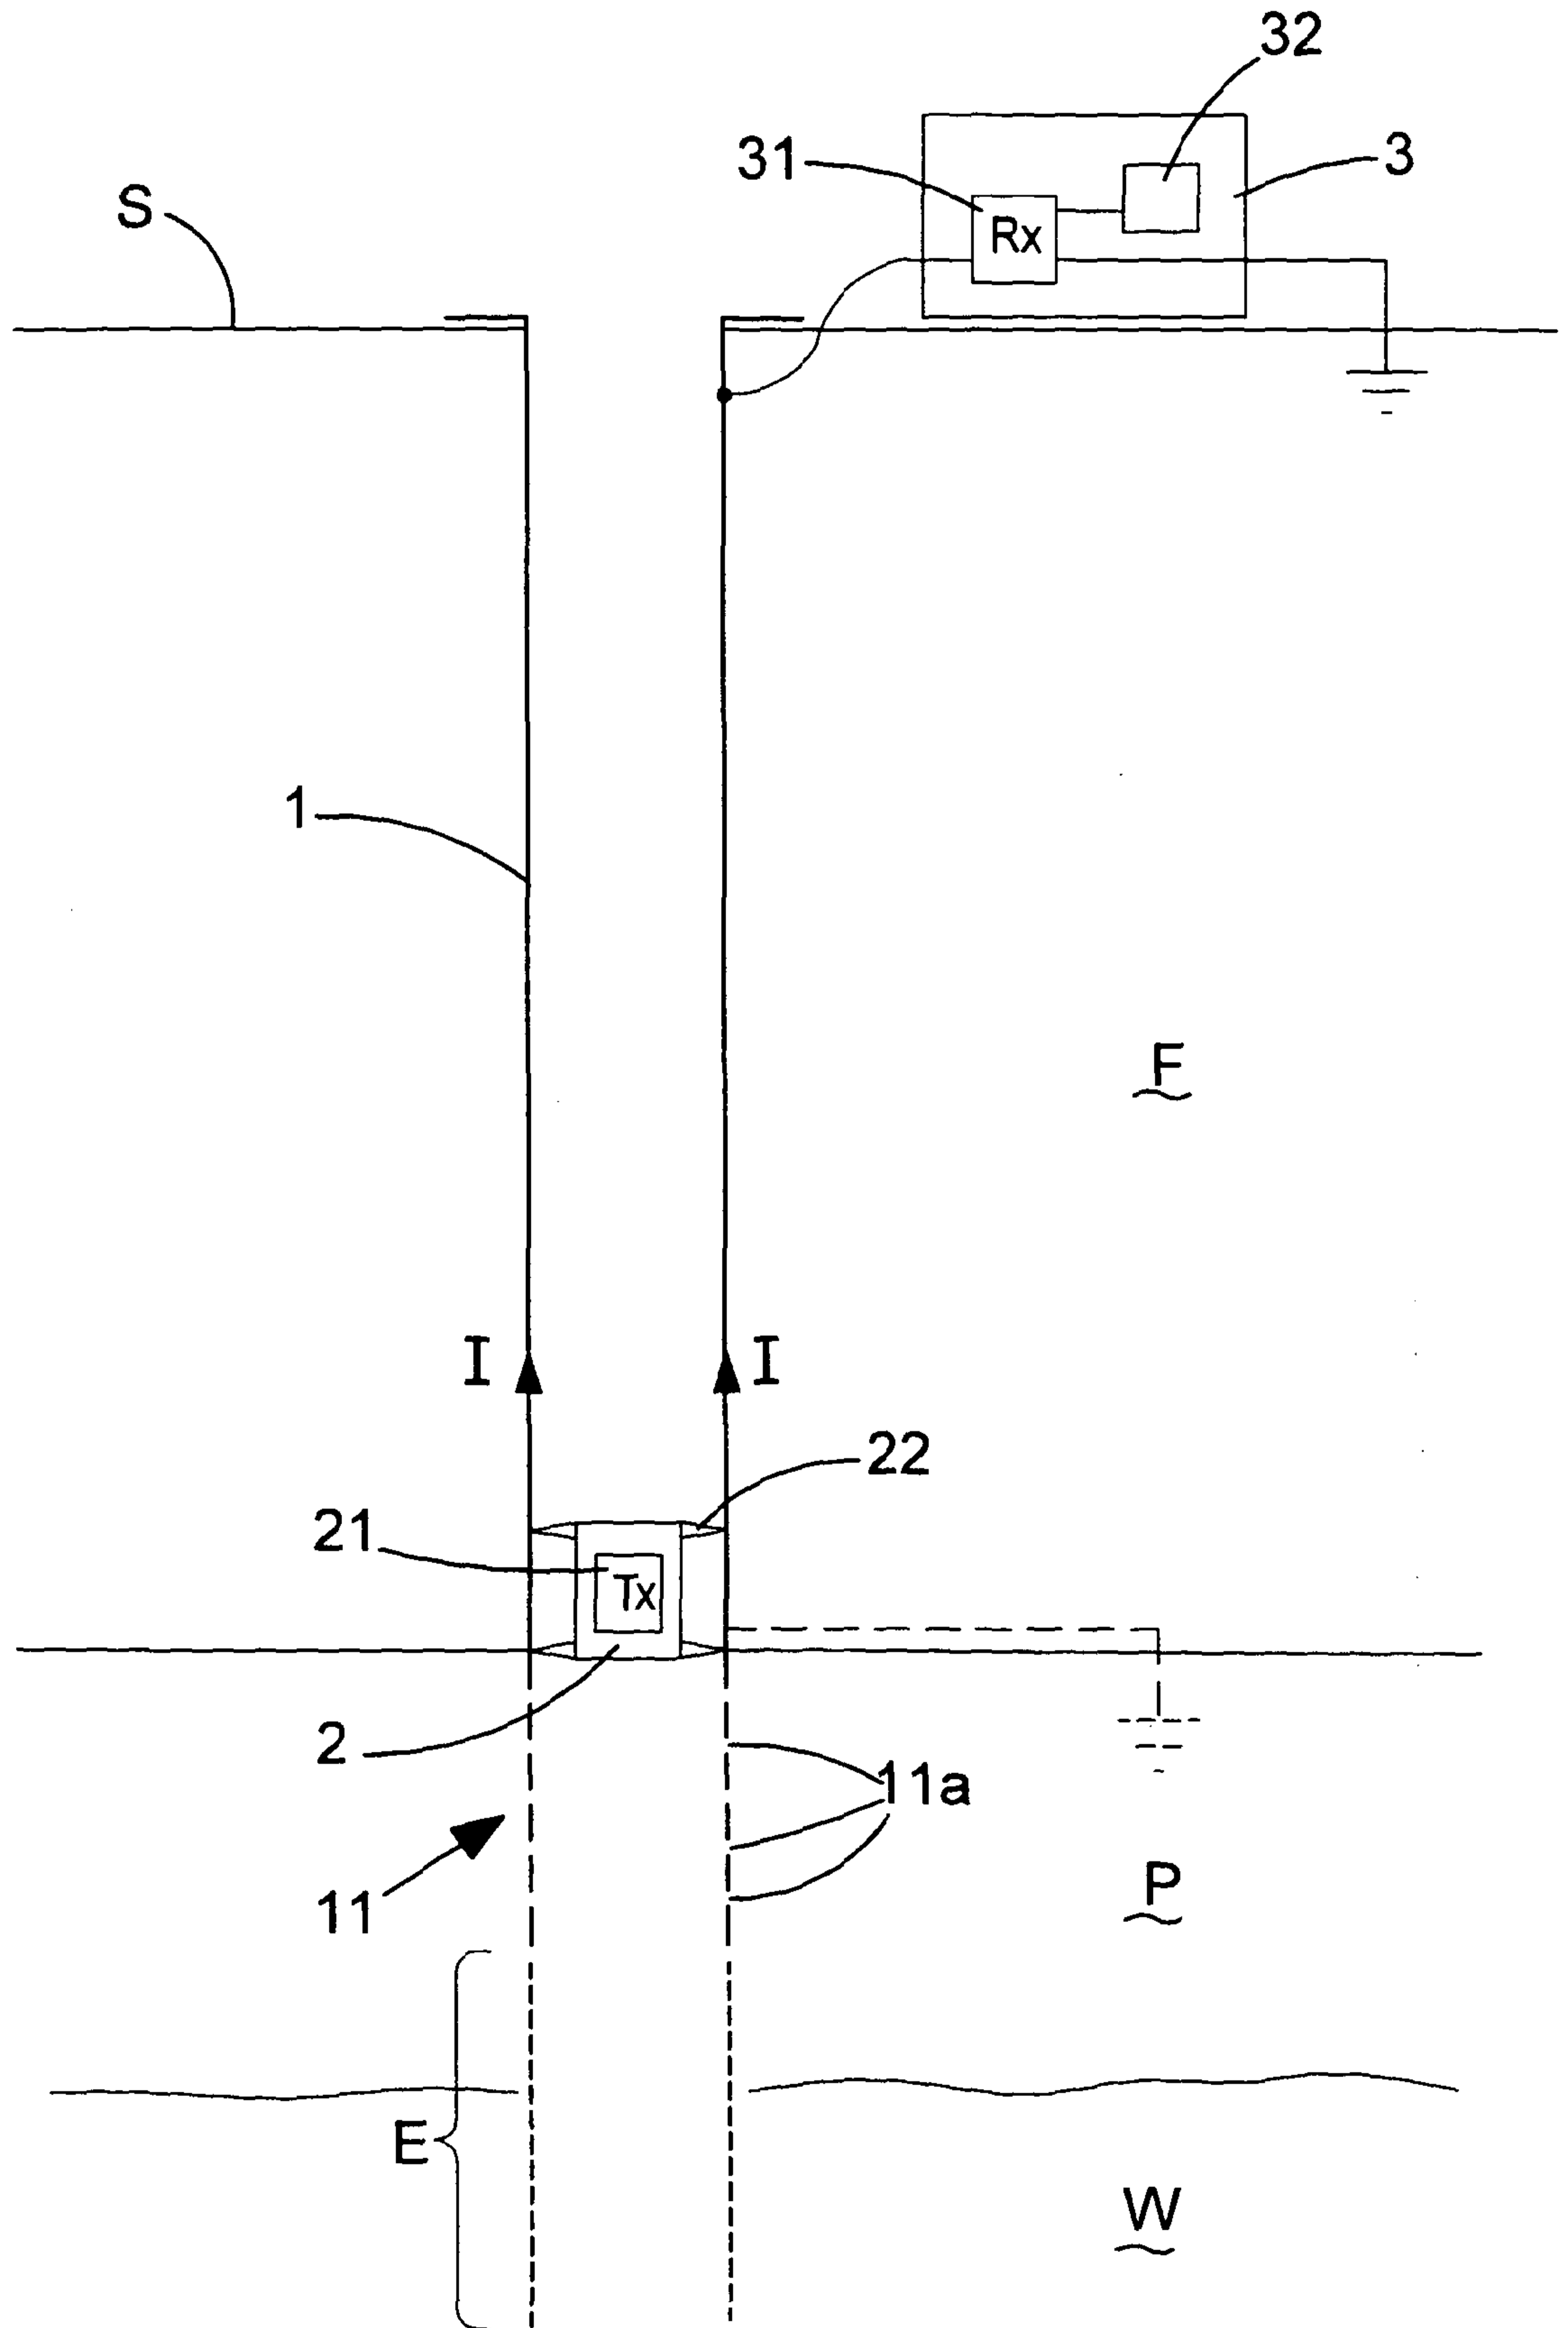


FIG.1

2/5

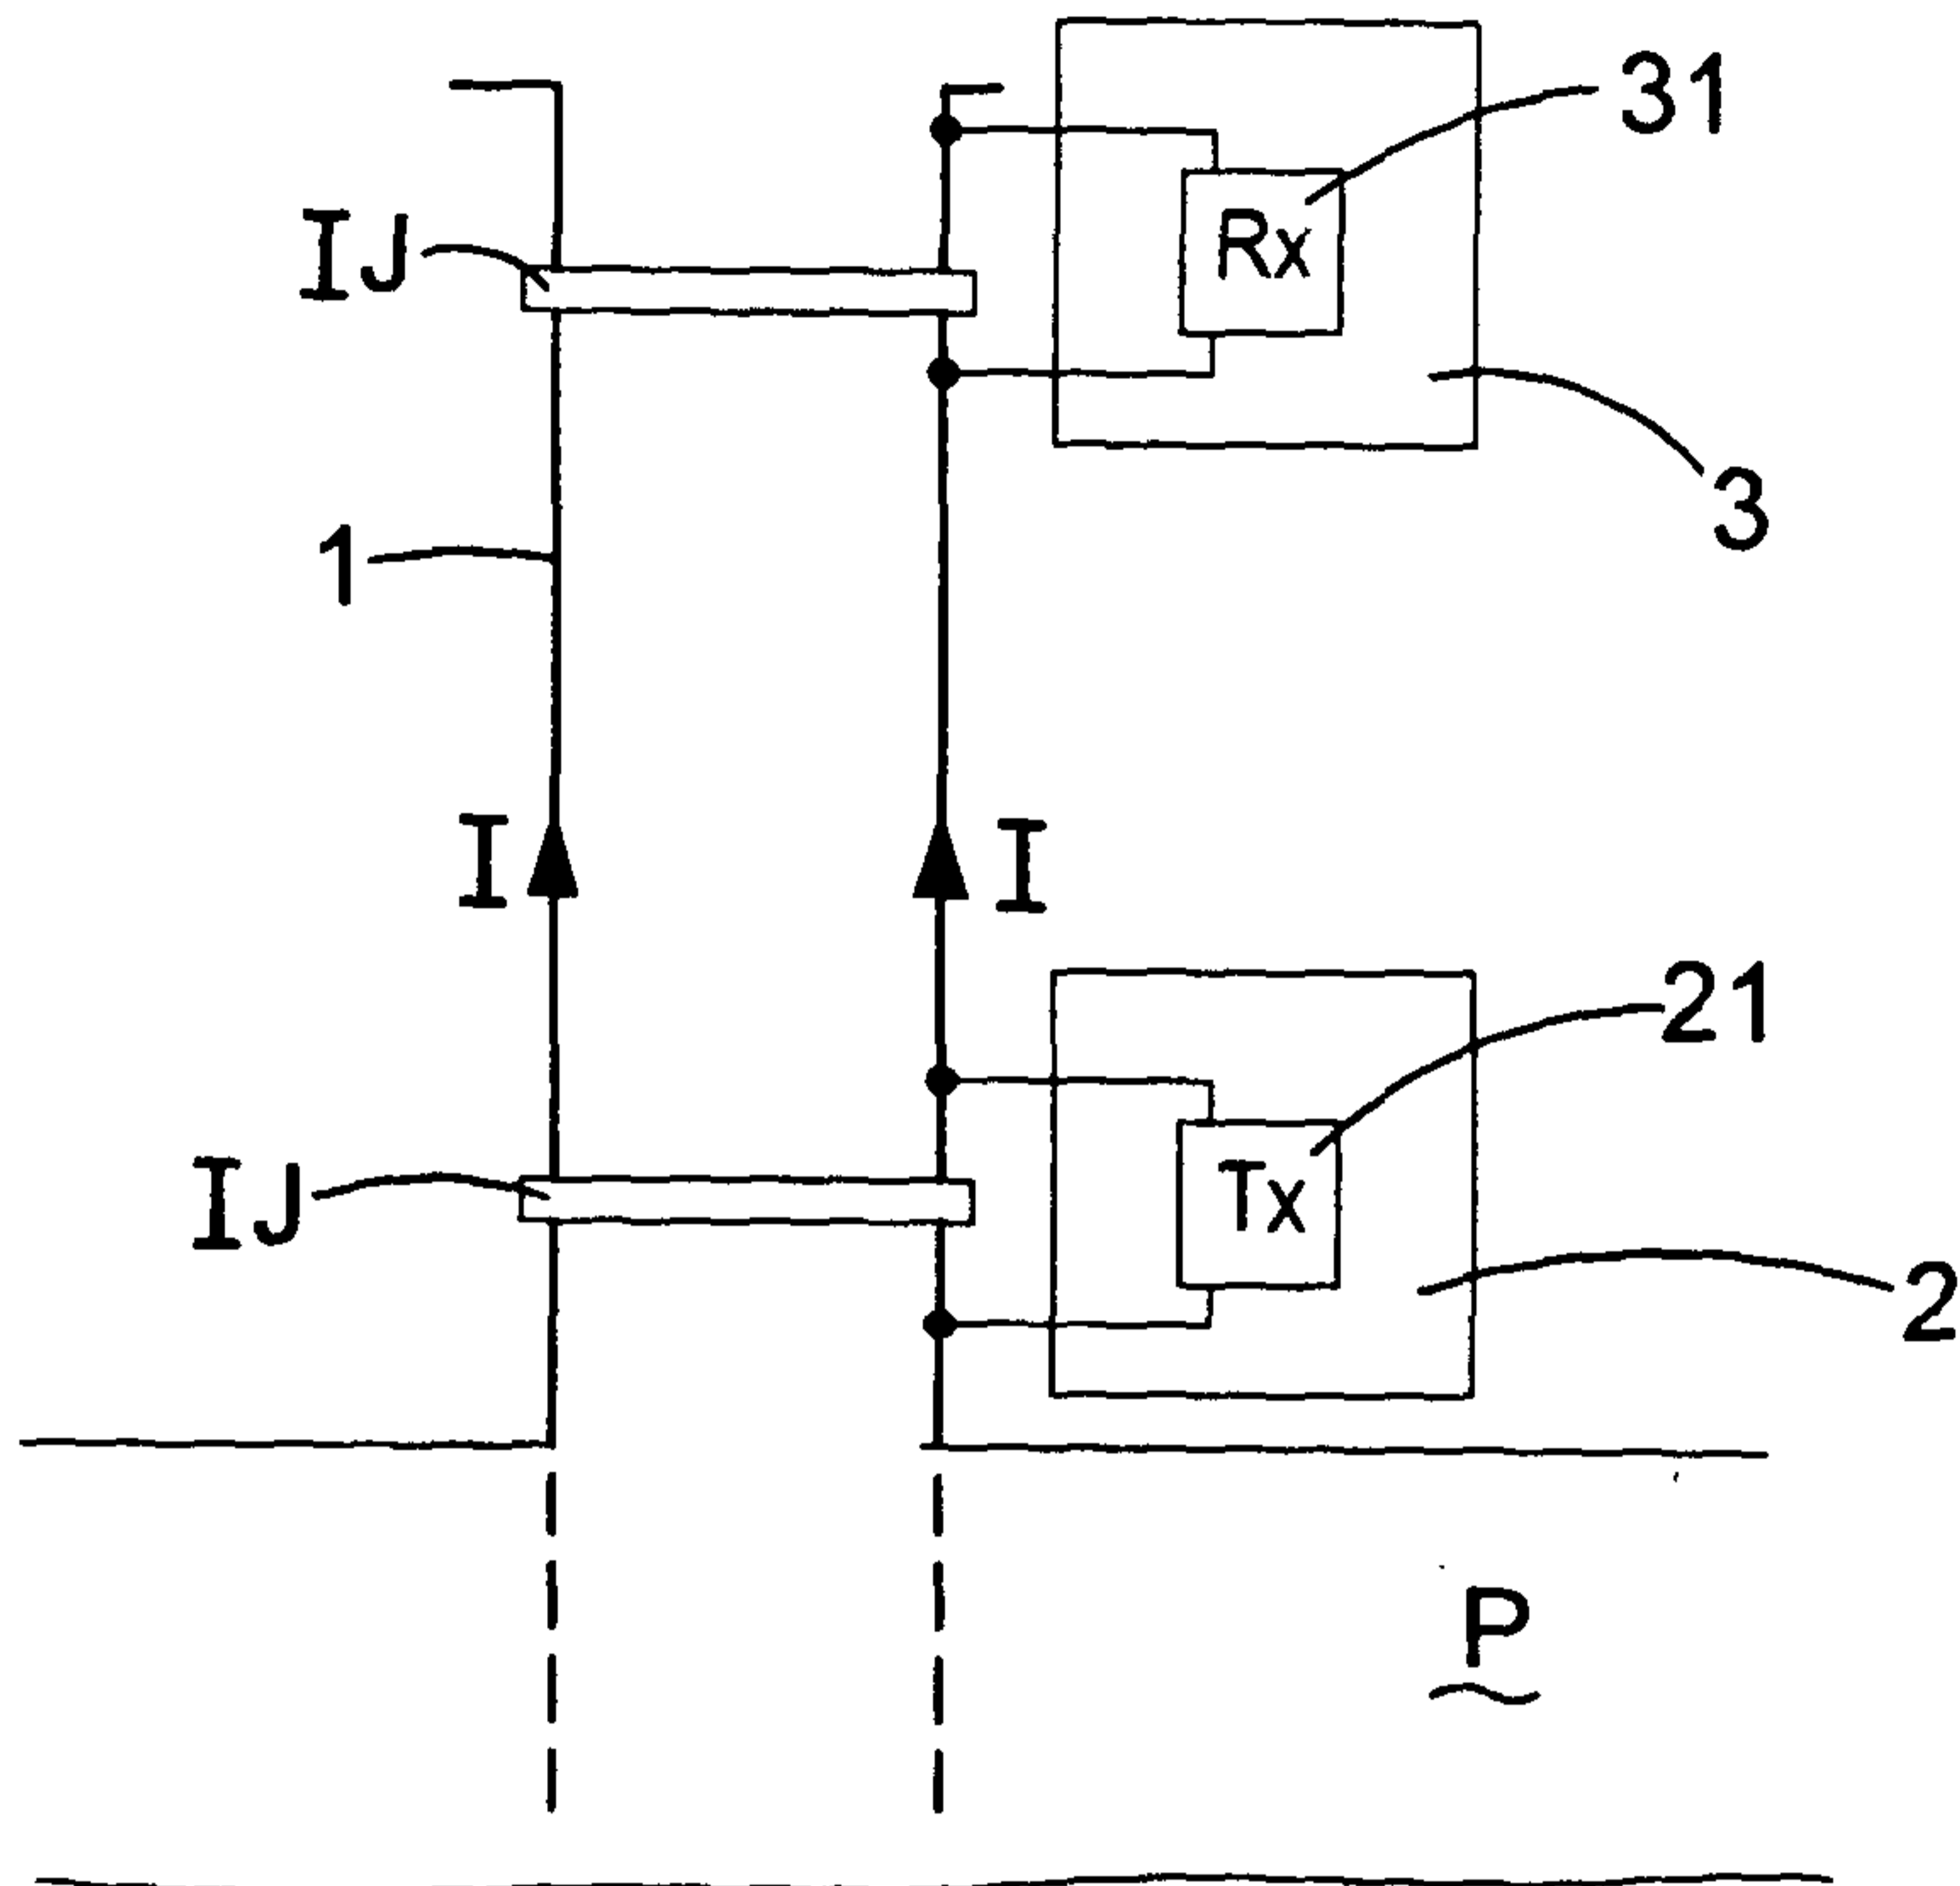


FIG. 2

W

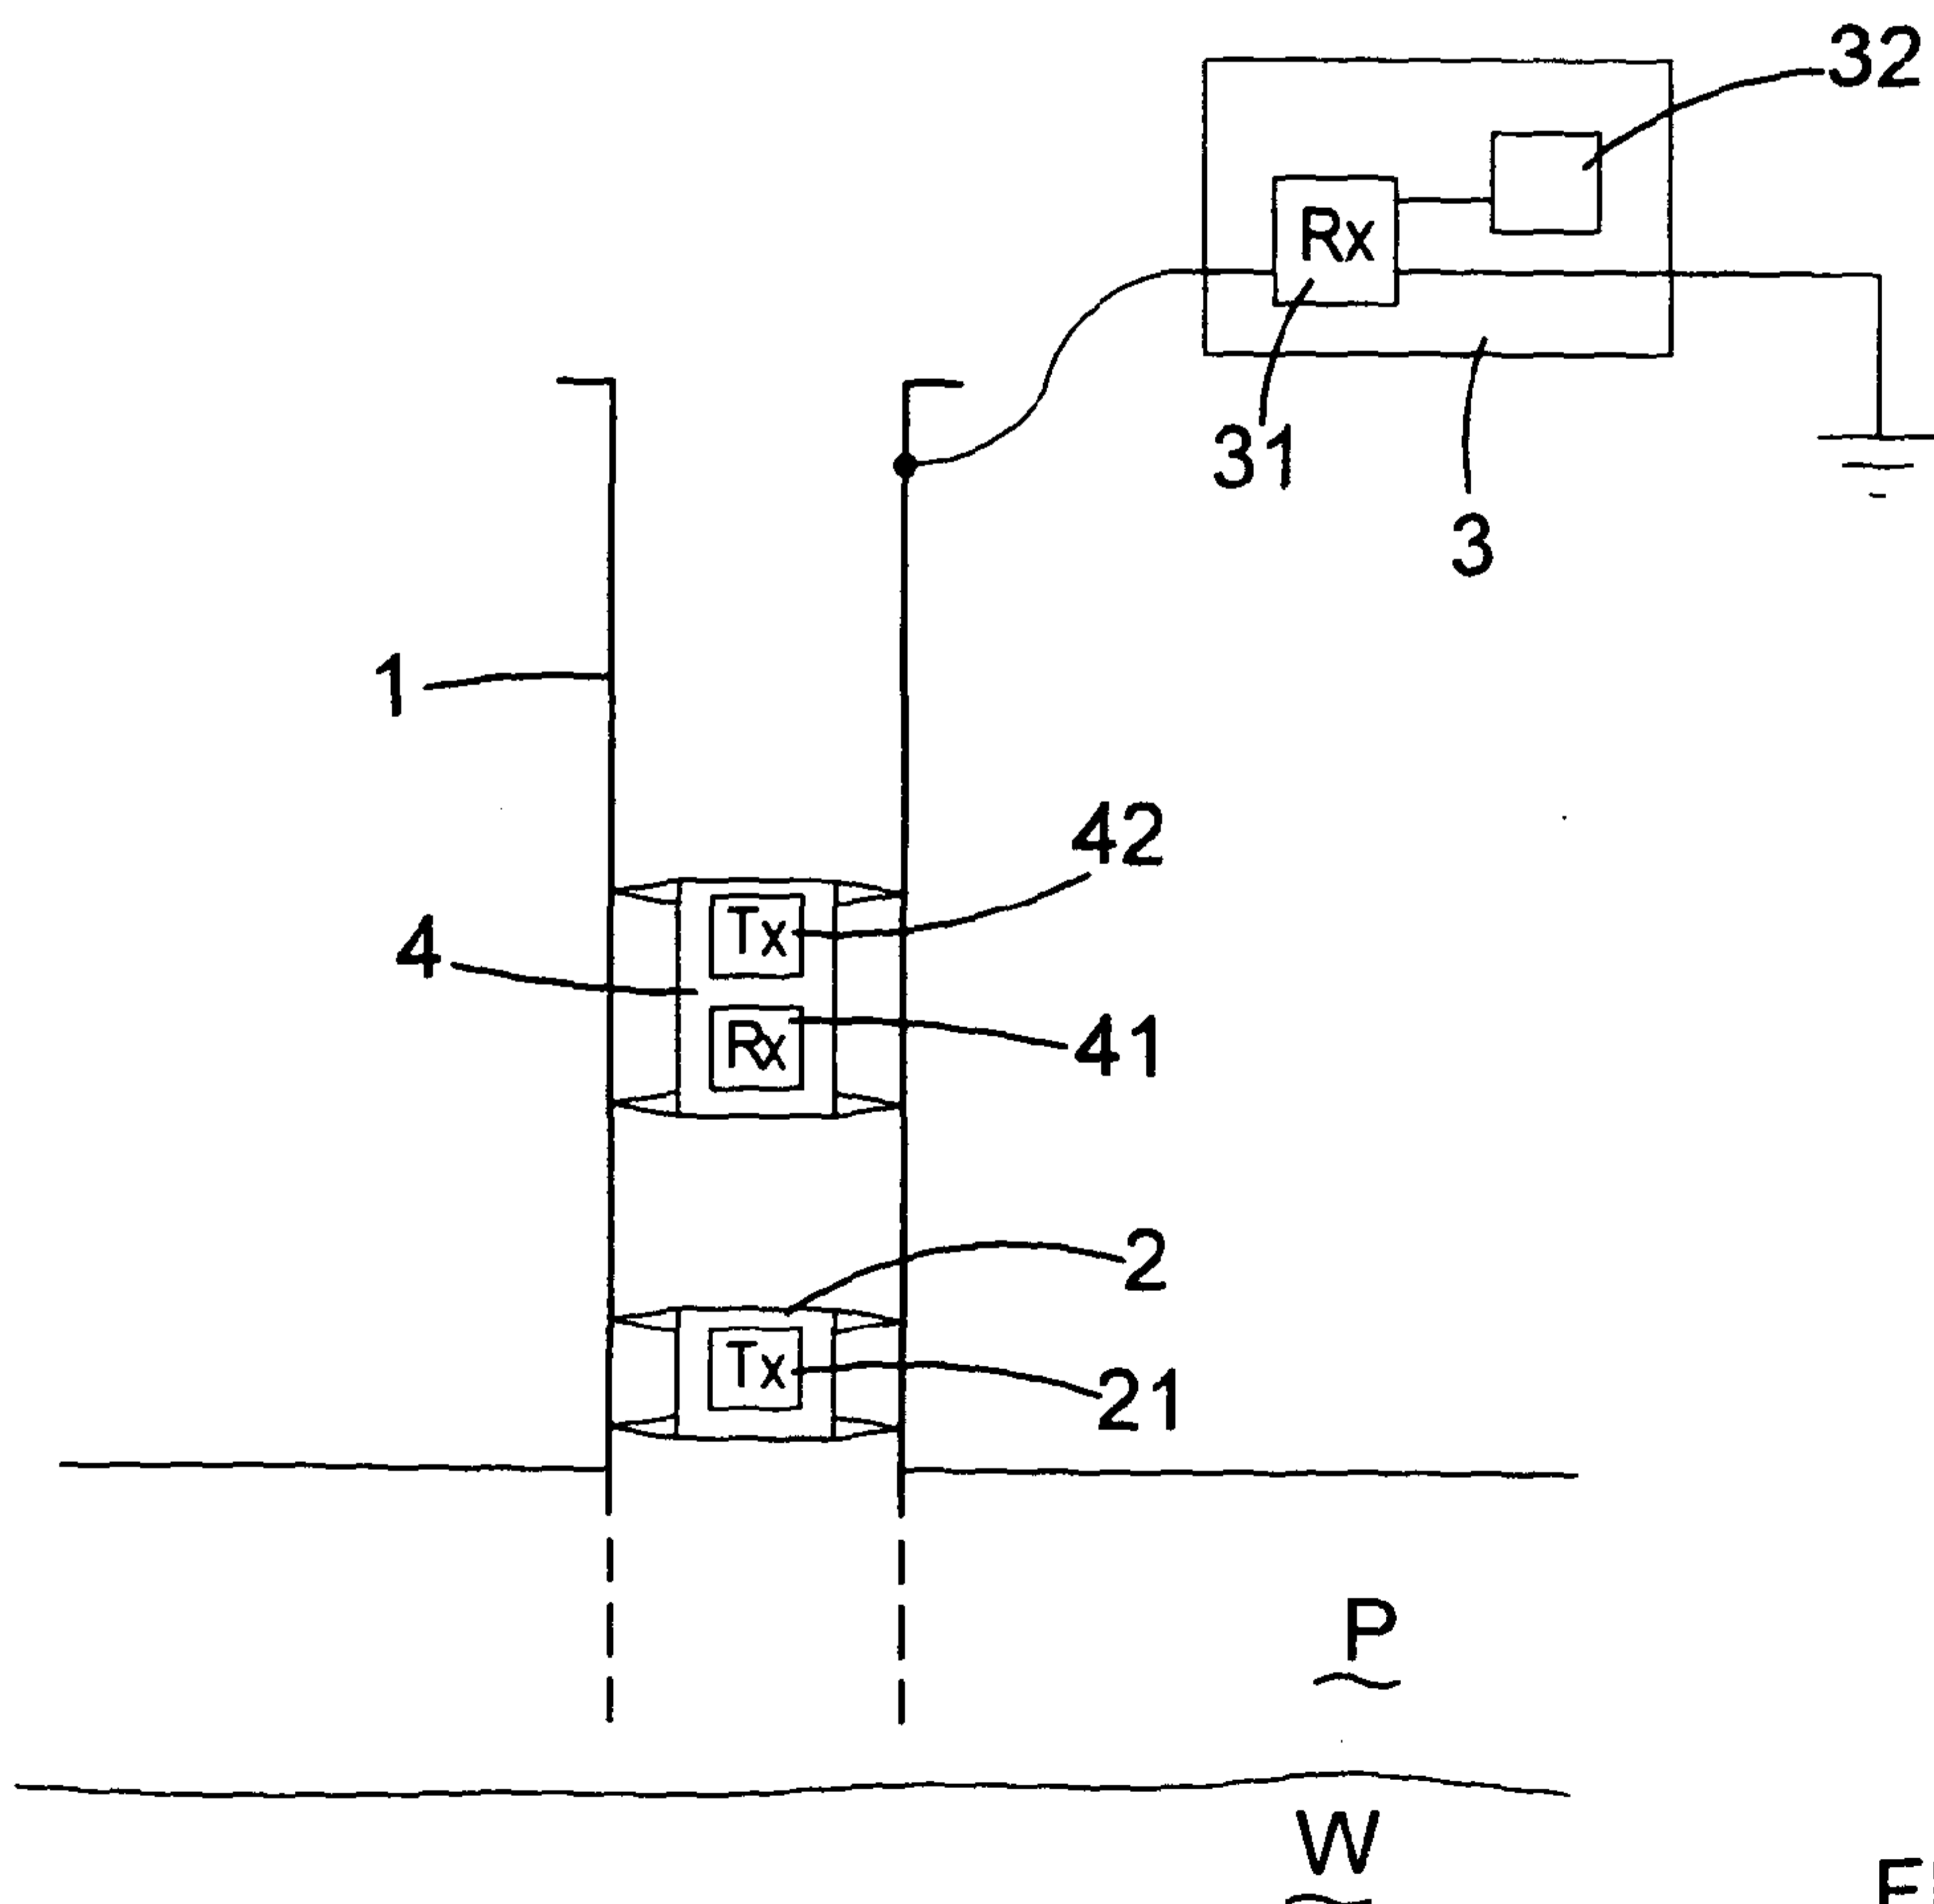


FIG. 3

3/5

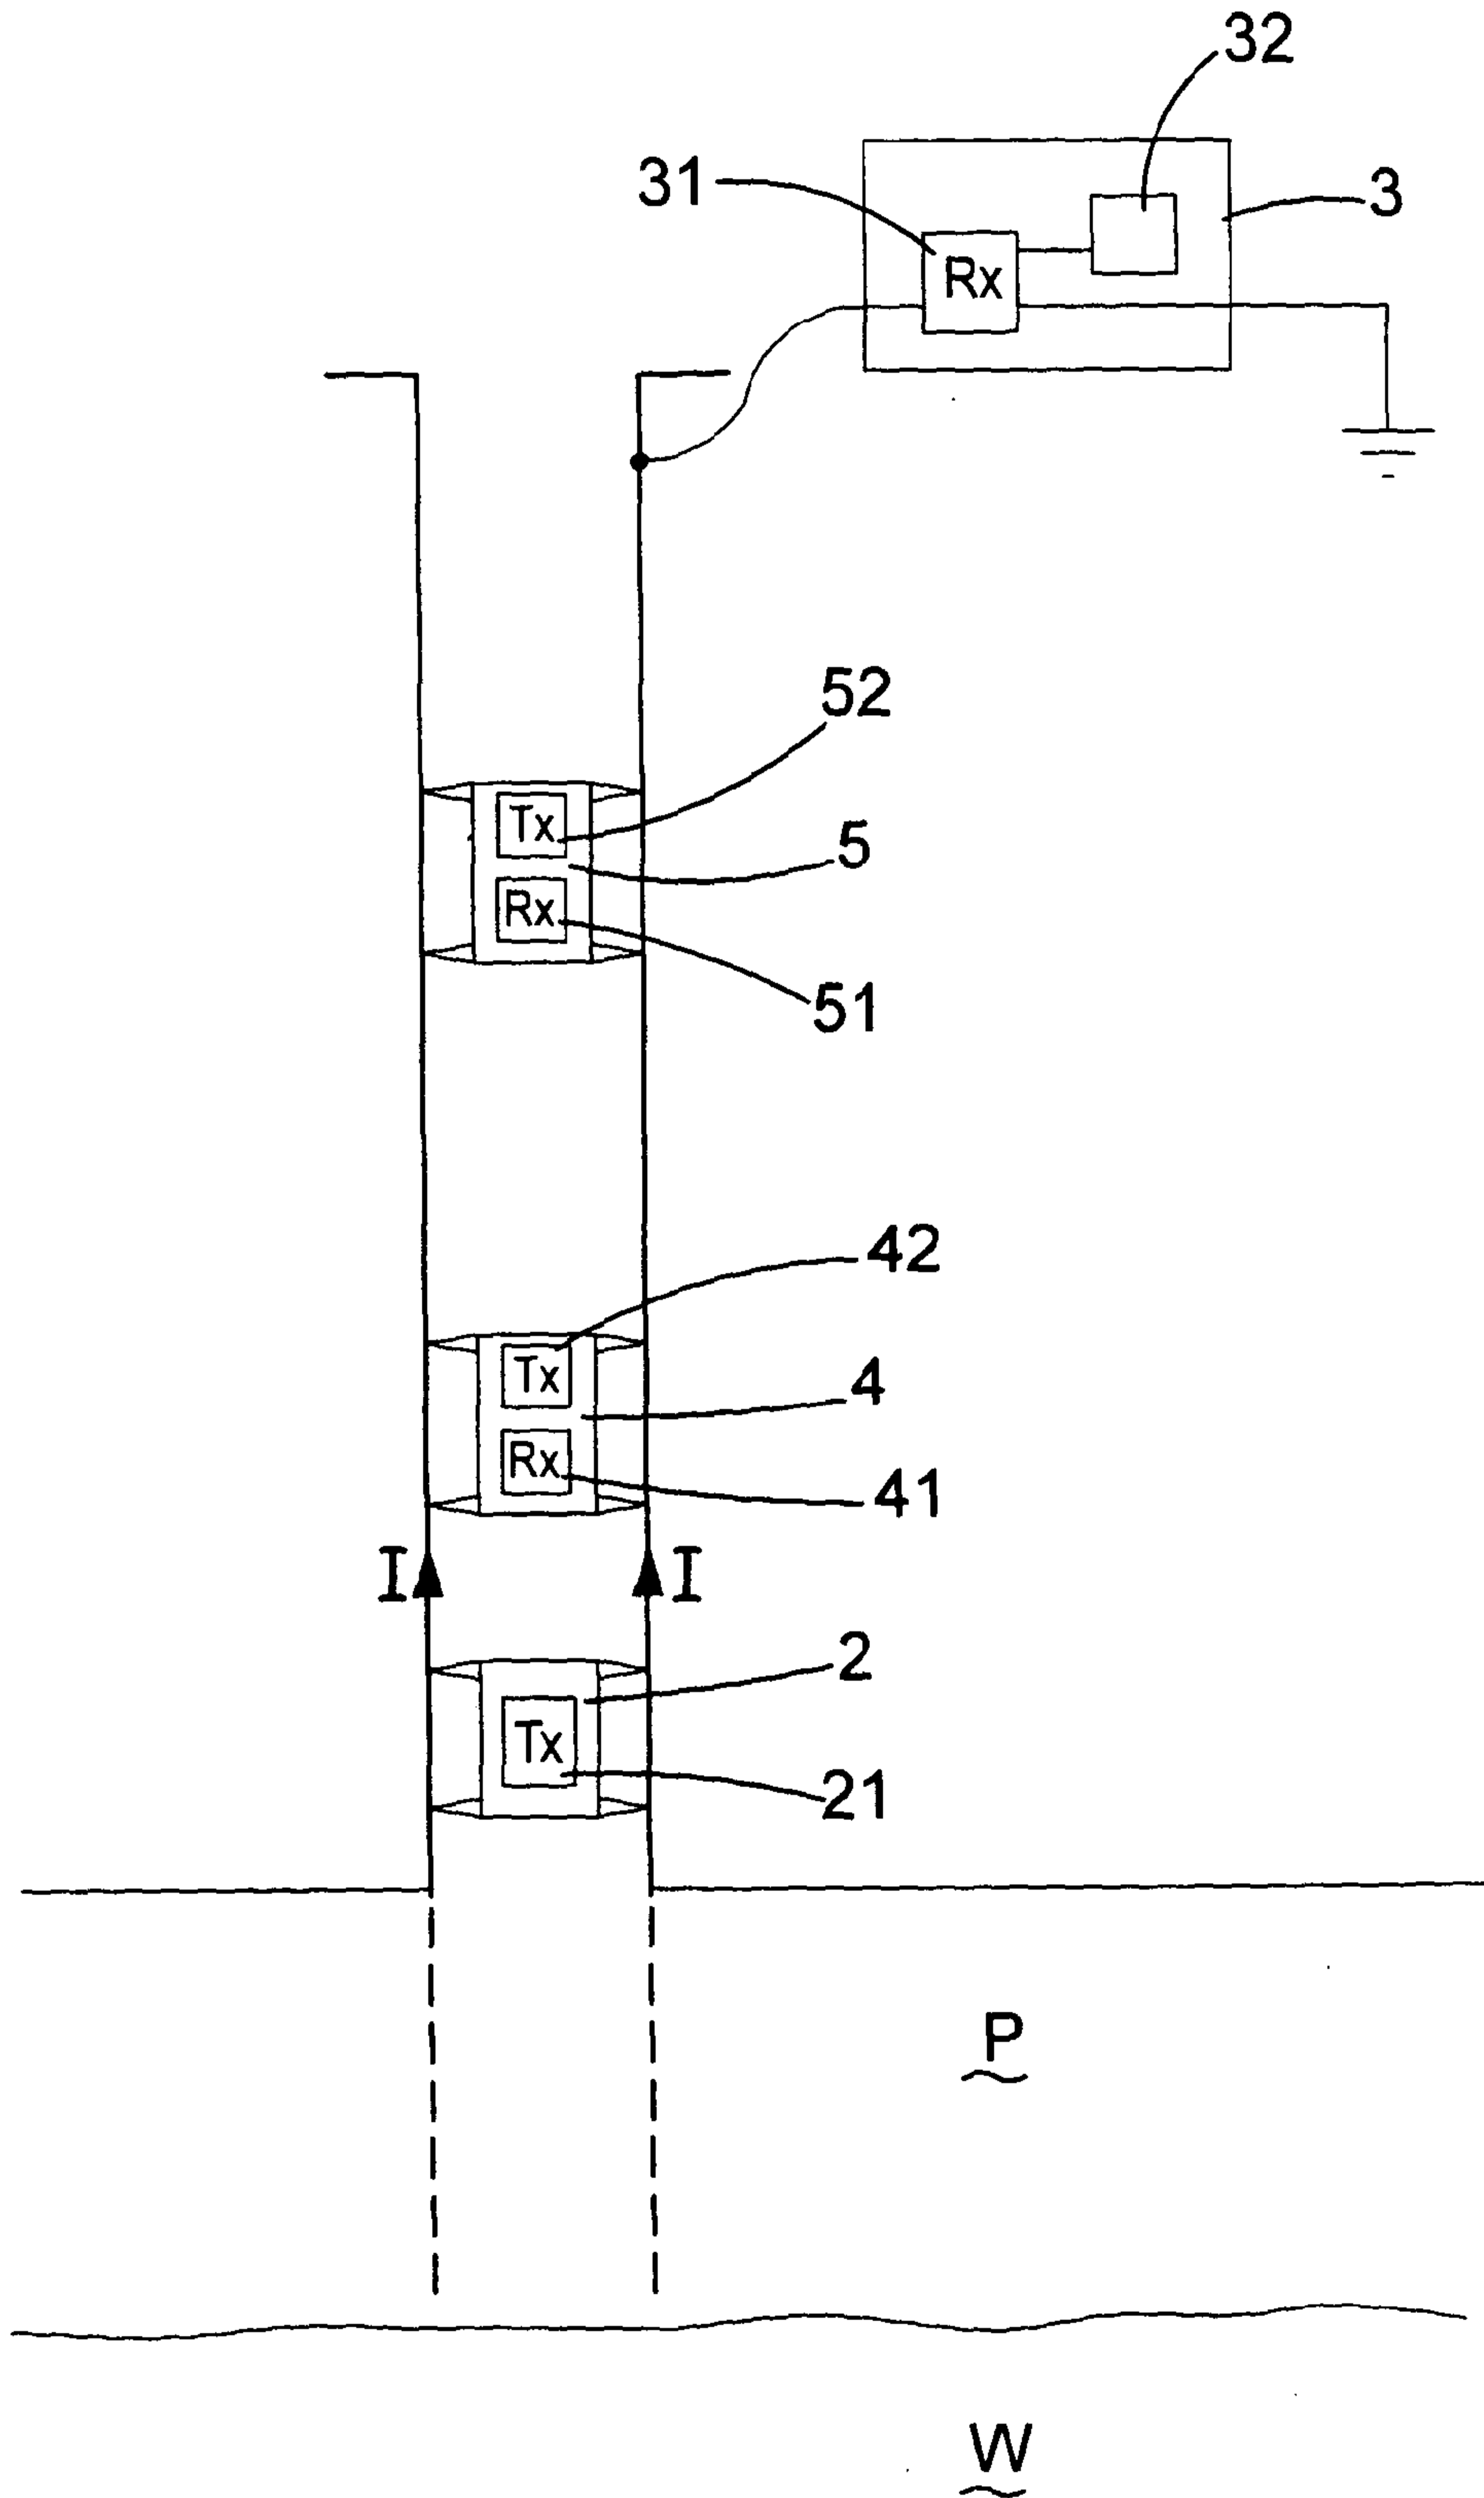


FIG.4

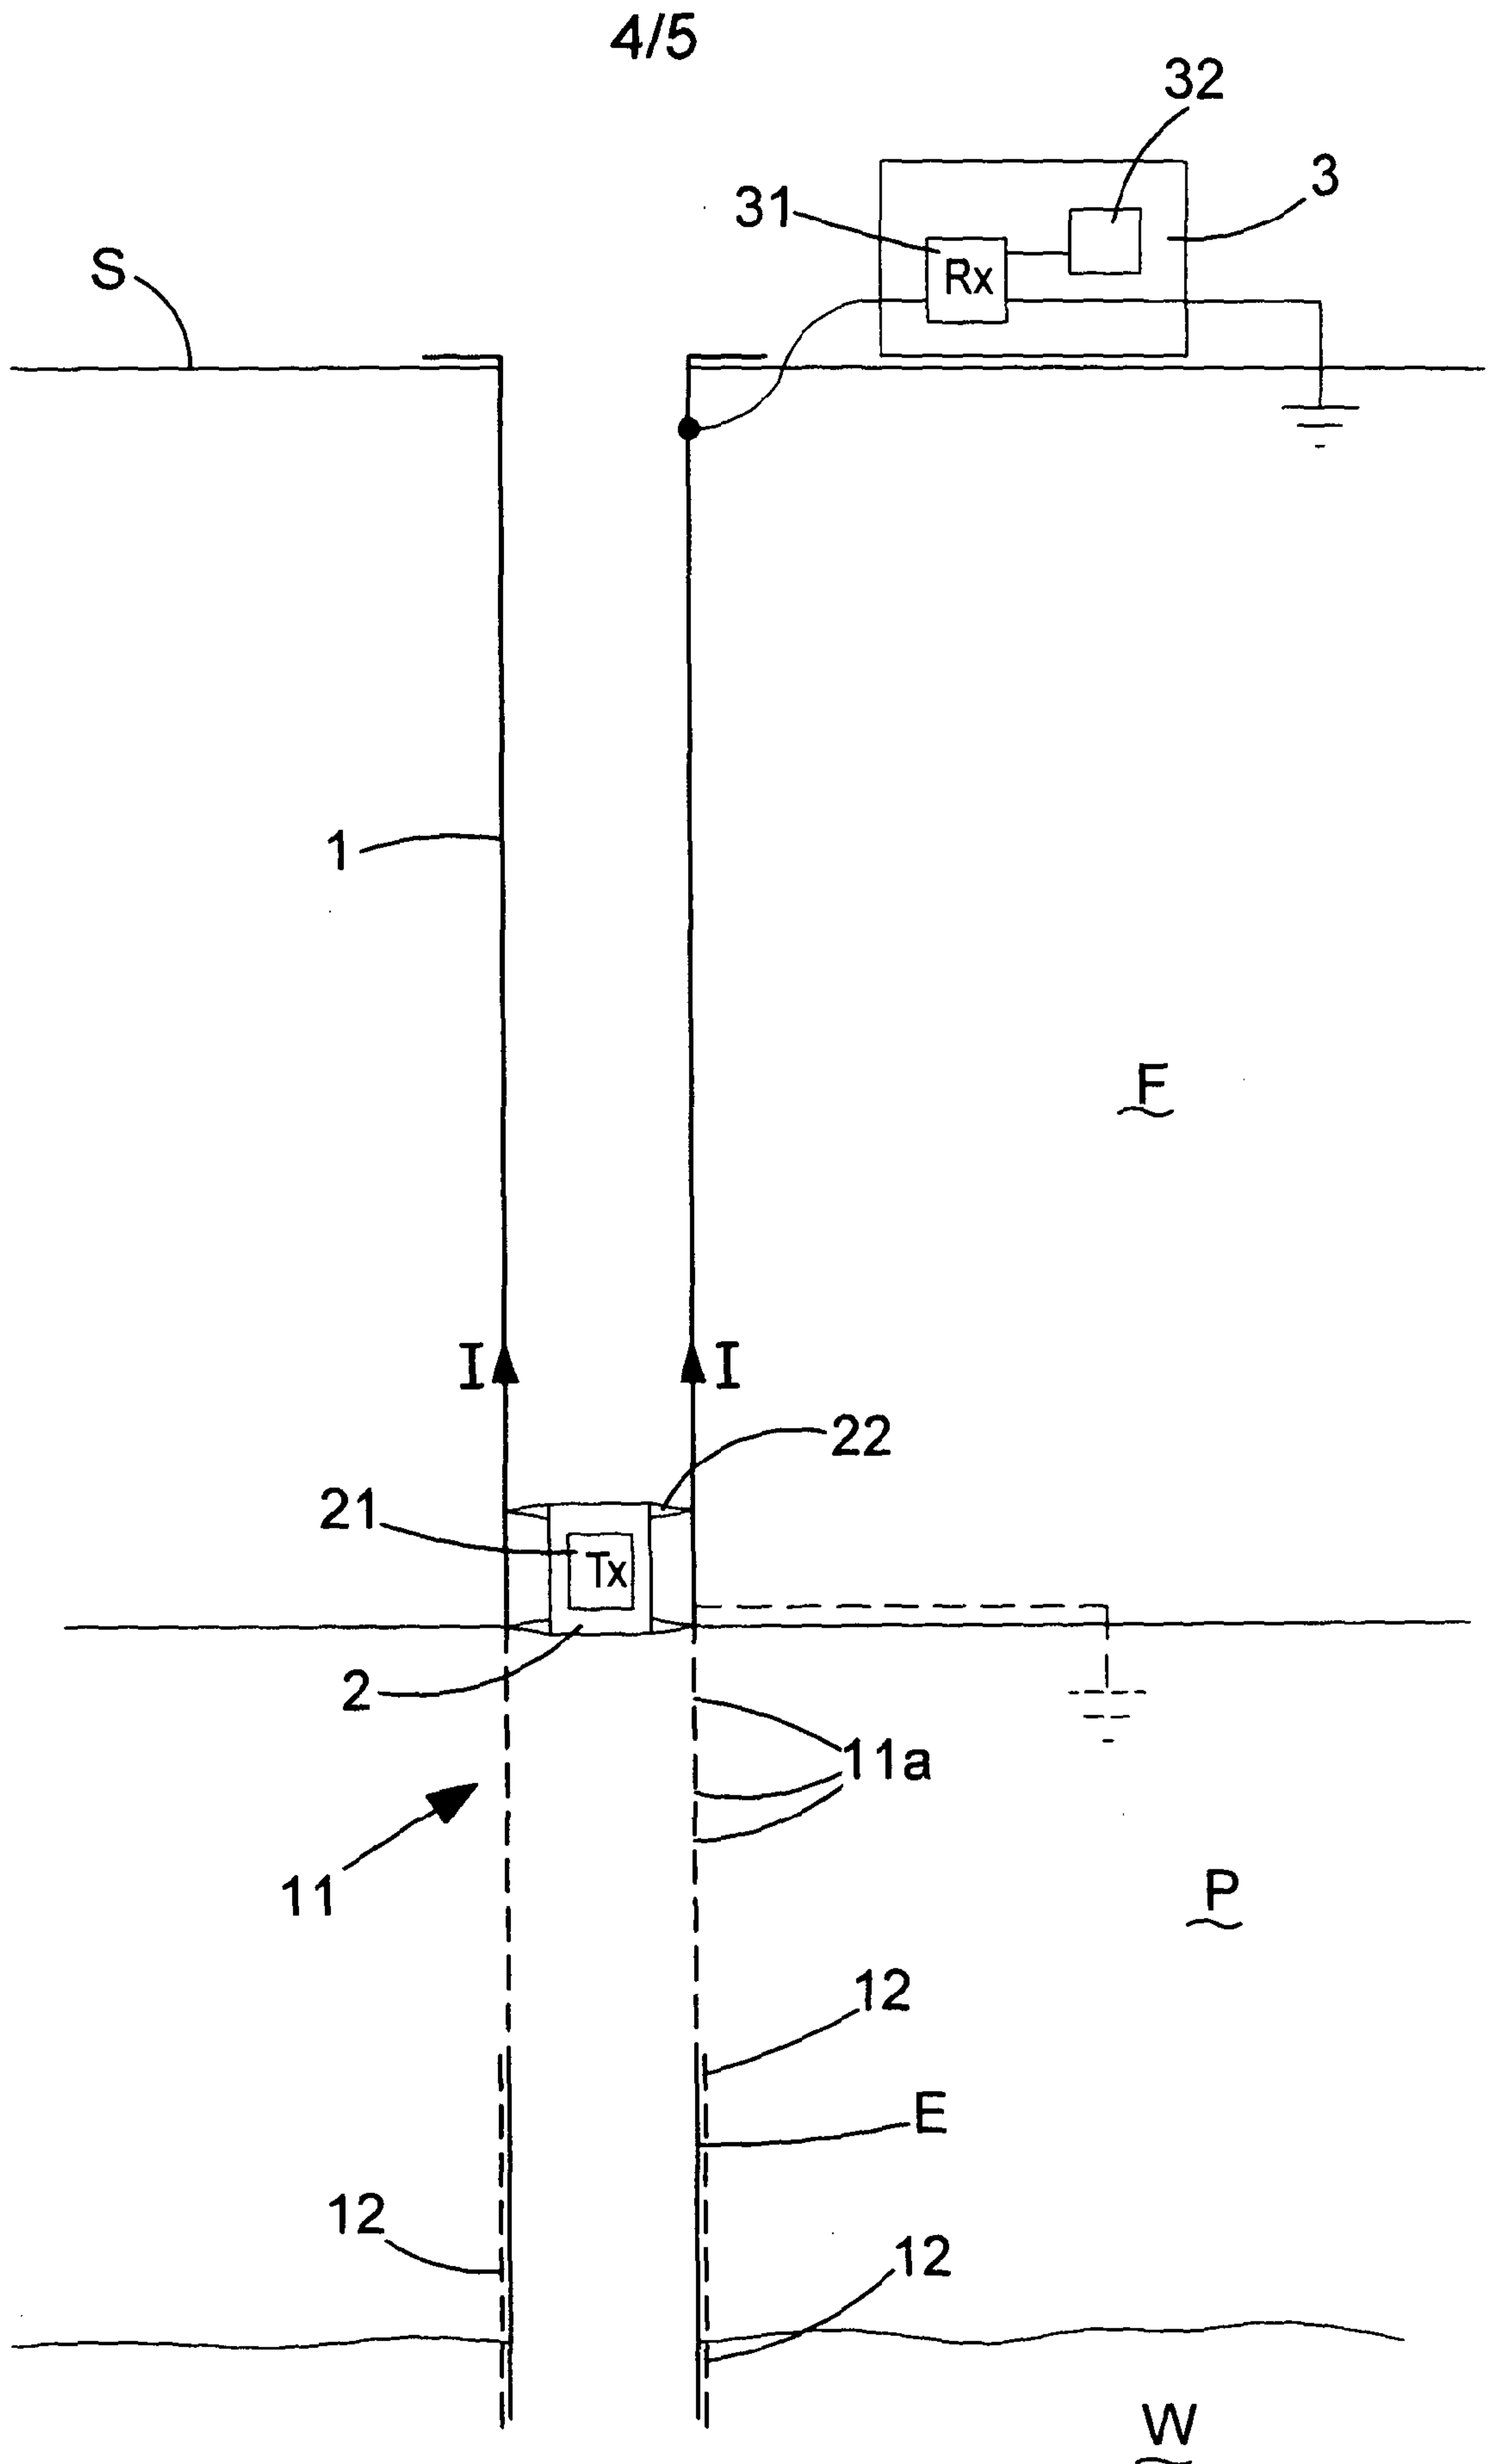


FIG.5

5/5

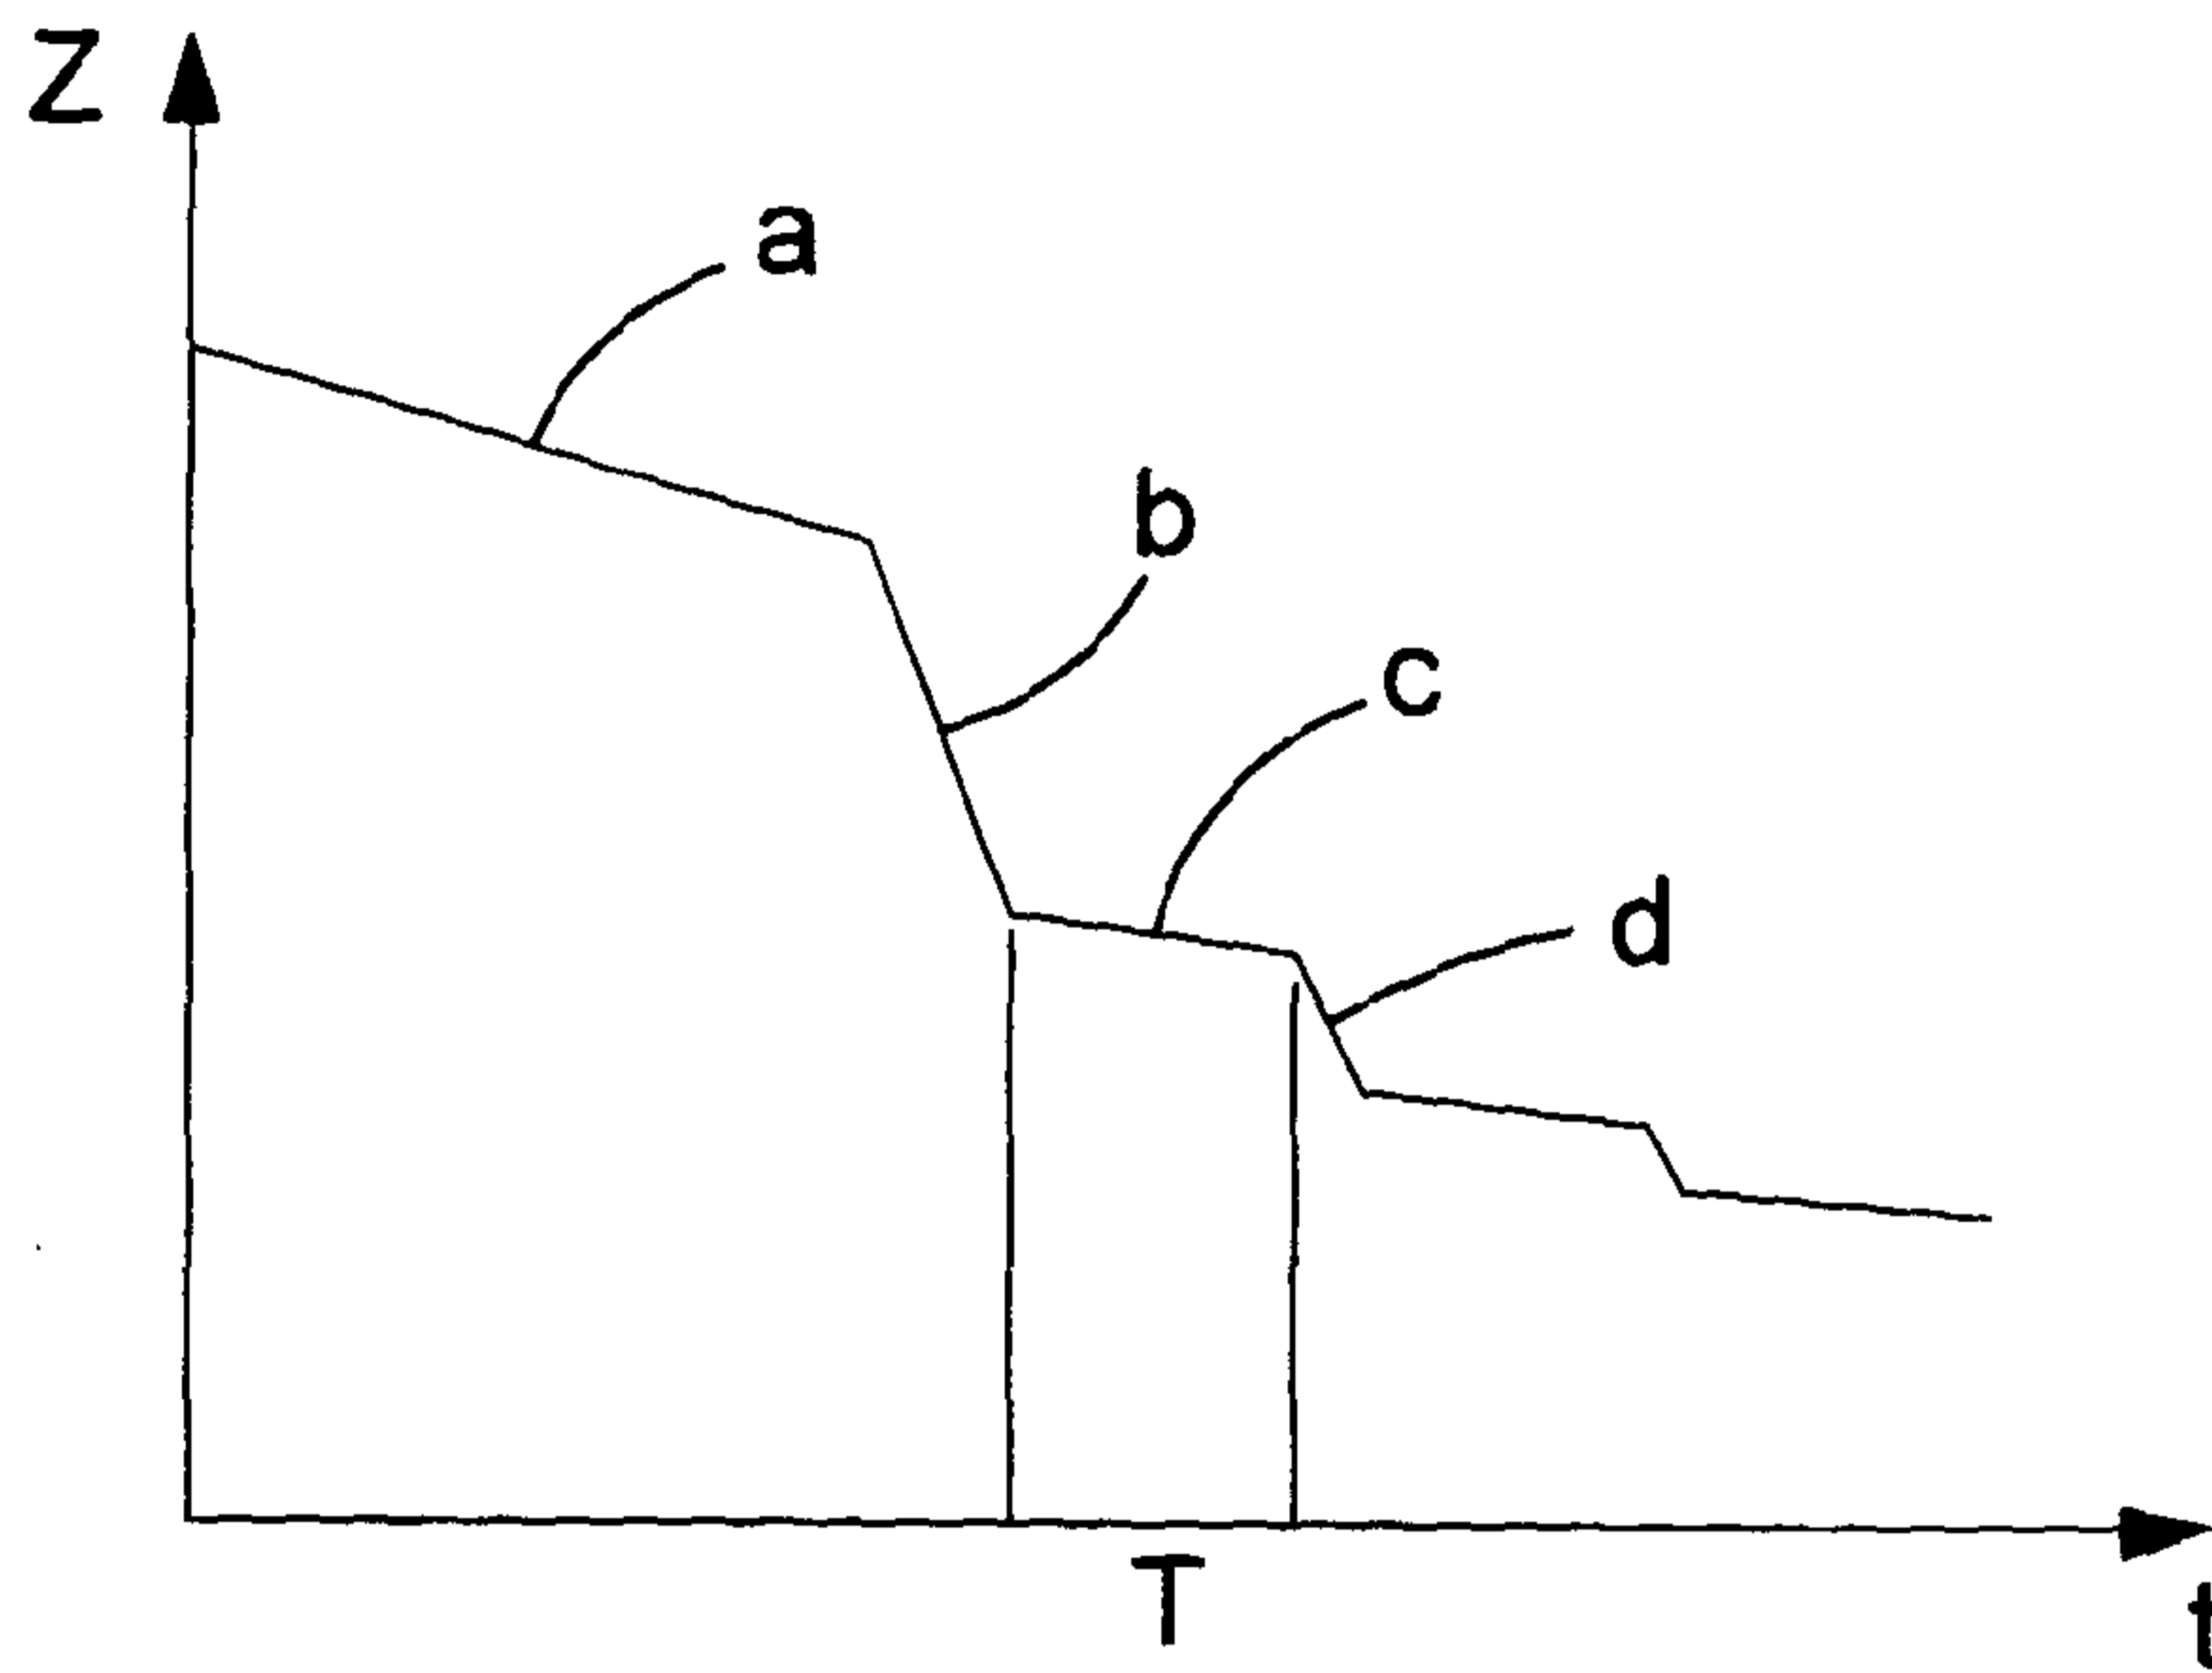


FIG. 6

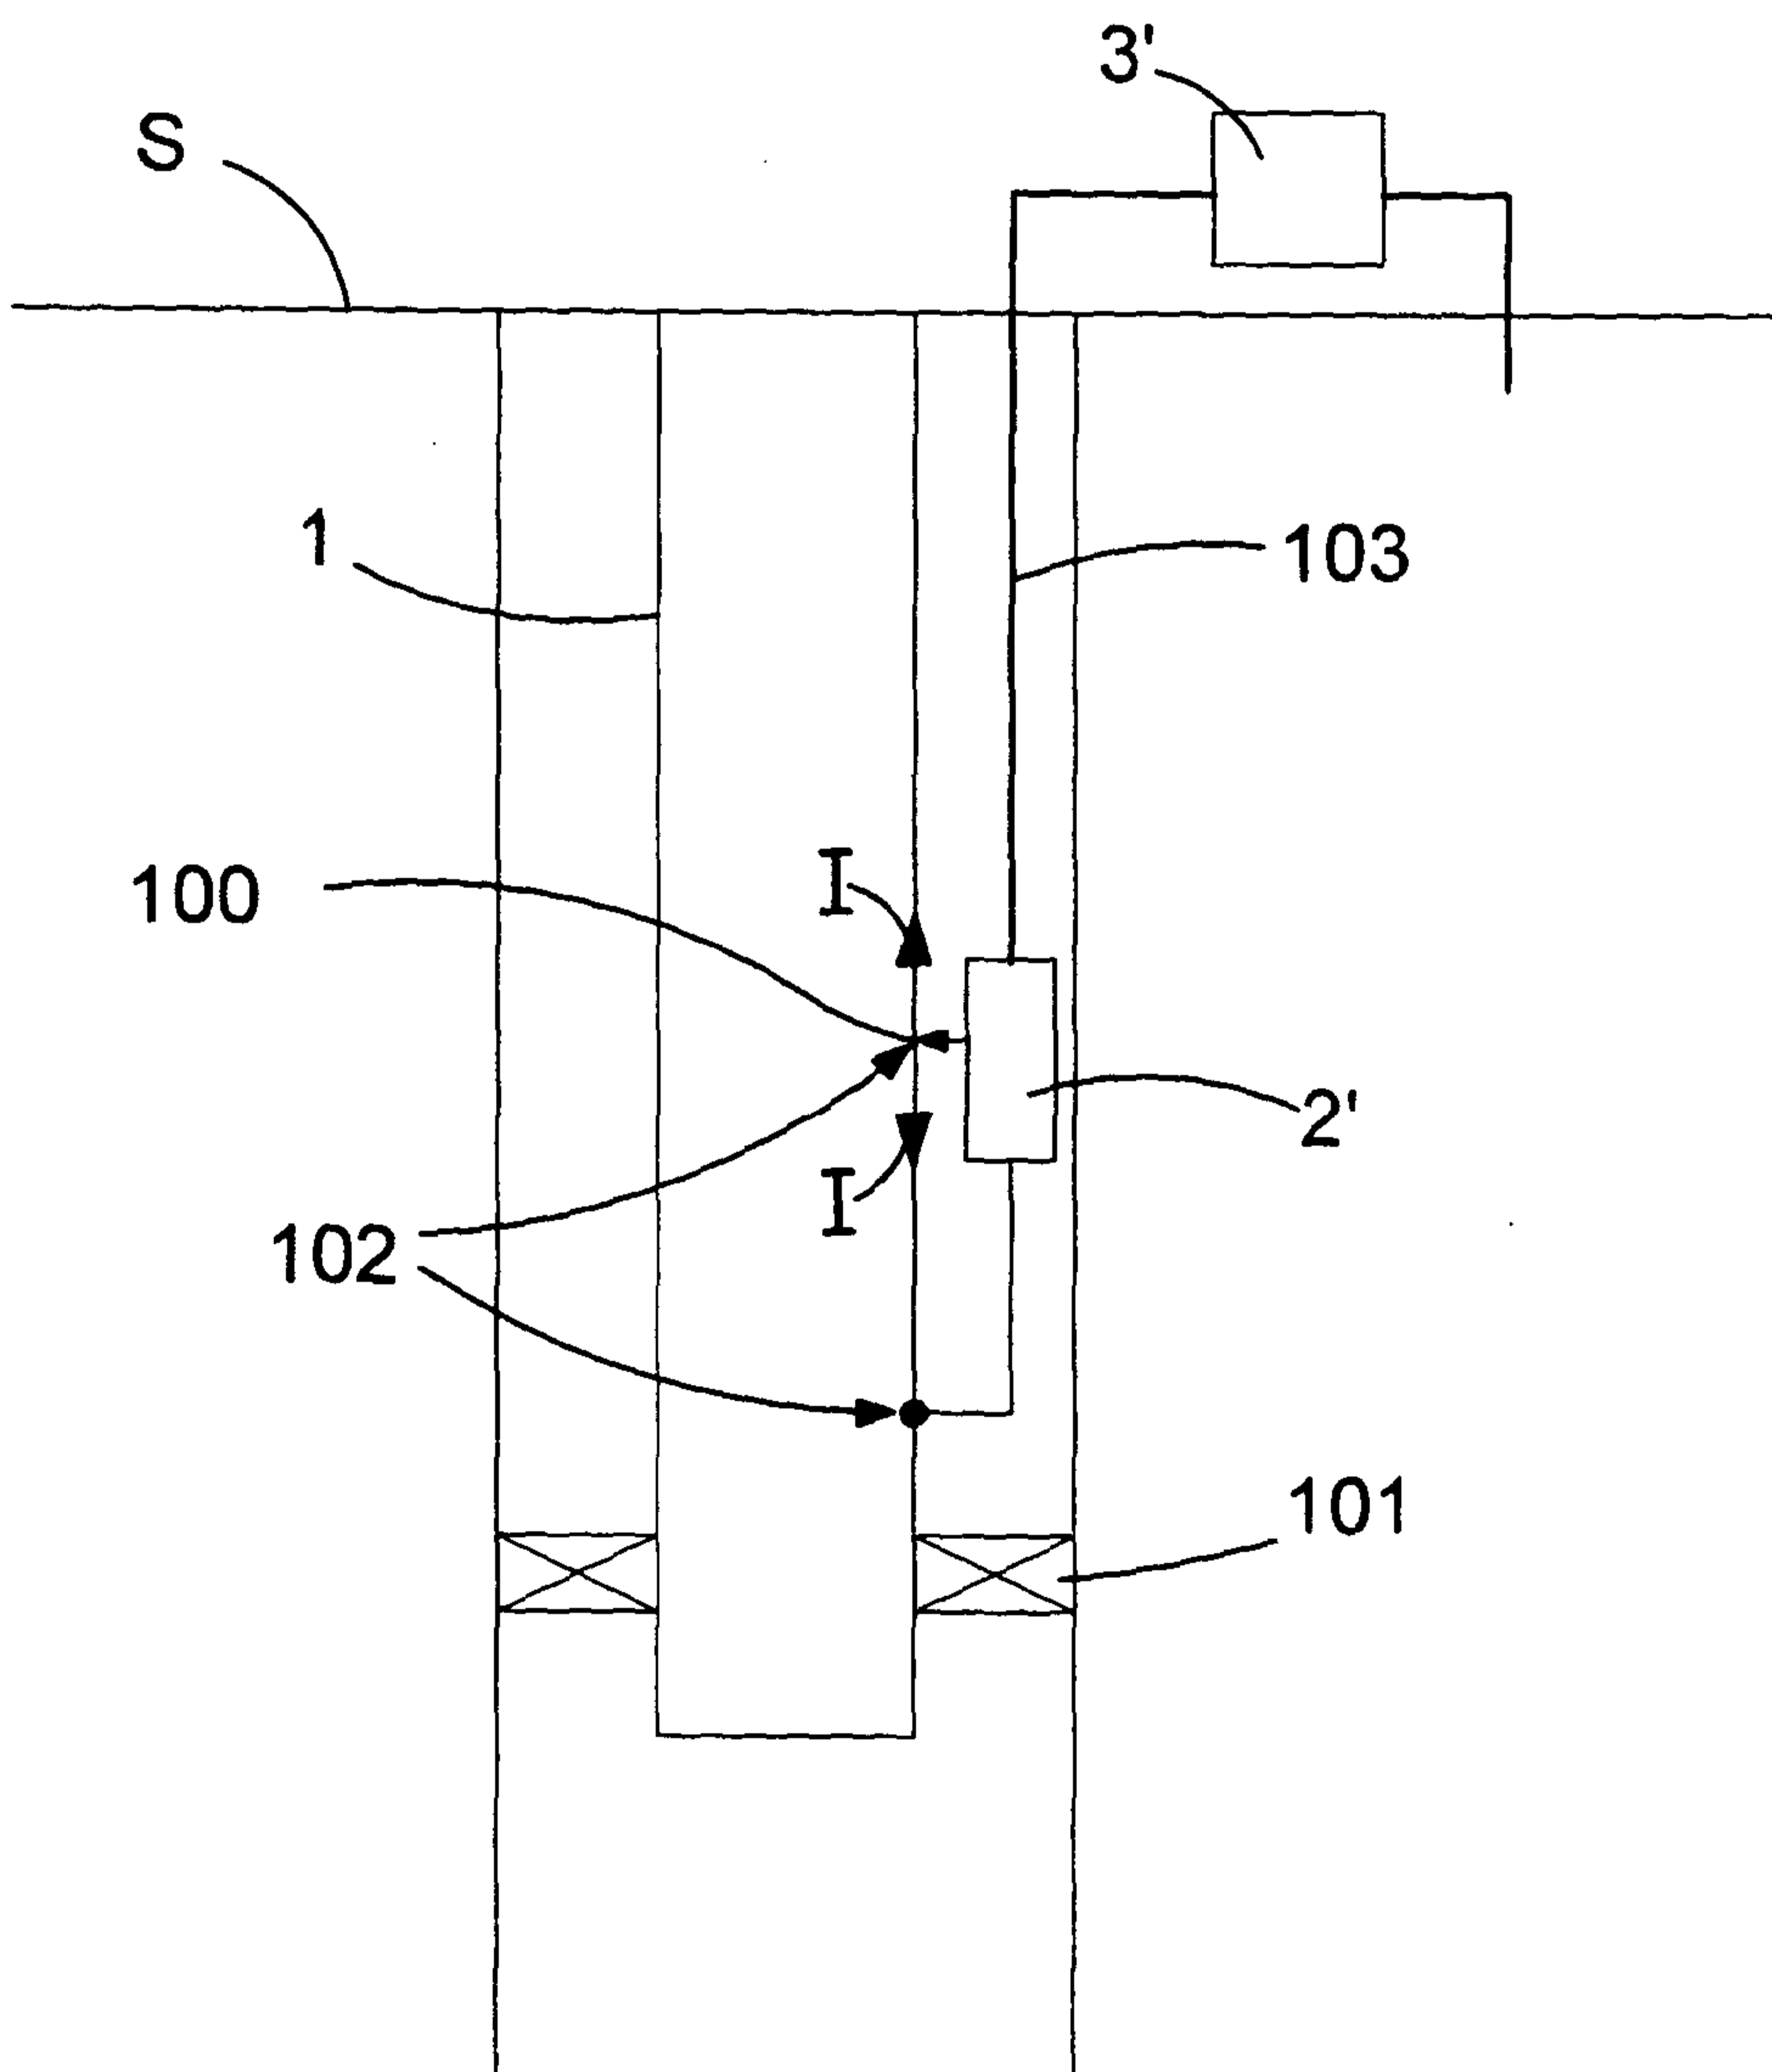


FIG. 7

