



(86) Date de dépôt PCT/PCT Filing Date: 2005/04/26
(87) Date publication PCT/PCT Publication Date: 2005/11/10
(85) Entrée phase nationale/National Entry: 2006/10/23
(86) N° demande PCT/PCT Application No.: EP 2005/004461
(87) N° publication PCT/PCT Publication No.: 2005/105285
(30) Priorité/Priority: 2004/04/30 (DE10 2004 021 434.4)

(51) Cl.Int./Int.Cl. *B01F 17/00* (2006.01),
C11D 1/722 (2006.01)
(71) Demandeur/Applicant:
BASF AKTIENGESELLSCHAFT, DE
(72) Inventeurs/Inventors:
STEINBRENNER, ULRICH, DE;
KLINGELHOFER, PAUL, DE;
TROPSCH, JUERGEN, DE
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : AGENTS MOUILLANTS FAIBLEMENT MOUSSANTS ET AGISSANT RAPIDEMENT, DESTINES A DES SURFACES HYDROPHOBES

(54) Title: RAPID LOW-FOAM WETTING AGENTS FOR HYDROPHOBIC SURFACES

(57) **Abrégé/Abstract:**

The invention relates to the use of detergents of general formula (I) $R-O-(A)_n-(B)_m-H$ (I), where $R = C_8$ alkyl, $A =$ propylenoxy, $B =$ ethylenoxy, $n =$ a mean value from 0.8 to 2.0 and $m =$ a mean value from 2.0 to 5.0, as wetting agents for polymeric surfaces and a wetting agent containing a) 0.5 to 50 wt. % of at least one detergent of general formula (I) from claim 1, b) 1.0 to 10 wt. % of a C_8 alcohol and c) 0.5 to 30 wt. % of a compound of general formula (IV) $R-O-(A)_n-H$ (IV), where $R = C_8$ alkyl, $A =$ propylenoxy and $n =$ a mean value of 0.8 to 2.0.



ABSTRACT

The present invention relates to the use of surfactants of the general formula (I)



where

- R is a C₈-alkyl radical,
- A is propylenoxy,
- B is ethylenoxy,
- n is an average value of from 0.8 to 2.0 and
- m is an average value of from 2.0 to 5.0

as a wetting agent for hydrophobic polymer surfaces, and to a wetting agent comprising

- a) from 0.5 to 50% by weight of at least one surfactant of the general formula (I) according to claim 1,
- b) from 1.0 to 10% by weight of a C₈-alcohol and
- c) from 0.5 to 30% by weight of a compound of the general formula (IV)



where

- R is a C₈-alkyl radical,
- A is propylenoxy and
- n is an average value of from 0.8 to 2.0.

Rapid low-foam wetter for hydrophobic surfaces

5

The present invention relates to the use of surfactants based on a C₈ alcohol, propylene oxide and ethylene oxide as a wetting agent for hydrophobic polymer surfaces, and to a wetting agent comprising surfactants and a C₈ alcohol.

10

Surfactants based on C₈ alcohols, propylene oxide and ethylene oxide are already known from the prior art.

15

DD 292147 describes a wetting agent for dusts which are difficult to wet, for example carbon dust, composed of an alkylpolyalkylene glycol ether containing ethylene oxide and propylene oxide. For this purpose, preference is given to using a wetting agent of the formula 2-ethylhexanol-(PO)_{2.5-3.5}-(EO)₂₋₃. Carbon dust is a highly aromatic surface which cannot be applied directly to every technical application. The wetting agent is effective in the presence of concentrated salt solutions, does not foam and has short wetting times.

20

DD 298651 describes C₆-C₉ alcohol propoxylate ethoxylates as emulsifiers for silicones. The compounds mentioned are used to prepare storage-stable aqueous diorganopolysiloxane emulsions having storage times of 6 months.

25

EP 0 051 878 A1 discloses a liquid, nonfoaming, nonionic surfactant composition which has improved wetting properties and generally good degreasing and/or cleaning properties. The composition includes a compound formed from an alcohol having from 7 to 11 carbon atoms and ethylene oxide and propylene oxide units.

30

WO 2004/005230 describes alkoxyates of 2-ethylhexanol which contain ethylene oxide and propylene oxide as alkylene oxides. On average, from 1.6 to 3.3 units of propylene oxide are attached to from 3.0 to 5.5 units of ethylene oxide in the compounds disclosed. The alkoxyates are used as cleaning compositions for hard surfaces.

35

It is an object of the present invention to provide suitable surfactants for use as wetting agents for hydrophobic polymer surfaces.

This object is achieved by the use of surfactants of the general formula (I)

- 2 -



where

- 5 R is a C₈-alkyl radical,
 A is propylenoxy,
 B is ethylenoxy,
 n is an average value of from 0.8 to 2.0 and
 m is an average value from 2.0 to 5.0

10 as a wetting agent for hydrophobic polymer surfaces.

The R radical is a linear or branched, saturated or unsaturated C₈-alkyl radical; R is preferably an alkyl radical which is at least monobranched. R is more preferably a C₈-alkyl radical which is monobranched.

15

In a very particularly preferred embodiment, surfactants are used in accordance with the invention in which R is an alkyl radical derived from 2-ethylhexanol.

20 In the general formula (I), A is propylenoxy. According to the invention, propylenoxy is a -O-CH₂-CH(CH₃)- or -O-CH(CH₃)-CH₂- group. In the surfactants used in accordance with the invention, ideally exclusively propylenoxy units are bonded directly to the alcohol.

In the general formula (I), B is ethylenoxy. According to the invention, ethylenoxy is the -O-CH₂-CH₂- group.

25

The surfactant ideally has a block structure, i.e. a propylenoxy block is bonded directly to the C₈ alcohol. Attached thereto is an ethylenoxy block.

30 As a technical surfactant, this block structure is in some cases interrupted to an extent when, for process technology reasons, the ethylene oxide metering is started even though not all of the propylene oxide has reacted with the alcohol.

In the surfactant of the general formula (I) used in accordance with the invention, n is the average value of the number of propylenoxy units bonded to the C₈ alcohol.

35

The term "average value" relates to technical products in which a different number of alkylenoxy units may be present in the individual molecules. In technical products, it

- 3 -

describes the average proportion of the corresponding alkyleneoxy units present. A value of 0.5 means, for example, that, on average, every second molecule bears a corresponding unit.

5 According to the invention, surfactants are used in which n has an average value of from 0.8 to 2.0, preferably from 0.8 to 1.8, more preferably from 1.3 to 1.6.

In the surfactant of the general formula (I) used in accordance with the invention, m is the average value of the number of ethyleneoxy units present in the surfactant.

10 According to the invention, surfactants are used in which m has an average value of from 2.0 to 5.0, preferably from 2.8 to 4.0, more preferably from 2.8 to 3.2.

15 The surfactants of the general formula (I) combine very good properties with regard to low foaming, biodegradability and wetting rate on hydrophobic polymer surfaces, so that they can be used in accordance with the invention as wetting agents for hydrophobic polymer surfaces.

20 For the parent alcohol component ROH of the inventive alcohol alkoxylates, useful alcohol components are not only pure C_8 alcohols, but also mixtures of different isomers of a C_8 alcohol. An example is a mixture of different positional isomers. The alcohol component present in the surfactants of the general formula (I) used in accordance with the invention is preferably only one isomer of a C_8 alcohol.

25 The present surfactants or mixtures of surfactants used in accordance with the invention are preferably prepared by reacting alcohols of the general formula ROH or mixtures of corresponding isomeric C_8 alcohols, first with propylene oxide and then with ethylene oxide. The alkoxylation is preferably carried out in the presence of alkoxylation catalysts. In particular, basic catalysts such as potassium hydroxide and/or sodium hydroxide are used. Specific alkoxylation catalysts such as modified bentonites or hydrotalcites, as described,
30 for example, in WO 95/04024, can allow the random distribution of the amounts of the incorporated alkylene oxides to be greatly narrowed, so that "narrow-range" alkoxylates are obtained.

35 Appropriate reaction conditions such as temperature, pressure, reaction time, solvent, workup and purification of the products, inter alia, are known to those skilled in the art. Likewise known to those skilled in the art are suitable reactors for the preparation of the surfactants usable in accordance with the invention.

- 4 -

In a preferred embodiment of the present invention, surfactants are used as wetting agents of hydrophobic polymer surfaces, and the surfactants have a wetting performance WP_{PE} according to the general formula (II)

$$5 \quad WP_{PE} = \frac{\cos \varphi_{\text{surfactant solution, 10s}} - \cos \varphi_{\text{dist. water}}}{1 - \cos \varphi_{\text{dist. water}}} \quad (\text{II})$$

where

10 $\varphi_{\text{surfactant solution, 10s}}$ contact angle of a drop of a 0.02% by weight aqueous surfactant solution at 40°C on a polyethylene surface 10 s after the drop hits it and

$\varphi_{\text{dist. water}}$ contact angle of a drop of dist. water at 40°C on a polyethylene surface 10 s after the drop hits it

15 of > 0.41.

The wetting agents used in accordance with the invention more preferably have wetting performances WP_{PE} of > 0.48, even more preferably > 0.52, especially preferably > 0.58.

20 Definition of the wetting performance WP_{PE} for hydrophobic polymer surfaces:

The wetting performance for hydrophobic polymer surfaces is determined via the contact angle of a drop of a 0.02% by weight aqueous surfactant solution determined at 40°C on a polyethylene surface 10 seconds after the drop hits it. The reference used is an analogous
25 experiment with distilled water.

In a further preferred embodiment of the present invention, surfactants are used as wetting agents of hydrophobic polymer surfaces, and the surfactants have a wetting rate WR_{PE} according to the general formula (III)

$$30 \quad WR_{PE} = \frac{\cos \varphi_{\text{surfactant solution, 50ms}} - \cos \varphi_{\text{dist. water}}}{1 - \cos \varphi_{\text{dist. water}}} \cdot \frac{1}{WP_{PE}} \quad (\text{III}),$$

of > 0.85 wherein $\varphi_{\text{dist. water}}$ and WP_{PE} are as defined above and $\varphi_{\text{surfactant solution, 50 ms}}$ is the
35 contact angle of a drop of a 0.02% by weight aqueous surfactant solution at 40°C on a polyethylene surface 50 milliseconds after the drop hits it.

- 5 -

The wetting agents used in accordance with the invention more preferably have wetting rates WR_{PE} of > 0.87 , even more preferably > 0.90 , especially preferably > 0.92 .

Definition of the wetting rate WR_{PE} for hydrophobic polymer surfaces:

5

The wetting rate for hydrophobic polymer surfaces of a surfactant is determined via the progression with time of the contact angle of a drop of an aqueous surfactant solution on a polyethylene surface. It is calculated from the contact angles 50 milliseconds after the drop hits the surface and the wetting performance WP_{PE} for the same surface. The reference used
10 is again an analogous experiment with distilled water.

In general, the hydrophobic or hydrophobicized polymer surfaces suitable in accordance with the invention may consist of any natural or synthetic material, or of mixtures of different materials.

15

Hydrophobic polymer surfaces refer, for example, to all hydrophobic or hydrophobicized biopolymers or plastics.

Preference is given to using the surfactants of the general formula (I) as wetting agents for
20 hydrophobic polymer surfaces which are composed of hydrophobic polymers selected from the group consisting of cotton, polyTHF-based polymers such as Lycra[®] or PEEK, polyethylene, polypropylene, polyamides, polyethers, polycarbonates, polyurethanes, rubber, silicone, polybutadiene, polystyrene and ABS. It is also possible to use the surfactants of the general formula (I) as wetting agents for surfaces of plants, for example
25 leaves, needles, or animals, for example chitin shells of insects. It is also possible to use mixtures of these materials. Particular preference is given to polyester, polyamide, polypropylene, cotton and mixtures thereof.

Preference is given to using the surfactants of the general formula (I) as wetting agents for
30 hydrophobic polymer surfaces, these being selected from the group consisting of moldings, fibers, dusts, granules, powders, foams, fabrics, yarns. Powders and dusts are less preferred.

Particular preference is given to selecting the hydrophobic polymer surfaces from the group consisting of fibers, yarns and fabrics.

35

The inventive low-foam or foam-suppressing surfactants may be used in a multitude of applications. Preference is given to using them as nonionic surfactants preferably in

- 6 -

detergent formulations and in surfactant-containing formulations for chemical-industrial applications, for example for cleaning processes in industry and household, such as for textile washing, or for cleaning processes in the foods sector such as the cleaning of drinks bottles or of vessels or of plants in the food processing industry or in dishwasher detergents.

5 In particular, it is the cleaning of hard surfaces made, for example, of glass, ceramic, lacquer, plastic or metal that is of interest. The surfactants further find use in industrial cleaners and in cleaning processes in the metals processing industry.

10 The surfactants may also be used advantageously for a multitude of other chemical-industrial processes, for instance generally in the metals processing industry, for example in cooling lubricants, hardening oils, hydraulic oil emulsions, polishing pastes, mold release agents, drawing oils, mordants, metal cleaners or metal driers.

15 In this context, the surfactants may be used in the production and processing of textiles. The application of surfactants in the production and processing of textiles is extremely versatile; it extends mainly to the fields of: pretreatment compositions of fibers, production of rayon fibers, spin finishes and textile melts, dyeing assistants, finishes, hydrophobicizing agents, assistants for printing, antistats or flocculants and coating compositions.

20 In addition, it is also possible to use surfactants in the leather, paper, printing, electroplating and photographic industry. Important fields of use here are coatings, pigments and printing inks. Surfactants are used in these fields of application both in aqueous and in nonaqueous systems. In nonaqueous systems, they serve in particular as dispersing assistants, antissettling agents or flow control agents. In addition, surfactants enable the preparation of what are

25 known as high-solids systems. Surfactants have a larger share in aqueous systems in which they serve not only to stabilize the binders which are prepared by emulsion polymerization or polycondensation and are based on polymer dispersions but also serve as dispersing assistants of organic and inorganic pigments which are often used. In addition, they improve the adhesion properties of these coating compositions.

30 In addition, the surfactants may be used in water treatment, for example in wastewater treatment.

35 In addition, the surfactants may be used in crop protection formulations.

In addition, the compounds may be used as surfactants or emulsifiers in the polymer production and polymer processing industry. Main fields of application in polymer

- 7 -

production and processing are: production of polymer dispersions, production of bead polymers, production of foams, use of interface-active mold release agents, production of microcapsules, improvement of the adhesion between fillers and polymers, additives to polymer dispersions for the achievement of particular effects such as foamability, filler compatibility or wetting capability, emulsifiers for nonaqueous systems, coloring of plastics, antistatic modification of polymers or adhesives.

The present invention also relates to a wetting agent comprising

- 10 a) from 0.5 to 50% by weight of at least one surfactant of the general formula (I),
 b) from 1.0 to 10% by weight of a C₈ alcohol and
 15 c) from 0.5 to 30% by weight of a compound of the general formula (IV)



where

- 20 R is a C₈-alkyl radical,
 A is propylenoxy and
 n is an average value of from 0.8 to 2.0.

The inventive wetting agent contains, as component a), from 0.5 to 50% by weight, preferably from 5 to 30% by weight, more preferably from 8 to 25% by weight, of a surfactant of the general formula (I). Structure and preferred ingredients of this surfactant have already been illustrated above.

30 As component b), the inventive wetting agent contains from 1.0 to 10% by weight, preferably from 1.5 to 5.0% by weight, more preferably from 1.5 to 4.0% by weight, of a C₈ alcohol. For the C₈ alcohol, that which has already been stated with regard to the surfactant of the general formula (I) applies. Component b) has a synergistic action as a cosurfactant and wetting agent in the inventive wetting agent.

35 As component c), the inventive wetting agent contains from 0.5 to 30% by weight, preferably from 2.0 to 20% by weight, more preferably from 5 to 15% by weight, of a compound of the general formula (IV)

- 8 -



where

- 5 R is a C₈-alkyl radical,
 A is propylene oxide and
 n is an average value of from 0.8 to 2.0.

10 The R radical is a linear or branched, saturated or unsaturated C₈-alkyl radical; R is preferably an alkyl radical which is at least monobranched. R is more preferably a C₈-alkyl radical which is monobranched. In a very particularly preferred embodiment, the inventive wetting agents comprise, as component c), compounds in which R is the alkyl radical derived from 2-ethylhexanol.

15 In a preferred embodiment, R in components a) or c) of the inventive wetting agent is the alkyl radical derived from 2-ethylhexanol.

In a particularly preferred embodiment, components a), b) and c) derive from the identical C₈ alcohol. This C₈ alcohol is most preferably 2-ethylhexanol.

20

The compound of the general formula (IV) is a nonethoxylated, i.e. exclusively propoxylated, surfactant which acts as an efficient defoamer in the inventive wetting agent. The defoaming action is desired in the inventive wetting agent.

25 In the general formula (IV), A is propylenoxy. According to the invention, propylenoxy is the -O-CH₂-CH(CH₃)- or -O-CH(CH₃)-CH₂- group.

30 In the inventive wetting agents, component c) used is a compound of the general formula (IV) in which n has an average value of from 0.8 to 2.0, preferably from 0.8 to 1.8, more preferably from 1.3 to 1.6. With regard to the definition of average value, that which was stated above applies.

35 The aforementioned surfactants of the general formula (IV) used in accordance with the invention are preferably prepared by reacting alcohols of the general formula ROH or mixtures of corresponding isomeric C₈ alcohols with propylene oxide. The alkoxylation is preferably carried out in the presence of alkoxylation catalysts. The catalysts used are in particular basic catalysts such as potassium hydroxide and/or sodium hydroxide. Specific

- 9 -

alkoxylation catalysts such as modified bentonites or hydrotalcites, as described, for example, in WO 95/04024, allow the random distribution of the amounts of incorporated alkylene oxides to be greatly narrowed, so that "narrow-range" alkoxyates are obtained.

- 5 Appropriate reaction conditions such as temperature, pressure, reaction time, solvent, workup and purification of the products, inter alia, are known to those skilled in the art. Likewise known to those skilled in the art are suitable reactors for the preparation of the surfactants usable in accordance with the invention.
- 10 The inventive wetting agent may be prepared by mixing components a), b) and c) in any sequence, preferably in the presence of a suitable solvent. Suitable solvents are polar solvents, for example alcohols, ketones, water or salt solutions such as aqueous sodium hydroxide solution. It is also possible to use a mixture of solvents.
- 15 In a preferred embodiment, components a), b) and c) of the inventive wetting agent are present in aqueous solution, i.e. water is used as the solvent for the inventive wetting agent.

The inventive wetting agent is low-foaming. According to the mechanical foaming method EN 12728 (40°C, 2 g/l of surfactant, 10° German hardness), the results obtained for the
20 inventive wetting agent are < 20 ml, preferably < 30 ml, more preferably < 20 ml, most preferably < 15 ml of foam.

What is claimed is:

1. The use of surfactants of the general formula (I)



where

- R is a C₈-alkyl radical,
 A is propylenoxy,
 B is ethylenoxy,
 n is an average value of from 0.8 to 2.0 and
 m is an average value of from 2.8 to 3.2

as a wetting agent for hydrophobic polymer surfaces, wherein the hydrophobic polymer surfaces consist of at least one material selected from the group consisting of cotton, polyTHF-based polymers, polyethylene, polypropylene, polyamides, rubber, silicone, polybutadiene, polystyrene, ABS, surfaces of plants and surfaces of animals.

2. The use according to claim 1, wherein the surfactants of the general formula (I) have a wetting performance WP_{PE} according to the general formula (II)

$$WP_{PE} = \frac{\cos \varphi_{\text{surfactant solution, 10s}} - \cos \varphi_{\text{dist. water}}}{1 - \cos \varphi_{\text{dist. water}}} \quad (II),$$

where

$\varphi_{\text{surfactant solution, 10s}}$ contact angle of a drop of a 0.02% by weight aqueous surfactant solution at 40°C on a polyethylene surface 10 s after the drop hits it and

$\varphi_{\text{dist. water}}$ contact angle of a drop of dist. water at 40°C on a polyethylene surface 10 s after the drop hits it

of > 0.41.


- 11 -

3. The use according to claim 1 or 2, wherein the surfactants of the general formula (I) have a wetting rate WR_{PE} according to the general formula (III)

$$WR_{PE} = \frac{\cos \varphi_{\text{surfactant solution, 50ms}} - \cos \varphi_{\text{dist. water}}}{1 - \cos \varphi_{\text{dist. water}}} \cdot \frac{1}{WP_{PE}} \quad (\text{III}),$$

wherein $\varphi_{\text{dist. water}}$ and WP_{PE} are as defined in claim 2 and $\varphi_{\text{surfactant solution, 50 ms}}$ is the contact angle of a drop of a 0.02% by weight aqueous surfactant solution at 40°C on a polyethylene surface 50 ms after the drop hits it, of > 0.85.

4. The use according to any of claims 1 to 3, wherein R is the alkyl radical derived from 2-ethylhexanol.
5. The use according to any of claims 1 to 4, wherein the hydrophobic polymer surfaces are selected from the group consisting of moldings, fibers, dusts, granules, powders, foams, fabrics and yarns.
6. A wetting agent comprising
- from 0.5 to 50% by weight of at least one surfactant of the general formula (I) according to claim 1,
 - from 1.0 to 10% by weight of a C₈ alcohol and
 - from 0.5 to 30% by weight of a compound of the general formula (IV)

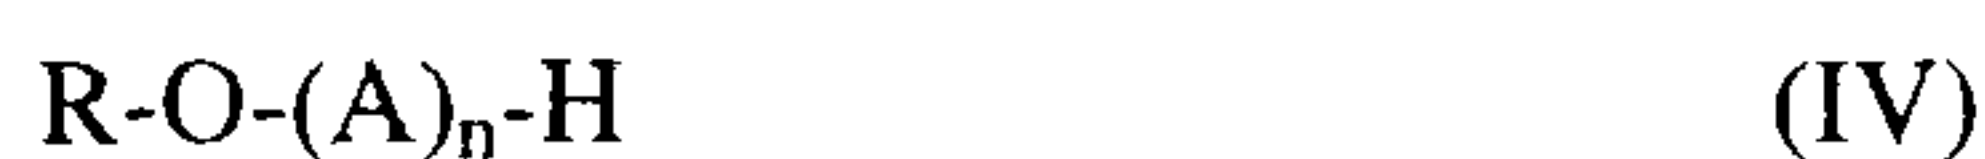

where

R is a C₈-alkyl radical,
 A is propylenoxy and
 n is an average value of from 0.8 to 2.0.

7. The wetting agent according to claim 6, wherein R in components a) and c) is the alkyl radical derived from 2-ethylhexanol.

- 12 -

8. The wetting agent according to claim 6 or 7, wherein components a), b) and c) derive from the identical C₈ alcohol.
9. The wetting agent according to any of claims 6 to 8, wherein the components are present to extents of
 - a) from 5.0 to 30% by weight,
 - b) from 1.5 to 5% by weight and
 - c) from 2.0 to 20% by weight.
10. The wetting agent according to any of claims 6 to 9, wherein the C₈ alcohol is 2-ethylhexanol.
11. The wetting agent according to any of claims 6 to 10, wherein components a), b) and c) are present in aqueous solution.