(12) STANDARD PATENT (11) Application No. **AU 2011328857 B2**
(19) AUSTRALIAN PATENT OFFICE

(54) Title
AC LED white light luminous device

(51) International Patent Classification(s)
H01L 33/00 (2010.01)

(21) Application No: **2011328857** (22) Date of Filing: **2011.03.01**

(87) WIPO No: **WO12/062065**

(30) Priority Data

(31) Number	(32) Date	(33) Country
201010537984.9	**2010.11.09**	**CN**

(43) Publication Date: **2012.05.18**
(44) Accepted Journal Date: **2015.12.03**

(71) Applicant(s)
Changchun Institute of Applied Chemistry, Chinese Academy of Sciences;Sichuan Sunfor Light Co., Ltd.

(72) Inventor(s)
Zhang, Hongjie;Zhang, Ming;Li, Chengyu;Zhao, Kun;Li, Dongming;Zhang, Li

(74) Agent / Attorney
Phillips Ormonde Fitzpatrick, L 16 333 Collins St, Melbourne, VIC, 3000

(56) Related Art
US 2008/0211421

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国 际 局

(43) 国际公布日
2012 年 5 月 18 日 (18.05.2012)

PCT

(10) 国际公布号
WO 2012/062065 A1

(51) 国际专利分类号:
H01L 33/00 (2010.01)

(21) 国际申请号: PCT/CN2011/071433

(22) 国际申请日: 2011 年 3 月 1 日 (01.03.2011)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
201010537984.9 2010 年 11 月 9 日 (09.11.2010) CN

(71) 申请人 (对除美国外的所有指定国): **四川新力光源有限公司 (SICHUAN SUNFOR LIGHT CO., LTD)** [CN/CN]; 中国四川省成都市高新区（西区）新达路 2 号, Sichuan 611731 (CN)。 **中国科学院长春应用化学研究所 (CHANGCHUN INSTITUTE OF APPLIED CHEMISTRY, CHINESE ACADEMY OF SCIENCES)** [CN/CN]; 中国吉林省长春市人民大街 5625 号, Jilin 130022 (CN)。

(72) 发明人; 及

(75) 发明人/申请人 (仅对美国): **张洪杰 (ZHANG, Hongjie)** [CN/CN]; 中国吉林省长春市人民大街 5625 号, Jilin 130022 (CN)。 **张明 (ZHANG, Ming)** [CN/CN]; 中国四川省成都市高新区（西区）新达路 2 号, Sichuan 611731 (CN)。 **李成宇 (LI, Chengyu)** [CN/CN]; 中国吉林省长春市人民大街 5625 号, Jilin 130022 (CN)。 **赵昆 (ZHAO, Kun)** [CN/CN]; 中国四川省成都市高新区（西区）新达路 2 号, Sichuan 611731 (CN)。 **李东明 (LI, Dongming)** [CN/CN]; 中国四川省成都市高新区（西区）新达路 2 号, Sichuan 611731 (CN)。 **张立 (ZHANG, Li)** [CN/CN]; 中国四川省成都市高新区（西区）新达路 2 号, Sichuan 611731 (CN)。

(74) 代理人: **成都虹桥专利事务所 (CHENGDU HONGQIAO PATENT LAW OFFICE)**; 中国四川省成都市武侯区一环路南一段 22 号 KEN 商务写字楼 3 层 13、15、16 号, Sichuan 610041 (CN)。

(81) 指定国 (除另有指明，要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

(84) 指定国 (除另有指明，要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)。

根据细则 4.17 的声明:

— 关于申请人有权申请并被授予专利(细则 4.17(ii))

— 关于申请人有权要求在先申请的优先权(细则 4.17(iii))

— 发明人资格(细则 4.17(iv))

本国际公布:

— 包括国际检索报告(条约第 21 条(3))。

(54) **Title**: AC LED WHITE LIGHT LUMINOUS DEVICE

(54) **发明名称** : 交流 LED 白光发光装置




图 5 / **FIG.** 5

(57) **Abstract**: An AC LED white light luminous device belongs to LED manufacturing field. The problem to be solved by the present invention is low-costly solving a problem of LED stroboflash by AC driver and solving a series of problems of heat emission difficulty caused by multi-LED integrated packaging. An LED white light luminous unit includes an LED chip and a light emitting material that can irradiate when it is excited by the LED chip. The emitting lifetime of the light emitting material is 1-100ms. The LED chip only comprises one PN junction. The light emitted by the LED chip is mixed with the light emitted by the light emitting material, and the color of the mixed light is white. The LED white light luminous unit can be driven by AC of which frequency is not more than 100 Hz. In the LED luminous device of prevent invention, it is used that single PN junction chip rather than prior integrated packaged AC multi-LED chip.

[见续页]

WO 2012/062065 A1

(57) **摘要**:

一种交流 LED 白光发光装置，属于白光 LED 制造技术领域。本发明所要解决的技术问题在于低成本地解决 LED 在交流驱动下的频闪、以及多个 LED 集成封装导致的散热不畅等一系列问题。LED 白光发光单元包括 LED 芯片和能够在此 LED 芯片激发下发光的发光材料。所述发光材料的发光寿命是 1-100ms，所述 LED 芯片只包含一个 PN 结，LED 芯片发出的光与发光材料发出的光混合为白色；所述 LED 白光发光单元采用频率不大于 100 赫兹的交流电驱动。本发明 LED 发光装置不使用现有的多 LED 集成封装的交流 LED 芯片，而使用单 PN 结 LED 芯片。

201132885 7 11 Nov 2015

AC WHITE LIGHT LUMINOUS DEVICE

Field of the Invention

The present invention relates to an Alternate Current (AC) white Light-Emitting Diode (LED) device, which belongs to the technical field of white LED manufacturing, and particularly, to an AC white LED device made of a light emitting material having a specific lifetime.

Background of the Invention

Currently, the LED is used in the fields of illumination, display, backlight, etc., and attracts extensive attentions due to its advantages such as energy saving, durable and pollution free. There are many solutions for implementing the white LED, and presently the most mature technical solution for manufacturing the white LED is to implement white light emission by combining the blue light LED chip with the yellow fluorescent powder. *Appl. Phys. Lett.* published in 1967 (refer to volume 11, page 53) reports a light emitting material $Y_3Al_5O_{12}$: Ce^{3+} which emits yellow light, with a maximum light emitting wavelength of 550 nm and a lifetime less than 100 ns. *Appl. Phys. A* published in 1997 (refer to volume 64, page 417) reports that white light emission of an LED is implemented using the yellow light emitted by $Y_3Al_5O_{12}$: Ce^{3+} and blue light gallium nitride, which is the most mature technical solution for manufacturing the white LED at present. But in practical applications, with the increase of the temperature of the working device, the luminous intensities of the blue light LED chip and the fluorescent powder decrease, wherein the luminous intensity of the fluorescent powder decreases obviously, thus the usage of the LED is influenced.

The conventional LED is driven by the direct current (DC), but most of the household, industrial, commercial or public electricity is supplied in the form of AC, thus a rectifier transformer must be accompanied for AC-DC conversion when the LED is used for illumination, etc. But in the process of AC-DC conversion, a power loss up to 15~30% will be caused. In addition, the conversion device has a short lifetime and a high cost, while it requires a lot of works and time in installation, so the efficiency is low.

US Patent No. 7,489,086 B2 "AC LIGHT EITTING DIODE AND AC LED DRIVE METHODS AND APPARATUS" provides an AC LED device, which mainly enables an integrated packaged LED device to work in a frequency higher than 100 Hz, so as to compensate for the stroboflash of light emission of the LED device in the AC working state with a visual persistence effect of naked eyes. Chinese Patent No. 200910307357.3 discloses a light emitting material $Y_2O_3Al_2O_3SiO_2$: CeBNaP with yellow long afterglow phenomenon and a white LED device using the same.

Chinese Patent No. CN100464111C discloses an AC LED lamp using LED chips of different emitting colors connected in parallel in an AC power supply, and it mainly describes different colors of LED chips used together for emitting white light, and the specific circuit thereof, such as red, green and blue light emitting chips. International Patent Application No. WO2004/023568A1 "LIGHT-EMITTING DEVICE HAVING LIGHT-EMITTING ELEMENTS" proposes to install a plurality of small LED chip arrays on a sapphire substrate, so as to provide a light emitting device that can be driven by an AC power supply. On the basis of similar ideas, the Seoul Semiconductor of South Korea and the Industrial Technology Research Institute of Taiwan integratedly package a lot of superfine LED grains onto a substrate referred to as AC LED chip. The core of the above AC LED technology is the microelectronic circuit processing technology integratedly packaging a lot of micro grains, e.g., the AC LED chip manufactured by the Industrial Technology Research Institute of Taiwan integratedly packages hundreds of tiny LEDs in an area of 1 mm^2. But it is difficult to process the AC LED chip, and problems such as poor heat dissipation will be caused as the large number of microchips are integrated in a narrow substrate space.

A reference herein to a patent document or other matter which is given as prior art is not to be taken as an admission that the document or matter was known or that the information it contains was part of the common general knowledge as at the priority date of any the claims.

Summary of the Invention

According to one aspect, the present invention provides a white Light-Emitting Diode (LED) unit, comprising LED chip capable of emitting ultraviolet light in a range of 200 nm to 380 nm and a light emitting material capable of emitting light when excited by the LED chip,

wherein the LED chip only comprises one light emitting PN junction, the LED chip is drivable by Alternate Current (AC) with a frequency not more than 100 Hz, and the light emitted by the LED chip is mixed with the light emitted by the light emitting material to form white light, wherein the light emitting material is one select of:

a) a combination of $Zn_2P_2O_7:Tm^{3+}$ and $Zn_3(PO_4)_2:Mn^{2+}$;

b) $CaAl_2O_4:Dy^{3+}$;

c) a combination of $Sr_2P_2O_7:Eu^{2+}$, Y^{3+} and $Sr_4Al_{14}O_{25}:Eu^{2+}$, Dy^{3+}, B^{3+} and $Ca_4O(PO_4)_2:Eu^{2+}$ and $Zn_3(PO_4)_2:Mn^{2+}$, Ga^{3+}; or

d) a combination of $Sr_2P_2O_7:Eu^{2+}$, Y^{3+} and $Sr_4Al_{14}O_{25}:Eu^{3+}$ and $Y_2O_2S:Eu^{3+}$.

In an embodiment, a white LED device overcomes a series of deficiencies such as the stroboflash under the AC power supply mode and the heat dissipation difficulty of the existing white LED device.

According to the definition of luminescence, the luminous lifetime of the light emitting material is the time for decreasing the luminous intensity of the material to be 1/e of the maximum intensity in the excitation.

The white LED unit is driven by Alternate Current (AC) with a frequency not more than 100 Hz, and preferably 50 to 60 Hz. The luminous brightness of the powered off chip under non-constant current condition may be compensated for with afterglow of the light emitting material, so that the AC driving is more practical.

The white LED unit ameliorates the stroboflash caused by the AC power supply by using the normal single PN junction LED chip, rather than the prior AC LED chip integrating a plurality of micro grains, thus the production is simple and the cost is low.

In which, the light emitted by the LED chip is ultraviolet light in a range of 200 nm to 380 nm or visible light in a range of 380 nm to 780 nm.

In an embodiment, the light emitting material emits light when being excited by the LED chip, and the overall visual effect of the emitted light is the white light, or the overall visual effect of the light emitted by the light emitting material and the light emitted by the chip is the white light.

In the white LED unit of the present invention, each LED chip only comprises one light emitting PN junction.

The white LED device comprises the white LED unit and a drive circuit. The AC driven drive circuit is a unidirectional series circuit, a reverse parallel circuit or a bridge rectifier circuit, as illustrated in Figs. 1 to 4, or arbitrary combinations thereof. The frequency of the AC driven drive circuit is not more than 100 Hz.

In addition, the white LED device further comprises a light guide covering layer, which is a non-planar light guide structure. Through the light guide covering layer, the light emitted by the LED chip and the light emitted by the light emitting material is reflected, refracted, diffused, dodged and finally mixed to output uniform light. In which, the light guide covering

2011328857 03 Jun 2013

layer is a lens or other transparent covering layer, which can be doped with particles of non-light-emitting material with a diameter less than 5 μm, so that the light from the chip is diffused more uniformly.

Embodiments of the present invention have the following beneficial effects:

The prior white LED device uses YAG: Ce as the light emitting material, which will cause stroboflash phenomenon due to the change of AC cycle at a power frequency below 100 Hz. The present invention can maintain the light emission when the excitation light source disappears since the light emitting material having a specific lifetime is used, thus in an AC white LED device based on the solution of the present invention, when the current cycle changes, the light emission of the light emitting material can be maintained for a certain time in the cycle, thereby compensating for the stroboflash of the LED chip caused by the AC fluctuation, and keeping a stable light output from the white LED device in the AC cycle. In addition, as the LED chip does not work in a half of the AC cycle, the heat effect is decreased, which is beneficial to overcome series of difficulties caused by the chip heating in the prior white LED device.

Brief Description of the Drawings

Fig. 1 illustrates a schematic diagram of a unidirectional series circuit of an AC white LED device of an embodiment of the present invention;

Fig. 2 illustrates a schematic diagram of a reverse parallel circuit of an AC white LED device of an embodiment of the present invention;

Fig. 3 illustrates a schematic diagram of a bridge rectifier circuit having a normal conducted LED chip of an AC white LED device of an embodiment of the present invention;

Fig. 4 illustrates a schematic diagram of a bridge rectifier circuit having no normal conducted LED chip of an AC white LED device of an embodiment of the present invention;

Fig. 5 illustrates a schematic diagram of the constitution of a white LED unit, wherein 1 represents a light emitting material or a light emitting layer made of the light emitting material and a transparent medium, and 2 represents an LED chip; and

Fig. 6 illustrates color points of Examples 1 to 8 in CIE1931 chromatic diagram, wherein digits 1 to 8 are corresponding to Examples 1 to 8, respectively.

2011328857 03 Jun 2013

The above contents of the present invention are further described in details through the following embodiments. But it shall not be appreciated that the range of the subject matter of the present invention is limited thereto. Any technology implemented based on the above contents of the present invention shall fall within the range of the present invention. Particularly, about the constitution of the basic circuit, the embodiments of the present invention only give the simplest reverse parallel circuit, but the AC white LED device of the present invention is not limited thereto, and it further includes for example a unidirectional series circuit and a bridge rectifier circuit.

Detailed Description of the Preferred Embodiments

Examples 1 to 8 overcome the stroboflash by implementing the white LED device made of a light emitting material shown in Table 1 and merchant normal LED chip in a general packaging technology, without using integrated chip dedicated to the AC LED.

Examples 1 to 8

Table 1

Example	LED chip (light emitting wavelength)	Light emitting material	Lifetime of light emitting material (ms)
1	Ultraviolet (254nm)	45wt%$Zn_2P_2O_7:Tm^{3+}$ 55wt%$Zn_3(PO4)_2:Mn^{2+},Ga^{3+}$	10
2	Ultraviolet (254nm)	$CaAl_2O_4:Dy^{3+}$	25
3	Ultraviolet (310nm)	15wt%$Sr_2P_2O_7:Eu^{2+}$, Y^{3+} 30wt%$Sr_4Al_{14}O_{25}:Eu^{2+},Dy^{3+},B^{3+}$ 15wt%$Ca_4O(PO_4)_2:Eu^{2+}$, 40wt%$Zn_3(PO_4)_2:Mn^{2+},Ga^{3+}$	30
4	Ultraviolet (365nm)	10wt%$Sr_2P_2O_7:Eu^{2+},Y^{3+}$ 30wt%$Sr_4Al_{14}O_{25}:Eu^{2+}$ 60wt%$Y_2O_2S:Eu^{3+}$	14
5	Purple light (400nm)	50wt%$SrMg_2(PO_4)_2:Eu^{2+},Gd^{3+}$ 50wt%$Ca_4O(PO_4)_2:Eu^{2+}$	4

2011328857 03 Jun 2013

Example	LED chip (light emitting wavelength)	Light emitting material	Lifetime of light emitting material (ms)
6	Purple light (400nm)	40wt%$Sr_4Al_{14}O_{25}:Eu^{2+}$ 60wt%$Y_2O_2S:Eu^{3+}$	1
7	Blue light (450nm)	30wt%$SrAl_2O_4:Eu^{2+},B^{3+}$ 70wt%$CaS:Eu^{2+}$	100
8	Blue light (460nm)	60wt%$Y_2O_2S:Mg^{2+},Ti^{3+}$ 40wt%$SrAl_2O_4:Eu^{2+}$	48

Test example 1: luminescence properties of the AC white LED device of the present invention

Table 2 shows the luminous brightness of the photos shot within 20 ms by the AC white LED device driven under 50 Hz AC using a high-speed scientific camera Sarnoff CAM512 which takes 300 photos per second. Reference 1 is an AC driven white LED device made in the same manner as examples 1 to 8 using the merchant 460 nm blue light chip packaged with a yellow light emitting material YAG: Ce (the luminous lifetime is 100 ns). Reference 2 is an AC driven white LED device made in the same manner as examples 1 to 8 using the merchant 460 nm blue light chip packaged with long lifetime materials SrA1204: Eu, Dy and Y2O2S: Eu, Mg, Ti (the luminous lifetime is more than 1s). In table 2, the brightness data is relative brightness without dimension.

Table 2

Time	3.33 ms	6.66 ms	9.99 ms	13.32 ms	16.65 ms	19.98 ms
Brightness of reference 1	2265	3466	0	2153	3570	0
Brightness of reference 2	746	998	670	702	965	712
Brightness of example 1	2931	3025	1455	3187	3443	1665
Brightness of example 2	3140	3373	1654	2884	3437	1877
Brightness of example 3	3200	3423	1506	3135	3362	1656
Brightness of example 4	2910	3190	1652	2723	3245	1850
Brightness of example 5	2250	2734	1468	2114	2800	1420

201132885703 Jun 2013

Time	3.33 ms	6.66 ms	9.99 ms	13.32 ms	16.65 ms	19.98 ms
Brightness of example 6	2109	2636	1150	2213	2858	1163
Brightness of example 7	2017	2420	1569	2115	2654	1510
Brightness of example 8	1879	2000	1270	1746	2123	1303

Table 3 gives the normalized value of the maximum luminous brightness of each sample in the examples of Table 2.

Table 3

Time / Normalized brightness ratio	3.33 ms	6.66 ms	9.99 ms	13.32 ms	16.65 ms	19.98 ms
Reference 1	0.63445	0.97087	0	0.60308	1	0
Reference 2	0.74749	1	0.67134	0.70341	0.96693	0.71343
Example 1	0.85129	0.87859	0.4226	0.92565	1	0.48359
Example 2	0.91359	0.98138	0.48123	0.8391	1	0.54612
Example 3	0.93485	1	0.43996	0.91586	0.98218	0.48379
Example 4	0.89676	0.98305	0.50909	0.83914	1	0.57011
Example 5	0.80357	0.97643	0.52429	0.755	1	0.50714
Example 6	0.73793	0.92232	0.40238	0.77432	1	0.40693
Example 7	0.75998	0.91183	0.59118	0.79691	1	0.56895
Example 8	0.88507	0.94206	0.59821	0.82242	1	0.61375

As can be seen from Tables 2 and 3, the luminescence of the present invention is stable and slightly fluctuant in the AC cycle. But about reference 1, i.e., a white LED device made of the merchant blue light chip packaged with the conventional yellow light emitting material YAG: Ce having a short luminous lifetime, the luminescence is unstable and largely fluctuant in the AC cycle. It is clear that the present invention effectively and low-costly overcomes the stroboflash of the AC LED.

2011328857 03 Jun 2013

Although as illustrated by reference 2, the luminescence of the white LED device made of the light emitting material with long luminous lifetime is also slightly fluctuant in the AC cycle, the energy obtained by the material when the exciting light exists cannot be released quickly, so the light is weak (refer to Table 1), which is disadvantageous to be used as a light emitting material.

Table 4 shows the color coordinates and the color temperatures of the examples in Table 1 (measured using Minolta colorimeter CS-100A).

Table 4 CIE Color Coordinates and Color Temperatures

Color Coordinates	CIEx	CIEy	Related color temperature
Example 1	0.4076	0.3807	3312K
Example 2	0.3410	0.3102	4997K
Example 3	0.3279	0.2939	5725K
Example 4	0.3320	0.3210	5496K
Example 5	0.3802	0.3566	3815K
Example 6	0.3503	0.3002	4441K
Example 7	0.3104	0.3154	6746K
Example 8	0.3484	0.3516	4867K

As can be seen from Table 4, the above examples enable the white LED device to emit white light. The color point positions in the light emissions of respective examples in the CIE1931 chromaticity diagram are shown in Fig. 6.

Test example 2: light attenuation of the AC white LED device of the present invention

Table 5 shows the light attenuation data of examples 1 to 18 and the reference. The reference is a white LED device obtained by installing a white LED chip made of the merchant 460 nm blue light chip packaged with YAG: Ce in the general DC power supply mode at present. The test method is as follows: electrifying the AC white LED device of the example and the reference device, and measuring their luminous brightness in a certain interval with Minolta colorimeter CS-100. The results are shown in Fig. 5. The data in Fig. 5

2011328857 03 Jun 2013

is relative brightness without dimension, and the initial data is normalized.

Table 5

Time	1 h	1,000 h	1,500 h	2,500 h
Brightness of reference	100	98	97.1	96.3
Brightness of example 1	100	99.8	99.5	99.1
Brightness of example 2	100	99.5	99.4	99.3
Brightness of example 3	100	99.6	99.5	99
Brightness of example 4	100	99.7	99.3	99
Brightness of example 5	100	99.8	99.4	98.6
Brightness of example 6	100	99.5	99	98
Brightness of example 7	100	99.4	99	98.3
Brightness of example 8	100	99.3	99	98

As can be seen from the data in Fig. 5, the AC white LED device of an embodiment of the present invention has a light attenuation less than the AC white LED device in the prior art.

Throughout the description and claims of this specification, the word “comprise” and variations of the word, such as “comprising” and “comprises”, is not intended to exclude other additives, components, integers or steps.

The discussion of documents, acts, materials, devices, articles and the like is included in this specification solely for the purpose of providing a context for the present invention. It is not suggested or represented that any or all of these matters formed part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed before the priority date of each claim of this application.

2011328857 11 Nov 2015

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A white Light-Emitting Diode (LED) unit, comprising an LED chip capable of emitting ultraviolet light in a range of 200 nm to 380 nm and a light emitting material capable of emitting light when excited by the LED chip, wherein the LED chip only comprises one light emitting PN junction and is driven by Alternate Current (AC) with a frequency not more than 100 Hz, the luminous lifetime of the light emitting material is 1 to 100 ms, the luminous brightness under non-constant current condition is compensated for through afterglow of the light emitting material, and the light emitted by the LED chip is mixed with the light emitted by the light emitting material to form white light, wherein the light emitting material is one select of:

a) a combination of 45wt% $Zn_2P_2O_7:Tm^{3+}$ and 55wt%$Zn_3(PO_4)_2:Mn^{2+}$;

b) $CaAl_2O_4:Dy^{3+}$;

c) a combination of 15wt% $Sr_2P_2O_7:Eu^{2+}$, Y^{3+} and 30wt% $Sr_4Al_{14}O_{25}:Eu^{2+}$, Dy^{3+}, B^{3+} and 15wt% $Ca_4O(PO_4)_2:Eu^{2+}$ and 40wt% $Zn_3(PO_4)_2:Mn^{2+}$, Ga^{3+}; or

d) a combination of 10wt% $Sr_2P_2O_7:Eu^{2+}$, Y^{3+} and 30wt% $Sr_4Al_{14}O_{25}:Eu^{2+}$ and 60wt% $Y_2O_2S:Eu^{3+}$.

2. The white LED device according to claim 1, wherein the LED chip is driven by Alternate Current (AC) with a frequency of 50 to 60 Hz.

3. An Alternate Current (AC) white Light-Emitting Diode (LED) device, wherein comprising an AC driving circuit and at least one white LED unit according to claims 1 or 2,

wherein, the driving circuit is one or arbitrary combinations of a unidirectional series circuit, a reverse parallel circuit and a bridge rectifier circuit.

4. The AC white LED device according to claim 3, wherein the AC white LED device further comprises a light guide covering layer.

5. The AC white LED device according to claim 4, wherein the light guide covering layer

2011328857 11 Nov 2015

is doped with particles of non-light-emitting material with a diameter less than 5 μm.

Drawings

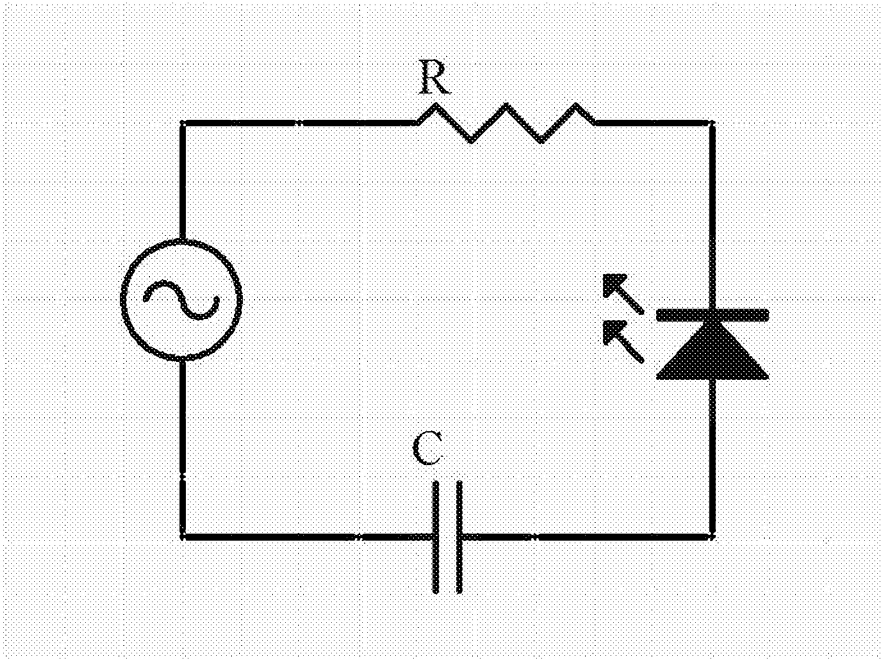


Fig. 1

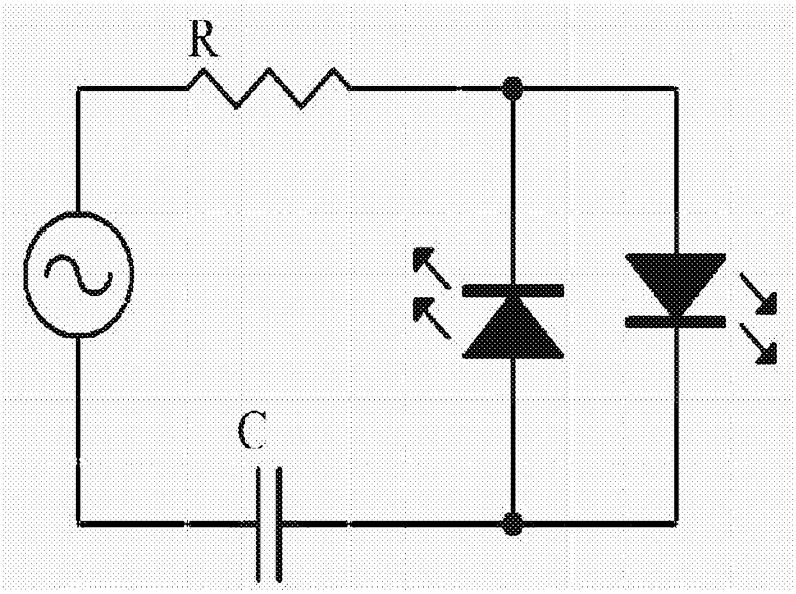


Fig. 2

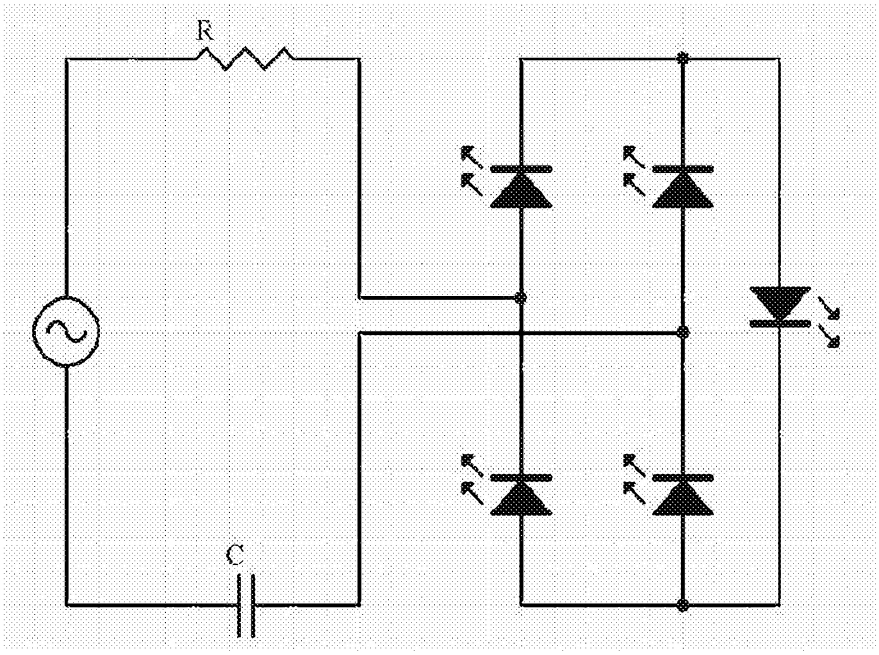


Fig. 3

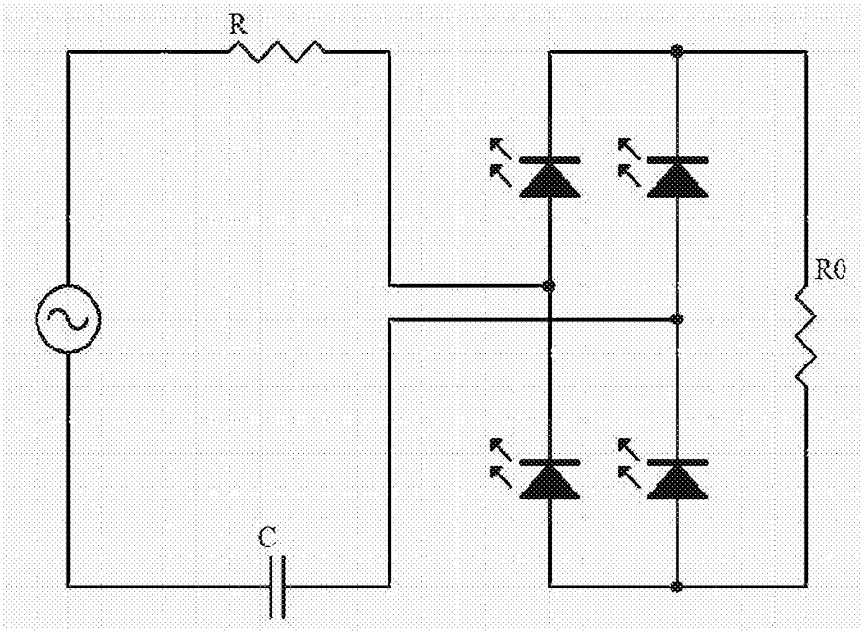


Fig. 4

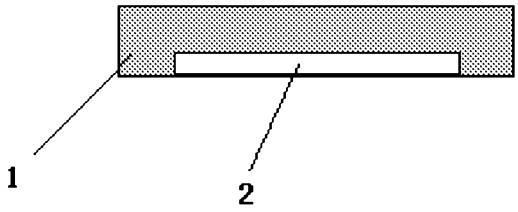


Fig. 5

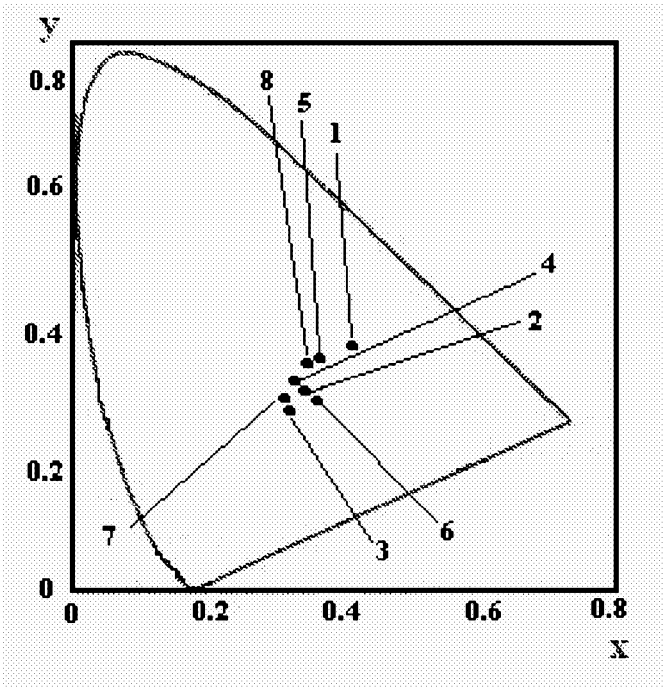


Fig. 6