

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 287 236 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

16.11.2005 Bulletin 2005/46

(21) Application number: **01941988.6**

(22) Date of filing: **06.06.2001**

(51) Int Cl.7: **F01D 9/02**

(86) International application number:
PCT/US2001/018274

(87) International publication number:
WO 2001/094755 (13.12.2001 Gazette 2001/50)

(54) **TURBINE CASING FOR AN EXHAUST TURBOCHARGER MADE BY CASTING**

GEGOSSENES SPIRALGEHÄUSE FÜR EINEN TURBOLADER

BACHE SPIRALE POUR LA TURBINE D'UN TURBOCOMPRESSEUR REALISE PAR COULAGE

(84) Designated Contracting States:
DE FR GB IT NL

(30) Priority: **07.06.2000 DE 10028161**

(43) Date of publication of application:
05.03.2003 Bulletin 2003/10

(73) Proprietor: **BorgWarner Inc.**
Auburn Hills, MI 48326-2782 (US)

(72) Inventors:
• **ALLMANG, Ruediger**
66887 St. Julian (DE)
• **CLAUS, Hartmut**
67269 Grunstadt (DE)

• **SIMON, Volker**
76829 Landau (DE)

(74) Representative: **Patentanwälte**
Westphal, Mussnug & Partner
Am Riettor 5
78048 Villingen-Schwenningen (DE)

(56) References cited:
US-A- 3 396 906 **US-A- 4 147 467**
US-A- 4 384 821 **US-A- 4 927 336**
US-A- 5 810 556

• **PATENT ABSTRACTS OF JAPAN vol. 007, no.**
230 (M-249), 12 October 1983 (1983-10-12) & JP
58 124008 A (NISSAN JIDOSHA KK), 23 July 1983
(1983-07-23)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention concerns a casing aggregate for the turbine of an exhaust turbocharger. The invention especially concerns the spiral casing of the turbine.

[0002] Exhaust turbochargers are a must in modern vehicles. The most important components include a turbine and a compressor.

These two components are located on one and the same shaft. The exhaust of the internal combustion engine is conducted to the turbine. The exhaust powers the turbine. Then the turbine in turn powers the compressor. This takes in air from the environment and compresses it. The compressed air is then used for combustion in the engine. The purpose of exhaust turbochargers is to minimize the exhaust emissions as well as to increase the efficiency of the engine and its torque. They also have an important function in regards to the efficiency of the catalytic converter.

[0003] The following requirements are generally demanded of an exhaust turbocharger: They should fulfill the mentioned functions regarding the exhaust emission, the efficiency level and torque of the engine in the most optimal manner possible. In doing so, they should have minimal weight and minimal construction volume. The design should be simple and easy to assemble, so that manufacturing costs are held to minimal levels. They should be compatible with catalytic converters.

[0004] The known exhaust turbochargers do not fill all these functions, or only to a certain point.

[0005] For example US 4,384,821 discloses a turbocharger construction of the divided turbine housing type, including first and second annular half sections. In such a construction thermally induced stresses are avoided. The separation joint of the half sections run in a perpendicular plane to the turbine axis.

[0006] Nevertheless, lowering pollutant emissions during the cold start phase leaves much to be desired, and weight and space demands are unreasonably high.

[0007] The task of the invention is to design a casing aggregate of the type mentioned in such a manner that significant improvements are made in the mentioned parameters. This task is accomplished by the characteristics of Claim 1.

[0008] In accomplishing the task, the inventors stuck with the tried and true execution of the casing aggregate by casting. For this, however, they departed from the conventional method of casting steel in a sand mold, and switched to a thin-walled fine casting, also known as precision casting. This allows the wall thickness to be greatly reduced. This also greatly decreases the weight of the aggregate. The casing aggregate now has a substantially lower mass, so that only relatively small heat energy can be removed from the exhaust in the cold start phase. Thus the thermal inertia is very minimal.

[0009] As an additional measure, the casing aggregate is assembled from at least two parts. Therefore,

the casing aggregate has at least one separation joint. The separation joint is arranged as follows:

- it extends in an axially perpendicular level,
- it runs along the apex line of the spiral casing,
- it extends over an arc of a circle of approximately 270 degrees, and
- it lies outside of the area of the tongue.

[0010] Thus in any case, the spiral casing is in at least two parts. In doing so, the division into two on the basis of the separation joint described above, occurs in such a manner that the two following benefits result:

[0011] For one thing, each of the two parts of the spiral casing can be cast without requiring the use of casting cores. The shapes of the two spiral casing parts don't require any undercutting.

[0012] In addition, the separation joint is positioned in such a manner that the area of the tongue lies outside of the separation joint. The tongue area is that area this is thermally stressed the most. When the two cast parts of the spiral casing are put together, the tongue area, therefore, consists of a single piece without separation joint, which takes into account the high thermal stress and, therefore, the high demands of rigidity in this area.

[0013] The two parts can be joined, for example, using any type of welding, for example using laser welding or micro-plasma welding.

[0014] By avoiding casting cores, positional tolerances don't need to be considered while casting. This means that the wall thickness can already be less for this reason than with the classical method of using casting cores. This already results in considerable weight reduction. A multiple-part turbine casing cast in precision casting has an average wall thickness of approximately 2 mm. This means a mass reduction of 40 to 60 % in comparison to execution in cast steel in sand. In addition, the manufacturing costs of a spiral casing based on the invention are lower than before. In general, a heat resistant cast steel for exhaust temperatures of 1050°C is considered suitable as a material.

[0015] The finish and dimensional accuracy are optimal. This leads to higher efficiency levels. The manufacturing costs will already be lower because refinishing is unnecessary.

[0016] The invention is further explained in the drawings. The following details are represented:

Fig. 1 shows an exhaust turbocharger in axial section.

Fig. 2 shows an enlarged section through the spiral casing of the turbine of Fig. 1.

[0017] The turbocharger shown in Fig. 1 has the following components as its most important elements:

[0018] A turbine **1** with turbine wheel **1.1**, a compressor **2** with compressor wheel **2.1**, a bearing **3**, and a

shaft 4 on which the turbine wheel 1.1 and the compressor wheel 2.1 are seated.

[0019] The turbine casing is executed in known fashion as a spiral casing. It is made of two main parts, namely a part 1.2 - herein referred to as the "inner part", and a part 1.3 - herein referred to as the "outer part". An outer exhaust support 1.4 is a component of the outer part 1.3. This could however also be separate from the outer part 1.3.

The following is decisive:

[0020] The two main parts 1.2 and 1.3 of the spiral casing of the turbine are separated along a separation joint. The separation joint runs in an axially perpendicular level. It runs along the apex line of the spiral casing.

[0021] As can be seen in Fig. 2, the separation joint extends over an angle of 270 degrees. It lies outside of the tongue area 1.5 of the spiral casing. This area is highly thermally stressed.

[0022] Fig. 2 shows part 1.3. Part 1.2 is removed.

[0023] The separation joint extends from point A to point B. The area of the tongue 1.5 remains undisturbed. This means that the spiral casing is one part in the tongue area. For the purpose of assembly, part 1.2 is seated over the area of the separation joint between point A and B on part 1.3.

Claims

1. Casing aggregate for the turbine (1) of an exhaust turbocharger, comprising:

- a. a spiral casing (1.2, 1.3) adapted to surround the running wheel (1.1) of the turbine (1);
- b. a tongue-like wall part (1.5) in the inside of the spiral casing (1.2, 1.3);
- c. an inlet connection;
- d. an outlet connection;
- e. a flange adapted for connecting to a bearing casing of the turbocharger;
- f. wherein the casing aggregate is manufactured by thin-walled precision casting;
- g. wherein the casing aggregate is comprised of at least two parts (1.2, 1.3), so that at least one separation joint is present; and
- h. wherein the separation joint is arranged as follows:

- i. it runs in a plane perpendicular to a turbine axis;
- ii. it runs along the apex line of the spiral casing (1.2, 1.3);
- characterized in that**
- iii. the separation joint extends over an arc of a circle of approximately 270 degrees;
- iv. the separation joint lies outside of the ar-

ea of the tongue.

- 2. Casing aggregate as in claim 1, wherein the parts (1.2, 1.3) of the casing aggregate are welded to each other along the separation joint.

Patentansprüche

1. Gehäuseverbund für die Turbine (1) eines Abgas-Turboladers, der Folgendes aufweist:

- a. ein Spiralgehäuse (1.2, 1.3), derart angepasst um das Laufrad (1.1) der Turbine (1) zu umgeben;
- b. ein Zungen ähnliches Wandteil (1.5) im Inneren des Spiralgehäuses (1.2, 1.3);
- c. einen Einlass-Anschluss;
- d. einen Auslass-Anschluss;
- e. einen Flansch, angepasst zur Verbindung mit einem Lagergehäuse des Turboladers;
- f. worin der Gehäuseverbund durch doppelwandigen Feinguss hergestellt ist;
- g. worin der Gehäuseverbund aus zumindest zwei Teilen (1.2, 1.3) besteht, so dass zumindest eine Trennfuge vorhanden ist; und
- h. worin die Trennfuge wie folgt angeordnet ist:

- i. sie verläuft in einer Ebene senkrecht zu einer Turbinenachse;
- ii. sie verläuft entlang der Scheitellinie des Spiralgehäuses (1.2, 1.3);
- dadurch gekennzeichnet, dass**
- iii. die Trennfuge sich über einen Kreisbogen von ungefähr 270 Grad erstreckt;
- iv. die Trennfuge ausserhalb des Bereiches der Zunge liegt.

- 2. Gehäuseverbund nach Anspruch 1, worin die Teile (1.2, 1.3) des Gehäuseverbunds entlang der Trennfuge miteinander verschweisst sind.

Revendications

1. Ensemble de carter pour la turbine (1) d'un turbo-compresseur d'échappement, comprenant :

- a. un carter en spirale (1.2, 1.3) adapté pour entourer le galet de roulement (1.1) de la turbine (1) ;
- b. une partie de paroi semblable à une languette (1.5) à l'intérieur du carter en spirale (1.2, 1.3) ;
- c. une connexion d'entrée ;

d. une connexion de sortie ;

e. un rebord adapté pour se raccorder à un carter de palier du turbocompresseur ;

5

f. dans lequel l'ensemble de carter est fabriqué par un coulage de précision des parois minces ;

g. dans lequel l'ensemble de carter est composé d'au moins deux parties (1.2, 1.3) de telle sorte qu'au moins un joint de séparation est présent ; et

10

h. dans lequel le joint de séparation est disposé comme suit :

15

i. il passe dans un plan perpendiculaire à un axe de la turbine ;

ii. il passe le long de la ligne de sommet du carter en spirale (1.2, 1.3) ;

20

caractérisé en ce que

iii. le joint de séparation s'étend sur un arc d'un cercle d'approximativement 270 degrés ;

25

iv. le joint de séparation se trouve à l'extérieur de l'aire de la languette.

30

2. Ensemble de carter comme dans la revendication 1, dans lequel les parties (1.2, 1.3) de l'ensemble de carter sont soudées l'une à l'autre

35

40

45

50

55

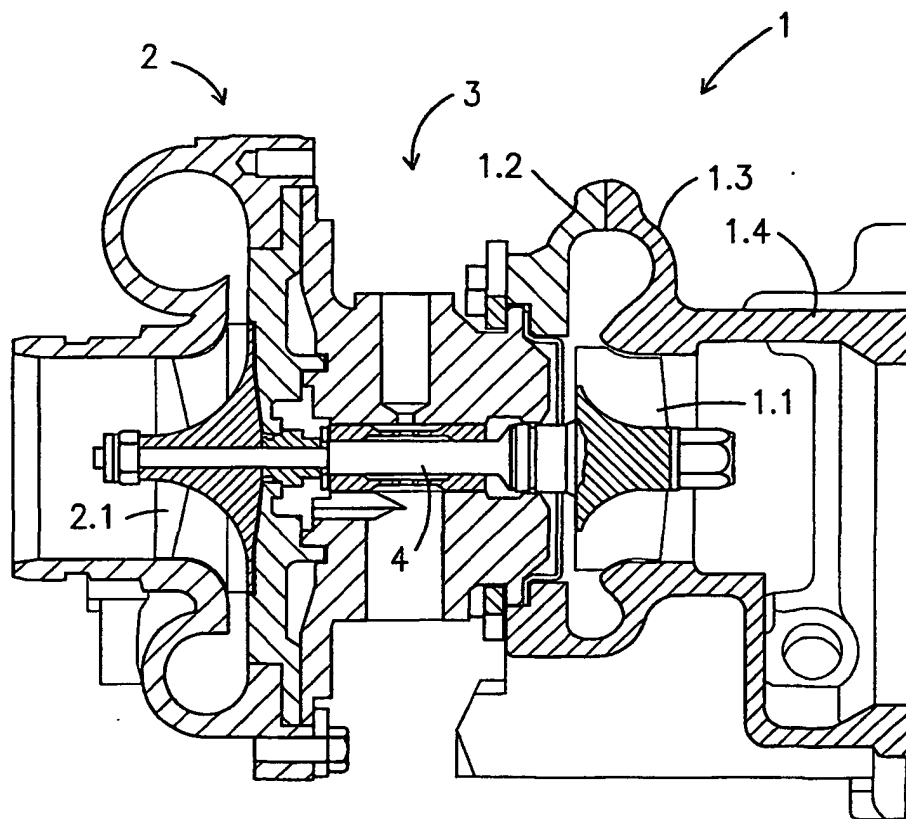


Fig. 1

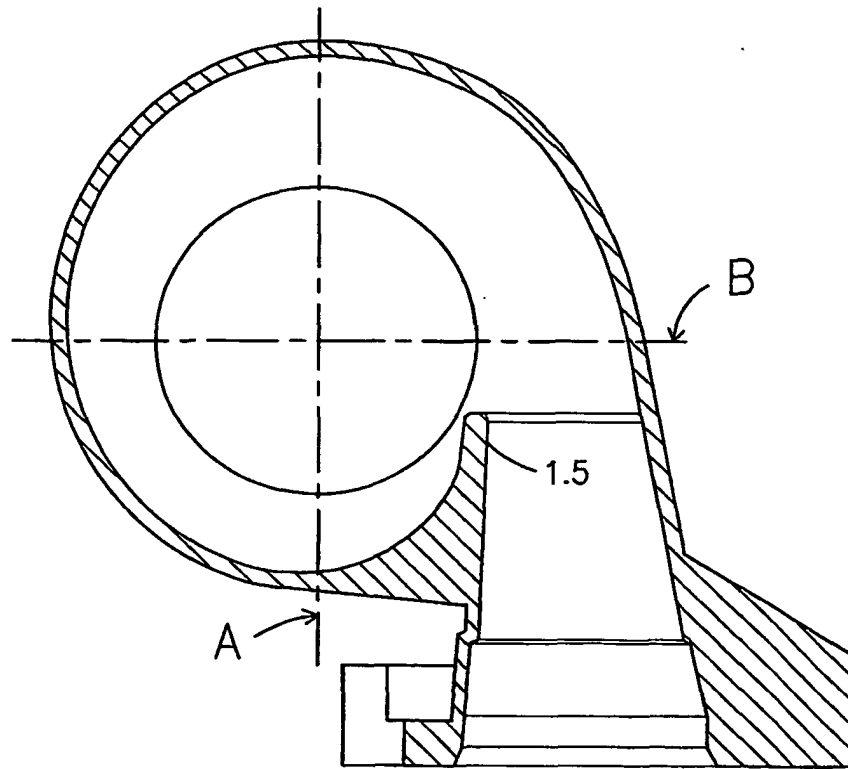


Fig. 2