



- (51) International Patent Classification:  
C03C 17/36 (2006.01)
- (21) International Application Number:  
PCT/US2016/030110
- (22) International Filing Date:  
29 April 2016 (29.04.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/308,343 15 March 2016 (15.03.2016) US
- (71) Applicants: **GUARDIAN INDUSTRIES CORP.** [US/US]; 2300 Harmon Road, Auburn Hills, MI 48326-1714 (US). **GUARDIAN EUROPE S.A.R.L.** [LU/LU]; 19 Rue Du Puits Romain, L-8070 Bertrange, Grand-Duché de Luxembourg (LU).
- (72) Inventors: **LINGLE, Philip, J.**; 43 E. Temperance Road, Temperance, MI 48182 (US). **DISTELDORF, Bernd**; Langwiese 10, D-66693 Mettlach (DE).
- (74) Agent: **RHOA, Joseph, A.**; Nixon & Vanderhye P.C., 901 North Glebe Road, 11th Floor, Arlington, VA 22203-1808 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


**Declarations under Rule 4.17:**

— of inventorship (Rule 4.17(iv))

**Published:**

— with international search report (Art. 21(3))

(54) Title: BRONZE COLORED HEAT TREATABLE COATED ARTICLE HAVING LOW SOLAR FACTOR VALUE

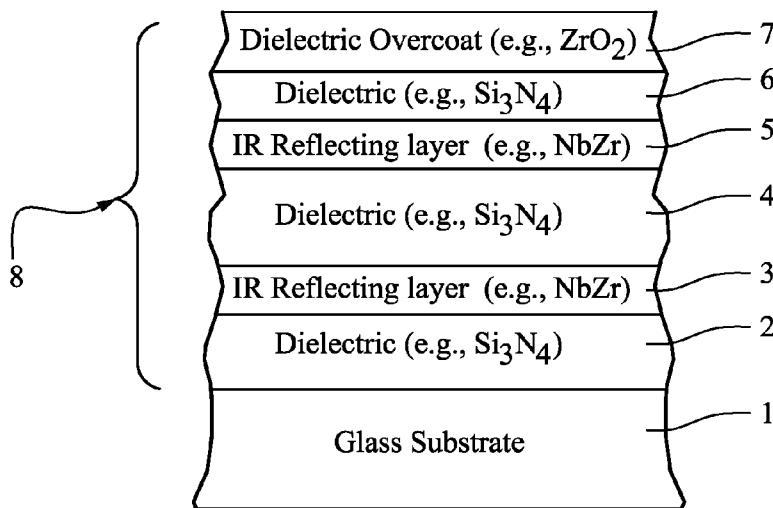

**FIG. 1**

(57) Abstract: There are provided coated articles that include two or more infrared (IR) reflecting layers (e.g., of or including NbZr, Nb, NiCr, NiCrMo, and/or a nitride thereof) sandwiched between at least dielectric layers, and/or a method of making the same. The coating may be designed so that the coated articles realize bronze glass side reflective coloration in combination with a low solar factor (SF) and/or a low solar heat gain coefficient (SFIGC). Such coated articles may be used in the context of monolithic windows, insulating glass (IG) window units, laminated windows, and/or other suitable applications, and may optionally be heat treated (e.g., thermally tempered) in certain instances.



## BRONZE COLORED HEAT TREATABLE COATED ARTICLE HAVING LOW SOLAR FACTOR VALUE

[0001] This invention relates to coated articles that include two or more functional infrared (IR) reflecting layers sandwiched between at least dielectric layers, and/or a method of making the same. The coating may be designed so that the coated articles realize bronze glass side reflective coloration in combination with a low solar factor (SF) and/or low solar heat gain coefficient (SHGC). Such coated articles may be used in the context of monolithic windows, insulating glass (IG) window units, laminated windows, and/or other suitable applications, and may optionally be heat treated (e.g., thermally tempered) in certain instances.

### BACKGROUND AND SUMMARY OF THE INVENTION

[0002] Solar control coatings having a layer stack of glass/Si<sub>3</sub>N<sub>4</sub>/NiCr/Si<sub>3</sub>N<sub>4</sub> are known in the art, where the metallic NiCr layer is the sole infrared (IR) reflecting layer in the coating. In certain instances, the NiCr layer may be nitrided. For example, see U.S. Patent No. 6,926,967, which is hereby incorporated herein by reference. See also U.S. Patent No. 5,688,585.

[0003] Unfortunately, while such layer stacks with NiCr IR reflecting layers provide efficient solar control and are overall good coatings, they are lacking in terms of being able to achieve a wider palette of available colors when desired combined with desirable solar control features. For example, with such a coating stack, if bronze glass side reflective coloration is desired, it was not possible to achieve such coloration in combination with desirable solar control features and/or durability.

[0004] Bronze coloration is often desired in the context of monolithic windows, insulating glass (IG) window units, and/or other suitable applications. Desirable bronze coloration (e.g., glass side reflective, or exterior in the context of an IG window unit), measured monolithically and/or in an IG window unit, may be characterized by: b\* values of from 0 to +20.0, more preferably from +2.0 to +15.0, and most preferably from +4.0 to +12.0; optionally in combination with a\* values of from -2.0 to +16.0, more preferably from 0 to +10.0, and most preferably 0. to +6.0.

**[0005]** Low solar factor (SF) and solar heat gain coefficient (SHGC) values are also desired in some applications, particularly in warm weather climates. Solar factor (SF), calculated in accordance with EN standard 410, relates to a ratio between the total energy entering a room or the like through a glazing and the incident solar energy. Thus, it will be appreciated that lower SF values are indicative of good solar protection against undesirable heating of rooms or the like protected by windows/glazings. A low SF value is indicative of a coated article (e.g., IG window unit) that is capable of keeping a room fairly cool in summertime months during hot ambient conditions. Thus, low SF values are sometimes desirable in hot environments. While low SF values are sometimes desirable for coated articles such as IG window units, the achievement of lower SF values may come at the expense of sacrificing coloration. It is often desirable, but difficult, to achieve a combination of acceptable visible transmission, desirable glass side reflective coloration, and a low SF value for a coated article such as an IG window unit or the like. SF (G-Factor; EN410-673 2011) and SHGC (NFRC-2001) values are calculated from the full spectrum (T, R<sub>g</sub> and R<sub>f</sub>) and are typically measured with a spectrophotometer such as a Perkin Elmer 1050. The SF measurements are done on monolithic coated glass, and the calculated values can be applied to monolithic, IG and laminated applications.

**[0006]** U.S. Patent Document 2012/0177899 discloses several different coatings. Examples 1 and 4 on page four of US '899 are glass/SiN/NiCrNx/SiN/NiCrNx/SiN. However, these examples have undesirable green glass side reflective coloration. Examples 2 and 5 on page four of US '899 are bronze reflective colored glass/SiN/NiCrNx/SiN/NiCrNx/SiN, but with different thicknesses. Unfortunately, Examples 2 and 5 in US '899, while having desirable bronze coloration, suffer from undesirably high solar control features SF and SHGC.

**[0007]** U.S. Patent No. 8,286,395 discloses in Comparative Example 2 a coating as follows: glass/SiN/NbN/SiN/NbN/SiN. Unfortunately, Comparative Example 2 in US '395 explains that the glass side reflective coloration is blue. Moreover, the coatings of Comparative Examples 1-2, coating No. 2 in Comparative Example 3, and Examples 3-4 of US '395 also could not achieve bronze glass side ("exterior" in an IG

unit) reflective coloration, as evidenced by their external reflective negative  $b^*$  values. Moreover, coating No. 1 in Comparative Example 3 of US '395 had undesirably high glass side (external/out) reflectance as evidenced by the undesirably high 28% value for glass side/external/"out" reflectance. US '395 is also silent as to SF and SHGC values. It is noted that glass side reflective color is a significant color when an IG window unit is provided with the coating on surface two, as the glass side reflective color is the color seen by those outside viewing the building on which the window is mounted. Thus, the coatings of US '395 could not achieve desirable bronze glass side/external reflective coloration in combination with desirable solar control features and acceptable glass side/external/out reflectivity.

**[0008]** It would be desirable if bronze glass side reflective coloration could be achieved in combination with low SF and/or SHGC values, and optionally also in combination with one or more of: glass side visible reflectivity of no greater than 22% and/or heat treatability. Note that a typical conventional IG window unit with two panes has an SHGC value around 0.70.

**[0009]** In certain example embodiments of this invention, it has surprisingly been found that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN<sub>x</sub>) between respective dielectric layers, along with particular thickness parameters, desirable bronze glass side reflective coloration can be achieved in combination with a low SF and/or SHGC value(s) in that the coated article (i) if measured monolithically has an SF value of no greater than 0.32 (more preferably no greater than 0.31, and most preferably no greater than 0.30) and/or an SHGC value of no greater than 0.36, more preferably no greater than 0.35, and most preferably no greater than 0.34, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.23 (more preferably no greater than 0.22, and most preferably no greater than 0.21) and/or an SHGC value of no greater than 0.26 (more preferably no greater than 0.25, and most preferably no greater than 0.24). And these desirable features may be achieved in combination with heat treatability and/or visible glass side reflectivity of no greater than 22% (more preferably no greater than 15%, and more preferably no greater than 11%). Such coatings provide

for improved color control and/or ranges when desired, low SF values and thus the ability to keep rooms cool in warm climates, and also for good thermal stability (low  $\Delta E^*$  value(s)) if desired.

**[0010]** Generally speaking, certain example embodiments of this invention fulfill one or more of the above listed needs by providing a coated article having bronze glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising: a first dielectric layer comprising silicon nitride; a first infrared (IR) reflecting layer comprising NbZr on the glass substrate over at least the first dielectric layer comprising silicon nitride; a second dielectric layer comprising silicon nitride on the glass substrate over at least the first dielectric layer comprising silicon nitride and the first IR reflecting layer comprising NbZr; a second layer IR reflecting layer comprising NbZr on the glass substrate over at least the second dielectric layer comprising silicon nitride; a third dielectric layer comprising silicon nitride on the glass substrate over at least the second IR reflecting layer comprising NbZr; wherein the coated article has a glass side visible reflectance of no greater than 15%; and wherein the coated article: has glass side/exterior reflective bronze coloration comprising a glass side/exterior  $a^*$  color value of from -2.0 to +16.0 and a glass side/exterior  $b^*$  color value of from 0 to +20; and (i) if measured monolithically has an SF value of no greater than 0.31 and an SHGC value of no greater than 0.36, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.22 and an SHGC value of no greater than 0.25.

**[0011]** In certain example embodiments of this invention, there is provided a coated article having bronze glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising: a first dielectric layer comprising nitrogen; a first infrared (IR) reflecting layer on the glass substrate over at least the first dielectric layer; a second dielectric layer comprising nitrogen on the glass substrate over at least the first dielectric layer and the first IR reflecting layer; a second layer IR reflecting layer on the glass substrate over at least the second dielectric layer; a third dielectric layer comprising nitrogen on the glass substrate over at least the second IR reflecting layer; wherein each of the first and second IR reflecting

layers comprises one or more of: NbZr, NbZrN<sub>x</sub>, NiCr, NiCrN<sub>x</sub>, NiCrMo, NiCrMoN<sub>x</sub>, NbCr, NbCrN<sub>x</sub>, Nb and NbN<sub>x</sub>; wherein the coated article has a glass side visible reflectance of no greater than 15%; and wherein the coated article: has glass side/exterior reflective bronze coloration comprising a glass side/exterior a\* color value of from -2.0 to +16.0 and a glass side/exterior b\* color value of from 0 to +20; and (i) if measured monolithically has an SF value of no greater than 0.31 and an SHGC value of no greater than 0.36, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.22 and an SHGC value of no greater than 0.25.

[0012] Thus, this invention covers monolithic window units, IG window units, laminated window units, and any other article including a glass substrate having a coating thereon as claimed. Note that monolithic measurements may be taken by removing a coated substrate from an IG window unit and/or laminated window unit, and then performing monolithic measurements. It is also noted that for a given coating the SF and SHGC values will be significantly higher for a monolithic window unit than for an IG window unit.

[0013] In certain example embodiments of this invention, heat treated (HT) coated articles have a glass side reflective  $\Delta E^*$  value due to heat treatment (e.g., thermal tempering) of no greater than 4.5, more preferably no greater than 4.0, even more preferably no greater than 3.5, and most preferably no greater than 3.0. For purposes of example, the heat treatment (HT) may be for at least about 5 minutes at a temperature(s) of at least about 580 degrees C, and is sufficient for thermal tempering. The term  $\Delta E^*$  is known in the art and is indicative of thermal stability upon heat treatment, and is defined and explained for example in U.S. Patent No. 6,926,967 which is incorporated herein by reference.

## IN THE DRAWINGS

[0014] Fig. 1 is a partial cross sectional view of a monolithic coated article (heat treated or not heat treated) according to an example embodiment of this invention.

[0015] Fig. 2 is a partial cross sectional view of a monolithic coated article (heat treated or not heat treated) according to another example embodiment of this invention.

[0016] Fig. 3 is a side cross sectional view of an insulating glass (IG) window unit, including the coated article of Fig. 1 or Fig. 2, according to example embodiments of this invention.

#### DETAILED DESCRIPTION OF CERTAIN EXAMPLE EMBODIMENTS OF THE INVENTION

[0017] Referring now more particularly to the accompanying drawings in which like reference numerals indicate like parts throughout the several views.

[0018] Coated articles according to example embodiments of this invention achieve desirable bronze glass side reflective coloration in combination with low SF and/or SHGC value(s), and also achieve heat treatability and/or visible glass side/exterior/out reflectivity of no greater than 22%. It has surprisingly been found that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN<sub>x</sub>) between respective dielectric layers, along with particular thickness parameters, desirable bronze glass side/exterior/outside reflective coloration, and desirable film side reflective coloration, can be achieved in combination with a low SF value and low glass side/exterior/outside visible reflectance ( $R_{G[\text{or outside}]Y}$ ). And optionally these desirable features may be achieved in combination with heat treatability. Thus, such coatings provide for improved color control and/or ranges when desired and low SF values indicating ability to keep rooms cool in warm environments, and may also provide for low glass side visible reflectance and good thermal stability (low  $\Delta E^*$  value(s)) when desired. In certain example embodiments, the coated article (i) if measured monolithically has an SF value of no greater than 0.32 (more preferably no greater than 0.31, and most preferably no greater than 0.30) and/or an SHGC value of no greater than 0.36, more preferably no greater than 0.35, and most preferably no greater than 0.34, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.23 (more preferably no greater than

0.22, and most preferably no greater than 0.21) and/or an SHGC value of no greater than 0.26 (more preferably no greater than 0.25, and most preferably no greater than 0.24).

**[0019]** Certain embodiments of this invention provide a coating or layer system that may be used in windows such as monolithic windows (e.g., vehicle, residential, and/or architectural windows), IG window units, and/or other suitable applications. Certain example embodiments of this invention provide a layer system that is characterized by color control, low SF values, low glass side visible reflectivity ( $R_{GY}$ ), and/or color stability upon heat treatment. With respect to stability upon heat treatment (HT), this means a low value of  $\Delta E^*$ ; where  $\Delta$  is indicative of  $a^*$ ,  $b^*$  and  $L^*$  change in view of HT such as thermal tempering, heat bending, or thermal heat strengthening, monolithically and/or in the context of dual pane environments such as IG units or laminates. In certain exemplary embodiments, the color stability with HT may result in substantial matchability between heat-treated and non-heat treated versions of the coating or layer system. In other words, in monolithic and/or IG applications, in certain embodiments of this invention two glass substrates having the same coating system thereon (one HT after deposition and the other not HT) appear to the naked human eye to look substantially the same.

**[0020]** The terms "heat treatment" and "heat treating" as used herein mean heating the article to a temperature sufficient to achieve thermal tempering, heat bending, and/or heat strengthening of the glass inclusive article. This definition includes, for example, heating a coated article in an oven or furnace at a temperature of least about 580 degrees C, more preferably at least about 600 degrees C, for a sufficient period to allow tempering, bending, and/or heat strengthening. In certain instances, the HT may be for at least about 4 or 5 minutes. The coated article may or may not be heat treated in different embodiments of this invention.

**[0021]** Figures 1-2 are side cross sectional views of coated articles according to different example embodiments of this invention. In the Fig. 1 embodiment the solar control coating 8 includes two IR reflecting layers 3 and 5, whereas in Fig. 2 the solar control coating 8' includes three IR reflecting layers 3, 5 and 15. An additional

dielectric layer 16 is also provided in the Fig. 2 embodiment. Fig. 3 illustrates an IG window unit, with the coating (8 or 8') on surface two, showing that the IG window unit can use the coating (8 or 8') of either the Fig. 1 embodiment or the Fig. 2 embodiment.

**[0022]** Referring to Fig. 1, the coated article includes at least glass substrate 1 (e.g., clear, green, bronze, grey, blue, or blue-green glass substrate from about 1.0 to 12.0 mm thick), dielectric layers 2, 4, 6 (e.g., of or including silicon nitride (e.g.,  $\text{Si}_3\text{N}_4$ ), silicon oxynitride, tin oxide, or some other suitable dielectric), IR reflecting layers 3, 5 which may be of or include substantially metallic or metallic material such as NbZr, NbZrN<sub>x</sub>, NiCr, NiCrN<sub>x</sub>, NiCrMo, NiCrMoN<sub>x</sub>, NbCr, NbCrN<sub>x</sub>, Nb and/or NbN<sub>x</sub>. It will be appreciated that the IR reflecting layers 3 and/or 5 may optionally be nitrated in certain example embodiments of this invention. While the IR reflecting layers may include some small amount of oxygen in certain instances, it is preferable that these layers 3 and 5 are substantially free of oxygen such as no more than 5% oxygen, more preferably no more than about 3% or 2% oxygen in certain embodiments (atomic %). The coated article further includes dielectric overcoat layer 7 of or including a protective material such as zirconium oxide (e.g.,  $\text{ZrO}_2$ ) or silicon oxynitride. Optionally, a dielectric layer of or including silicon oxynitride and/or zirconium silicon oxynitride of any suitable stoichiometry may be located between and contacting layers 6 and 7 in the upper part of the layer stack. In certain example embodiments of this invention, coating 8 does not include any metallic IR blocking or reflecting layer of or based on Ag or Au. In certain example embodiments of this invention, IR reflecting layers 3 and 5 reflect at least some IR radiation, and do not contact any other metal IR reflecting layer. In certain example embodiments, it is possible for each of the layers to include other materials such as dopants. It will be appreciated of course that other layers may also be provided, or certain layers may be omitted, and different materials may be used, in certain alternative embodiments of this invention.

**[0023]** Referring to the Fig. 2 embodiment, the coated article includes at least glass substrate 1 (e.g., clear, green, bronze, grey, blue, or blue-green glass substrate

from about 1.0 to 12.0 mm thick), dielectric layers 2, 4, 6, 16 (e.g., of or including silicon nitride (e.g.,  $\text{Si}_3\text{N}_4$ ), silicon oxynitride, tin oxide, or some other suitable dielectric), IR reflecting layers 3, 5, 15 which may be of or include substantially metallic or metallic material such as NbZr, NbZrN<sub>x</sub>, NiCr, NiCrN<sub>x</sub>, NiCrMo, NiCrMoN<sub>x</sub>, NbCr, NbCrN<sub>x</sub>, Nb and/or NbN<sub>x</sub>. It will be appreciated that the IR reflecting layers 3, 5 and/or 15 may optionally be nitrided in certain example embodiments of this invention. Optionally, a dielectric layer of or including silicon oxynitride and/or zirconium silicon oxynitride of any suitable stoichiometry may be located between and contacting layers 16 and 7 in the upper part of the layer stack in the Fig. 2 embodiment. While the IR reflecting layers may include some small amount of oxygen in certain instances, it is preferable that these layers 3, 5, 15 are substantially free of oxygen such as no more than 5% oxygen, more preferably no more than about 3% or 2% oxygen in certain embodiments. The coated article in Fig. 2 further includes dielectric overcoat layer 7 of or including a protective material such as zirconium oxide (e.g.,  $\text{ZrO}_2$ ) or silicon oxynitride. For example, when the IR reflecting layers are of or include NbZr, they may be sputter deposited using NbZr targets, and with a gas flow of from about 200-300 ml Ar and from about 0.8-2.5 ml/kW  $\text{N}_2$  and/or  $\text{O}_2$ .

**[0024]** In certain example embodiments of this invention, coating 8' of the Fig. 2 embodiment does not include any metallic IR blocking or reflecting layer of or based on Ag or Au. In certain example embodiments of this invention, IR reflecting layers 3, 5 and 15 reflect at least some IR radiation, and do not contact any other metal IR reflecting layer. In certain example embodiments, it is possible for each of the layers to include other materials such as dopants. It will be appreciated of course that other layers may also be provided, or certain layers may be omitted, and different materials may be used, in certain alternative embodiments of this invention.

**[0025]** The overall coatings (8, 8') of Figs. 1-2 include at least the illustrated layers. It is noted that the terms "oxide" and "nitride" as used herein include various stoichiometries. For example, the term silicon nitride (for one or more of layers 2, 4, 6, 16) includes stoichiometric  $\text{Si}_3\text{N}_4$ , as well as non-stoichiometric silicon nitride. Likewise, various stoichiometries may be used. For instance, when NbZr is used for IR

reflecting layers 3, 5, 15, various ratios of Nb to Zr may be used including but not limited to a 50/50 ratio, an 85/15 ratio, or a 90/10 ratio. In certain example embodiments of this invention, the Nb/Zr ratio in layers 3, 5, and 15 may be from 1/1 to 9.5/1 in various example embodiments of this invention, such that these layers preferably contain more Nb than Zr. The illustrated layers may be deposited on glass substrate 1 via magnetron sputtering, any other type of sputtering, or via any other suitable technique in different embodiments of this invention. It is noted that other layer(s) may be provided in the stacks shown in Figs. 1-2 such as between layers 2 and 3, or between layers 3 and 4, or between the substrate 1 and layer 2, or the like. Generally, other layer(s) may also be provided in other locations of the coating. Thus, while the coating 8, 8' or layers thereof is/are "on" or "supported by" substrate 1 (directly or indirectly), other layer(s) may be provided therebetween. Thus, for example, the layer systems 8, 8' and layers thereof shown in Figs. 1-2 are considered "on" the substrate 1 even when other layer(s) may be provided therebetween (i.e., the terms "on" and "supported by" as used herein are not limited to directly contacting). However, there may be the direct contacts shown in Figs. 1-2 in preferred embodiments.

[0026] In certain example embodiments of this invention, dielectric layers 2, 4, 6, and 16 may each have an index of refraction "n" of from 1.7 to 2.7 (at 550 nm), more preferably from 1.9 to 2.5 in certain embodiments, and most preferably from about 2.0 to 2.06 in preferred embodiments of this invention. One, two, three, or all of these layers 2, 4, 6, 16 may be of or include silicon nitride and/or silicon oxynitride in certain example embodiments of this invention. In such embodiments of this invention where layers 2, 4, 6 and/or 16 comprise silicon nitride (e.g.,  $\text{Si}_3\text{N}_4$ ), sputtering targets including Si employed to form these layers may or may not be admixed with up to 1-20% (e.g., 8%) by weight aluminum or stainless steel (e.g. SS#316), with about this amount then appearing in the layers so formed. Even with this amount(s) of aluminum and/or stainless steel, such layers are still considered dielectric layers.

[0027] While Figs. 1-2 illustrate a coated article according to an embodiment of this invention in monolithic form, coated articles according to other embodiments of

this invention may comprise IG (insulating glass) window units such as shown in Fig. 3. In IG window embodiments, coating 8 or 8' from Figs. 1-2 may be provided on the inner wall of the outer substrate of the IG unit as shown in Fig. 3 (surface two), and/or on the inner wall of the inner substrate, or in any other suitable location in other embodiments of this invention. As shown in Fig. 3, an example IG window unit may comprise a pair of spaced apart glass substrates 1, 30 each about 3-19 mm thick, at least one of which is coated with a coating 8, 8' herein in certain example instances, where the gap 34 between the substrates may be from about 5 to 30 mm, more preferably from about 10 to 20 mm, and most preferably about 16 mm. Spacer(s) 32 may be provided around the periphery to space the glass substrates from each other and maintain gap 34. In certain preferred embodiments, the glass substrate 1 shown in Figs. 1-2 may be the outer glass substrate 1 of an IG window unit as shown in Fig. 3 and the coating 8, 8' may be provided on the interior surface of the outer glass substrate 1 (i.e., surface two of the IG window unit). The gap between substrates in an IG unit may be filed with air and/or argon gas in certain example embodiments. IG window units with three glass panes may also be used, with for example the coating being on the interior surface of the outermost pane.

**[0028]** Turning back to the Fig. 1 embodiment, various thicknesses may be used consistent with one or more of the needs discussed herein. According to certain example embodiments of this invention, example thicknesses (in angstroms) and materials for the respective layers of the Fig. 1 embodiment on the glass substrate 1 are as follows in certain example embodiments for achieving desired bronze glass side reflective coloration in combination with a low SF and/or SHGC value(s) and low glass side visible reflectance (layers are listed in order moving away from the glass substrate 1):

Table 1 (Thicknesses for bronze color and low SF/SHGC in Fig. 1 embodiment)

Layer	Example Range (Å)	Preferred (Å)	Best (Å)
silicon nitride (layer 2):	10-300 Å	15-140 Å	20-120 Å

12

IR reflector (e.g., NbZr) (layer 3):	40-120 Å	60-90 Å	65-80 Å
silicon nitride (layer 4):	300-800 Å	350-680 Å	480-560 Å
IR reflector (e.g., NbZr) (layer 5):	50-150 Å	80-120 Å	90-110 Å
silicon nitride (layer 6):	150-450 Å	220-360 Å	260-320 Å
overcoat (e.g., ZrO <sub>2</sub> ) (layer 7):	10-500 Å	10-90 Å	20-70 Å

**[0029]** Table 1 above relates to, for example, embodiments where glass side reflective generally bronze coloration and a low SF and/or SHGC value(s), and low visible glass side reflectivity, are desirable for the Fig. 1 embodiment (or Fig. 1 embodiment used in an IG window unit as shown in Fig. 3). It has been surprisingly found that in the Fig. 1 embodiment desirable bronze glass side reflective coloration can be achieved in combination with low SF and low SHGC values and low glass side visible reflection using the thicknesses discussed in Table 1 above and when designing the Fig. 1 coating 8 so that one or more of the following are provided: (i) bottom dielectric layer 2 is thinner than each of dielectric layers 4 and 6 by at least 100 Å, more preferably by at least 150 Å, (ii) the thickness ratio of layer 4/layer 2 is at least 2, more preferably at least 3, and most preferably at least 4, (iii) the thickness ratio of layer 6/layer 2 is at least two, (iv) dielectric layer 4 is thicker than dielectric layer 6 by at least 100 Å (more preferably by at least 150 Å), (v) dielectric layer 6 is thicker than dielectric layer 2 by at least 100 Å (more preferably by at least 150 Å), (vi) IR reflecting layer 5 is thicker than IR reflecting layer 3 by at least 15 Å, more preferably by at least 20 Å. It is noted that desirable bronze coloration (e.g., glass side reflective, or exterior/out), measured monolithically and/or in an IG window unit, may be characterized by b\* values of from 0 to +20.0, more preferably from +2.0 to +15.0, and most preferably from +4.0 to +12.0; optionally in combination with a\* values of from -2.0 to +16.0, more preferably from 0 to +10.0, and most preferably 0 to +6.0.

**[0030]** In certain example embodiments, the IR reflecting layers 3 and 5 may be of the same or substantially the same materials as indicated above (e.g., NbZr and/or a

nitride thereof). In certain example embodiments, the layers 3 and/or 5 are metallic, or substantially metallic, and are provided between nitride layers (e.g., silicon nitride based layers 2, 4, 6) in order to reduce or prevent oxidation of the IR reflecting layers during possible heat treatment (e.g., thermal tempering, heat bending, and/or heat strengthening) thereby permitting predictable coloration to be achieved following the heat treatment at multiple viewing angles.

**[0031]** In certain exemplary embodiments, the color stability with HT may result in substantial matchability between heat-treated and non-heat treated versions of the coating or layer system. In other words, in monolithic and/or IG applications, in certain embodiments of this invention two glass substrates having the same coating system thereon (one HT after deposition and the other not HT) appear to the naked human eye to look substantially the same.

**[0032]** Before and/or after any optional heat treatment (HT) such as thermal tempering, in certain example embodiments of this invention coated articles according to the Fig. 1 (or Fig. 1, 3) embodiment have color/optical characteristics as follows in Table 2 (measured monolithic and/or in an IG unit). It is noted that subscript "G" stands for glass side reflective, subscript "T" stands for transmissive, and subscript "F" stands for film side. As is known in the art, glass side (G) means when viewed from the glass side (as opposed to the layer/film side) of the coated article. Film side (F) means when viewed from the side of the coated article on which the coating is provided. Table 3 set forth below illustrates certain characteristics of coated articles according to certain example embodiments of this invention after HT such as thermal tempering (monolithically measured for Table 3) for all colors. The characteristics below in Table 2 are applicable to HT and non-HT coated articles herein, except that the thermal stability data in Table 3 relates to HT coated articles and demonstrates the stability upon HT.

Table 2: Color/Optical Characteristics (Fig. 1 embodiment monolithic or in IG)

	General	Preferred	Most Preferred
T <sub>vis</sub> (TY):	9-35%	10-20%	12-17%

14

$L^*_T$	30-60	35-55	40-50
$a^*_T$	+9 to -16	+8 to -8	+4 to -4
$b^*_T$	-15 to +15	-10 to +10	-5 to +5
$R_{GY}$ (glass side):	$\leq 22\%$	$\leq 15\%$	$\leq 11\%$
$L^*_G$	25-55	33-50	36-44
$a^*_G$	-2 to +16	0 to +10	0 to +6
$b^*_G$	0 to +20	+2 to +15	+4 to +12
$R_{FY}$ (film side):	$\leq 35\%$	$\leq 25\%$	$\leq 20\%$
$a^*_F$	-15 to +15	-10 to +10	-4 to +7
$b^*_F$	-30 to +30	-22 to +24	-15 to +18
$R_s$ ( $\Omega$ /sq):	$< 140$	$< 100$	30-75
SF [Monolithic]:	$\leq 0.32$	$\leq 0.31$	$\leq 0.30$
SHGC [Monolithic]:	$\leq 0.36$	$\leq 0.35$	$\leq 0.34$
SF [IG]:	$\leq 0.23$	$\leq 0.22$	$\leq 0.21$
SHGC [IG]:	$\leq 0.26$	$\leq 0.25$	$\leq 0.24$

Table 3: Thermal Stability (Fig. 1 after HT; in addition to Table 2)

	General	Preferred	Most Preferred
$\Delta E^*_G$	$\leq 4.0$	$\leq 3.5$	$\leq 3.0$

[0033] Regarding the Fig. 2 embodiment, various thicknesses may be used consistent with one or more of the needs discussed herein. According to certain example embodiments of this invention, example thicknesses (in angstroms) and materials for the respective layers of coating 8' in the Fig. 2 embodiment on the glass substrate 1 are as follows in certain example embodiments for achieving desired bronze glass side reflective coloration in combination with low glass side visible reflectivity and a low SF and/or SHGC value(s) (layers are listed in order moving away from the glass substrate 1):

Table 4 (Thicknesses for bronze color and low SF/SHGC in Fig. 2 embodiment)

Layer	Example Range (Å)	Preferred (Å)	Best (Å)
silicon nitride (layer 2):	10-200 Å	15-100 Å	20-40 Å
IR reflector (e.g., NbZr) (layer 3):	20-90 Å	30-70 Å	40-60 Å
silicon nitride (layer 4):	10-200 Å	15-100 Å	20-40 Å
IR reflector (e.g., NbZr) (layer 5):	10-80 Å	15-60 Å	20-40 Å
silicon nitride (layer 6):	300-700 Å	400-550 Å	450-500 Å
IR reflector (e.g., NbZr) (layer 15):	50-140 Å	70-115 Å	80-100 Å
silicon nitride (layer 16):	150-600 Å	250-450 Å	300-400 Å
overcoat (e.g., ZrO <sub>2</sub> ) (layer 7):	10-500 Å	10-60 Å	20-40 Å

[0034] Table 4 above relates to, for example, embodiments where glass side reflective generally bronze coloration and a low SF and/or SHGC value(s) are desirable for the Fig. 2 embodiment (or Fig. 2 embodiment used in an IG window unit as shown in Fig. 3) along with low glass side visible reflectance. It has been surprisingly found that in the Fig. 2 embodiment desirable bronze glass side reflective coloration can be achieved in combination with low SF and low SHGC values, and low glass side visible

reflection, using the thicknesses discussed in Table 4 above and when designing the Fig. 2 coating 8' so that one or more of the following are satisfied: (i) bottom dielectric layer 2 and/or dielectric layer 4 is/are thinner than each of dielectric layers 6 and 16 by at least 100 Å, more preferably by at least 200 Å, and most preferably by at least 230 Å, (ii) the thickness ratio of layer 6/layer 2 (and/or the thickness ratio of layer 6/layer 4) is at least 8, more preferably at least 12, and most preferably at least 15, (iii) the thickness ratio of layer 16/layer 2 (and/or the thickness ratio of layer 16/layer 4) is at least 5, more preferably at least 7 and most preferably at least 8, (iv) dielectric layer 6 is thicker than dielectric layer 16 by at least 100 Å (more preferably by at least 120 Å), (v) IR reflecting layer 15 is thicker than IR reflecting layer 5 by at least 20 Å, more preferably by at least 40 Å, (vi) IR reflecting layer 15 is thicker than IR reflecting layer 3 by at least 20 Å, more preferably by at least 30 Å, and (vii) (v) IR reflecting layer 3 is thicker than IR reflecting layer 5 by at least 10 Å, more preferably by at least 15 Å.

**[0035]** In certain example embodiments, the IR reflecting layers 3, 5 and 15 may be of the same or substantially the same materials as indicated above (e.g., NbZr and/or a nitride thereof). In certain example embodiments, the layers 3, 5 and/or 15 are metallic, or substantially metallic, and are provided between nitride layers (e.g., silicon nitride based layers 2, 4, 6, 16) in order to reduce or prevent oxidation of the IR reflecting layers during possible heat treatment (e.g., thermal tempering, heat bending, and/or heat strengthening) thereby permitting predictable coloration to be achieved following the heat treatment at multiple viewing angles.

**[0036]** Before and/or after any optional heat treatment (HT) such as thermal tempering, in certain example embodiments of this invention coated articles according to the Fig. 2 (or Fig. 2, 3) embodiment have color/optical characteristics as follows in Table 5 (measured monolithically and/or in an IG unit). Table 6 set forth below illustrates certain characteristics of coated articles according to certain example embodiments of this invention after HT such as thermal tempering (monolithically measured for Table 6) for all colors. The characteristics below in Table 5 are applicable to HT and non-HT coated articles herein according to the Fig. 2 (or Fig. 2-3) embodiment, except that the thermal stability data in Table 6 relates to HT coated articles and demonstrates the

stability upon HT.

Table 5: Color/Optical Characteristics (Fig. 2 embodiment monolithic or in IG)

	General	Preferred	Most Preferred
$T_{vis}$ (TY):	9-35%	10-20%	12-17%
$L^*_T$	30-60	35-55	40-50
$a^*_T$	+16 to -16	+3 to -8	+2 to -4
$b^*_T$	-15 to +15	-10 to +10	-6 to +6
$R_{G/outside}Y$ (glass side): $\leq 22\%$		$\leq 15\%$	$\leq 12\%$
$L^*_G$	30-60	35-55	40-50
$a^*_G$	-2 to +16	0 to +10	0 to +6
$b^*_G$	0 to +20	+2 to +15	+4 to +12
$R_{F/inside}Y$ (film side): $\leq 30\%$		$\leq 25\%$	$\leq 16\%$
$a^*_{F/inside}$	-15 to +15	-10 to +10	-2 to +5
$b^*_{F/inside}$	-30 to +35	-15 to +30	-10 to +23
$R_s$ ( $\Omega/sq$ ):	< 160	< 100	30-75
SF [Monolithic]: $\leq 0.32$		$\leq 0.31$	$\leq 0.30$
SHGC [Monolithic]: $\leq 0.36$		$\leq 0.35$	$\leq 0.34$
SF [IG]: $\leq 0.23$		$\leq 0.22$	$\leq 0.21$
SHGC [IG]: $\leq 0.26$		$\leq 0.25$	$\leq 0.24$

Table 6: Thermal Stability (Fig. 2 after HT; in addition to Table 5)

	General	Preferred	Most Preferred
$\Delta E^*_G$	$\leq 4.0$	$\leq 3.5$	$\leq 3.0$

[0037] For purposes of example only, Examples 1-2 representing different example embodiments of this invention, as well we Comparative Examples (CEs) 1-3, are set forth below.

EXAMPLES

[0038] Example 1 was a layer stack on a clear glass substrate as shown in Fig. 1, and Example 2 was a layer stack on a clear glass substrate as shown in Fig. 2. Both were measured monolithically, heat treated and measured again. They were also put into IG window units as shown in Fig. 3. The silicon nitride layers in each example were deposited by sputtering a silicon target (doped with about 8% Al) in an atmosphere including argon and nitrogen gas. The glass substrates 1 and 30 were clear and 6 mm thick, and the air gap 34 in the IG window unit was 12 mm thick. The NbZr layers in each example were deposited by sputtering approximately 90/10 Nb/Zr magnetron sputtering targets in an atmosphere including argon and a small amount of nitrogen gas. Comparative Examples (CEs) 1-3 were provided for purposes of comparison. Layer thicknesses were in angstroms (Å).

Table 7: Layer Stacks of Examples

Layer	Ex. 1	Ex. 2	CE 1	CE 2	CE 3
silicon nitride (layer 2):	30 Å	30 Å	485 Å	600 Å	1310 Å
NbZr (layer 3):	73 Å	52 Å	79 Å	68 Å	107 Å
silicon nitride (layer 4):	514 Å	30 Å	239 Å	314 Å	236 Å
NbZr (layer 5):	102 Å	29 Å	101 Å	136 Å	n/a

silicon nitride (layer 6):	290 Å	476 Å	452 Å	388 Å	n/a
NbZr (layer 15):	n/a	93 Å	n/a	n/a	n/a
silicon nitride (layer 16):	n/a	355 Å	n/a	n/a	n/a
ZrO <sub>2</sub> (layer 7):	30 Å	30 Å	40 Å	40 Å	40 Å

**[0039]** Measured monolithically before tempering (HT), Examples 1-2 according to embodiments of this invention, and Comparative Examples (CEs) 1-3, had the following characteristics (annealed and non-HT, monolithic) (Ill. C, 2 degree observer). Note that “R<sub>G</sub>Y(at angle of 45°)” indicates visible glass side reflection at an angle of forty-five degrees from normal.

Table 8: Measured Monolithic, annealed (before tempering)

Parameter	Ex. 1	Ex. 2	CE 1	CE 2	CE3
T <sub>vis</sub> (TY)(transmission):	14.6%	15.1%	22.5%	19.0%	34.0%
a* <sub>T</sub>	0.5	0.1	-3.0	-0.5	2.5
b* <sub>T</sub>	-0.6	-0.1	8.0	6.5	-8.0
R <sub>G</sub> Y(glass side refl. %):	10.7%	13.8%	13.0%	10.5%	26.0%
a* <sub>G</sub> :	3.4	2.3	3.0	-2.0	-10.0
b* <sub>G</sub> :	6.2	9.3	7.5	-6.5	3.0
Glass side refl. color:	bronze	bronze	bronze	gray	green
R <sub>G</sub> Y(at angle of 45°):	12.7%	13.0%	n/a	n/a	n/a
R <sub>F</sub> Y(film side refl. %):	14.4%	7.7%	4.0%	6.0%	15.0%
a* <sub>F</sub> :	1.5	4.2	30.0	15.0	0.0

b* <sub>F</sub> :	15.4	18.4	-15.0	35.0	9.0
SF (EN410-673 2011):	0.296	0.291	0.337	0.352	0.513
SHGC (NFRC-2001):	0.335	0.330	0.388	0.405	0.590

**[0040]** It can be seen from Table 8 above that measured monolithically prior to any optional thermal tempering only Examples 1-2 had a combination of (i) desirable bronze glass side reflective visible color and (ii) an acceptably low SF/SHGC value(s). It can be seen above that Comparative Examples 2-3 (CEs 2-3) were undesirable at least because they could not achieve bronze glass side reflective coloration. And the only CE that could achieve bronze glass side reflective coloration was CE 1, but CE 1 was problematic in that its SF of 0.337 is too high (unacceptable) as was its high SHGC value. It can also be seen from Table 8 that the SF values (and thus the SHGC values) of Examples 1-2 were improved (lower) compared to those of CEs 1-3. It can also be seen in Table 8 that bronze CE 1 had undesirable film side coloration in that it had a high film side reflective a\* value of 30 – in contrast, Examples 1-2 have much lower film side reflective a\* values which is advantageous. Moreover, it can surprisingly be seen that Examples 1-2 achieved these advantages over CE1 even though they all had approximately the same total amount of IR absorption layer material with respect to thickness and material, which represents surprising and unexpected technical results regarding Examples 1-2. Thus, it can be seen that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN<sub>x</sub>) between respective dielectric layers, along with particular thickness parameters, desirable bronze glass side reflective coloration can be achieved together with a low SF/SHGC value(s) along with acceptable film side reflective coloration and glass side visible reflectivity. Thus, such coatings provide for improved color and optics control and/or ranges when desired and low SF/SHGC values indicating ability to keep rooms cool in warm environments.

**[0041]** Measured monolithically after tempering (HT), Examples 1-2 according to embodiments of this invention had the following characteristics (HT, monolithic) (Ill. C, 2 degree observer). The pre-HT data is provided in Table 9 for CEs 1-3, as it

would not have significantly changed due to HT.

Table 9: Measured Monolithic, after thermal tempering (HT) for Exs. 1-2

Parameter	Ex. 1	Ex. 2	CE 1	CE 2	CE3
T <sub>vis</sub> (TY)(transmission):	13.6%	13.9%	22.5%	19.0%	34.0%
a* <sub>T</sub>	0.6	0.7	-3.0	-0.5	2.5
b* <sub>T</sub>	-0.8	0.7	8.0	6.5	-8.0
R <sub>G</sub> Y(glass side refl. %):	10.9%	14.0%	13.0%	10.5%	26.0%
a* <sub>G</sub> :	3.0	2.3	3.0	-2.0	-10.0
b* <sub>G</sub> :	6.9	9.2	7.5	-6.5	3.0
Glass side refl. color:	bronze	bronze	bronze	gray	green
R <sub>G</sub> Y(at angle of 45°):	13.1%	15.8%	n/a	n/a	n/a
R <sub>F</sub> Y(film side refl. %):	15.4%	10.2%	4.0%	6.0%	15.0%
a* <sub>F</sub> :	1.3	2.3	30.0	15.0	0.0
b* <sub>F</sub> :	15.6	18.0	-15.0	35.0	9.0
SF (EN410-673 2011):	0.294	0.292	0.337	0.352	0.513
SHGC (NFRC-2001):	0.333	0.332	0.388	0.405	0.590

**[0042]** It can be seen from Table 9 above that following thermal tempering (HT) only Examples 1-2 had a combination of (i) desirable bronze glass side reflective visible color and (ii) an acceptably low SF/SHGC value(s). It can be seen above that Comparative Examples 2-3 (CEs 2-3) were undesirable at least because they could not achieve bronze glass side reflective coloration. And the only CE that could achieve

bronze glass side reflective coloration was CE 1, but CE 1 was problematic in that its SF and/or SHGC are too high (unacceptable). It can also be seen from Table 9 that the SF values (and thus the SHGC values) of Examples 1-2 were improved (lower) compared to those of CEs 1-3. It can also be seen in Table 9 that bronze CE 1 had undesirable film side coloration in that it had a high film side reflective  $a^*$  value of 30 – in contrast, Examples 1-2 have much lower film side reflective  $a^*$  values which is advantageous. Moreover, it can surprisingly be seen that Examples 1-2 achieved these advantages over CE 1 even though they all had approximately the same total amount of IR absorption layer material with respect to thickness and material, which represents surprising and unexpected technical results regarding Examples 1-2. Thus, it can be seen that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN<sub>x</sub>) between respective dielectric layers, along with particular thickness parameters, desirable bronze glass side reflective coloration can be achieved together with a low SF/SHGC value(s) along with acceptable film side reflective coloration and glass side visible reflectivity. Thus, such coatings provide for improved color and optics control and/or ranges when desired and low SF/SHGC values indicating ability to keep rooms cool in warm environments.

**[0043]** Measured in an IG window unit as shown in Fig. 3 (with the coating on surface two) before tempering, Examples 1-2 according to embodiments of this invention and Comparative Examples (CEs) 1-3 had the following characteristics (annealed and non-HT, IG unit) (Ill. C, 2 degree observer).

Table 10: IG Window Unit, annealed (before optional tempering)

Parameter	Ex. 1	Ex. 2	CE 1	CE 2	CE3
$T_{vis}$ (TY)(transmission):	13.6%	13.0%	20.0%	17.5%	30.0%
$a^*_T$	-0.8	-1.1	-3.0	-1.0	2.0
$b^*_T$	1.8	0.0	7.5	6.5	-7.5
$R_{G/out}Y$ (glass side refl. %):	10.9%	13.6%	13.0%	11.0%	27.0%

23

a* <sub>G</sub> :	3.5	1.8	3.0	-2.0	-10.0
b* <sub>G</sub> :	5.8	8.5	9.0	-6.0	2.0
Glass side refl. color:	bronze	bronze	bronze	gray	green
R <sub>G</sub> Y(at angle of 45°):	12.9%	15.8%	n/a	n/a	n/a
R <sub>F/interior</sub> Y(film side refl. %):	19.6%	13.8%	10.0%	12.0%	20.0%
a* <sub>F</sub> :	-0.1	1.6	10.0	6.0	-1.0
b* <sub>F</sub> :	9.4	7.7	-9.0	10.0	5.0
SF (EN410-673 2011):	0.215	0.203	0.230	0.240	0.35
SHGC (NFRC-2001):	0.246	0.229	0.265	0.276	0.403

**[0044]** It can again be seen from Table 10 above that measured in an IG window unit as shown in Fig. 3 prior to any optional thermal tempering only Examples 1-2 had a combination of (i) desirable bronze glass side reflective visible color and (ii) an acceptable SF/SHGC value(s). It can be seen above that Comparative Examples 2-3 (CEs 2-3) were undesirable at least because they could not achieve bronze glass side reflective coloration. And the only CE that could achieve bronze glass side reflective coloration was CE 1, but CE 1 was problematic in that its SF and/or SHGC values are too high (unacceptable). It can also be seen from Table 10 that the SF and SHGC values of Examples 1-2 were improved (lower) compared to those of CEs 1-3. Moreover, it can surprisingly be seen that Examples 1-2 achieved these advantages over CE 1 even though they all had approximately the same total amount of IR absorption layer material with respect to thickness and material, which represents surprising and unexpected technical results regarding Examples 1-2. Thus, it can be seen that by providing two or more IR reflecting layers (e.g., of or including NbZr and/or NbZrN<sub>x</sub>) between respective dielectric layers, along with particular thickness parameters, desirable bronze glass side reflective coloration can be achieved together with a low

SF/SHGC value(s) along with acceptable film side reflective coloration and glass side visible reflectivity.

**[0045]** Measured in an IG window unit after tempering (HT), Examples 1-2 according to embodiments of this invention had the following characteristics (HT, IG unit) (Ill. C, 2 degree observer). The pre-HT IG unit data is provided in Table 11 for CEs 1-3, as it would not have significantly changed due to HT.

Table 11: IG Window Unit, after thermal tempering (HT) for Exs. 1-2

Parameter	Ex. 1	Ex. 2	CE 1	CE 2	CE3
T <sub>vis</sub> (TY)(transmission ):	12.9%	12.4%	20.0%	17.5%	30.0%
a* <sub>T</sub>	-0.8	-0.6	-3.0	-1.0	2.0
b* <sub>T</sub>	0.2	2.3	7.5	6.5	-7.5
R <sub>G/out</sub> Y(glass side refl. %):	11.1%	13.8%	13.0%	11.0%	27.0%
a* <sub>G</sub> :	3.3	1.8	3.0	-2.0	-10.0
b* <sub>G</sub> :	7.8	8.9	9.0	-6.0	2.0
Glass side refl. color:	bronze	bronze	bronze	gray	green
R <sub>G</sub> Y(at angle of 45°):	13.2%	15.9%	n/a	n/a	n/a
R <sub>F/interior</sub> Y(film side refl. %):	20.4%	15.8%	10.0%	12.0%	20.0%
a* <sub>F</sub> :	0.1	0.4	10.0	6.0	-1.0
b* <sub>F</sub> :	9.4	9.2	-9.0	10.0	5.0
SF (EN410-673 2011):	0.213	0.206	0.230	0.240	0.35
SHGC (NFRC-2001):	0.244	0.237	0.265	0.276	0.403

[0046] It can again be seen from Table 11 above that following thermal tempering (HT) in an IG window unit only Examples 1-2 had a combination of (i) desirable bronze glass side reflective visible color and (ii) an acceptable SF/SHGC value(s). The advantages discussed above regarding Table 10 are applicable to the Table 11 data as well.

Example 3

[0047] Example 3 was similar to Example 1 with respect to the layer stack, as shown in Fig. 1. Example 3 was as follows: glass(5.8 mm clear)/Si3Nx(10 nm)/NbZr(7.2 nm)/Si3Nx(53.1 nm)/NbZr(9.4 nm)/Si3Nx(28 nm)/ZrOx(6.6 nm). Example 3 has SF and SHGC values similar to Example 1 above, realized glass side reflective bronze color, and had the following optical characteristics as coated (prior to thermal tempering): TY 15.0%; a\*T -0.5; b\*T 0.0; RG/outY 11.0%; a\*G 2.5; b\*G 9.0; RF/interior 8.5%; a\*F 3.0; and b\*F 18.0. Example 3 following thermal tempering (heat treatment) had the following optical characteristics: TY 14.0%; a\*T -0.5; b\*T 0.5; RG/outY 10.5%; a\*G 2.5; b\*G 8.5; RF/interior 10.0%; a\*F 3.0; and b\*F 18.0.

[0048] It is noted above that one, two or all of IR reflecting layers 3, 5, 15 may be of or include NiCrMo and/or NiCrMoNx in certain example embodiments of this invention. In such embodiments one, two or all of the IR reflecting layers 3, 5, 15 may, for example, be of or include C22 or an oxide and/or nitride thereof. Table 12 below shows an example composition of the NiCrMo-based alloy C22.

Table 12: NiCrMo based alloy C22 (wt. %)

Element	Preferred	More Preferred	Example
Ni	40-70%	50-60%	54-58% (e.g., 56%)
Cr	5-40%	10-30%	20-22.5%
Mo	5-30%	10-20%	12.5-14.5%
Fe	0-15%	0-10%	1-5% (e.g., 3%)
W	0-15%	0-10%	1-5% (e.g., 3%)
Co	0-15%	0-10%	1-5% (e.g., 3%)

Si	0-2%	0-1%	=<0.2% (e.g., .08%)
Mn	0-3%	0-2%	=<1% (e.g., 0.5%)
C	0-1%	0-0.5%	=<0.1% (e.g., .01%)
V	0-2%	0-1%	=<1% (e.g., 0.35%)

[0049] Once given the above disclosure many other features, modifications and improvements will become apparent to the skilled artisan. Such other features, modifications and improvements are therefore considered to be a part of this invention, the scope of which is to be determined by the following claims:

## WHAT IS CLAIMED IS:

1. A coated article having bronze glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising:
  - a first dielectric layer comprising silicon nitride;
  - a first infrared (IR) reflecting layer comprising NbZr on the glass substrate over at least the first dielectric layer comprising silicon nitride;
  - a second dielectric layer comprising silicon nitride on the glass substrate over at least the first dielectric layer comprising silicon nitride and the first IR reflecting layer comprising NbZr;
  - a second layer IR reflecting layer comprising NbZr on the glass substrate over at least the second dielectric layer comprising silicon nitride;
  - a third dielectric layer comprising silicon nitride on the glass substrate over at least the second IR reflecting layer comprising NbZr;wherein the coated article has a glass side visible reflectance of no greater than 15%; and  
wherein the coated article: has glass side/exterior reflective bronze coloration comprising a glass side/exterior  $a^*$  color value of from -2.0 to +16.0 and a glass side/exterior  $b^*$  color value of from 0 to +20; and (i) if measured monolithically has an SF value of no greater than 0.31 and an SHGC value of no greater than 0.36, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.22 and an SHGC value of no greater than 0.25.
2. The coated article of claim 1, wherein the coated article has a glass

side/exterior  $b^*$  value of from +2.0 to +15.0.

3. The coated article of any preceding claim, wherein the coated article has a glass side/exterior  $b^*$  value of from +4.0 to +12.0.

4. The coated article of any preceding claim, wherein the coated article has a glass side/exterior  $a^*$  value of from 0 to +10.0.

5. The coated article of any preceding claim, wherein the second dielectric layer comprising silicon nitride is located directly between and contacting the first and second IR reflecting layers comprising NbZr.

6. The coated article of any preceding claim, wherein at least one of the first and second IR reflecting layers comprising NbZr is/are nitrided.

7. The coated article of any preceding claim, wherein each of the first and second IR reflecting layers comprising NbZr comprise  $NbZrN_x$ .

8. The coated article of any preceding claim, wherein each of the first and second IR reflecting layers comprising NbZr includes more Nb than Zr based on an atomic percentage.

9. The coated article of any preceding claim, wherein the coated article is heat

treated and has a  $\Delta E^*$  value (glass side reflective) of no greater than 3.0 after and/or due to heat treatment.

10. The coated article of any preceding claim, wherein the coated article has a visible transmission of from 10-20%.

11. The coated article of any preceding claim, wherein the coated article has a visible transmission of from 12-17%.

12. The coated article of any preceding claim, wherein the coated article has no metallic infrared (IR) reflecting layer based on Ag and/or Au.

13. The coated article of any preceding claim, wherein the coated article comprises an IG window unit.

14. The coated article of any of claims 1-12, wherein the coated article comprises a monolithic window unit.

15. The coated article of any preceding claim, wherein at least one of the first and second layers IR reflecting layers is/are substantially free of oxygen.

16. The coated article of any preceding claim, wherein the coating further comprising an overcoat layer comprising an oxide of zirconium.

17. The coated article of any preceding claim, wherein the coating includes only two IR reflecting layers and consists essentially of the first dielectric layer comprising silicon nitride, the first infrared (IR) reflecting layer comprising NbZr, the second dielectric layer comprising silicon nitride, the second layer IR reflecting layer comprising NbZr, and third dielectric layer comprising silicon nitride, and optionally an overcoat layer comprising an oxide of zirconium.

18. The coated article of any preceding claim, wherein the first dielectric layer is thinner than each of the second and third dielectric layers by at least 150 Å.

19. The coated article of any preceding claim, wherein a thickness ratio of the second dielectric layer/the first dielectric layer is at least 2, more preferably at least 3, and most preferably at least 4.

20. The coated article of any preceding claim, wherein, a thickness ratio of the third dielectric layer/the first dielectric layer is at least two.

21. The coated article of any preceding claim, wherein the second dielectric layer is thicker than the third dielectric layer by at least 100 Å.

22. The coated article of any preceding claim, wherein the third dielectric layer is thicker than the first dielectric layer by at least 100 Å, more preferably by at least 150

Å.

23. The coated article of any preceding claim, the second IR reflecting layer is thicker than the first IR reflecting layer by at least 15 Å, more preferably by at least 20

Å.

24. The coated article of any preceding claim, wherein the coating further comprises: a third IR reflecting layer comprising NbZr; and a fourth dielectric layer comprising silicon nitride.

25. The coated article of any preceding claim, wherein at least one of the IR reflecting layers comprising NbZr further comprises oxygen.

26. The coated article of any preceding claim, wherein at least one of the IR reflecting layers comprising NbZr is metallic.

27. The coated article of any preceding claim, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

28. The coated article of any preceding claim, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising

zirconium silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

29. The coated article of any preceding claim, wherein the coated article (i) if measured monolithically has an SF value of no greater than 0.30 and an SHGC value of no greater than 0.35, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.21.

30. The coated article of any preceding claim, wherein the coated article has a film side reflective  $a^*$  value of from -15 to +15, measured monolithically.

31. The coated article of any preceding claim, wherein the coated article has a glass side visible reflectance of no greater than 15%.

32. The coated article of any preceding claim, wherein the coated article has a glass side visible reflectance of no greater than 11%.

33. A coated article having bronze glass side reflective coloration and including a layer system supported by a glass substrate, the layer system comprising:

- a first dielectric layer comprising nitrogen;
- a first infrared (IR) reflecting layer on the glass substrate over at least the first dielectric layer;
- a second dielectric layer comprising nitrogen on the glass substrate over at least

the first dielectric layer and the first IR reflecting layer;

a second layer IR reflecting layer on the glass substrate over at least the second dielectric layer;

a third dielectric layer comprising nitrogen on the glass substrate over at least the second IR reflecting layer;

wherein each of the first and second IR reflecting layers comprises one or more of: NbZr, NbZrN<sub>x</sub>, NiCr, NiCrN<sub>x</sub>, NiCrMo, NiCrMoN<sub>x</sub>, NbCr, NbCrN<sub>x</sub>, Nb and NbN<sub>x</sub>;

wherein the coated article has a glass side visible reflectance of no greater than 15%; and

wherein the coated article: has glass side/exterior reflective bronze coloration comprising a glass side/exterior a\* color value of from -2.0 to +16.0 and a glass side/exterior b\* color value of from 0 to +20; and (i) if measured monolithically has an SF value of no greater than 0.31 and an SHGC value of no greater than 0.36, and/or (ii) if an insulating glass (IG) window unit having two glass substrates has an SF value of no greater than 0.22 and an SHGC value of no greater than 0.25.

34. The coated article of claim 33, wherein each of the first, second and third dielectric layers comprises silicon nitride.

35. The coated article of any of claims 33-34, wherein the coated article has a glass side/exterior b\* value of from +2.0 to +15.0.

36. The coated article of any of claims 33-35, wherein the coated article has a

glass side/exterior  $b^*$  value of from +4.0 to +12.0.

37. The coated article of any of claims 33-36, wherein the coated article has a glass side/exterior  $a^*$  value of from 0 to +10.0.

38. The coated article of any of claims 33-37, wherein at least one of the first and second IR reflecting layers is nitrided.

39. The coated article of any of claims 33-38, wherein the coated article has a visible transmission of from 10-20%.

40. The coated article of any of claims 33-39, wherein the coated article has no metallic infrared (IR) reflecting layer based on Ag and/or Au.

41. The coated article of any of claims 33-40, wherein the coated article comprises an IG window unit, a monolithic window unit, and/or a laminated window unit.

42. The coated article of any of claims 33-41, wherein at least one of the first and second layers IR reflecting layers is/are substantially free of oxygen.

43. The coated article of any of claims 33-42, wherein the coating further comprising an overcoat layer comprising an oxide of zirconium.

44. The coated article of any of claims 33-43, wherein the coating includes only two IR reflecting layers and consists essentially of the first dielectric layer, the first infrared (IR) reflecting layer, the second dielectric layer, the second layer IR reflecting layer, and third dielectric layer, and optionally an overcoat layer comprising an oxide of zirconium.

45. The coated article of any of claims 33-44, wherein one or more of the IR reflecting layers further comprises oxygen.

46. The coated article of any of claims 33-44, wherein one or more of the IR reflecting layers is metallic.

47. The coated article of any of claims 33-46, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

48. The coated article of any of claims 33-47, wherein the coating comprises an overcoat layer comprising an oxide of zirconium, and wherein a layer comprising zirconium silicon oxynitride is located under and contacting the overcoat comprising an oxide of zirconium.

49. The coated article of any of claims 33-48, wherein the IR reflecting layers comprise NbZr.

50. The coated article of any of claims 33-49, wherein the IR reflecting layers comprise a nitride of NbZr.

51. The coated article of any of claims 33-50, wherein the IR reflecting layers comprise NiCrMo.

52. The coated article of any of claims 33-51, wherein the IR reflecting layers comprise a nitride of NiCrMo.

53. The coated article of any of claims 33-48 or 51-54, wherein a metal content of one or more of the IR reflecting layers comprises, by % metal, 54-58 wt. % Ni, 20-22.5 wt. % Cr, and 12.5-14.5 wt. % Mo.

54. The coated article of any of claims 33-53, wherein the IR reflecting layers do not physically contact any other metallic or substantially metallic IR reflecting or blocking layer.

55. The coated article of any of claims 33-54, wherein the second dielectric layer is located directly between and contacting the first and second IR reflecting layers.

56. The coated article of any of claims 33-55, wherein the first dielectric layer is thinner than each of the second and third dielectric layers by at least 100 Å, more preferably by at least 150 Å.

57. The coated article of any of claims 33-56, wherein a thickness ratio of the second dielectric layer/the first dielectric layer is at least 2, more preferably at least 3, and most preferably at least 4.

58. The coated article of any of claims 33-57, wherein, a thickness ratio of the third dielectric layer/the first dielectric layer is at least two.

59. The coated article of any of claims 33-58, wherein the second dielectric layer is thicker than the third dielectric layer by at least 100 Å.

60. The coated article of any of claims 33-59, wherein the coating further comprises: a third IR reflecting layer comprising NbZr; and a fourth dielectric layer comprising nitrogen.

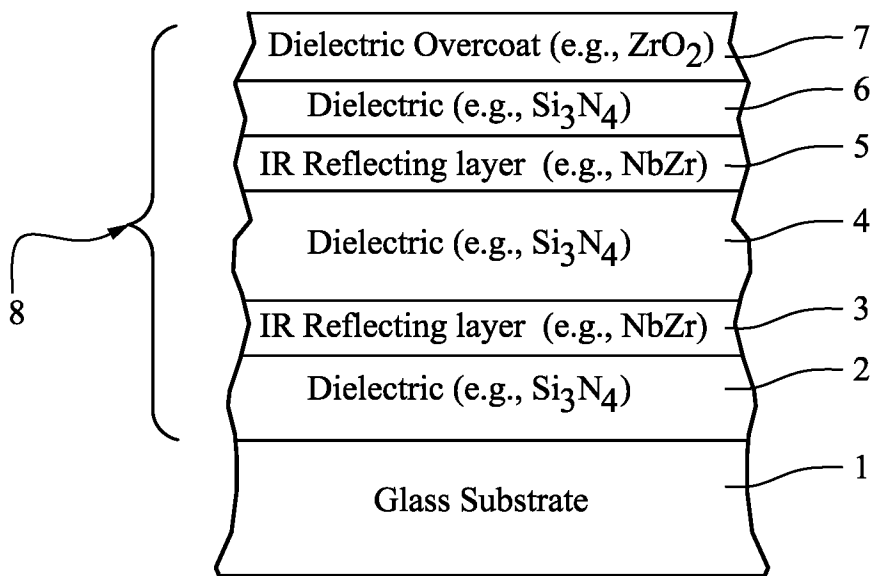


FIG. 1

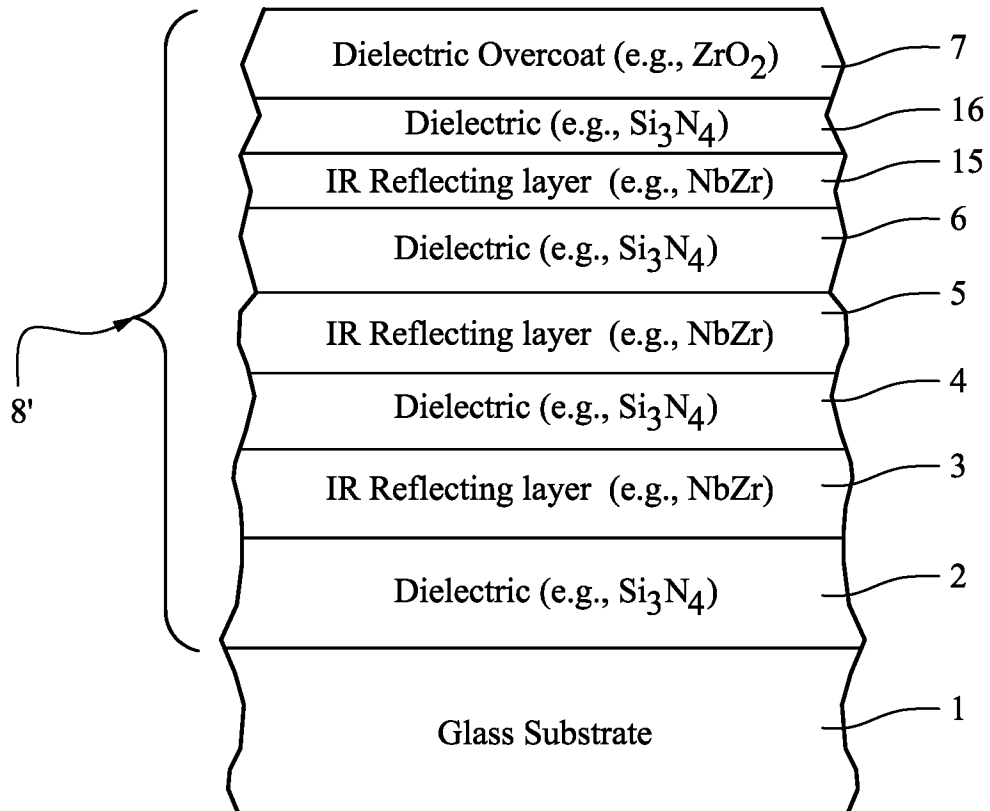


FIG. 2

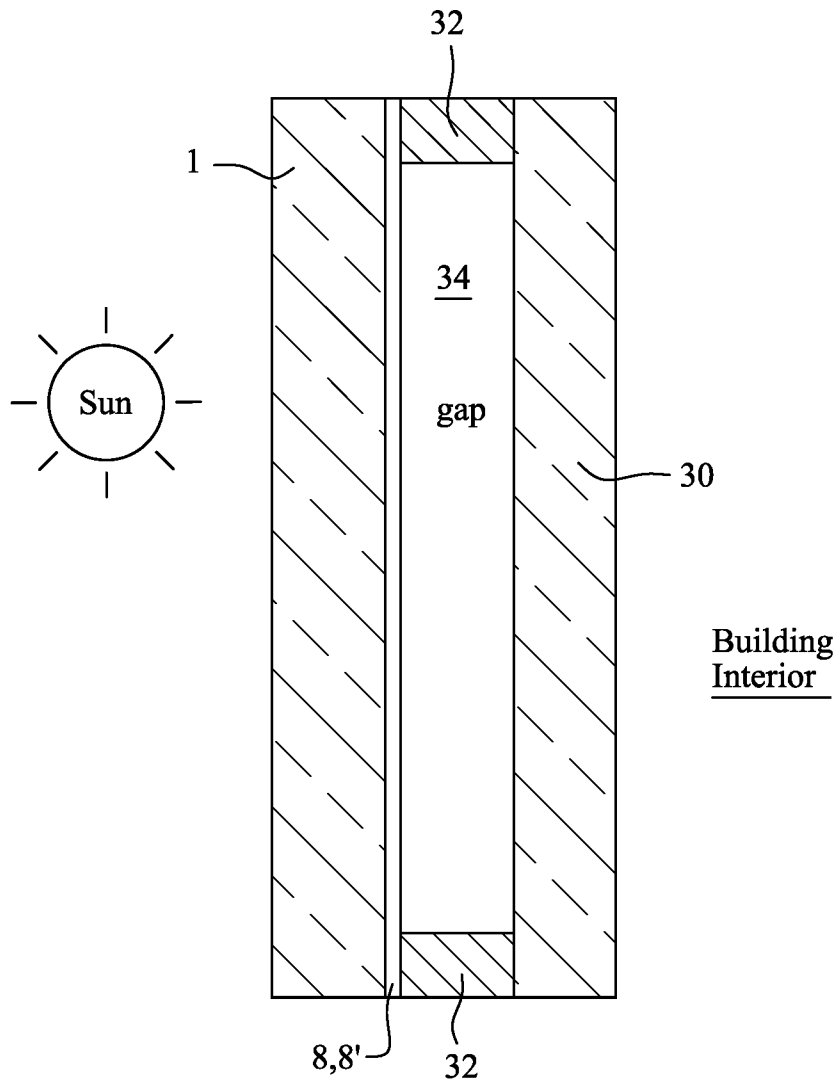


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2016/030110

A. CLASSIFICATION OF SUBJECT MATTER  
INV. C03C17/36  
ADD.  
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
Minimum documentation searched (classification system followed by classification symbols)  
C03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/177899 A1 (UNQUERA JAVIER [ES] ET AL) 12 July 2012 (2012-07-12)	1-15,17, 22-26, 29-42, 44-46, 49,50, 54,55,60
Y	Fig. 1, 2; [0001], [0005]-[0009], [0012]-[0015], [0017]-[0020], [0022], [0024]-[0025]; table 2, 6; examples 2, 5	16,27, 28,33, 43,47, 48,51-53
A		18-21, 56-59
Y	----- US 2005/079369 A1 (STACHOWIAK GRZEGORZ [US]) 14 April 2005 (2005-04-14) Fig. 4; [0008], [0010] ----- -/--	16,43

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search  28 November 2016	Date of mailing of the international search report  06/12/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Deckwerth, Martin

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2016/030110

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2013/216860 A1 (IMRAN MUHAMMAD [US] ET AL) 22 August 2013 (2013-08-22) Fig. 1; [0013], [0016] -----	27,47
Y	US 2006/159933 A1 (DISTELDORF BERND [DE] ET AL) 20 July 2006 (2006-07-20) Fig. 1; [0009], [0010], [0017], [0020] -----	28,48
Y	US 2012/225316 A1 (IMRAN MUHAMMAD [US] ET AL) 6 September 2012 (2012-09-06) Fig. 14, 15; [0002], [0003], [0056], [0090], [0091], [0096] -----	33,51-53
X	US 6 159 607 A (HARTIG KLAUS W [US] ET AL) 12 December 2000 (2000-12-12) Fig. 4A; col. 2, l. 51-57; col. 5, l. 33-50; col. 9, l. 3-57; col. 11, l. 3-7; col. 12, l. 44-col. 13, l. 15: example 11, 12; col. 16, l. 32-col. 17, first table; claims 1, 3, 8, 12 -----	33
A	US 2014/072784 A1 (DIETRICH ANTON [CH] ET AL) 13 March 2014 (2014-03-13) paragraph [0015]; figure 1 -----	1,33
A	US 2011/261442 A1 (KNOLL HARTMUT [DE] ET AL) 27 October 2011 (2011-10-27) paragraph [0122] - paragraph [0126]; tables 17-20 -----	1-60

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/030110

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 2012177899	A1	12-07-2012	AU 2011354610 A1	22-08-2013
			BR 112013017617 A2	18-10-2016
			CN 103429548 A	04-12-2013
			EP 2663536 A1	20-11-2013
			EP 3100987 A1	07-12-2016
			RU 2013137243 A	20-02-2015
			US 2012177899 A1	12-07-2012
			WO 2012096771 A1	19-07-2012
US 2005079369	A1	14-04-2005	AT 525204 T	15-10-2011
			CA 2538048 A1	28-04-2005
			CA 2677591 A1	28-04-2005
			EP 1682346 A2	26-07-2006
			EP 2314451 A1	27-04-2011
			ES 2373956 T3	10-02-2012
			PL 1682346 T3	29-02-2012
			US 2005079369 A1	14-04-2005
			US 2006172138 A1	03-08-2006
			WO 2005037723 A2	28-04-2005
US 2013216860	A1	22-08-2013	US 2013216860 A1	22-08-2013
			US 2015225286 A1	13-08-2015
			WO 2013126224 A1	29-08-2013
US 2006159933	A1	20-07-2006	AT 414048 T	15-11-2008
			CA 2591461 A1	27-07-2006
			EP 1841706 A2	10-10-2007
			ES 2316065 T3	01-04-2009
			US 2006159933 A1	20-07-2006
			WO 2006078491 A2	27-07-2006
US 2012225316	A1	06-09-2012	CA 2827834 A1	07-09-2012
			CN 103502171 A	08-01-2014
			EP 2681166 A1	08-01-2014
			JP 5897611 B2	30-03-2016
			JP 2014506866 A	20-03-2014
			KR 20140025365 A	04-03-2014
			RU 2013144393 A	10-04-2015
			US 2012225316 A1	06-09-2012
			US 2013118674 A1	16-05-2013
			US 2014154524 A1	05-06-2014
			WO 2012118469 A1	07-09-2012
US 6159607	A	12-12-2000	AR 002343 A1	11-03-1998
			AT 211717 T	15-01-2002
			AU 680786 B2	07-08-1997
			AU 4567096 A	19-12-1996
			BR 9602659 A	06-10-1998
			CA 2176520 A1	08-12-1996
			CN 1142469 A	12-02-1997
			CO 4560355 A1	10-02-1998
			DE 69618381 D1	14-02-2002
			DE 69618381 T2	08-08-2002
			EP 0747329 A1	11-12-1996
			ES 2169167 T3	01-07-2002
			LT 4148 B	25-04-1997
			LV 11634 B	20-04-1997
			SG 88721 A1	21-05-2002

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/030110

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		SI 9600187 A	31-12-1996
		TR 9600271 A2	21-12-1996
		TW 403728 B	01-09-2000
		US 6159607 A	12-12-2000
-----			
US 2014072784 A1	13-03-2014	CN 104936924 A	23-09-2015
		EP 2892858 A2	15-07-2015
		JP 2015529187 A	05-10-2015
		KR 20150054863 A	20-05-2015
		RU 2015112577 A	10-11-2016
		TW 201412674 A	01-04-2014
		US 2014072784 A1	13-03-2014
		US 2016002102 A1	07-01-2016
		US 2016221866 A1	04-08-2016
		WO 2014039345 A2	13-03-2014
-----			
US 2011261442 A1	27-10-2011	EP 2560927 A1	27-02-2013
		MX 337053 B	11-02-2016
		RU 2012149670 A	27-05-2014
		US 2011261442 A1	27-10-2011
		US 2013088773 A1	11-04-2013
		WO 2011133202 A1	27-10-2011
-----			