

**(12) STANDARD PATENT**

**(11) Application No. AU 2001265249 B2**

**(19) AUSTRALIAN PATENT OFFICE**

(54) Title  
**Low weight cushioned carpet, carpet tile and method**

(51) International Patent Classification(s)  
**D06N 7/00** (2006.01)

(21) Application No: **2001265249** (22) Date of Filing: **2001.05.31**

(87) WIPO No: **WO01/94689**

(30) Priority Data

(31) Number <b>09864478</b>	(32) Date <b>2001.05.23</b>	(33) Country <b>US</b>
<b>09587654</b>	<b>2000.06.05</b>	<b>US</b>

(43) Publication Date: **2001.12.17**  
(43) Publication Journal Date: **2002.03.07**  
(44) Accepted Journal Date: **2005.12.15**

(71) Applicant(s)  
**Milliken & Company**

(72) Inventor(s)  
**Higgins, Kenneth B.;Miller, Scott C**

(74) Agent / Attorney  
**Phillips Ormonde & Fitzpatrick, Level 21 367 Collins Street, Melbourne, VIC, 3000**

(56) Related Art  
**US 5616200**  
**US 5540968**  
**US 4522857**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 December 2001 (13.12.2001)

PCT

(10) International Publication Number  
**WO 01/94689 A3**

(51) International Patent Classification<sup>7</sup>: **D06N 7/00**

(21) International Application Number: PCT/US01/17609

(22) International Filing Date: 31 May 2001 (31.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/587,654 5 June 2000 (05.06.2000) US  
09/864,478 23 May 2001 (23.05.2001) US

(71) Applicant: MILLIKEN & COMPANY [US/US]; Legal Department (M-495), 920 Milliken Road, Spartanburg, SC 29303 (US).

(72) Inventors: MILLER, Scott, C.; 139 Taylor Len Drive, LaGrange, GA 30240 (US). HIGGINS, Kenneth, B.; 204 E. Yorktown Drive, LaGrange, GA 30240 (US).

(74) Agent: ALEXANDER, Daniel, R.; Milliken & Company, Legal Department (M-495), P.O. Box 1926, Spartanburg, SC 29304 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) Date of publication of the international search report:  
21 March 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



**WO 01/94689 A3**

(54) Title: LOW WEIGHT CUSHIONED CARPET, CARPET TILE AND METHOD

(57) Abstract: An improved low weight cushioned flooring, floor covering, carpet, carpet tile, and method is provided. The low weight, cushioned carpet includes a low weight primary carpet having a base and a plurality of pile-forming yarns projecting outwardly from one side. A layer of reinforcement material is bonded to the base on the side opposite the pile forming yarns. The reinforcement layer is adjacent to and may be embedded in, a cushion layer of a polymer such as a polyurethane. An apparatus and process for forming the low weight cushioned carpet or carpet tile of the present invention are also provided.

## **CARPET TILE**

### **FIELD OF THE INVENTION**

5 The present invention relates to cushioned, carpet tile and more particularly, to a low weight, cushioned, carpet tile. A process and apparatus for forming the cushion backed carpet tile is also provided.

### **BACKGROUND OF THE INVENTION**

10 As described in U. S. Patent Nos. 4,522,857, 5,540,968, 5,545,276, 5,948,500, and 6,203,881 (all hereby incorporated by reference herein) carpet and carpet tiles having cushioned backings are well known to those of skill in the art. As described in the 5,948,500 patent and as shown herein, an example of a tufted carpet product is illustrated in FIG. 1A and an example of a bonded carpet product is illustrated in FIG. 1B.

15 In the tufted carpet of Figure 1A, a primary carpet fabric 12 is embedded in an adhesive layer 16 in which is embedded a layer of glass scrim or non-woven material. A foam base composite 19 is likewise adhesively bonded to the adhesive layer 16. In the tufted carpet illustrated in FIG. 1A, the primary carpet fabric 12 includes a loop pile layer 20 20 tufted through a primary backing 22 by a conventional tufting process and held in place by a pre-coat backing layer of latex 24 or other appropriate adhesives including a hot melt adhesive or the like. The foam base composite 19 of the tufted carpet product includes an intermediate layer 26 molded to a layer of urethane foam 28 as illustrated.

The bonded carpet product (FIG. 1B) employs the same type of foam base composite 19 adhesively bonded by adhesive laminate layers 16. However, the primary bonded carpet fabric 12 has somewhat different components from that of the tufted product in that it has cut pile yarns 34 implanted in a PVC, latex, or hot melt adhesive 36 having a woven or 5 non-woven reinforcement or substrate layer 38 of fiberglass, nylon, polypropylene, or polyester.

The practice utilized in forming the product disclosed in the 4,522,857 patent and other known products involves pre-forming and curing the foam base composite 19 of 10 urethane foam and backing material by practices such as are disclosed in U.S. Pat. Nos. 4,171,395, 4,132,817 and 4,512,831, to Tillotson (all hereby incorporated by reference herein). As described in these patents, only after this foam base composite is formed and cured to some degree as a modular component, is it laminated to the carpet base.

15 As described in the above-mentioned 5,948,500 patent, the cost associated with such modular formation and assembly practices may be reduced by a simplified operation in which a primary carpet fabric, either with or without a stabilizing layer of scrim or the like, is laid directly into a polyurethane-forming composition and thereafter curing the polyurethane. The process can be made even more efficient if the polyurethane-forming 20 composition requires no pre-curing prior to joining the carpet base.

Prior to the invention described in the 5,948,500 patent, the known processes directed to the application of the polyurethane cushioned backings to fabric substrates relied on the extremely close control of temperature in both the polyurethane composition and the 25 adjoined fabric layer to effect stability through pre-cure of the polyurethane prior to lamination of the primary carpet to form a composite structure. Such pre-cure had been largely considered necessary in order to yield a stable foam structure to which the primary carpet backing could be applied. The application of heat to the polyurethane composition prior to joining of the heated fabric backing caused polymer cross linking 30 which had been thought to be necessary to stabilize the foam mixture to a sufficient degree to prevent the collapse of the foam.

The invention described in the 5,948,500 patent also provides a particularly simple composite structure amendable to in-situ formation of a stable cushion carpet composite which is not believed to have been previously utilized. Specifically, it had not been

5 previously recognized that a single process could be used to bring all the layers of the cushioned carpet composite together by laying a primary carpet fabric, either with or without some degree of preheat, directly into a mechanically frothed polyurethane-forming composition prior to curing the polyurethane and without an intermediate layer of material.

10

As indicated, the prior art carpet forming processes typically required the separate formation of a foam base composite having a backing layer and a layer of urethane foam. The backing layer is then used as an intermediate layer to which a primary carpet fabric and reinforcing layer can be adhesively bonded.

15

As described in the 5,948,500 patent, the base of the primary carpet fabric is adhesively bonded to a layer of non-woven glass reinforcement material to form a preliminary composite. A puddle of polyurethane-forming composition is simultaneously deposited across a woven or non-woven backing material. The preliminary composite and the 20 polyurethane-forming composition are thereafter almost immediately brought together with the preliminary composite being laid into, and supported by, the polyurethane-forming puddle. The entire structure is then heated to cure the polyurethane forming composition. The preliminary composite may be slightly heated to about 120 degree F to improve heating efficiency although the process may likewise be carried out without 25 such preheating.

A superior cushion backed carpet tile or modular cushion back carpet tile on the market today, for example, sold under the trademark Comfort Plus® by Milliken & Company of LaGrange, Georgia has a primary carpet fabric with a face weight of about 20 to 40 30 oz/yd<sup>2</sup>, a hot melt layer of about 38 to 54 oz/yd<sup>2</sup>, a cushion of about 0.10 to 0.2 inches thick, a weight of about 28-34 oz/yd<sup>2</sup>, and having a density of about 18 lbs. per cubic

foot, and an overall product height of about 0.4-0.8 inches. This superior cushion back carpet tile provides excellent resilience and under foot comfort, exhibits performance characteristics that rate it for very heavy commercial use, and has achieved a notable

5 status throughout the industry as having excellent look, feel wear, comfort, and cushion characteristics, performance, properties, and the like. Such a superior cushion backed carpet tile is relatively expensive to produce due to the high quality and quantity of materials utilized.

10 Although attempts have been made at reducing the cost of floor coverings or carpet by using lower quality materials, such attempts have not been particularly successful. Low quality products tend to have a less than desirable look, feel, wear, comfort, cushion, and the like. Hence, such products have not been accepted in the industry and have failed commercially.

15 It should be noted that the discussion of the background to the invention herein is included to explain the context of the invention. This is not to be taken as an admission that any of the material referred to was published, known or part of the common general knowledge as at the priority date of any of the claims.

20

### **SUMMARY OF THE PRESENT INVENTION**

25 The present invention aims to provide a novel form of carpet tile that may, in its various embodiments, provide a number of advantages.

30 Viewed from one aspect, the present invention provides a low weight cushion backed carpet tile, including a low face weight primary carpet having a face weight of less than or equal to about 15 ounces per square yard and a light weight cushion backing having a polymer weight of less than about 20 ounces per square yard.

The carpet tile may have a resilient or hot melt layer of less than or equal to about 50 oz/yd<sup>2</sup>.

5 The carpet tile may have a lightweight cushion of about 0.04 to 0.12 inches thick, preferably 0.04-0.09 inches thick.

The carpet tile may have a lightweight cushion with a density of less than or equal to about 20 lbs. per cubic foot.

10

The carpet tile may have a lightweight cushion with a density of about 13-16 lbs. per cubic foot.

15

The present invention may provide a low weight modular carpet tile having resilience and under foot comfort.

Preferably, the carpet tile provides a low weight modular carpet tile exhibiting performance characteristics that rate it for heavy commercial use.

20

The carpet tile may provide a low weight cushioned carpet tile wherein a reinforcement layer is disposed, at least partially, within a polymer mass which is adjacent to a primary carpet with such primary carpet being laid in-situ into a puddle of the polymer which forms the cushion.

25

In making the carpet tile, a primary carpet fabric may be joined to a reinforcement layer and laid in-situ into a polyurethane-forming composition which has not undergone a pre-cure operation.

30

A process for the formation of a low weight cushioned carpet tile is disclosed wherein a reinforcement layer is adhered to the base of a primary carpet fabric, a polyurethane-

forming composition is applied to a non-woven backing layer, and the primary carpet fabric with the adhered reinforcement layer is attached to the polyurethane-forming composition to form the carpet tile.

- 5 The carpet tile may be made by a continuous process for the in-situ formation of a cushioned carpet tile wherein a reinforcement layer is adhered between a primary carpet base and a backing layer through the in-situ application of a polyurethane forming composition without the need for an intermediate adhesion step.
- 10 An apparatus may be provided for carrying out the continuous in-situ formation of a cushioned carpet composite.

The low weight carpet tile may be printed with orientation independent designs or designs having the ability to seam properly without cutting the tiles in register with the 15 design and to allow the carpet to be installed monolithically as well as by conventional quarter turn "Parquet", or by ashler (brick). The preferred installation techniques are monolithic or ashler with or without floor adhesives.

In accordance with an exemplary embodiment of the present invention, a low weight 20 modular carpet composite which may be cut to form low weight modular carpet tiles includes a low weight primary carpet or greige carpet having, for example, a face weight of less than or equal to about 15 oz/yd<sup>2</sup>, a hot melt layer of less than or equal to about 50 oz/yd<sup>2</sup>, and a lightweight cushion of about 0.04-0.12 inches thick. The cushion may have a density of about 13-16 lbs. per cubic foot or less.

25 Such a low weight modular carpet tile has unexpectedly been found to have excellent look, wear cushion, resilience, under foot comfort, and exhibits performance characteristics that rate it for heavy commercial use. Hence, such a low weight carpet tile may be used in place of standard weight cushion backed or hard backed carpet tile,

or broadloom thus reducing cost, reducing material requirements, reducing weight, reducing energy requirements, reducing environmental impact, and the like.

5 In accordance with a particular example of the present invention, a low weight modular carpet composite is cut into modular carpet tiles or carpet squares, for example, 18 inches X 18 inches, 36 inches X 36 inches, 50 cm X 50 cm, 1 meter X 1 meter, 48 inches X 48 inches, or the like.

10 Also, the low weight carpet tile of the present invention may be installed on site or on flooring by all of the conventional installation techniques as well as can be constructed for adhesive-free installation, self-stick, or the like.

15 Also, the low weight carpet tile of the present invention may be printed with orientation independent designs or designs having the ability to seam properly without cutting the tiles in register with the design and to allow the carpet to be installed monolithically as well as by conventional quarter turn "Parquet", or by ashler (brick). The preferred installation techniques are monolithic or ashler with or without floor adhesives.

20 In accordance with the present invention, it has been unexpectedly discovered that a carpet tile having excellent look, feel, wear, resilience, and under foot comfort and exhibiting performance characteristics that rate it for heavy commercial use can be formed by combining a low weight primary carpet with a hot melt or resilient layer and a lightweight cushion.

25 In accordance with the present invention, a low weight modular carpet tile may be provided having an overall height of about 0.20 to 0.5 inches thick depending on the construction of the carpet tile (the number of layers or components) and which can be cut in any conventional shape or size.

The present invention may provide a low weight, cushioned carpet tile including a primary carpet fabric in laminar relation to a reinforcement layer wherein such reinforcement layer is at least partially embedded in a polyurethane foam layer which is disposed adjacent to a non-woven backing layer. The reinforcement layer may be

5 bonded to the base of the primary carpet fabric by the polyurethane foam or by a separate adhesive.

The present invention may provide a low weight, cushioned carpet tile including a primary carpet fabric in laminar relation to a polyurethane foam layer which is disposed

10 adjacent to a non-woven backing layer.

The present invention may provide a low weight, cushioned carpet tile including a primary carpet fabric in laminar relation to a reinforcement layer and a polyurethane foam layer. The reinforcement layer may be bonded to the base of the primary carpet

15 fabric by the polyurethane foam or by a separate adhesive.

The carpet tile may be cut from a low weight carpet composite.

A process for forming a cushioned carpet composite may include the simultaneous

20 continuous steps of adhering a woven or non-woven reinforcement material to the base of a primary carpet fabric; depositing a puddle of a polyurethane-forming composition across a backing layer or support structure and laying the primary carpet fabric and adhered reinforcement material into the puddle of polyurethane-forming composition deposited on the backing layer.

25

A process for forming a cushioned carpet composite may include the steps of adhering a woven or non-woven reinforcement material to the base of a primary carpet fabric and adhering a polyurethane foam and backing layer to the reinforcement material.

A process for forming a cushioned carpet composite may include the simultaneous continuous steps of forming a primary carpet fabric; forming a polyurethane foam layer, and adhering the primary carpet fabric to the polyurethane foam layer.

- 5 A single step process for forming a cushioned carpet composite may include applying a polyurethane-forming composition adjacent a primary carpet fabric and a non-woven backing layer with the polyurethane-forming composition at least partially holding an intermediate layer of reinforcement material.
- 10 A process for forming a cushioned carpet composite may include applying a polyurethane-forming composition adjacent a primary carpet fabric with the polyurethane-forming composition at least partially holding an intermediate layer of reinforcement material.
- 15 A process for forming a cushioned carpet composite may include applying a polyurethane-forming composition adjacent a primary carpet fabric and a non-woven backing layer.

- 20 An apparatus for use in the continuous in-situ formation of a cushioned carpet composite may include a polymer application unit for depositing a polyurethane-forming composition or other suitable polymer in combination with an adhesive application apparatus for adhering a reinforcement layer to the base of a primary carpet fabric. The polymer application unit and the adhesive application unit being simultaneously operable in controlled relation to one another such that the primary carpet with the adhered reinforcement layer may be laid directly into the polymer.
- 25

An apparatus for use in the formation of a cushioned carpet composite may include a polymer application unit for depositing a polyurethane-forming composition or other suitable polymer to the base of a primary carpet fabric.

An apparatus for use in the formation of a cushioned carpet composite may include an adhesive application apparatus for adhering a reinforcement layer to the base of a primary carpet fabric.

5 A cushioned carpet tile may include a primary carpet having a primary base and a plurality of pile-forming yarns projecting outwardly from one side. A layer of reinforcement material may be bonded to the primary base on the side away from the pile-forming yarns. The reinforcement material may be adjacent to, and embedded at least partially in, a cushion layer of polymer such as polyurethane. There may be no  
10 additional adhesive between the cushion layer and the layer of reinforcement material. An optional backing material may be disposed on the underside of the cushion layer. The backing material may include an adhesive backing on the side away from the cushion layer.

15 A cushioned carpet tile may include a primary carpet having a primary base and a plurality of pile-forming yarns projecting outwardly from one side. A layer of reinforcement material may be bonded to the primary base on the side away from the pile-forming yarns. The reinforcement material may be adjacent to a cushion layer of polymer such as polyurethane. An optional backing material may be disposed on the  
20 underside of the cushion layer. The backing material may include an adhesive backing on the side away from the cushion layer.

25 A cushioned carpet tile may include a primary carpet having a primary base and a plurality of pile-forming yarns projecting outwardly from one side. A cushion layer may be bonded to the primary base on the side away from the pile-forming yarns. A reinforcement material may be embedded in the cushion layer of polymer such as polyurethane. The cushion layer may be bonded to the primary carpet by a layer of hot melt. An optional backing material may be disposed on the underside of the cushion layer. The backing material may include an adhesive backing on the side away from the  
30 cushion layer.

A process for making a cushioned carpet tile may involve obtaining a primary carpet fabric comprising a plurality of pile-forming yarns extending outwardly from one side of a primary base. A layer of reinforcement material may be adhered to the primary

5 carpet fabric on the side, from which the pile-forming yarns do not extend, thereby forming a preliminary composite. A puddle of polymer such as a polyurethane-forming composition may be applied to one side of a backing material and preferably doctored to desired thickness to form a cushion layer. The preliminary composite may then be adhered to the cushion layer. Following this mating operation, the carpet may be cut

10 into tiles.

A process for making a cushioned carpet tile may involve obtaining a primary carpet fabric comprising a plurality of pile-forming yarns extending outwardly from one side of a primary base. A puddle of polymer such as a polyurethane-forming composition

15 may be applied to one side of a backing material and preferably doctored to desired thickness. The primary carpet fabric may then be laid into the puddle of polymer without curing. Following this mating operation, the polymer may be heat cured and the carpet cut into tiles.

20 A process for making a cushioned carpet tile may involve obtaining a primary carpet fabric comprising a plurality of pile-forming yarns extending outwardly from one side of a primary base. A layer of reinforcement material may be adhered to the primary carpet fabric on the side, from which the pile-forming yarns do not extend, thereby forming a preliminary composite. A puddle of polymer such as a polyurethane-forming

25 composition may be applied to one side of a backing material and preferably doctored to desired thickness. The preliminary composite may then be laid into the puddle of polymer without curing. Following this mating operation the polymer may be heat cured and the carpet cut into tiles.

An apparatus for use in forming a cushioned carpet tile may include: a reinforcement bonding unit for bonding a layer of reinforcement material to the underside of a primary carpet fabric to form a preliminary carpet composite; a polymer application unit for dispersing a polyurethane-forming composition across the surface of a carrier fabric; a

5 mating unit for laying said preliminary carpet composite into said polyurethane-forming composition; and means for heat curing the polyurethane-forming composition subsequent to said preliminary composite being laid into said polyurethane-forming composition; wherein said reinforcement bonding unit, said polymer application and said mating unit are operable in a continuous, simultaneous manner.

10

An apparatus for use in forming a cushioned carpet tile may include: a reinforcement bonding unit for bonding a layer of reinforcement material to the underside of a primary carpet fabric to form a preliminary carpet composite; a polymer application unit for dispersing a polyurethane-forming composition across the surface of a carrier fabric;

15 means for heat curing the polyurethane-forming composition to form a cushion layer, and a mating unit for joining the carpet composite and cushion layer.

An apparatus for use in forming a cushioned carpet tile may include: a reinforcement bonding unit for bonding a layer of reinforcement material to the underside of a primary

20 carpet fabric and to the top side of a cushion layer to form a carpet composite.

A modular carpet tile may be manufactured by:

tufting broadloom at a weight of 15 oz/yd<sup>2</sup> or less,  
printing a design in broadloom form,  
25 applying a cushion backing system, and  
cutting into square tiles.

The low weight modular carpet tile may be aesthetically pleasing and exhibit performance characteristics that rate it for a heavy commercial application. The

combination of a low weight (<15 oz/yd<sup>2</sup>) tufted carpet, hot melt layer, and cushion backing also provides resilience and under-foot comfort.

The low weight carpet tile may be especially suited for broadloom because of:

5           a.     Tufted construction  
              b.     Applied design  
              c.     Attached cushion backing

The low weight carpet tile may be well adapted for modular applications because of:

10           a.     Post applied design  
              b.     Tufted construction  
              c.     Cushion backing

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

15

Example carpet tiles and apparatus and methods for forming them are now described, together with various carpets and carpet compositions of relevance.

FIG. 1A is a cut-away view of a tufted carpet with a cushioned composite structure.

20

FIG. 1B is a cut-away side view of a bonded carpet incorporating a cushioned composite structure.

25

FIG. 2 is a schematic view illustrating an exemplary embodiment of the apparatus and process of the present invention.

FIG. 2A is a schematic view illustrating a modified embodiment of the apparatus and process of FIG. 2 with the latex backcoat added during the process.

FIG. 3A is a cut-away side view of a tufted carpet incorporating a structure formed by the apparatus and process of the present invention as illustrated in FIG. 2.

5 FIG. 3B is a cut-away side view of a bonded carpet incorporating a structure formed by the apparatus and process of the present invention as illustrated in FIG. 2.

FIG. 4A is a cut-away side view of an alternative embodiment of a tufted carpet having no reinforcement layer.

10 FIG. 4B is a cut-away side view of an alternative embodiment of a bonded carpet having no reinforcement layer.

FIG. 5 is a schematic view illustrating an alternative apparatus and process according to the present invention for forming a cushioned carpet composite without separate

15 adhesive bonding between the primary carpet and the reinforcement layer.

FIG. 5 is a schematic view illustrating an alternative apparatus and process according to the present invention for forming a cushioned carpet composite without separate adhesive bonding between the primary carpet and the reinforcement layer.

5 FIG. 6A is a cut-away side view of an alternative structure for a tufted carpet formed by the apparatus and process illustrated in FIG. 5.

FIG. 6B is a cut-away side view of an alternative structure for a bonded carpet formed by the apparatus and process illustrated in FIG. 5.

10

FIG. 7 is a schematic view illustrating yet another alternative apparatus and process according to the present invention for forming a cushioned carpet composite without separate adhesive bonding between the primary carpet and the reinforcement layer as illustrated in FIGS. 6A and 6B.

15

FIGS. 8A and 8B are respective, simple, and more complex schematic flow diagrams of the production of low weight modular carpet tiles in accordance with selected embodiments of the present invention.

20 Figure 9 is a tabular representation of the materials, dimensions, temperatures, and the like used in the process of Figure 8.

25 Figures 10 – 18 are cut-away side views of respective tufted and bonded low weight carpet, composite, or tiles in accordance with different embodiments or aspects of the present invention.

30 Although Figures 10A and 11 - 18 show a looped pile in the primary carpet and Figure 10B shows a bonded primary carpet, it is to be understood that a bonded or tufted loop and/or cut pile may be used and that the pile may be sculptured, printed, dyed, and or the like as desired.

Figures 19 and 19A are respective schematic illustrations of alternative apparatus and process in accordance with selected embodiments of the present invention.

FIG. 19 is a schematic view representing still another alternative apparatus of the present  
5 invention without felt.

FIG. 19A is a schematic view illustrating still yet another alternative embodiment on the apparatus and process of the present invention without felt (secondary backing) or scrim (reinforcement layer).

10 While the invention will be described and disclosed in connection with certain preferred embodiments and procedures, it is by no means intended to limit the invention to such specific embodiments and procedures. Rather it is intended to cover all such alternative embodiments, procedures, and modifications thereto as may fall within the true spirit and  
15 scope of the invention as defined and limited only by the appended claims.

#### DETAILED DESCRIPTION

In accordance with the present invention, a low weight surface covering, wall covering, flooring, carpet, floor covering, carpet composite, or modular carpet tile and method is  
20 provided which is aesthetically pleasing, exhibits performance characteristics that rate it for heavy commercial use, has resilience and underfoot comfort, and which may be dyed, printed, and installed as can be done with conventional foam backed or cushion backed carpet, composite, or tiles.

25 A schematic view illustrating an exemplary apparatus and process used in forming the low weight, cushioned surface covering, wall covering, flooring, floor covering, carpet or tile of the present invention is illustrated in FIG. 2. The apparatus is designated generally by reference numeral 100. As illustrated, a primary carpet fabric 112 which may incorporate either a tufted or a bonded configuration (with loop and/or cut pile) as  
30 described above is drawn from a mounted carpet roll 114. As indicated previously, the primary carpet fabric 112 preferably includes a plurality of pile-forming yarns projecting

SEARCHED

outwardly from one side of a primary backing or base. If the primary carpet 112 used in the present invention is a tufted carpet, its configuration will preferably conform to that of the primary carpet 12 illustrated in regard to that in FIG. 1A, while if the primary carpet 112 used in the present invention is a bonded product, its configuration will be 5 that of the primary carpet 12 illustrated in FIG. 1B. It is contemplated that the primary carpet 112 may include one or more backing or base layers.

It is to be understood that, as with the prior art products, wherein the primary tufted or bonded carpet fabric 12 may have different embodiments, the component structure of the 10 primary carpet fabric is not critical to the present invention. Rather it is intended that any low weight (low face weight) primary carpet fabric having a pile forming portion and a primary base may be utilized as the primary carpet fabric. By "primary base" is meant any single layer or composite structure including, inter alia, the commonly used layered composite of primary backing 22 and latex pre-coat 24 previously described in relation 15 to the tufted product (FIG. 1A) and the adhesive layer 36 with reinforcement substrate 38 previously described in relation to the bonded product (FIG. 1B). As will be appreciated, the use of polyester in the primary base structure may be desirable due to the eventual heat curing such structure may undergo. Other embodiments as may occur to those of skill in the art may, of course, also be utilized. For example, in the bonded product, the 20 pile forming yarns could be heat tacked to the substrate 38 as described in U. S. Patent No. 5,443,881 (hereby incorporated by reference herein) to permit simplified construction of a primary carpet.

Alternative embodiments including those disclosed in U.S. Pat. No. 4,576,665 to 25 Machell (incorporated by reference) may likewise be utilized. For example, it is contemplated that specialized primary backings such as non-woven structures comprising fiberglass sandwiched between layers of polyester may be utilized in the primary tufted carpet to impart the desired properties relating to stability thereby potentially reducing or even eliminating the need for the secondary backing or the latex 30 pre-coat presently utilized. Moreover, it is contemplated that if a pre-coat is to be utilized, it may be added directly in-line in an operation prior to any adhesive operation.

With regard to one embodiment, in the tufted carpet of the present invention (FIG. 3A), the primary carpet fabric 112 preferably comprises a loop pile layer 120 of pile-forming yarns tufted into a primary backing 122 as is well known and held in place by a pre-coat 5 of adhesive 124 such as latex or a hot melt adhesive. It is contemplated that the latex or hot melt adhesive may be added in-line after removal from the carpet roll prior to the application of any other adhesive as described below. The carpet may be steamed after addition of the pre-coat to facilitate subsequent printing operations if desired to reduce stresses. The two basic primary backing constructions are woven polypropylene and 10 non-woven polyester. Each material may have a variety of construction characteristics engineered for a specific end use. The preferred primary backing material is 20 pick per inch, woven polypropylene, with needle punched nylon fleece.

In accordance with one example of the present invention and with reference to FIG. 2A 15 of the drawings, the primary carpet 112 is a loop pile tufted carpet formed by tufting, for example, a non-heatset yarn through the primary backing, then washing, steaming, drying, and injection or jet dying thereon a, preferably, monolithic or orientation independent design, color, or pattern to form, for example, a 12 foot wide primary carpet precursor of loop pile 120 and primary backing 122. By using a non-heatset yarn, and 20 originally tufting the yarn at a rather long loop length, the washing, steaming, drying, and dying steps shrink the yarn to form smaller, tighter loops and provide a denser surface to the primary carpet precursor. Next, this primary carpet precursor is split in half and rolled to form, two separate six foot wide rolls 115 of split primary carpet precursor 113 (FIG. 2A). Next, one roll 115 of the split primary carpet precursor 113 is used as the 25 initial carpet feed in and the apparatus of Figure 2A. The latex pre-coat or hot melt adhesive coat 124 is added to the back of the primary carpet precursor 113 to form a primary carpet fabric 112 in the upper run of the apparatus of FIG. 2A downstream of the accumulator 150 and upstream of the reinforcement bonding unit 155. For example, a thin layer of latex pre-coat 119 is applied to the back of the primary carpet precursor 113 30 using a coating roller 117.

In accordance with one embodiment of the present invention, the primary carpet precursor (not having a latex pre-coat) is rolled or wound with the primary backing 122 exposed (Figures 19 and 19A).

5 Also, it is contemplated that the apparatus and process of the present invention may include the entire assembly process from tufting the yarn in the primary backing, dying the tufted yarn, latex pre-coating the back of the primary backing, hot-melt coating the fiberglass reinforcing material, foam coating the felt secondary backing, laminating the primary carpet, reinforcing fiberglass, and foam cushioning layer, heating or curing the  
10 laminate, and cutting the carpet composite into carpet tiles, runners, area rugs, or the like. Also, it is contemplated that in accordance with the present invention the process may be broken down into its respective steps and done in a batch rather than a continuous mode, although the continuous mode of operation is preferred. For example, the primary carpet may be formed in one operation and placed on rolls. The cushion backing or foam layer  
15 may be formed in a separate operation and be placed on a roll. The two may be joined by a mating unit using an adhesive, hot melt, hot melt with reinforcing layer, or the like.

In the bonded carpet of the present invention (FIG. 3B), the primary carpet fabric 112 preferably comprises a plurality of cut pile yarns 134 implanted in an adhesive 136 such  
20 as a latex or hot melt adhesive which is laminated to a reinforcement or substrate layer 138 of a woven or non-woven material including fiberglass, nylon, polyester, or polypropylene. It is contemplated that this substrate layer 138 may be pre-coated with latex or other thermoplastic polymers to permit melting adhesion with the cut pile yarns 134 upon the application of heat, thereby potentially reducing or eliminating the need for  
25 the latex or hot melt adhesive 136.

The yarns 120, 134 may be either spun or filament yarns and are preferably formed from a polyamide polymer such as nylon 6 staple, nylon 6 filament, or nylon 6,6 staple, nylon 6,6 filament, available from DuPont Fibers in Wilmington, Del., although other suitable  
30 natural or synthetic yarns may likewise be employed as will be recognized by those of skill in the art. By way of example only and not limitation, other materials, which might

be used, include polyester staple or filament such as polyethylene terephthalate (PET), and polybutylene terephthalate (PBT); polyolefins, such as polyethylene and polypropylene staple or filament; rayon; and polyvinyl polymers such as polyacrylonitrile, wool, nylon/wood blends, Lyocell, rayon, saran, acetate, glass, aramid, 5 fluorocarbon, Sulfar, acrylic, Pelco, olefin, melamine, polybenzimidazole, and combinations thereof. A variety of deniers, plies, twist levels, air entanglement, and heatset characteristics can be used to construct the yarn. The preferred yarn is nylon 6,6, filament, 1360 denier, 1 ply, no twist, no entanglement, and no heatset. Another yarn is nylon 6,6, filament, 1350 denier, no ply, nominal twist (0-1 twist), non-heat set.

10

In the tufted product, the adhesive pre-coat 124 is preferably styrene butadiene rubber (SBR) latex but other suitable materials such as polyvinyl chloride (PVC), ethylene vinyl acetate (EVA), polyurethane, acrylic, and hot melt adhesives as are well known to those of skill in the art may likewise be utilized. In the event that a hot melt adhesive is 15 utilized, it is contemplated that a reinforcement material such as a glass scrim could be directly attached to form a composite laminate without the use of adhesives. Moreover, as previously indicated, it is contemplated that the adhesive pre-coat 124 may be entirely eliminated in the tufted product if the loop pile 120 is tufted in suitably stable relation to the primary backing 122. The commonly used hot melts are bitumen, polyolefin-based 20 thermoplastic, and polyurethane. The preferred hot melt material is polyolefin based thermoplastic.

Referring again to FIG. 2, in the potentially preferred practice the primary carpet fabric 112 is conveyed by means of a plurality of rolls through an accumulator 150 as is well 25 known in the art to a reinforcement bonding unit 155. Simultaneously with the conveyance of the primary carpet fabric 112 to the reinforcement bonding unit 155, a sheet of reinforcement material 158 is likewise conveyed to the reinforcement bonding unit 155. The reinforcement material 158 is preferably fiberglass non-woven material such as a 2.0 oz/yd<sup>2</sup> fiberglass mat or tissue containing a urea formaldehyde binder 30 although alternative materials may include woven glass, woven polyester, and non-woven polyester.

At the reinforcement bonding unit 155, an adhesive 160 (FIGS. 3A, 3B) such as a hot melt adhesive is preferably applied to the reinforcement material 158 by means of a film coater or other such unit as are well known. The reinforcement material 158 and the 5 primary carpet fabric 112 are thereafter preferably passed in mating relation between joining members such as rolls 163, 165, thereby bonding the reinforcement material 158 to the underside of the primary carpet fabric 112. That is, the reinforcement material 158 is bonded on the side of the primary carpet fabric 112 from which the pile forming yarns do not project. The bonding of the reinforcement material 158 to the underside of the 10 primary carpet fabric 112 produces a preliminary composite 166 which is thereafter laid into a puddle of polymer or foam forming composition such as a polyurethane-forming composition as described below.

Although the reinforcement bonding unit 155 is illustrated in its preferred embodiment 15 as incorporating a film coater, it is to be understood that alternative equivalent means such as application rolls, spray headers and the like may also be utilized. By way of example only, and not limitation alternative means for the application of adhesive 160 are disclosed in U.S. Pat. No. 4,576,665 to Machell.

20 In the preferred practice, while the preliminary composite 166 is being formed, a backing material 170 such as a non-woven backing is passed through a spray 172 to a polymer application unit 175 which preferably includes a polymer discharge unit 176 and a doctor blade 177. The backing material 170 is coated with a polymer 178 such as a polyurethane-forming composition as disclosed more fully below.

25 In the preferred embodiment, the backing material 170 is woven or non-woven synthetic fiber material such as 10% to 100% polyester/polypropylene, preferably 50% polyester, 50% polypropylene non-woven fibrous material which is available from Spartan Mills Company in Spartanburg, S.C. While this represents the backing material of preference, 30 it is to be understood that any number of alternative compositions may likewise be utilized as dictated by requirements regarding shrinkage and installation. The commonly

used secondary backing materials include non-woven polyester, non-woven polyester and polypropylene blends, or woven polypropylene. By way of example only, in instances where very little or no shrinkage may be tolerated, the backing material may be up to 100% polyester. Further, while a non-woven backing material may be preferred, it

5 is contemplated that either woven or non-woven constructions may be utilized as can materials other than polyester, polypropylene, and polyester/polypropylene such as nylon, fiberglass and the like. The thickness of the backing material 170 preferably varies in the range of from about 0.01 inches to about 0.19 inches, although a range of between about 0.05 inches and 0.12 inches may be most preferred.

10

As indicated, in the preferred practice, the polymer application unit 175 applies a deposit of a polymer 178 (FIGS. 3A, 3B) to the backing material 170 after which the height of the polymer is doctored to a desired level.

15 In the preferred practice, the polymer applied is a polyurethane-forming composition based on a so-called soft segment pre-polymer of MDI (diphenylmethane diisocyanate) or an MDI derivative. The polyurethane-forming composition also preferably incorporates a silicone surfactant to improve both the frothability and stability of the polyurethane layer or "puddle" which is spread across the surface of the backing material

20 170. The commonly used foam density is 18 lbs. per cubic foot with a thickness of greater than 0.10 inches. The preferred density is 16 lbs. per cubic foot with a thickness of 0.06 inches.

25 The preferred polyurethane-forming composition for use in the present invention is disclosed in U.S. Pat. No. 5,104,693 to Jenkines the teachings of which are incorporated herein by reference. Specifically, the preferred polyurethane-forming composition which is applied across the surface of the carrier backing 170 includes:

30 A. At least one isocyanate-reactive material having an average equivalent weight of about 1000 to about 5000;

B. An effective amount of blowing agent; and

C. A polyisocyanate in an amount to provide an isocyanate index of between about 90 and about 130, wherein at least 30 percent by weight of such polyisocyanate is a soft

5 segment pre-polymer reaction product of a stoichiometric excess of diphenylmethane diisocyanate (MDI) or a derivative thereof and an isocyanate-reactive organic polymer having an equivalent weight of from about 500 to about 5,000 and wherein the prepolymer has an NCO content of about 10 to about 30 percent by weight.

10 The polyurethane-forming composition also preferably contains a silicone surfactant to improve frothability and stability in the form of an Organo-silicone polymer such as are disclosed generally in U.S. Pat. No. 4,022,941 to Prokai et al. the teachings of which are incorporated herein by reference. Specifically, the preferred surfactant is preferably a linear siloxane-polyoxyalkylene (AB) block copolymer and specifically a

15 polyalkyleneoxidemethylsiloxane copolymer. One such silicone surfactant which is particularly useful is available under the trade designation L-5614 from OSI Specialties, Inc. whose business address is believed to be 6525 Corners Parkway, Suite 311, Norcross, Ga. 30092.

20 A sufficient level of the silicone surfactant is used to stabilize the cells of the foaming reaction mixture until curing occurs to allow the preliminary composite 166 to be laid into the uncured polyurethane-forming composition puddle without destabilizing the layer of such polyurethane-forming composition disposed across the surface of the backing material 170. In general, the silicone surfactants are preferably used in amounts

25 ranging from about 0.01 to about 2 parts per hundred parts by weight of component (A) and more preferably from about 0.35 parts to about 1.0 parts by weight of component (A) and most preferably from about 0.4 to 0.75 parts per hundred parts by weight of component (A).

30 As previously indicated, after disposition of the polymer across the backing material 170 the layer or "puddle" of polymer deposited is preferably doctored to a pre-determined

height by means of a doctor blade located at the polymer application unit 175. While a simple mechanical doctor blade is preferred, alternative equivalent means such as an air knife or the like may also be used. Such an air knife is disclosed, for example, in U.S. Pat. No. 4,512,831 to Tillotson (hereby incorporated by reference herein).

5

In one embodiment of the present invention, the primary carpet fabric 112 which is preferably joined to reinforcement material 158 to form the preliminary composite 166 is laid directly into the polyurethane-forming composition immediately after it is doctored to the appropriate level without any need to significantly heat either the preliminary

10 composite 166 or the polyurethane-forming composition. Accordingly, the preliminary composite 166 and the backing material 170 with the applied polyurethane-forming composition may be simultaneously delivered at room temperature to a mating roll 180 immediately following the application and doctoring of the polyurethane-forming composition. As will be appreciated, this avoidance of lag time between formation of the  
15 components of the cushioned carpet composite permits highly efficient processing readily controllable either manually or by computer control means (not shown) as are well known to those of skill in the art. In the preferred process, the preliminary composite 166 may be slightly preheated to improve operating control during lamination and curing but such preheat is not essential to formation of the desired product.

20

25 In the illustrated and preferred embodiment of the carpet, the process described above results in the layer of reinforcement material 158 being laid adjacent to and at least partially embedded in the layer of polyurethane 178. That is, the reinforcement material 158 is preferably in intimate contact with the polyurethane 178 such that the polymer material is bonded to the reinforcement material and will hold the reinforcement in place.

Once the preliminary composite 166 has been laid into the polyurethane-forming composition, the resulting composite may be heated in a heating unit 182 by means of conduction, radiant, or convection heaters as are well known in the art. Contact

30 conduction heaters may be preferred. Such heating may be carried out at a temperature of between about 250°F and about 325°F for between about 2 minutes and 8 minutes.

The resulting cured foam or foam cushion layer (FIGS. 3A, 3B) which is produced thereby has a density of between about 12 pounds per cubic foot and about 20 pounds per cubic foot preferably between about 14 pounds per cubic foot and about 16 pounds per cubic foot, and more preferably about 16 pounds per cubic foot.

5

Following the heat curing operation, the cushioned carpet composite which is formed may be passed over a unidirectional heat source 185 such as a plate heater or roll heater at about 400° F to fuse any outstanding fibers on the backing material 170 into a smooth surface. The carpet composite, which is formed, will thereafter be rolled, cut, sliced, or

10 the like. When making carpet tiles, it is preferred that it be cut into carpet tiles almost immediately (rather than rolled) to avoid any undesired cupping or curl. After the carpet tiles are cut from the composite, they are stacked, packaged and stored or shipped to the customer or store.

15 It will be appreciated that a number of alternative practices may be incorporated into the present invention yielding slightly different products. By way of example only, the reinforcement material 158 may be left completely out of the process thereby making the use of the adhesive application apparatus 155 and adhesive 160 completely unnecessary. In such instances, the primary carpet fabric may be laid directly into the polyurethane-  
20 forming composition thereby yielding a composite structure as illustrated in FIGS. 4A and 4B with the polyurethane 278 immediately adjacent to the primary carpet fabric 212 and as described in U.S. Patent No. 6,203,881 hereby incorporated by reference.

25 In accordance with another embodiment, when the cushion layer is preformed rather than formed in-situ, a hot melt layer may be used to mate the primary carpet to the cushion layer with or without the reinforcement material (Fig. 12). Such a process described in U.S. Patent No. 4,522,857 hereby incorporated by reference.

30 In yet another potential alternative, the backing 170, 270 may have an adhesive quick release backing attached to the face to which the polyurethane-forming composition is not applied. As will be appreciated, such a quick release backing will permit the carpet to

be readily installed and removed without damaging the polyurethane cushion 178, 278.

Moreover, it is contemplated that in some instances the backing 170, 270 might be completely eliminated such that the polyurethane cushion 178, 278 would directly contact the flooring as disclosed in relation to U.S. Pat. No. 4,286,003 which is

5 incorporated herein by reference. Also, an adhesive-free carpet and method is described for example in co-pending U. S. Patent Application Serial No. 09/513,020, filed February 25, 2000, and entitled Adhesive-Free Carpet Tiles and Carpet Tile Installations (hereby incorporated by reference herein). It is preferred that carpet tiles for adhesive-free installations have a cup of about 3/16 inch or less and a curl of 1/16 inch or less.

10

Although it is preferred for the tufted surface covering, tufted low weight modular carpet or low weight modular carpet tile of the present invention to have the following layers: yarn, primary backing, latex pre-coat adhesive, hot melt adhesive, fiberglass, polyurethane foam, and felt (Fig. 10A), it is contemplated that one or more of these

15 layers may be eliminated or substituted for and still provide a low weight carpet or tile having the desired properties or characteristics. For example, the latex pre-coat adhesive layer may be replaced by a bitumen hot melt layer (Fig. 11), the felt layer may be eliminated on a free lay (no floor adhesive) installation product (Fig. 16), the glass layer may be eliminated (Fig. 12), or the like.

20

An alternative process and apparatus for producing a cushioned carpet composite according to the present invention is shown schematically in FIG. 5. As illustrated, a primary carpet fabric 312 having either a tufted or a bonded configuration is drawn from a mounted carpet roll 314, through an accumulator 350, in the same manner described above. Simultaneously with the delivery of the primary carpet fabric 312 to the mating roll 380, a reinforcement material 358 such as a non-woven glass is delivered to a polymer contact roll 360 or similar device such as an extrusion coater. The polymer contact roll 360 preferably is in rolling contact with both the surface of the reinforcement material 358 as well as with an accumulation of a polymer 378 such as the polyurethane-forming composition previously described. The polymer contact roll 360 serves to pick

up a portion of the polymer 378 and to pass the polymer over and through the reinforcement material 358.

Simultaneously with the passage of polymer through the reinforcement material 358, a  
5 backing material 370 such as the non-woven polyester/polypropylene described above is  
preferably passed in adjacent mating relation to the polymer-coated reinforcement  
material 358 between the polymer contact roll 360 and a backing material mating roll  
379. A doctor blade 377 serves to control the depth of the polymer which does not pass  
through the reinforcement material 358 into contact with the backing material 370. Thus,  
10 it is to be appreciated that a polymer sandwich structure is formed preferably comprising  
a layer of backing material 370, a relatively thin layer of polymer 378 such as  
polyurethane which has been passed through a layer of reinforcement material 358, and a  
doctored layer of polyurethane 378 which was not passed through the reinforcement  
material 358. This polymer sandwich structure can thereafter be passed to the mating roll  
15 380 for joinder with the primary carpet fabric 312 by laying the primary carpet fabric  
312 directly into the doctored layer of polyurethane 378 without any pre-curing  
operation. Thereafter, the composite is heated, cured, and rolled or cut.

A potentially preferred configuration for a resulting tufted carpet composite is illustrated  
20 in FIG. 6A. As illustrated, the reinforcement material 358 will be at least partially  
surrounded by, and embedded in, the polyurethane 378. As illustrated, it is contemplated  
that the layer of pre-coat may be eliminated in the tufted structure since the tufts may be  
held in place by the polyurethane 378. A potentially preferred configuration for a  
resulting bonded carpet composite is shown in FIG. 6B.

25

With respect to Figures 5A and 18 of the drawings, the reinforcement material and hot  
melt layers can be eliminated simply by not feeding the reinforcement 358 along with the  
felt 370 and primary carpet 312.

30 A further alternative process and apparatus for joining all layers of the cushioned carpet  
composite is illustrated in FIG. 7. As shown, a layer of reinforcement material 358 is

preferably passed adjacent to a polymer contact roll 360 which is in simultaneous rolling contact with both the reinforcement material 358 and a deposit of polymer 378. The polymer contact roll 360 serves to spread a portion of the polymer 378 through the reinforcement material 358 to create a coating on both sides thereof. The reinforcement 5 material 358 with its coating of polymer 378 is then joined in a laminate structure to the primary carpet fabric 312 and a layer of backing material 370 by passage through the nip between the doctor blade 377 and backing material mating roll 379. Thereafter, the composite is heated, cured, and rolled or cut. This practice will yield a bonded carpet composite structure substantially similar to those which are illustrated in FIGS. 6A and 10 6B.

In accordance with one aspect of the present invention, the designs that are printed on the low weight modular carpet or carpet tile are preferably characterized as orientation independent or as having the ability to seam properly without cutting the tiles in register 15 with the design. The techniques used to create these designs make it possible to install modular carpet monolithically rather than quarter turn or ashler. The commonly used techniques of modular carpet installation such as quarter turn (parquet), monolithic, and ashler (brick) may be used to install low weight carpet or carpet tiles of the present invention. The preferred technique is monolithic or ashler. Also, a floor adhesive may 20 or may not be used depending on whether the carpet or tile is designed for adhesive-free installation or conventional adhesive installation. Also, the carpet tile may be self-stick and contain an adhesive quick release backing attached to the face of the backing 170, 270 opposite the polyurethane foam.

25 With reference to Figures 19 and 19A of the drawings, the felt and hot melt layers can be eliminated by, for example, feeding the primary carpet 314 through an apparatus similar to that shown in Fig. 5 of the drawings, except that the carpet is inverted and the polymer layer or layers are applied directly to the reinforcement material and/or lower surface of the primary carpet.

With respect to Figures 17 and 19A of the drawings, the reinforcement material such as glass is eliminated by not feeding the reinforcement material along with the carpet and polymer.

5 In accordance with one example of the present invention, the low weight modular carpet tile of Example I below was tested using a hexapod test as described below.

Test Method Conducted
ASTM D-5252 Hexapod Drum Tester
ISO/TR 10361 Hexapod Tumbler
Ratings Based on CRI TM-101 Photographic Scales

10

**APPARATUS: WIRA INSTRUMENTATION HEXAPOD  
TUMBLER CARPET TESTER**

**PROCEDURE:**

15 The test specimen was subjected to the reported cycles of "Hexapod" tumbling, removing the specimen every 2,000 cycles for restoration by vacuuming.

An Electrolux upright vacuum cleaner (Discovery II) was used, making four (4) forward and backward passes along the length of the specimen.

20 The samples were assessed using daylight equivalent vertical lighting (1500 lux). Samples were viewed at an angle of 45 degrees from 1 1/2 meter distance, judging from all directions.

25 The samples were also measured for pile height before and after testing to obtain a pile height retention value.

PCT/US 01/17609

IPENUS 04 JAN 2002

## TEST RESULTS

Number of Hexapod Cycles	4000	12000	Key to Ratings
Color Change	3 - 4	3	5 = Negligible or no change
Pile Height Retention	89.4%	74.8%	4 = Slight change
Overall Appearance Change	4	3	3 = Moderate change
		2 = Considerable change	
		1 = Severe change	

The invention may be further understood by reference to the following examples which are not to be construed as unduly limiting the invention which is to be defined and

5 construed in light of the appended claims.

## EXAMPLE I

A tufted carpet was produced by the apparatus and process as illustrated and described in relation to FIG. 2. The carpet produced has the configuration illustrated and described in 10 relation to FIG. 3A. The production parameters were as follows:

Yarn 15 ounces per sq. yd. nylon 6,6 loop pile continuous filament

Primary Backing 4 ounces per sq. yd. non-woven polyester

Pre-coat 16 ounces per sq. yd. SBR Latex filled with 100 parts  $\text{CaCO}_2$ .

15 Hot Melt Adhesive 42 ounces per sq. yd. modified polypropylene

Laminate

Reinforcement 2 ounces per sq. yd. Non-woven glass with acrylic binder

20 Urethane Foam Coverage 20 ounces per sq. yd.

Urethane Foam Density 16 pounds per cubic foot

Backing Material 4 ounces per sq. yd. Non-woven (50% polypropylene, 50%

25 polyester)

## EXAMPLE II

Construction	Tufted, Textured Loop Pile
Face Fiber	100% Milliken Certified WearOn®
Nylon	
5 Soil Protectant	MilliGuard®
Antimicrobial	BioCare®
Dye Method	Millitron® Dye Injection Printing
Gauge	1/10 in. (39.4/10cm.)
Rows	14.4/in. (56.7/10cm.)
10 Tufts	143.9/sq.in. (2230.3/100 sq.cm.)
Standard Backing cushion	PVC-Free UNDERSCORE™
Nominal Total Thickness	0.34 in. (8.6mm)
Total Weight	99.9 oz./sq.yd. (3,387.4 g./sq.m.)
15 Tile Size	36 X 36 in. (914.4 X 914.4mm)
Flammability (Radiant Panel ASTM-E-648)	≥0.45 (Class I)
Smoke Density (NFPA-258-T or ASTM-E-662)	≤450
Methenamine Pill Test  (CPSC FF-1-70 or ASTM D 2859)	Self-Extinguishing
20 Lightfastness (AATCC 16E)	≥4.0 at 80 hrs.
Crocking (AATCC 165)	≥4.0 wet or dry
Static Electricity (AATCC-134) 20% R.H.,70°F	≤3.5 KV
Dimensional Stability – Aachener test  (DIN Standard 54318)	≤0.2%
25 Recommended Traffic	Heavy Commercial
Recommended Maintenance	Millicare®
CRI Indoor Air Quality	Product Type: 12200793

## EXAMPLE III

Construction	Tufted, Textured Loop Pile
Face Fiber	100% Milliken Certified WearOn®
Nylon	
5 Soil Protectant	MilliGuard®
Antimicrobial	BioCare®
Dye Method	Millitron®
Gauge	1/10 in. (39.4/10cm.)
Rows	14.4/in. (56.7/10cm.)
10 Tufts	143.9/sq.in. (2230.3/100 sq.cm.)
Standard Backing	PVC-Free UNDERSCORE™
cushion	
Nominal Total Thickness	0.34 in. (8.6mm.)
Total Weight	99.9 oz./sq.yd. (3,387.4g./sq.m.)
15 Tile size	36 X 36 in. (914.4 X 914.4mm.)
Flammability (Radiant Panel ASTM-E-648)	≥0.45 (Class I)
Smoke Density (NFPA-258-T or ASTM-E-662)	≤450
Methenamine Pill Test	Self-Extinguishing
	(CPSCFF-1-770 or ASTM D 2859)
20 Lightfastness (AATCC 16E)	≥4.0 at 80 hrs.
Crocking (AATCC 165)	≥4.0 wet or dry
Static Electricity (AATCC-134) 20% R.H., 70°F	≤3.5 KV
Dimensional Stability – Aachener Text	≤0.2%
	(DIN Standard 54318)
25 Recommended Traffic	Heavy Commercial
Recommended Maintenance	MilliCare®
CRI Indoor Air Quality	Product Type: 12200793

## EXAMPLE IV

A tufted carpet is produced by the apparatus and process as illustrated and described in relation to FIG. 2. The carpet has the configuration illustrated and described in relation to FIG. 3A. The production parameters are as follows:

5	Yarn	12 ounces per sq. yd. nylon 6,6 loop pile continuous filament, white, 1350 denier, not plied, not twisted, not heat set
10	Primary Backing	4 ounces per sq. yd. non-woven polyester
	Pre-coat	16 ounces per sq. yd. SBR Latex filled with 100 parts $\text{CaCO}_2$ .
15	Hot Melt Adhesive	36 ounces per sq. yd. modified polypropylene
	Laminate	
	Reinforcement	2 ounces per sq. yd. Non-woven glass with acrylic binder
20	Urethane Foam Coverage	15 ounces per sq. yd.
	Urethane Foam Density	16 pounds per cubic foot
25	Backing Material	4 ounces per sq. yd. Non-woven (50% polypropylene, 50% polyester)

## EXAMPLE V

A tufted carpet is produced by the apparatus and process as illustrated and described in relation to FIG. 2. The carpet has the configuration illustrated and described in relation to FIG. 3A. The production parameters are as follows:

30	Yarn	16 ounces per sq. yd. nylon 6,6 loop pile continuous filament
----	------	---

	Primary Backing	2 ounces per sq. yd. non-woven polyester
	Pre-coat	14 ounces per sq. yd. SBR Latex filled with 100 parts
5	CaCO <sub>3</sub> sub.2.	
	Hot Melt Adhesive	38 ounces per sq. yd. modified polypropylene
	Laminate	
10	Reinforcement	3 ounces per sq. yd. Non-woven glass with acrylic binder
	Urethane Foam Coverage	12 ounces per sq. yd.
	Urethane Foam Density	14 pounds per cubic foot
15	Backing Material	2 ounces per sq. yd. Non-woven (50% polypropylene, 50% polyester)

## EXAMPLE VI

20 A tufted carpet is produced by the apparatus and process as illustrated and described in relation to FIG. 5. The carpet has the configuration illustrated and described in relation to FIG. 6A. The production parameters are as follows:

25 Yarn 15 ounces per sq. yd. nylon 6,6 loop pile continuous filament, white, 1350 denier, not plied, not twisted, not heat set

	Primary Backing	4 ounces per sq. yd. non-woven polyester
	Laminate	
30	Reinforcement	2 ounces per sq. yd. Non-woven glass with acrylic binder

Urethane Foam Coverage      36 ounces per sq. yd.

Urethane Foam Density      16 pounds per cubic foot

5    Backing Material      4 ounces per sq. yd. Non-woven (50% polypropylene, 50% polyester)

#### EXAMPLE VII

A tufted carpet is produced by the apparatus and process as illustrated and described in

10    relation to FIG. 19. The carpet has the configuration illustrated and described in relation to FIG. 18. The production parameters are as follows:

Yarn      15 ounces per sq. yd. nylon 6,6 loop pile continuous filament, white, 1350 denier, not plied, not twisted, not heat set

15

Primary Backing      4 ounces per sq. yd. non-woven polyester

Pre-coat      16 ounces per sq. yd. SBR Latex filled with 100 parts CaCO<sub>3</sub> sub.2.

20

Reinforcement Material      2 ounces per sq. yd. Non-woven glass with acrylic binder

Urethane Foam Coverage      20 ounces per sq. yd.

25    Urethane Foam Density      16 pounds per cubic foot

#### Comfort Rating

1.    Gmax – Gmax simulates footfall onto a surface. The measure is reported as multiples of “g” (gravities), or Gmax. The lower the value, the lower the force upon impact, and the more comfortable underfoot the product feels. The higher

30

the value, the higher the force upon impact, and the less comfortable the carpet feels.

#### Gmax Test Results

5      Standard Milliken ComfortPlus® cushion-backed carpet tile – 116  
 Low weight cushion backed carpet tile of the present invention – 129  
 Standard commercial broadloom without underlayment – 185  
 Standard hardback carpet tile, such as Everwher a PVC hardback – 227

#### 10 Resilience Rating

15            Cushion Resilience – Cushion resiliency measures the rebound percent of a metal ball when dropped from a standard height. It shows the shock absorbing character of the cushion, which helps reduce visible wear of the carpet face. The higher the value, the higher the rebound percent, and the more resilient the cushion.

#### Resilience Results

20      Standard Milliken ComfortPlus® cushion backed carpet tile – 30  
 Low weight polyurethane cushion back carpet tile of the present invention – 27  
 Standard commercial broadloom without underlayment – 17  
 Standard hardback carpet tile – 13

#### Appearance Retention

25      Appearance Retention Rating (ARR) – the ARR value is determined by grading the appearance change of carpet subjected to exposure conditions in accordance with either the ASTM D-5252 (Hexapod) or ASTM D-5417 (Vettermann) test method using the number of cycles for short and long-term tests specified.  
 ARR – Light (short-term  $\geq$  3.0, long-term  $\geq$  2.5)  
 ARR – Moderate (short-term  $\geq$  3.5, long-term  $\geq$  3.0)  
 30      ARR – Heavy (short-term  $\geq$  4.0, long-term  $\geq$  3.5)

The low weight modular carpet tile of the present invention had an APR of about 4.0 short term and 3.5 long term.

#### Durability

5 The low weight polyurethane cushion back carpet tile of the present invention is very durable and can withstand 25,000 cycles or more of the caster chair test without failure.

In accordance with at least one embodiment of the present invention, the low face weight primary carpet preferably has a face weight of less than 15 oz/yd<sup>2</sup>, more preferably 12

10 oz/yd<sup>2</sup> or less.

(a) The low weight carpet tile of the present invention is unexpectedly very merchantable and commercially viable due in part to its reduced cost; look, wear, and cushion characteristics; seamability; patterned monolithic design; uniformity of appearance

15 between tiles; constant shade; durability; less crush; short pile; dense surface; and combinations thereof.

One method used to achieve sufficient yarn coverage, suitable for patterning and resilience in commercial use, on the low face weight carpet tile of the present invention

20 is to utilize a singles yarn of sufficient denier, in the range of 1000d and 1400d, in a non-heatset form. By using non-heatset yarn, the shrinkage which normally takes place in heatsetting (typically about 11%), now takes place in the wet processing of dyeing the tufted carpet. After dye application, the carpet enters the continuous dye steamer, where the yarn bulks (shrinks ~11%) in the formed fabric of the carpet, thus dramatically

25 increasing the coverage of the carpet face, lowering the pile height, and making a much denser face fabric. The positive result of this post fabric formation shrinkage is better carpet performance with low density face weight, and improved aesthetic appearance due to the improved coverage.

30 In accordance with one embodiment of the present invention, it is preferred to have a pile height of less than 8/64 inch after dyeing (after heat set).

In accordance with at least one embodiment of the present invention, it is preferred to use an open cell foam such as a polyurethane foam in the foam or cushion backing.

5 The lighter weight and reduced thickness of the tiles allows more tiles to be added in each box or on each pallet. Also, each tile is easier to handle during installation, easier to cut, and easier to bend.

There are at least four options or examples of the foam cushion to obtain low weight,

10 commercially acceptable foam products using polyurethane.

1) Use of standard filled Polyurethane system. One polyurethane foam contains 110 parts of filler and is applied as low a density as 15#/cu. ft. If the thickness is in the range of .04 - .12 and we determine polymer weight only, using the density and filler levels above, the weight range of the polymer would be 4.32 oz/sq yd to 12.96 oz/sq yd.

15 2) A second option which would also work would be to increase the filler levels to 190 and reduce the density to 13#/cu. ft. (Min. which is possible with a filled system). At the same thickness limits the polymer weights would then be 2.72 - 8.24 oz/sq. yd.

20 3) A third option would be to use an unfilled polyurethane (Prime urethane) system. High densities such as above are not possible with prime however, they perform because of the wall structure and the fact that no filler is present. If we consider a prime to be at 6#/cu. ft. applied at the thickness limits above the polymer weight would be 2.88 - 8.64 oz/sq. yd.

25 4) A fourth option is also possible. Textile Rubber has a polyurethane system available called "Kangahide" which has only 15 parts of a filler material and is applied at 6 - 9 lb/cu. ft. density, if a polymer calculation is again made at the described thickness limits it would be 4.3 - 13.02 oz/sq. yd.

30 Although the above examples have to do with Polyurethane, a water based foam system can also be used.

Although it is preferred to print the carpet composite and then cut tiles therefrom, the carpet composite may be cut into tiles and then each cut tile may be printed. For example, the cut tiles or blanks may be jet dyed or dye injection printed. This provides

5 for improved design or pattern registration on the tiles and allows for monolithic installation of complex designs.

In one embodiment, the invention relates to a single 1350d, white carpet yarn that is tufted into a backing. The face weight is usually about 12 ounces/yd<sup>2</sup>. The resulting

10 face fabric is weak, and has many "holes" where the backing is visible through the face. The face is applied to a cushion backing by a hot-melt resilient layer. The carpet is passed through the broadloom Millitron jet dye process, whereby the steam and dry heat involved in the dye fixation process shrink the tuft yarns. The shrinkage results in short, dense tufts that are durable and have good appearance. The roll is then cut into tiles and  
15 shipped.

In accordance with at least one embodiment, the low weight cushion backed carpet of the present invention provides for one or more of the following:

Benefits

20 1. Reduced Cost  
2. Underfoot Comfort  
3. Performance

Reduced Cost

25 1. Less raw materials – lower pile height  
2. Lower processing cost – lower yarn conversion  
a. No heatsetting  
b. No twisting  
c. No plying  
3. Less dye  
a. Lower amount  
b. Print broadloom and cut

40

- c. 10 gauge
- d. Coagulation chemistry – dye concentration at tip
- 4. No edge trimming required
- 5. Backing
  - a. Different backing – polypropylene (woven)
  - b. Nylon cap (for functionality)
- 6. Lower foam cost
  - a. Thinner layer
  - b. Increased speed down range
- 10 7. 36" tiles (larger tiles)
- 8. More yardage can be run before doffing
- 9. Shipping/packaging – from 80 to 110 tiles per pallet (low thickness/light weight)
- 10. Installation
  - a. Can use brick-laying pattern (lots of patterns)
  - b. Easier to cut and lift because it is thinner

#### Performance Benefits

- 1. Long lasting
  - a. Appearance retention
  - b. Foam resilience retention
  - c. Less susceptible to "pulled lines"
- 20 2. Highly patterned
- 3. Vacuums more easily
- 4. Can use an ashler pattern for laying the tiles – fewer visible seams
- 25 5. Performance
  - a. Under-foot comfort
  - b. Resilience/durability improved in high traffic areas
  - c. Crush resistance
  - d. Ergonomics
  - e. Noise reduction
  - f. Hides imperfections under carpet

- g. Roll resistance reduced
- h. Tuft binding

It is, of course, to be appreciated that while several potentially preferred embodiments  
5 have been shown and described, the invention is in no way to be limited thereto, since  
modifications may be made and other embodiments of the principles of this invention  
will occur to those skilled in the art to which this invention pertains. Therefore, it is  
contemplated by the appended claims to cover any such modifications and other  
embodiments as incorporate the features of this invention within the true spirit and scope  
10 thereof.

**CLAIMS:**

1. A low weight cushion backed carpet tile, including a low face weight primary carpet having a face weight of less than or equal to about 15 ounces per square yard and a light weight cushion backing having a polymer weight of less than about 20 ounces per square yard.
2. The carpet tile as recited in claim 1, further including an adhesive layer between said carpet and cushion backing.
3. The carpet tile as recited in claim 2, wherein the adhesive layer is about 36-50 oz/yd<sup>2</sup>.
4. The carpet tile as recited in claim 1, 2 or 3, exhibiting performance characteristics that rate it for a heavy commercial use.
5. The carpet tile as recited in claim 2 or 3, further including a reinforcing material in or between at least one of said primary carpet, adhesive layer, and lightweight cushion.
6. The carpet tile as recited in any one of claims 1 to 5, wherein the lightweight cushion is about 0.04-0.12 inches thick.
7. The carpet tile as recited in any one of claims 1 to 5, wherein said lightweight cushion is about 0.04-0.09 inches thick.
8. The carpet tile as recited in any one of claims 1 to 5, wherein the lightweight cushion has a polymer weight of less than about 15 oz/yd<sup>2</sup>.
- 30 9. The carpet tile as recited in any one of claims 1 to 5, wherein said lightweight cushion has a polymer weight of about 4.32-12.96 oz/yd<sup>2</sup>.

10. The carpet tile as recited in any one of claims 1 to 5, wherein said lightweight cushion is a polyurethane foam having about 110 parts of filler by weight.
11. The carpet tile as recited in any one of claims 1 to 5, wherein the lightweight cushion has a polymer weight of about 2.72-8.24 oz/yd<sup>2</sup>.
- 5 12. The carpet tile as recited in any one of claims 1 to 5, wherein said lightweight cushion is a polyurethane foam with about 190 parts of filler by weight
- 10 13. The carpet tile as recited in any one of claims 1 to 5, wherein the lightweight cushion is an unfilled polyurethane.
14. The carpet tile as recited in any one of claims 1 to 5, wherein said lightweight cushion has a density of about 6 lbs./per cubic foot and a polymer weight of
- 15 15. The carpet tile as recited in any one of claims 1 to 5, wherein the lightweight cushion has a density of about 2.88-8.64 oz/yd<sup>2</sup>.
16. The carpet tile as recited in any one of claims 1 to 5, wherein the lightweight cushion has a density of about 6-9 lb./cu. ft.
- 20 17. The carpet tile as recited in any one of claims 1 to 5, wherein said lightweight cushion is a polyurethane system with about 15 parts of filler material by weight and a polymer weight of about 4.30-13.02 oz/yd<sup>2</sup>.
18. The carpet tile as recited in any one of claims 1 to 5, wherein the lightweight cushion is at least one of a polyurethane foam and a water based foam system.
- 25 19. The carpet tile as recited in any one of claims 1 to 18, wherein the low face weight carpet is at least one of tufted and bonded.

20. The carpet tile as recited in any of claims 1 to 19, wherein the low face weight carpet is made from a yarn with a denier of about 1000-1700.
21. The carpet tile as recited in any one of claims 1 to 20, wherein the low weight cushion has a density of about 14-18 lbs. per cubic foot.  
5
22. The carpet tile as recited in any one of claim 1 to 21, wherein the low face weight carpet is made using a non-heatset single yarn.
- 10 23. The carpet tile as recited in claim 22, wherein the single yarn has a denier of about 1000-1400.
24. The carpet tile as recited in any one of claims 1 to 23, wherein the low face weight carpet has a non-woven backing and a latex coating.  
15
25. The carpet tile as recited in any one of claims 1 to 24, wherein said low face weight carpet has a face weight of less than 20 oz/yd<sup>2</sup> and is jet dyed.
26. The carpet tile as recited in any one of claims 1 to 25, wherein the carpet tile has  
20 a Hexapod rating of at least 3.
27. The carpet tile as recited in any one of claims 1 to 26, wherein the carpet tile has a Gmax test result of less than 130.
- 25 28. The carpet tile as recited in any one of claims 1 to 27, wherein the carpet tile has a resilience rating of greater than 25.
29. The carpet tile as recited in any one of claims 1 to 28, wherein the carpet tile has  
30 an Appearance Retention Rating (ARR) of at least 3.5 long term and at least 4.0 short term.
30. The carpet tile as recited in any one of claims 1 to 29, wherein the carpet tile has a Hexapod test color change test result of only slight or moderate color change.


31. The carpet tile as recited in any one of claims 1 to 30, wherein the carpet tile has a Hexapod test pile height retention result of a pile height retention of at least about 74%.

5 DATED: 18 November 2005


PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:


MILLIKEN & COMPANY



1/18

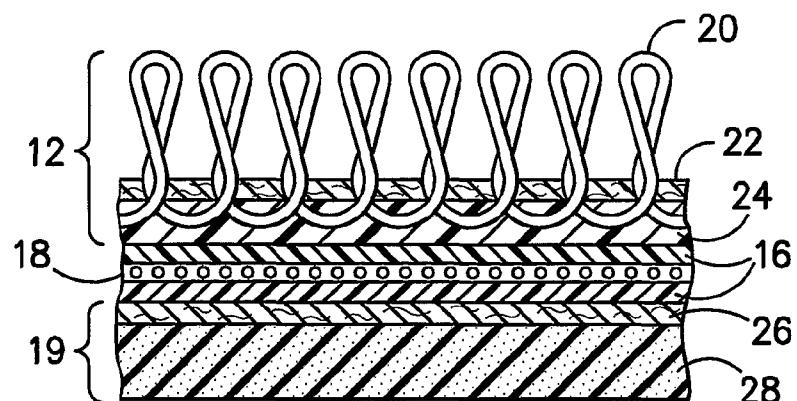


*FIG. -1A-*

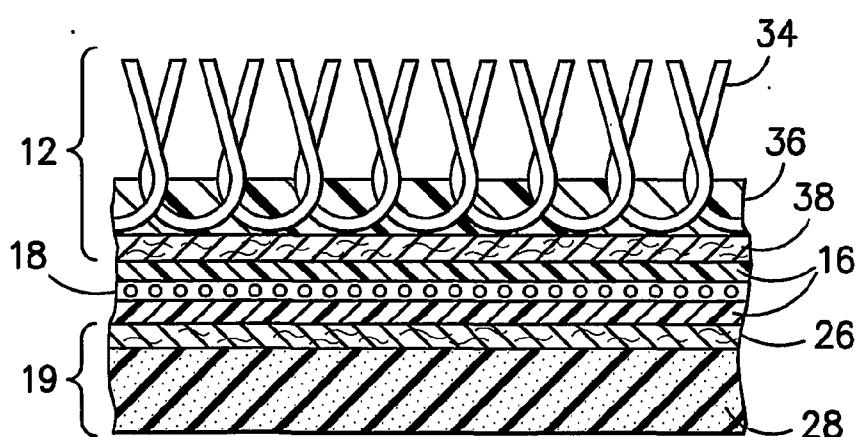

*FIG. -1B-*

Fig. -2-

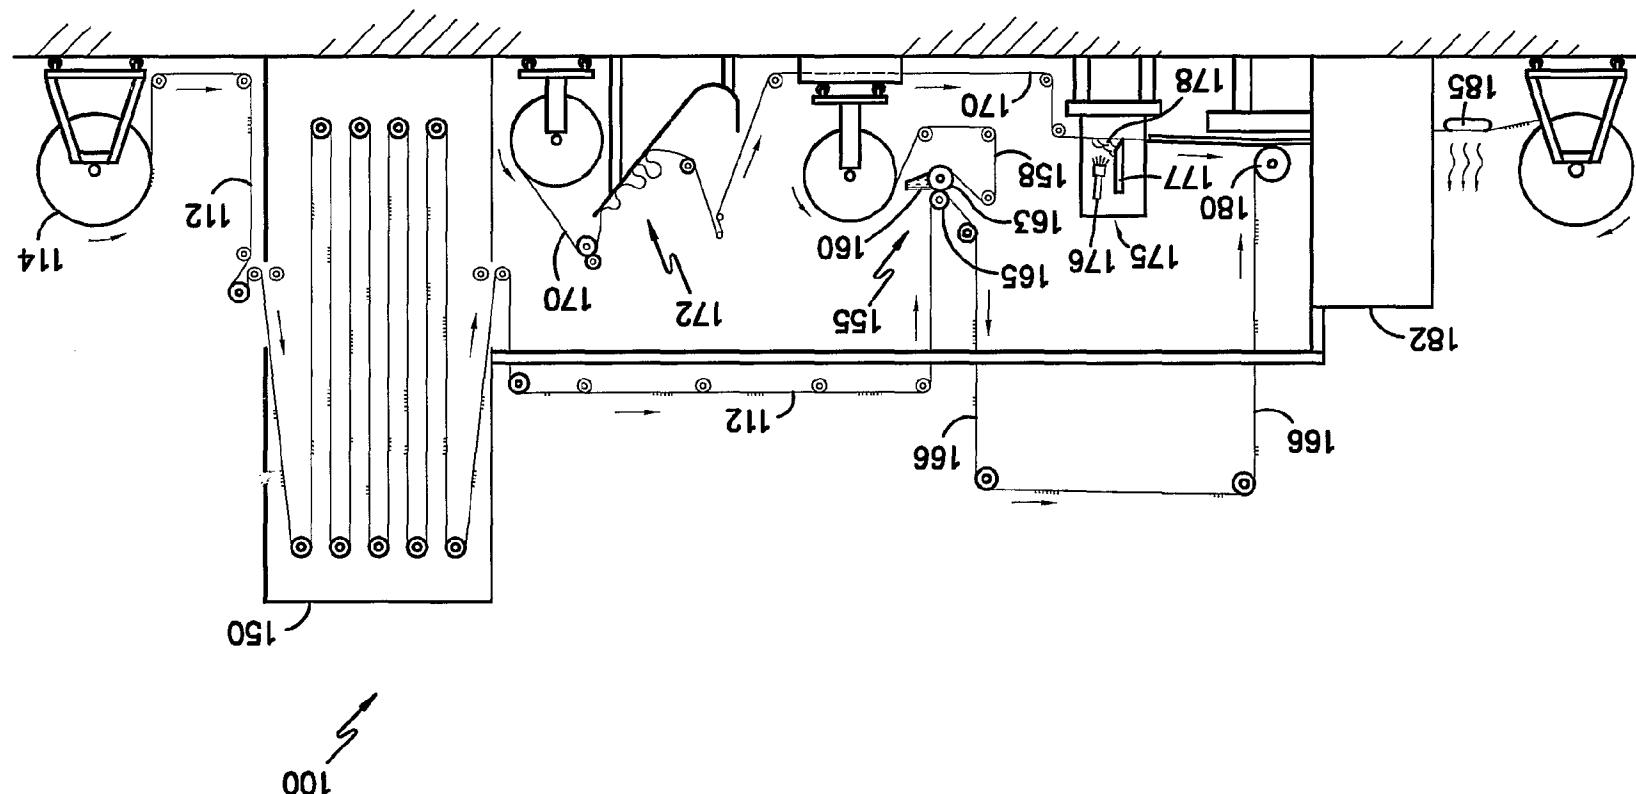

3/18



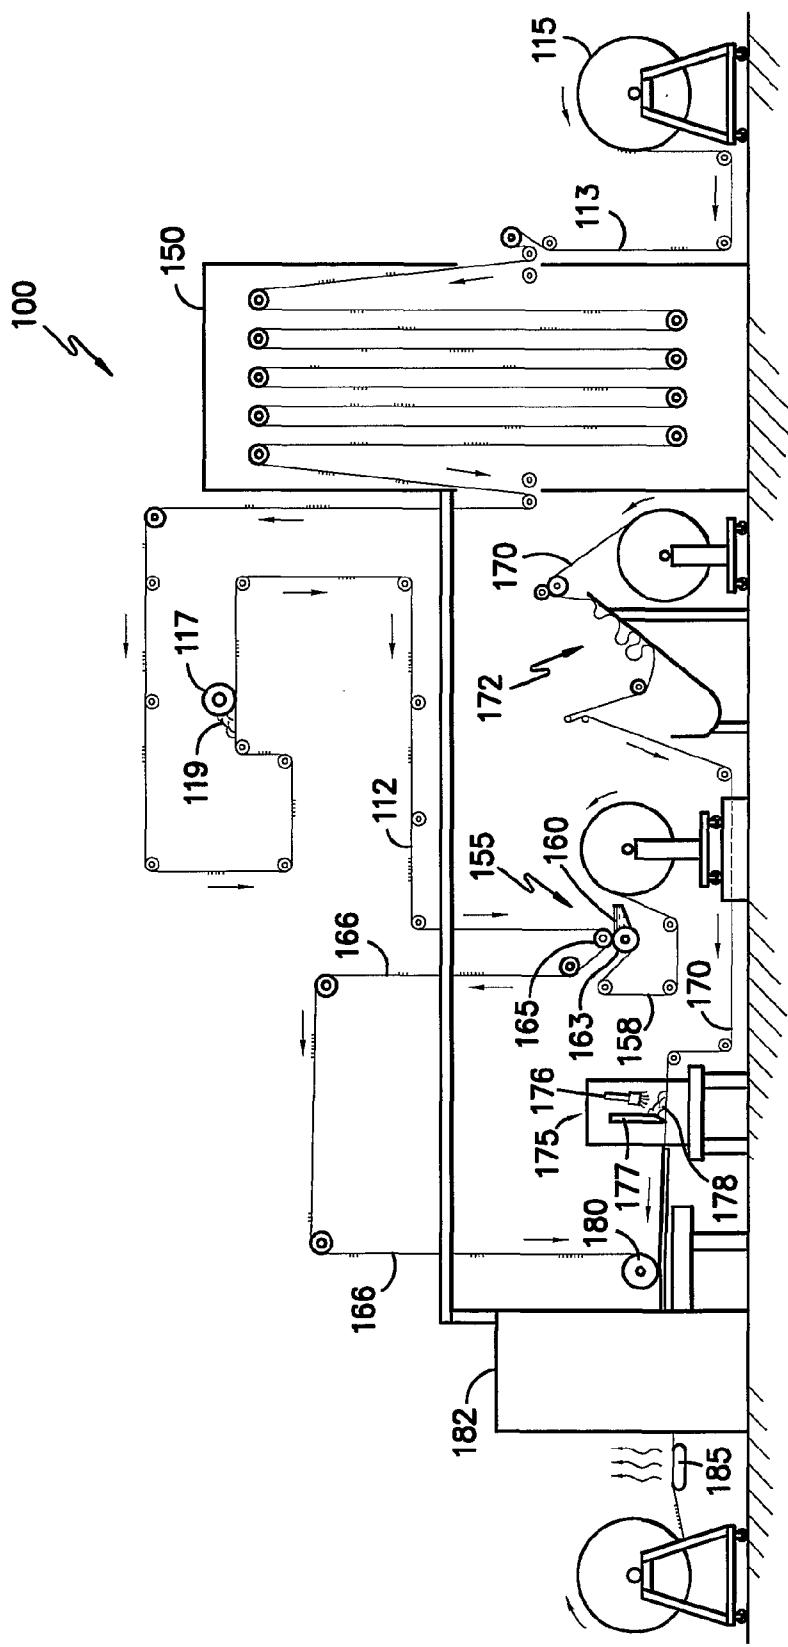


FIG. -24-

4/18

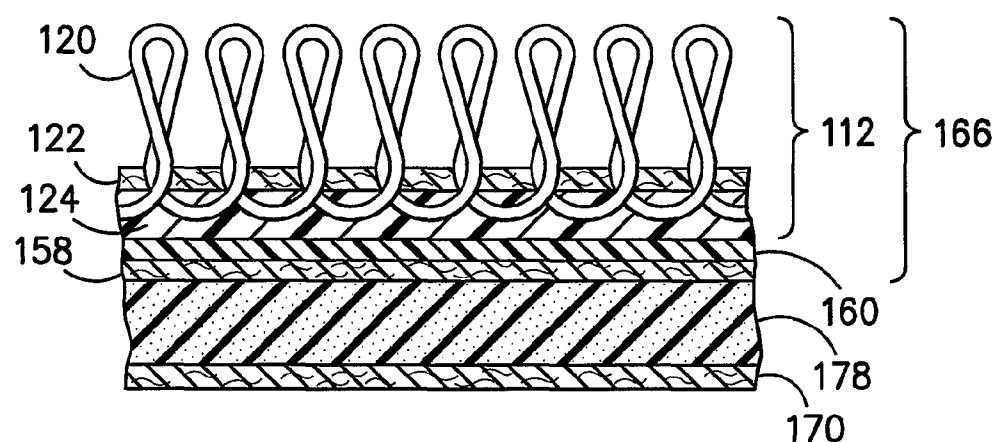


*FIG. -3A-*

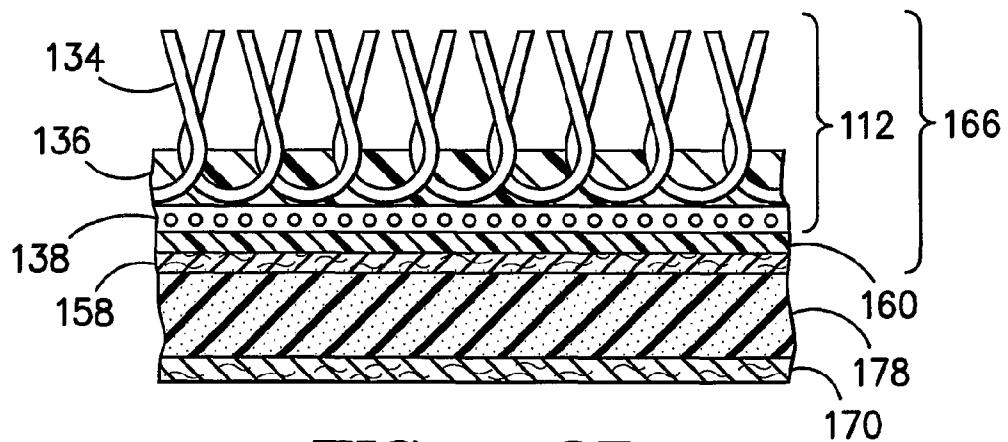


*FIG. -3B-*


5/18

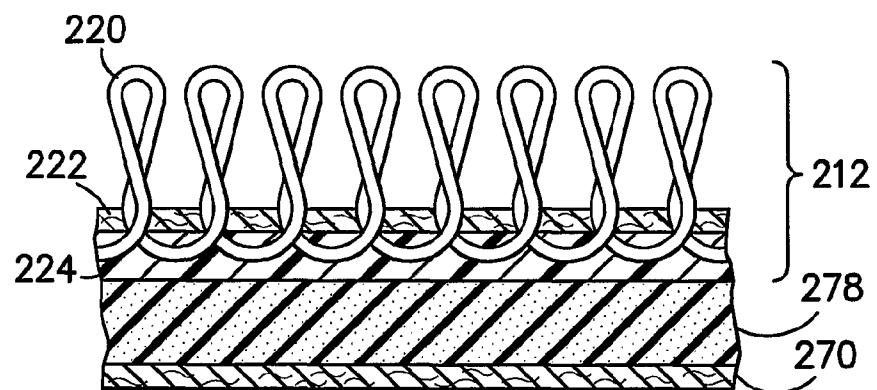

*FIG. -4A-*

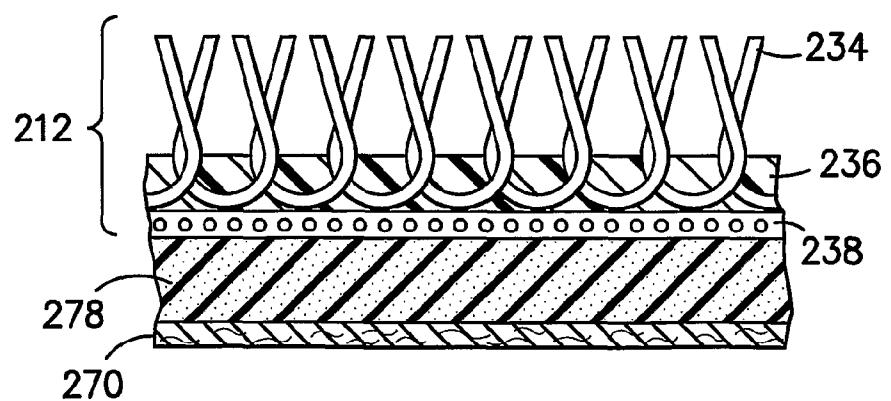


*FIG. -4B-*

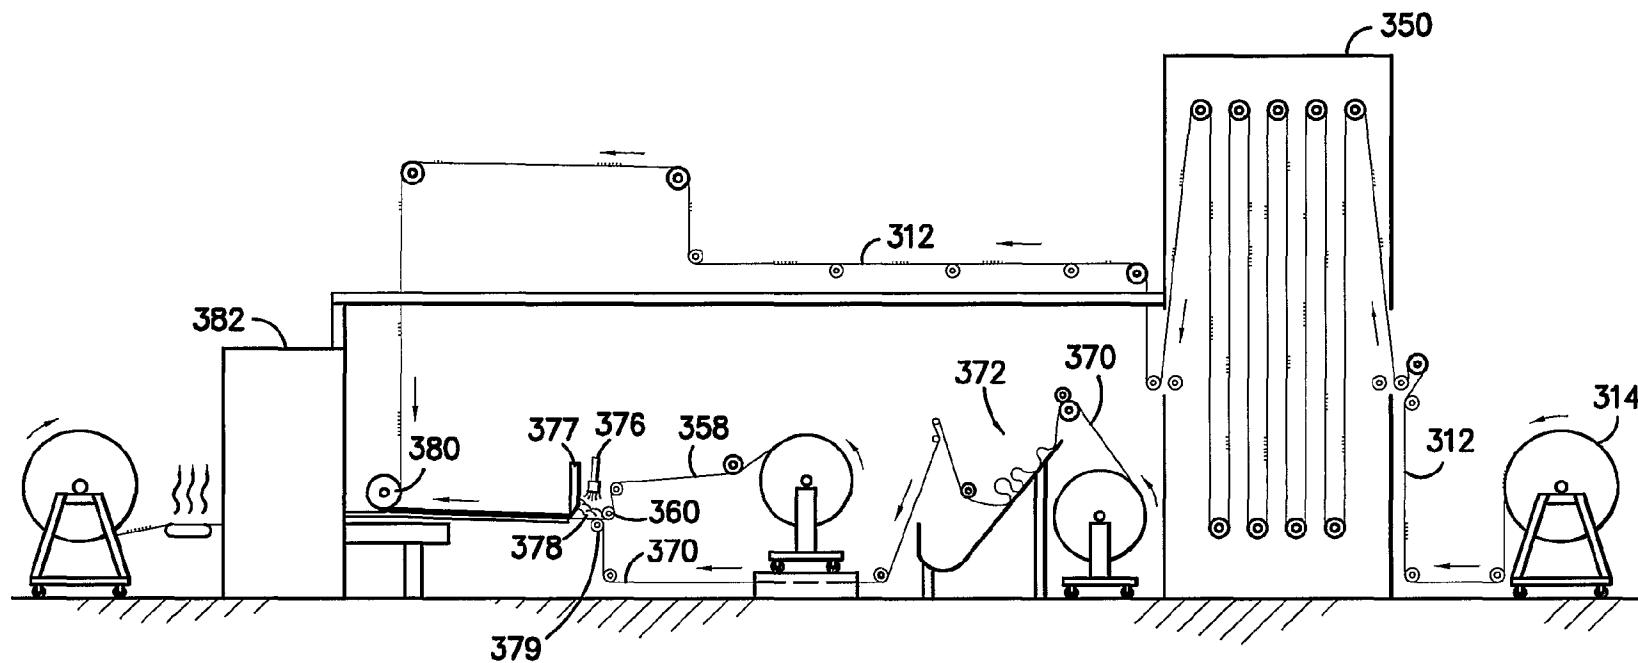


*FIG. -5-*

FIG. -5A-


7/18

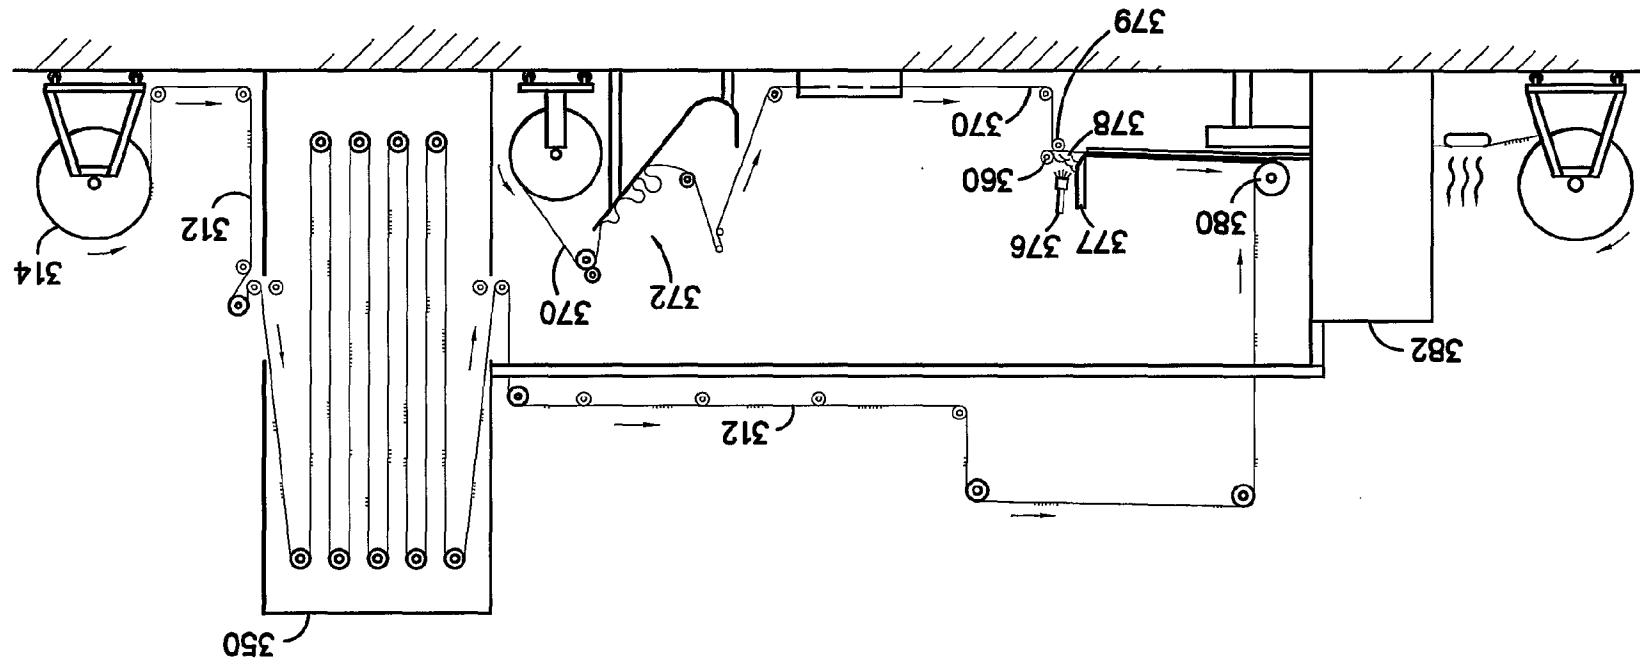

8/18

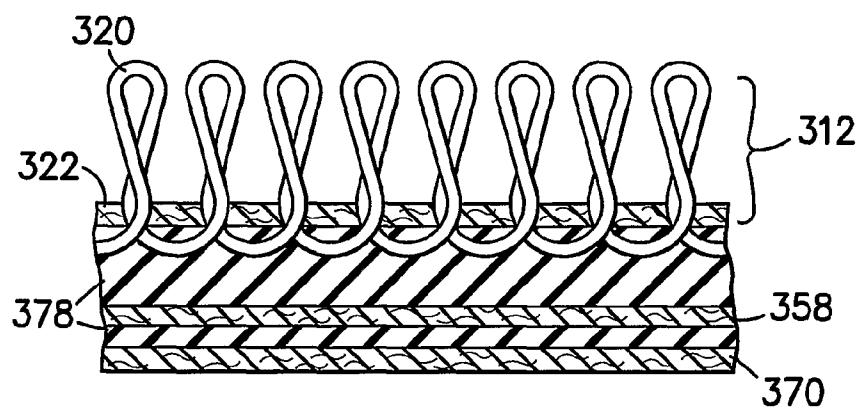


*FIG. -6A-*

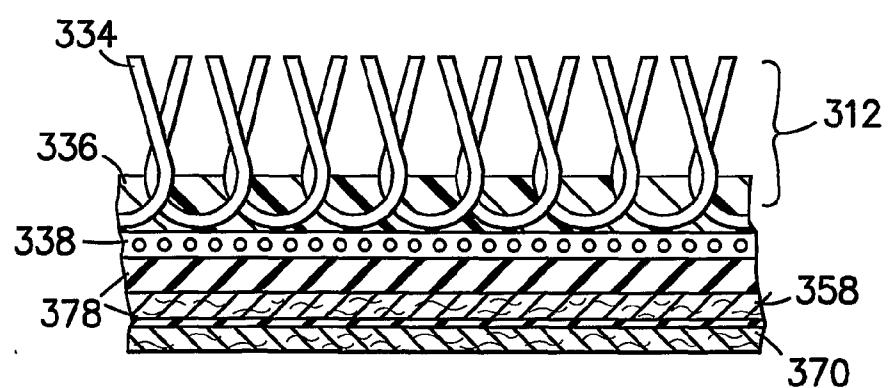


*FIG. -6B-*

9/18

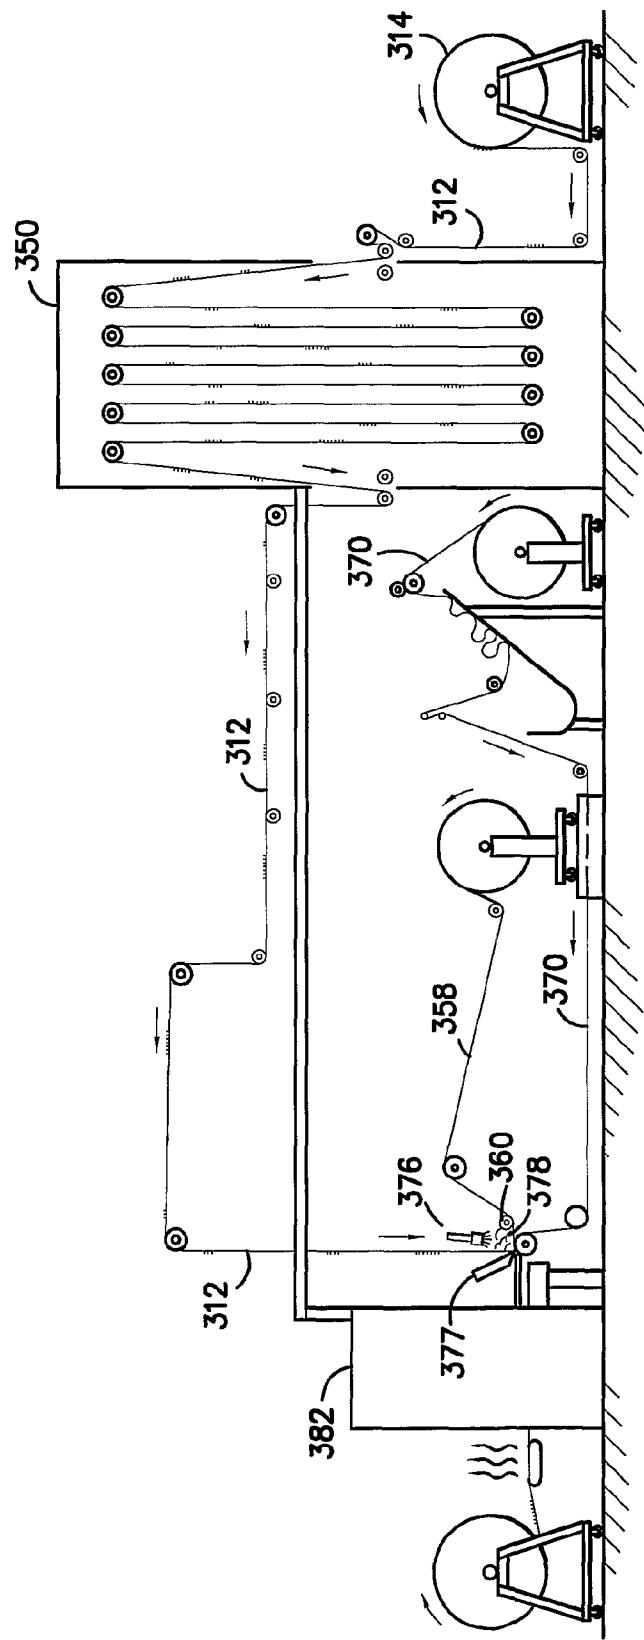



*FIG. -8A-*

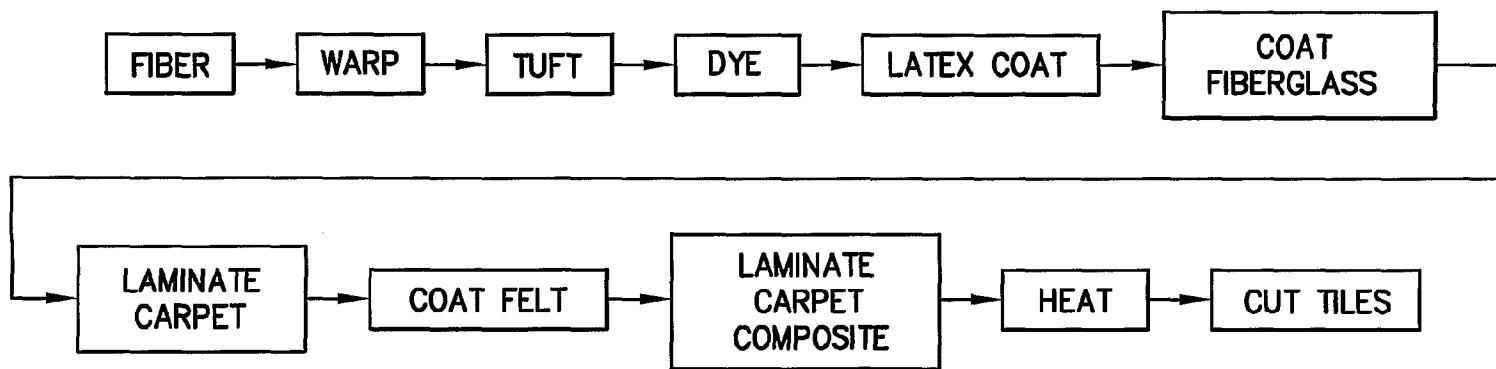


*FIG. -8B-*


FIBER	FIBER	FILAMENT	DENIER	PLY	TWIST	AIR ENTANGLE	HEATSET	
UPPER SETTING	NYLON T-6,6 OR T6	BCF	1700	3	4 x 4	YES	YES	
MOST LIKELY SETTING	NYLON T-6,6 OR T6	BCF	1360	1	NONE	NONE	NONE	
LOWER SETTING	POLYPROPYLENE	STAPLE	1120	1	NONE	NONE	NONE	
WARP	ENDS							
UPPER SETTING	1800							
MOST LIKELY SETTING	1512							
LOWER SETTING	576							
TUFT	TYPE	CREEL	GAUGE	PILE HEIGHT	STITCHES/in	PRIMARY BACKING	TUFTED WEIGHT	
UPPER SETTING	CUT	BEAM	5/64"	16/64"	18	NON-WOVEN	POLYESTER 15 oz/yd <sup>2</sup>	
MOST LIKELY SETTING	LOOP	BEAM	1/10"	10/64 & 13/64	14.39	WOVEN	POLYPROPYLENE 12.34 oz/yd <sup>2</sup>	
LOWER SETTING	LOOP	CREEL	1/8"	8/64"	10	WOVEN	POLYPROPYLENE 8 oz/yd <sup>2</sup>	
DYE	SCOUR	VACUUM	WET OUT	DESIGN	STEAM	WASH	FLUOROCHEM	DRY
UPPER SETTING	H <sub>2</sub> O 180F	12 in Hg	100° wpu	DYE INJECTION	210F	H <sub>2</sub> O	0.16 oz/yd <sup>2</sup>	300F
MOST LIKELY SETTING	H <sub>2</sub> O 155F	10 in Hg	80° wpu	DYE INJECTION	210F	H <sub>2</sub> O	0.08 oz/yd <sup>2</sup>	270F
LOWER SETTING	H <sub>2</sub> O 120F	6 in Hg	50° wpu	TUFTED DESIGN	210F	H <sub>2</sub> O	0.04 oz/yd <sup>2</sup>	210F
COAT	LATEX TYPE	LATEX ADD ON	LATEX OVEN	HOTMELT ADHESIVE	FIBERGLASS	POLYURETHANE ADD ON	POLYURETHANE THICKNESS	POLYURETHANE DENSITY
UPPER SETTING	SBR	20 oz/yd <sup>2</sup>	320F	50 oz/yd <sup>2</sup>	4 oz/yd <sup>2</sup>	30 oz/yd <sup>2</sup>	0.12 INCHES	18 lb/ft <sup>2</sup>
MOST LIKELY SETTING	SBR	16 oz/yd <sup>2</sup>	300F	42 oz/yd <sup>2</sup>	2 oz/yd <sup>2</sup>	20 oz/yd <sup>2</sup>	0.06 INCHES	16 lb/ft <sup>2</sup>
LOWER SETTING	EVA	12 oz/yd <sup>2</sup>	280F	36 oz/yd <sup>2</sup>	1.5 oz/yd <sup>2</sup>	10 oz/yd <sup>2</sup>	0.04 INCHES	14 lb/ft <sup>2</sup>
COAT	FELT CONSTRUCTION	FELT FIBER	CURE 360F	TILE SIZE				
UPPER SETTING	NON-WOVEN	POLYSETER	330F	1 METER				
MOST LIKELY SETTING	NON-WOVEN	PE & PP	300F	36 INCH				
LOWER SETTING	WOVEN	POLYPROPYLENE		18 INCH				

*FIG. -9-*

12/18

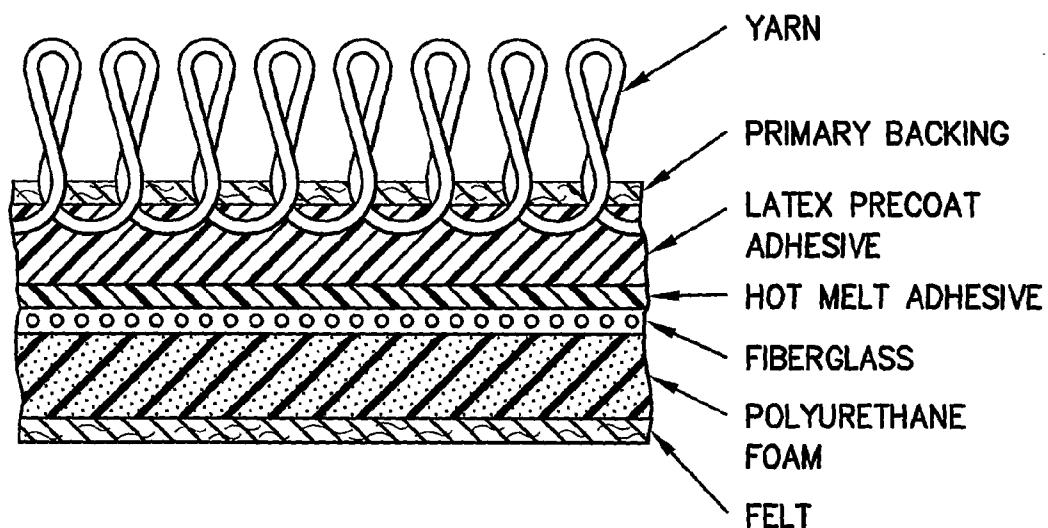


*FIG. -10A-*

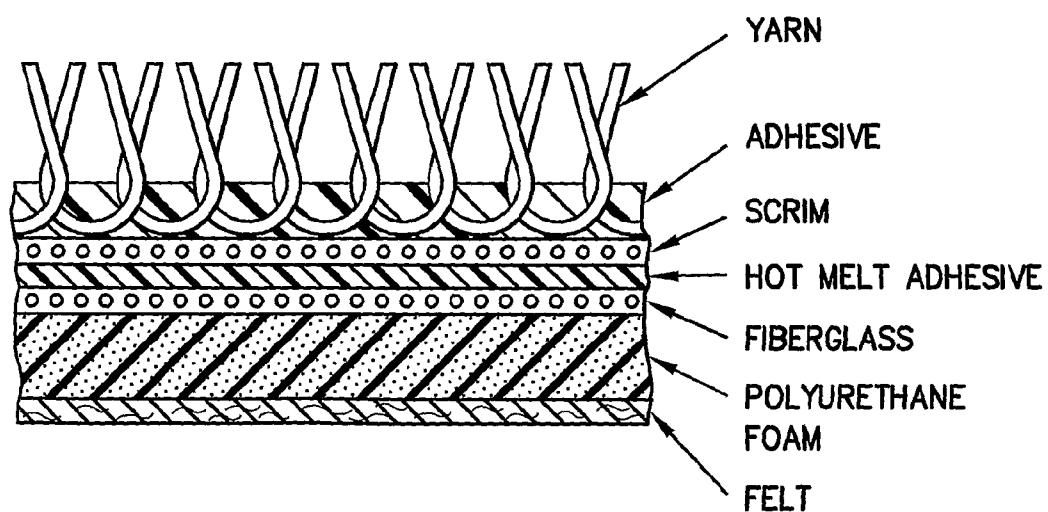


*FIG. -10B-*

13/18

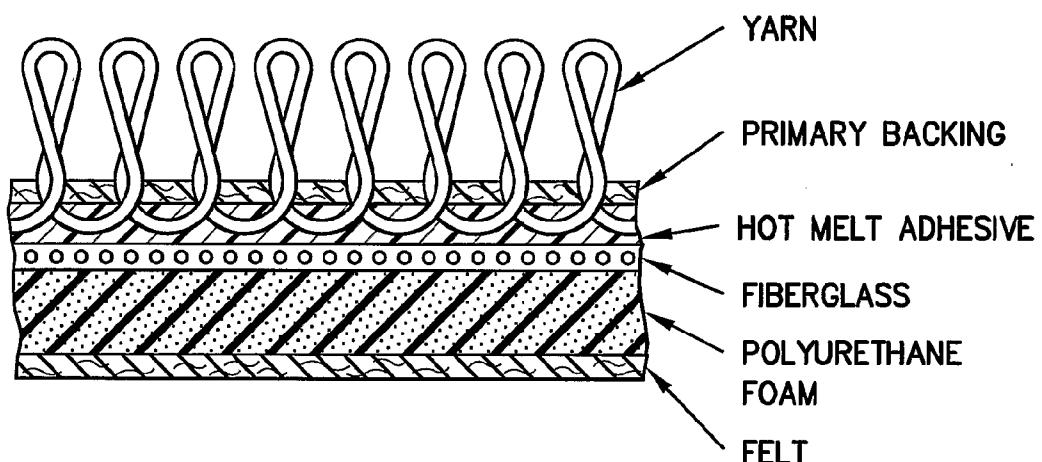


*FIG. -11-*

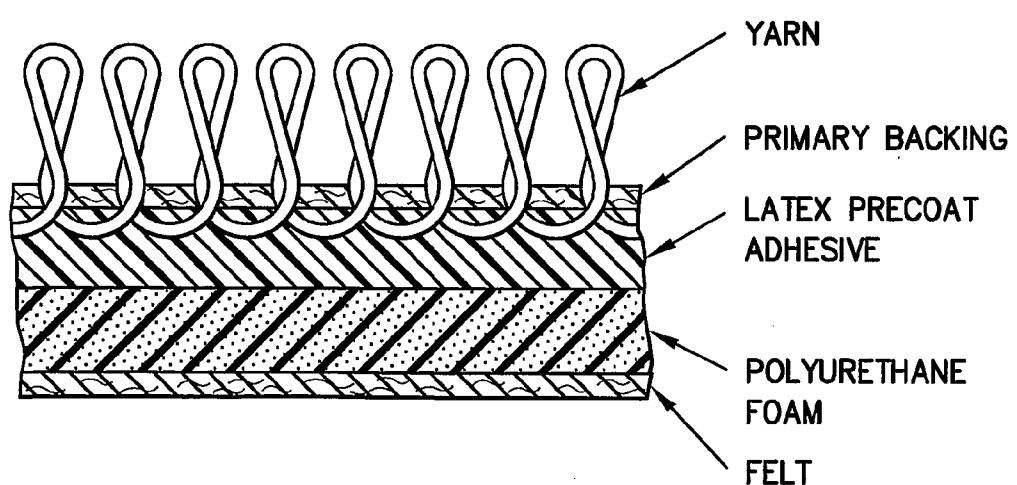


*FIG. -12-*

14/18

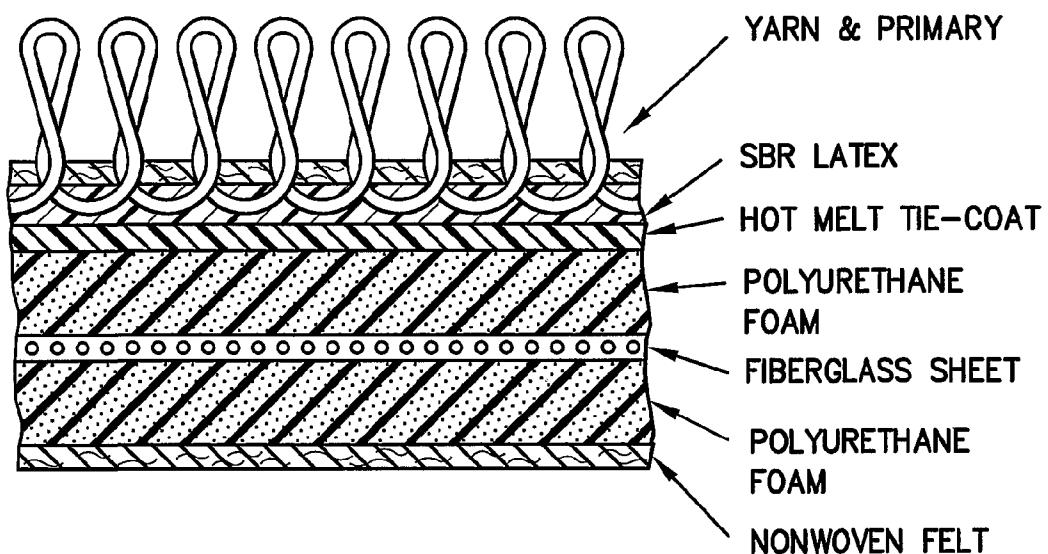


*FIG. -13-*

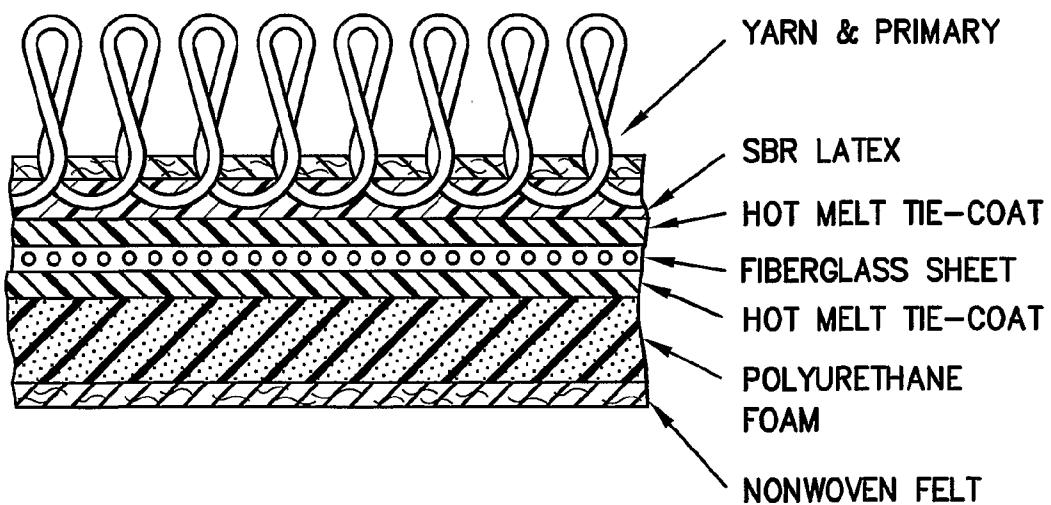


*FIG. -14-*

15/18

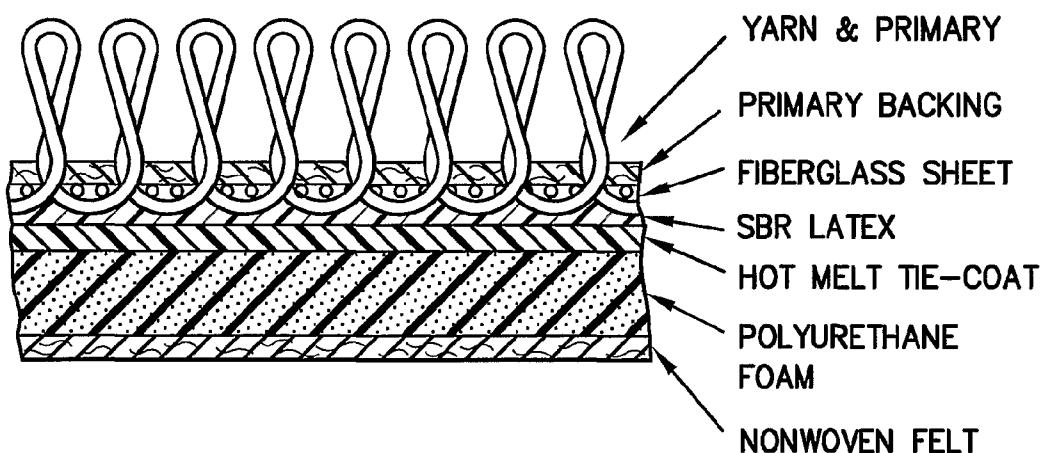


*FIG. -15-*

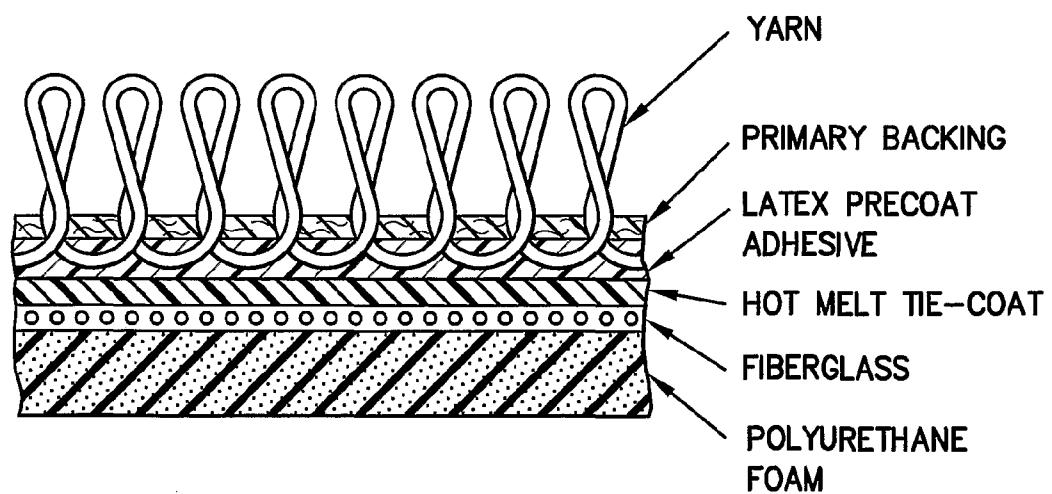


*FIG. -16-*


16/18

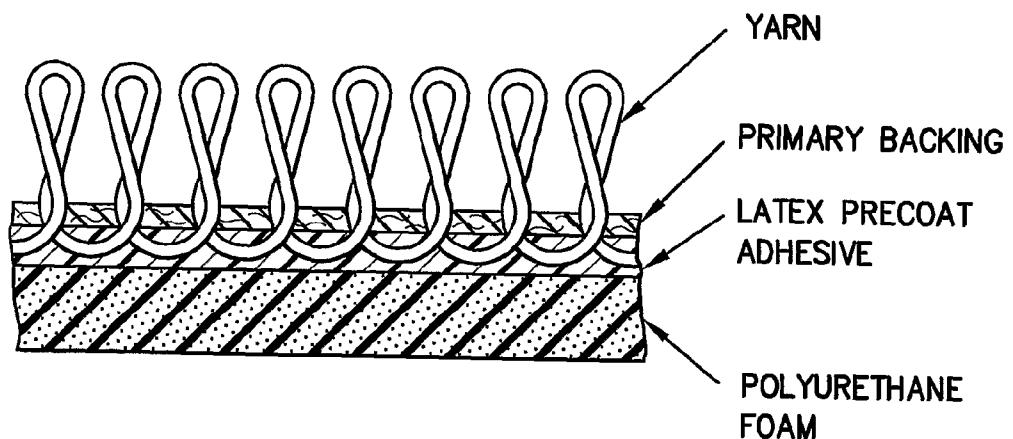

*FIG. -17-*

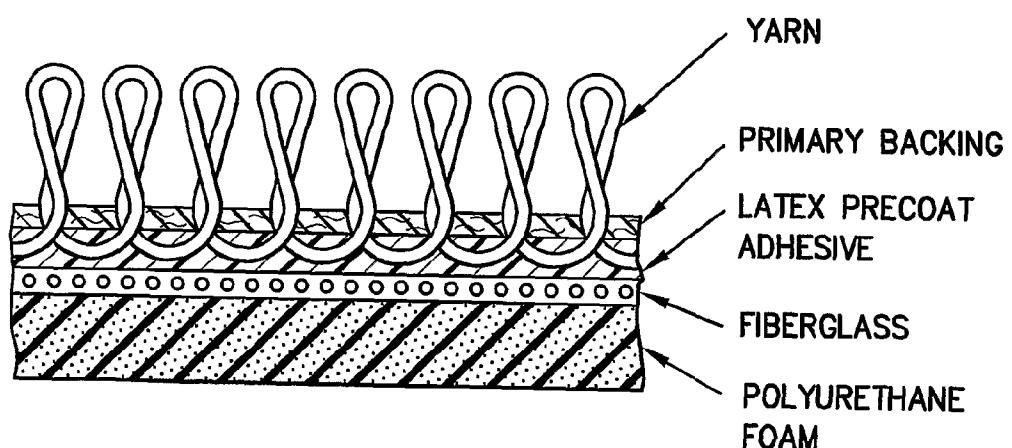

*FIG. -18-*

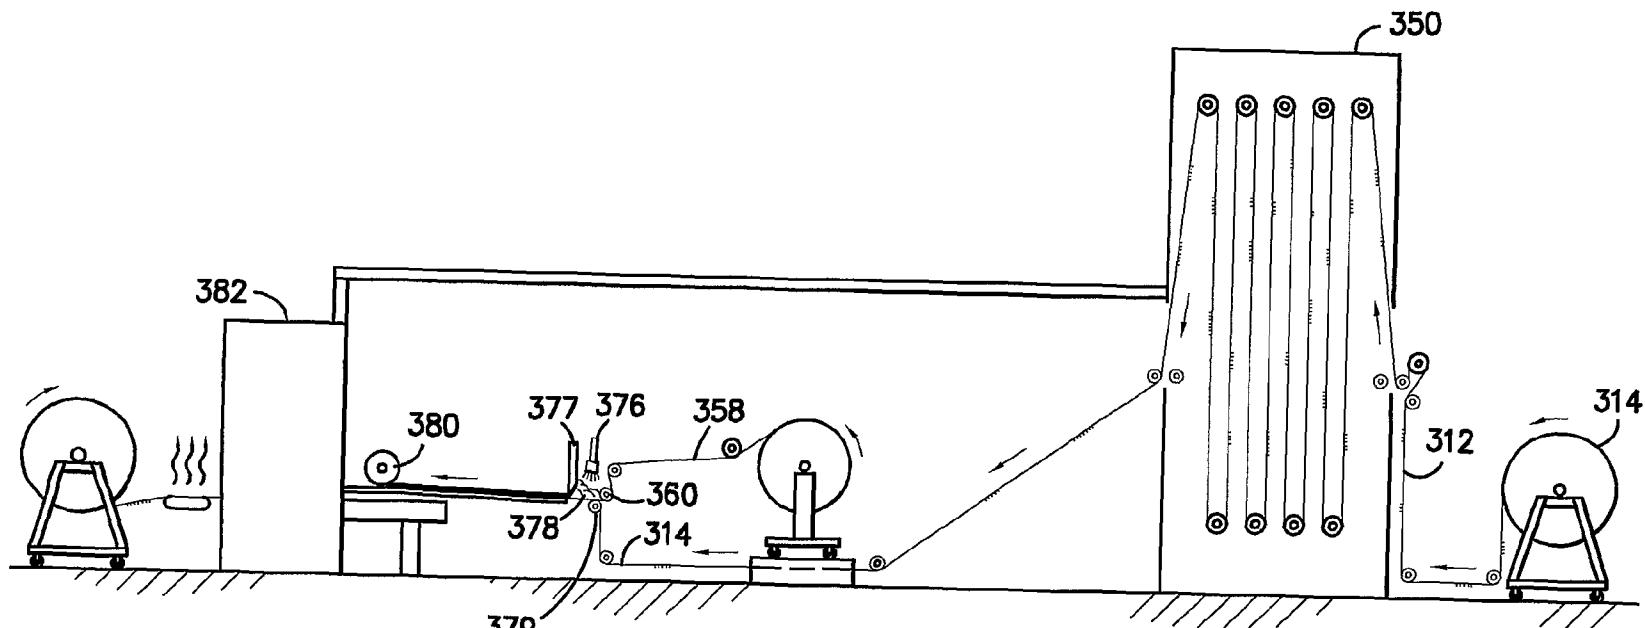

*FIG. -19-*

18/18

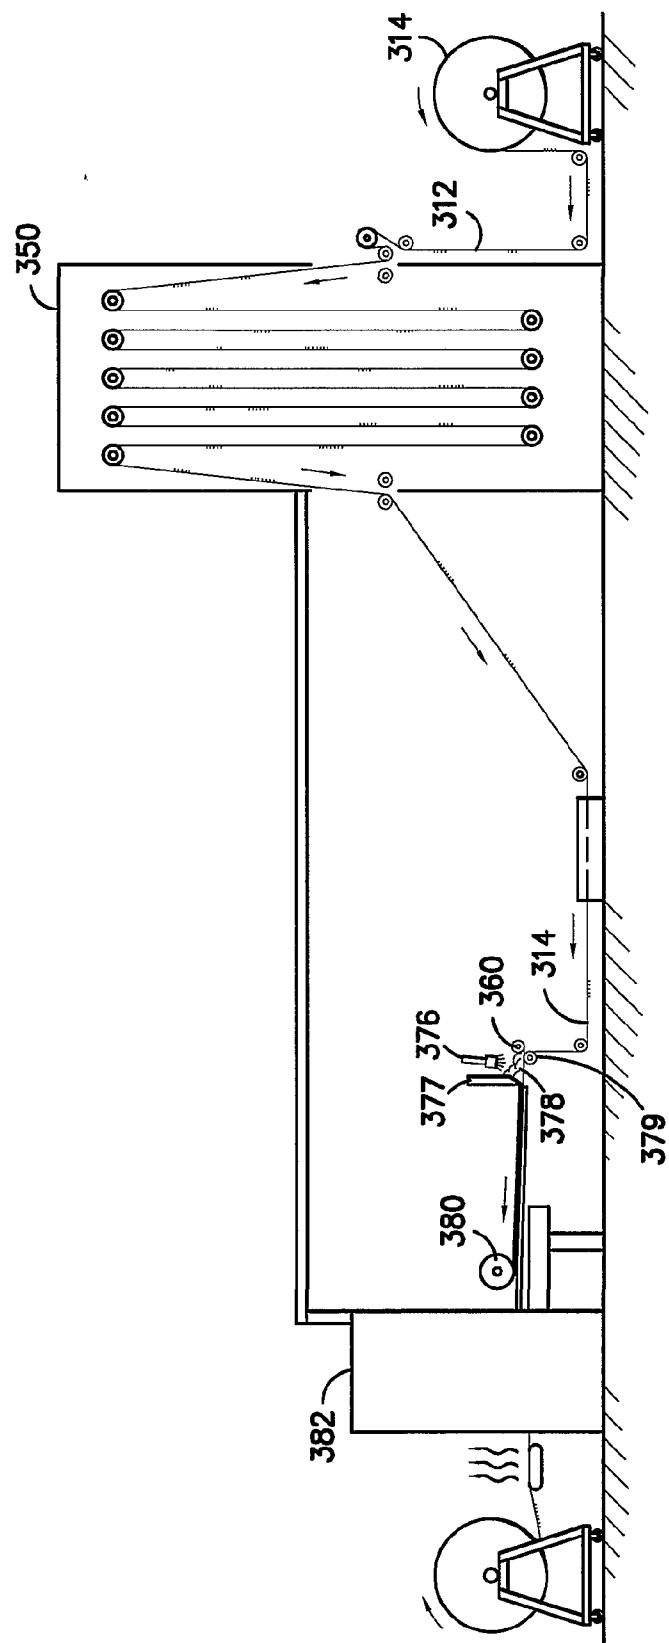


FIG. -19A-