



US 20070034959A1

(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2007/0034959 A1**

Esmark et al.

(43) **Pub. Date:**

Feb. 15, 2007

(54) **INTEGRATED CIRCUIT ARRANGEMENTS WITH ESD-RESISTANT CAPACITOR AND CORRESPONDING METHOD OF PRODUCTION**

Related U.S. Application Data

(63) Continuation of application No. PCT/EP05/50398, filed on Jan. 31, 2005.

Foreign Application Priority Data

Feb. 10, 2004 (DE)..... DE102004006484.9

(76) Inventors: **Kai Esmark**, Neuried (DE); **Harald Gossner**, Riemerling (DE); **Christian Russ**, Diedorf (DE); **Jens Schneider**, Munchen (DE)

Publication Classification

(51) **Int. Cl.**
H01L 23/62 (2006.01)
(52) **U.S. Cl.** 257/355

Correspondence Address:
BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, IL 60610 (US)

(57) **ABSTRACT**

A circuit arrangement including a capacitor in an n-type well is disclosed. A specific polarization of the capacitor ensures that a depletion zone arises in the well and the capacitor has a high ESD strength. An optionally present auxiliary doping layer ensures a high area capacitance of the capacitor despite high ESD strength.

(21) Appl. No.: **11/502,262**

(22) Filed: **Aug. 10, 2006**

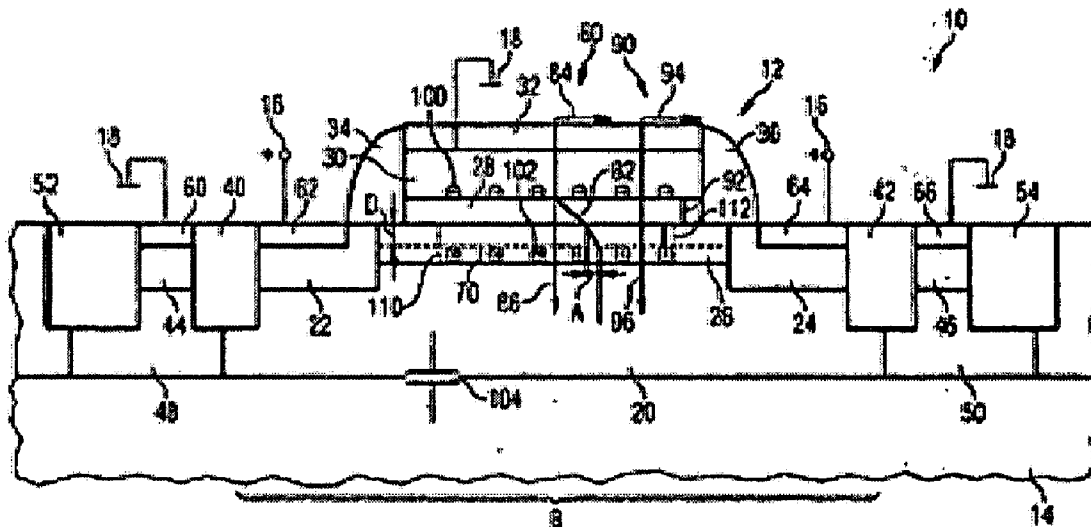
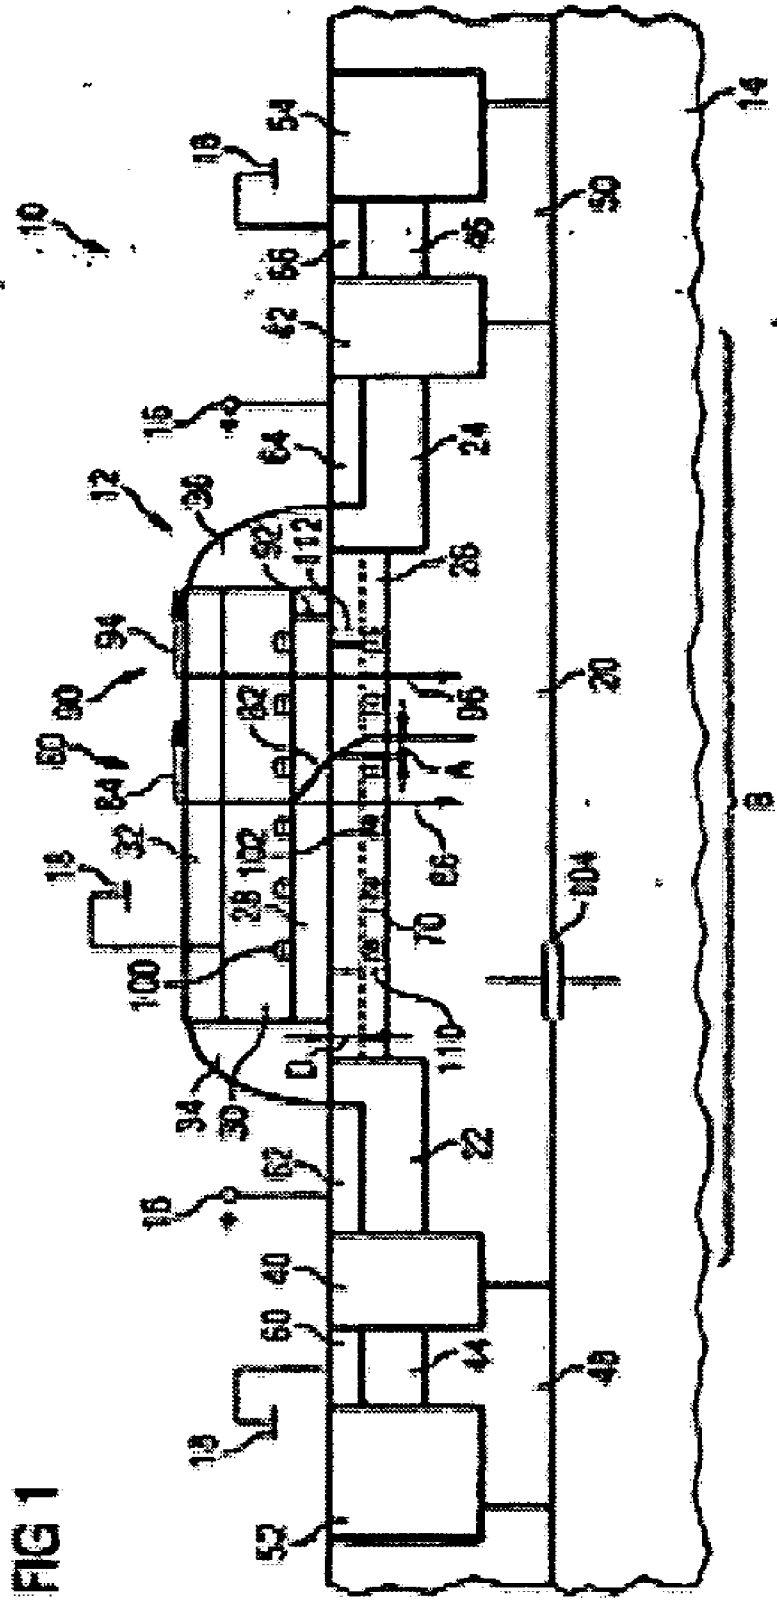
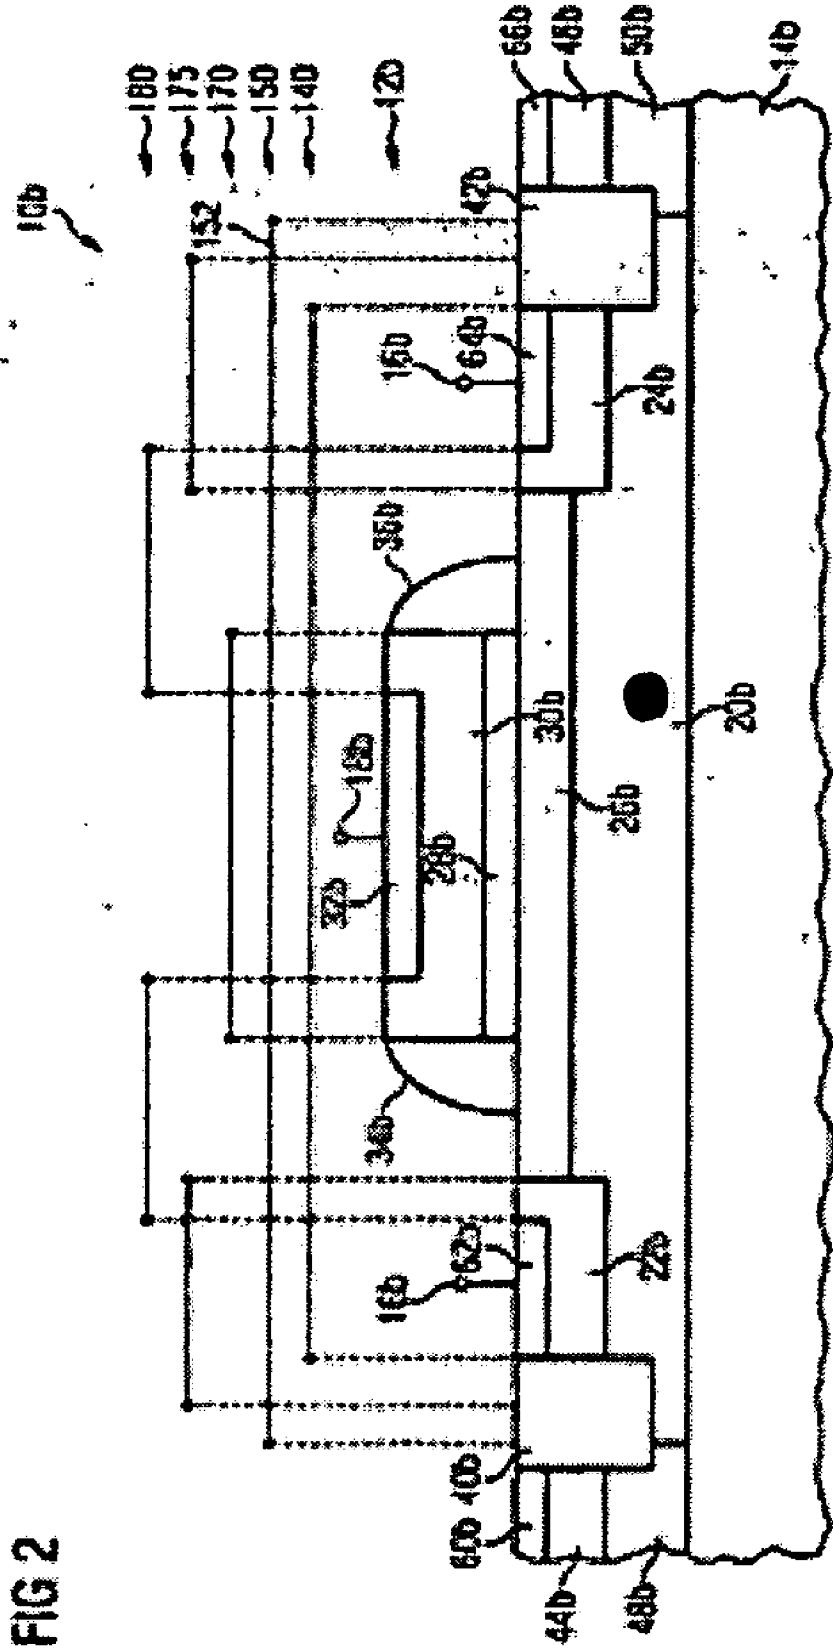


FIG 1





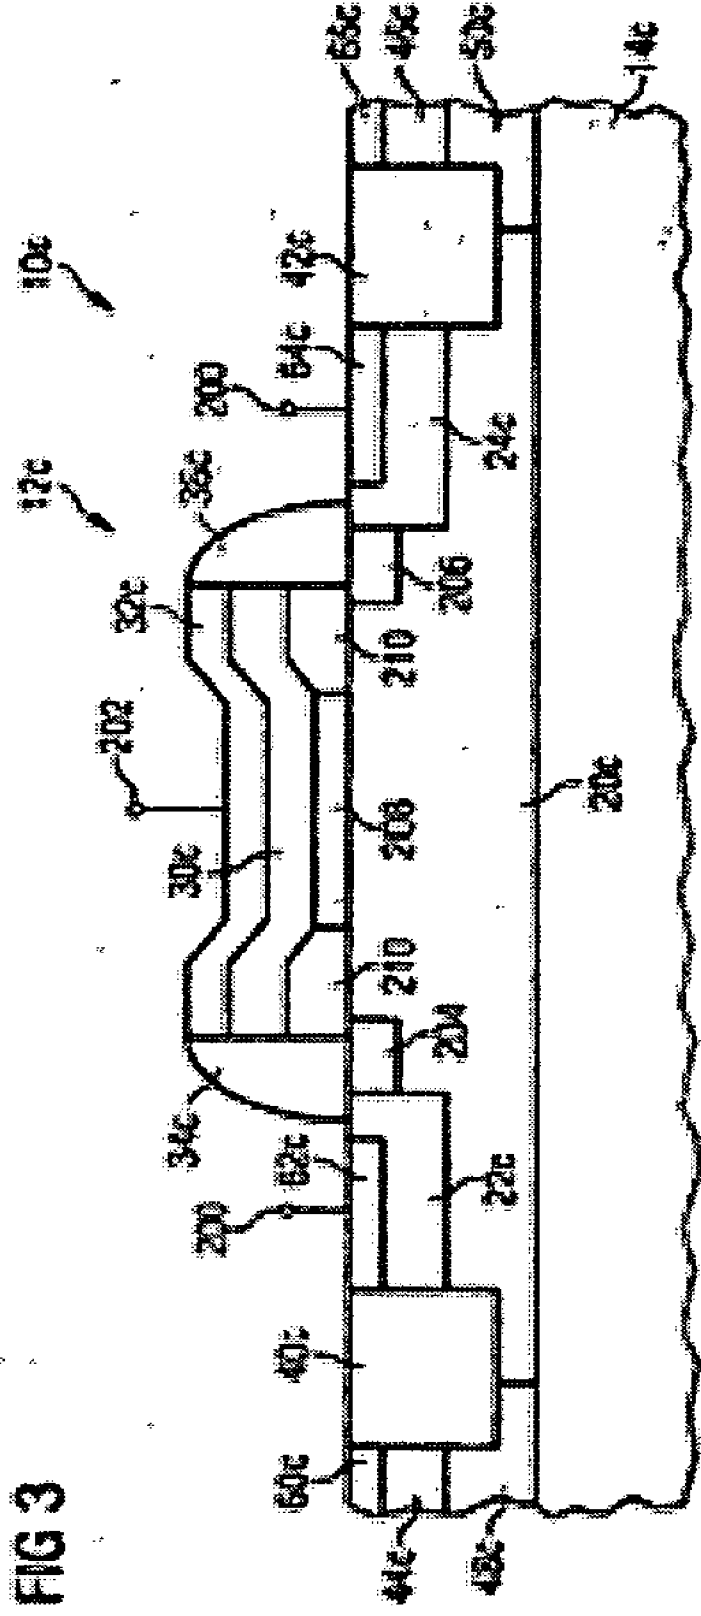


FIG 3

**INTEGRATED CIRCUIT ARRANGEMENTS WITH
ESD-RESISTANT CAPACITOR AND
CORRESPONDING METHOD OF PRODUCTION**

PRIORITY CLAIM

[0001] This application is a continuation of International Patent Application PCT/EP2005/050398, filed Jan. 31, 2005, and claims the benefit of priority of German Patent Application No. DE 102004006484.9, filed Feb. 10, 2004, the contents of both of which are incorporated by reference in their entirety.

BACKGROUND

[0002] 1. Technical Field

[0003] The invention relates to a circuit for electrostatic discharge (ESD) protection. In particular, the invention relates to an ESD protection circuit with an ESD-resistant capacitor.

[0004] 2. Background Information

[0005] ESD cases occur particularly when the circuit arrangement is not yet in the state ready for operation, that is to say during the fabrication of the circuit arrangement, during incorporation into a chip housing or during mounting onto a printed circuit board. By way of example, an ESD voltage pulse has a voltage of greater than 100 volts and a duration of approximately 100 nanoseconds.

[0006] Capacitors may be used for ESD protection. Such capacitors are used in particular for circuits with analog signal processing. Said capacitors are also referred to as decoupling capacitors, blocking capacitors or backup capacitors. The capacitors decouple and stabilize the supply voltage of the integrated circuit arrangement.

BRIEF SUMMARY OF THE INVENTION

[0007] An integrated circuit arrangement includes a reference operating potential line, which carries a basic potential, e.g. a ground potential, during operation of the circuit arrangement, and comprising a positive operating potential line, which carries a more positive potential in comparison with the basic potential, e.g. a positive potential, during operation of the circuit arrangement. Moreover, the integrated circuit arrangement contains a capacitor connected between the operating potential lines.

[0008] The capacitor can be embodied as a so-called N well Capacitor (NCAP) or a P well capacitor (PCAP) and then contains the following regions: a basic doping region doped in accordance with a basic doping type, at least one doped connection region which preferably adjoins the basic doping region and is doped in accordance with the basic doping type and the maximum dopant concentration of which is higher than the maximum dopant concentration in the basic doping region, an electrode region arranged at a distance from the basic doping region, said electrode region, following the construction of a Metal Oxide Semiconductor (MOS) transistor, also being referred to as a gate region, and a dielectric arranged between the electrode region and the basic doping region.

[0009] To protect the capacitor against Electrical Overstress (EOS) phenomena and in particular against ESD phenomena, the integrated circuit arrangement contains at

least one protection element which is connected in parallel with the capacitor and, when a specific voltage lying above the operating voltage or below the ground potential in the case of a reverse ESD polarity is exceeded, becomes readily conductive, e.g. a protection diode, a MOS transistor, a bipolar transistor, a thyristor, a zener diode, a diode stack, etc. or combinations thereof.

[0010] The disclosure specifies integrated circuit arrangements each comprising at least one capacitor which, despite good electrical properties, remains functional even after loading with electrostatic discharges in the case of which capacitors used heretofore are damaged. In particular, a circuit arrangement is disclosed that is robust in the ESD case, or the geometry of said circuit arrangement. The disclosure also provides methods for the production of integrated circuit arrangements.

[0011] The disclosure is based on the consideration that NCAP or PCAP capacitors have a large capacitance per unit area, so that comparatively large capacitance values can be achieved even given a small chip area, for example in comparison with p-n junction capacitances. Moreover, the RC time constants of the capacitor are of importance. In many applications it is necessary in particular for the parasitic series resistance of the capacitor to be small.

[0012] For an NCAP or a PCAP, the dielectric must be as thin as possible to obtain a high capacitance per unit area. By way of example, the thickness of the dielectric is less than 2 nanometers, particularly in the case of technologies with minimum lithographic dimensions of less than 100 nanometers and operating voltages of less than 2 volts. Moreover, despite the circuitry interconnection with the ESD protection circuit, in the ESD case, voltages of a few volts, e.g. of 5 or 6 volts, build up across the dielectric. However, such a thin dielectric can then be damaged even by momentarily occurring voltages of 4 volts, which may lead to the failure of the entire integrated circuit arrangement.

[0013] Therefore, either given a basic doping region of the n basic doping type the connection region is electrically conductively connected to the positive operating potential line and the electrode region is electrically conductively connected to the reference operating potential line, or that given a p basic doping type the connection region is electrically conductively connected to the reference operating potential line and the electrode region is electrically conductively connected to the positive operating potential line.

[0014] In one example arrangement, an auxiliary doping region doped in accordance with an auxiliary doping with the basic doping type is arranged between the basic doping region and the dielectric, the maximum dopant concentration of said auxiliary doping region being equal to the maximum dopant concentration in the basic doping region or greater than said dopant concentration.

[0015] For an ESD voltage having a polarity for which the supplementarily connected protection circuit affords less protection, a so-called depletion of charge carriers occurs in the basic doping region and also in the optional auxiliary doping layer, that is to say that a so-called depletion layer is formed, which has a dielectric effect and thus leads to a larger effective dielectric thickness. If appropriate, the ESD voltage at the capacitor is so high that not only does an inversion channel. However, on account of the doping type

of the connection region, no charge carriers that would decrease the effective dielectric thickness again pass into the inversion channel.

[0016] What is achieved by the auxiliary doping region and the specified polarization in the normal operating mode of the circuit arrangement is that the capacitance is not reduced to an excessively great extent by the relationships explained for the ESD case. In particular, by way of example, because of the auxiliary doping layer, the thickness of the depletion layer is smaller than without such an auxiliary doping layer.

[0017] Because the capacitor is connected between the operating potential lines, a large voltage is dropped across it in the ESD case because a voltage divider effect as in the case of a series circuit of transistors or capacitors does not occur. Such a series circuit occurs in particular in functional blocks where use is made e.g. of PMOS and NMOS connected in series as an inverter. In particular, the capacitor is contained in the core logic of the circuit arrangement, or in a so-called analog macroblock.

[0018] The circuit arrangement according to the disclosure is robust in the ESD case because the electric field strength is reduced in the dielectric or in the most jeopardized overlap regions between dielectric and connection regions or extension regions.

[0019] The auxiliary doping region therefore enables the ESD strength to be established better, without the thickness of the dielectric, e.g. of an oxide, having to be altered. Often there are only two dielectric thicknesses that can be chosen in a production process, so that, as a result of the auxiliary doping, a freely selectable and more finely adjustable optimization parameter is available and overdimensioning is avoided. In one arrangement, the auxiliary doping is not chosen entirely freely, but rather corresponds to one of the implantations available anyway in the process, of which different ones can be selected, however.

[0020] The auxiliary doping region may lie at the surface of a substrate and can therefore be easily introduced. In another refinement, the substrate is a monocrystalline substrate, in particular a silicon substrate. Such substrates have high purity. On account of the purity and the monocrystalline material, the substrates can carry a comparatively high field strength, which is of great importance in the ESD case, too, to prevent a breakdown. Moreover, the dopant concentration in the auxiliary doping region and also the doping profile can be established in a reproducible manner on account of the surface position, the purity and the monocrystalline material, in particular in a simple production process. The dopant concentration and the dopant profile of the basic doping region or auxiliary doping region are determining factors for the thickness of the depletion layer.

[0021] The doping of the auxiliary doping region is effected by using one implantation or by using a plurality of implantations, for example implantations which have been used hitherto in the process for producing the circuit arrangement for setting different threshold voltages of field effect transistors in each case in mutually different regions of the circuit arrangement. The doping of the auxiliary doping region is preferably superimposed on a well doping or basic doping. The use of a plurality or one selected implantation for setting the threshold voltage of a transistor also for

producing the auxiliary doping region enables an optimization without additional steps, in particular an optimization of the thickness of the depletion layer that forms in the normal operating mode of the circuit arrangement and thus also of the voltage drop across the depletion layer. The lower the dopant concentration in the auxiliary doping region, the thicker the depletion layer and the greater the ESD robustness becomes. By contrast, a higher dopant concentration in the auxiliary doping region leads to a thinner depletion layer which, however, hardly impairs the capacitance per unit area during normal operation. However, even the thin depletion layer still enables sufficient ESD robustness.

[0022] Because of the polarization of the capacitor, with the use of an N type well (in the case of a P predoped substrate) or a P type well (for an N type substrate) for the basic doping region, there is also an additional p n junction capacitance with respect to the substrate in addition to the capacitance of the capacitor. The junction capacitance is connected in parallel with the capacitance of the capacitor, so that the capacitance per unit area is increased.

[0023] The breakdown strength of the capacitor can be increased further by suitable silicide blocking during the formation of silicide on the connection region and on the electrode region or the gate region.

[0024] The effects of the circuit arrangement are independent of the material used for the electrode region, and of a doping of the electrode region. Therefore, these effects can be obtained both in the case of polycrystalline electrode regions and in the case of electrode regions made of metal, in particular in future technologies.

[0025] Only two or at most three different gate oxide thicknesses are available in a typical process. The circuit arrangement exploits this to form in a capacitor a dual dielectric containing a thin central region and a thicker edge region in comparison therewith. The choice of the width of the thicker edge region of the dielectric enables an optimization to be carried out in such a way that, on the one hand, the capacitance is not decreased excessively in comparison with the use of an exclusively thin dielectric and that, on the other hand, the ESD strength is sufficient without the occurrence of overdimensioning, as would be the case with an exclusively thick dielectric.

[0026] Furthermore, the disclosure relates to methods for the production of integrated circuit arrangements. There are various possibilities for forming the dual dielectric: the thin dielectric is formed simultaneously with a layer of the thick dielectric that is near the basic doping region. A further layer of the thick dielectric is subsequently produced, the thin dielectric being masked, e.g. by a resist layer. The thin dielectric may be formed completely prior to forming the thick dielectric. Afterward, the thin dielectric is masked and the thick dielectric is produced. The thin dielectric may be formed after forming a layer of the thick dielectric that is near the basic doping region, a further layer of the thick dielectric preferably being produced simultaneously.

[0027] Thermal oxidations, in particular, are suitable for forming the dielectrics. Regions at which the silicon is to be accessible are etched free later, by way of example.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The invention is explained below with reference to the accompanying drawings, in which:

[0029] FIG. 1 shows an integrated circuit arrangement with an n-type well capacitor 12.

[0030] FIG. 2 shows masks which are used during the production of a further n-type well capacitor, and

[0031] FIG. 3 shows an n-type well capacitor with dual gate oxide.

DETAILED DESCRIPTION OF THE DRAWINGS

[0032] FIG. 1 shows an integrated circuit arrangement containing an ESD-resistant n-type well capacitor 12. The integrated circuit arrangement 10 additionally contains on a monocrystalline silicon substrate 14, which is lightly p-doped in an example arrangement, a positive line 16 leading to a positive connection pad, a ground line 18 leading to a ground connection pad, an ESD protection circuit (not illustrated), and a multiplicity of transistors (not illustrated), e.g. memory transistors or transistors of a logic circuit or an analog circuit, in particular field effect transistors.

[0033] The well capacitor 12 contains an n-doped well 20 having e.g. a maximum dopant concentration of 1×10^{17} to 1×10^{18} dopant atoms per cubic centimeter, e.g. phosphorus atoms or arsenic atoms. The well 20 has e.g. a depth of 1500 nanometers, a width B and a length of in each case typically up to 100 micrometers. The well capacitor 12 also includes heavily n-doped connection regions 22 and 24 or source/drain regions typically lying in each case along the longitudinal sides of the well 20, the maximum dopant concentration lying e.g. within the range of 1×10^{20} to 1×10^{21} dopant atoms per cubic centimeter. The connection regions 22, 24 have a depth of typically 200 nm in an example arrangement.

[0034] With increasing distance from the substrate 14, the capacitor 12 additionally contains, in the order specified below, an n-doped optional auxiliary doping region 26 between the connection regions 22 and 24. In an example arrangement, the auxiliary doping region 26 adjoins the connection region 22 on one side and the connection region 24 on the other side and extends between the two connection regions 22 and 24 without any interruption. As an alternative, the auxiliary doping region adjoins n-doped extension regions formed at the connection regions 22, 24. The extension regions are also referred to as Lightly Doped Drain (LDD) regions because their dopant concentration is lower than that of the connection regions 22, 24, but higher than that of the auxiliary doping region. The auxiliary doping region 26 has e.g. in a depth of 100 nanometers and a maximum dopant concentration within the range of 1×10^{17} to 1×10^{18} dopant atoms per cubic centimeter.

[0035] The capacitor 12 includes a dielectric 28 extending along the surface of the auxiliary doping region 26 and arranged at a distance from the connection regions 22, 24. The dielectric 28 is also referred to as a gate oxide (GOX) and comprises e.g. silicon dioxide ($\epsilon_r=3.9$) or a material having a relative permittivity of greater than 3.9, in particular a so-called high-k dielectric. In an example arrangement, the dielectric 28 has a thickness of two nanometers.

[0036] The capacitor 12 includes a gate region 30, which adjoins the dielectric 28 (toward the top), and which comprises doped polycrystalline silicon, e.g. n- or p-doped polysilicon having a maximum dopant concentration of greater than 5×10^{19} dopant atoms per cubic centimeter. The gate region 30 has a thickness within the range of e.g. 100 nanometers to 400 nanometers. A silicide region 32 extends on the gate region 28 and has e.g. a thickness of 40-60 nanometers.

[0037] In an example arrangement, the connection regions 22, 24 do not extend beneath the dielectric 28. The stack formed from the dielectric 28, the gate region 30 and the silicide region 32 is laterally delimited by two electrically insulating spacer elements 34, 36 which each have a base width of e.g. 40 nanometers and partly overlap the connection regions 22 and 24. The spacer elements 34, 36 are also referred to 20 as spacers.

[0038] Two isolation trenches 40 and 42 are arranged laterally with respect to the well 20. The isolation trench 40 isolates the connection region 22 from a substrate connection region 44. By contrast, the isolation trench 42 isolates the connection region 24 from a substrate connection region 46. The substrate connection regions 44, 46 are heavily p-doped. Lying beneath the substrate connection region 44 and 46 is a p-doped intermediate region 48 and 50, respectively, which extends as far as the substrate 14. The substrate connection regions 48 and 50 are arranged as near as possible to the capacitor 12, that is to say directly at the n-type well 20.

[0039] Two further isolation trenches 52 and 54 delimit the substrate connection region 44 and 46, respectively. The isolation trenches 40, 42, 52 and 54 have a depth of e.g. 250 to 500 nanometers and are also referred to as Shallow Trench Isolation (STI) trenches. The isolation trenches 40, 42, 52 and 54 are filled with an electrically insulating material.

[0040] A silicide region 60 extends between the isolation trench 52 and the isolation trench 40 at the surface of the substrate connection region 48. The silicide region 60 is electrically conductively connected to the ground line 18.

[0041] A further silicide region 62 extends between the isolation trench 40 and the spacer element 34 at the surface of the connection region 22. The silicide region 62 is electrically conductively connected to the positive line 16.

[0042] A next silicide region 64 extends between the spacer element 36 and the isolation trench 42 at the surface of the connection region 24. The silicide region 64 is likewise electrically conductively connected to the positive line 16.

[0043] A silicide region 66 extends between the isolation trench 42 and the isolation trench 54 at the surface of the substrate connection region 46. The silicide region 66 is electrically conductively connected to the ground line 16.

[0044] To explain the improved ESD protection, an ESD case shall be assumed in which a voltage pulse has a polarity corresponding to the polarity of the voltage which is present at the capacitor 12 in the normal operating mode of the circuit arrangement 10. In the ESD case—as well as in the normal operating mode—a depletion layer 70 is formed which e.g. has a layer thickness D of a few nanometers, e.g. a layer thickness of two nanometers. On account of the lack

of charge carriers, the depletion layer **70** has a dielectric effect with a relative permittivity of twelve (ϵ_r of silicon) and leads to a lower electric field strength in the dielectric **28** since it acts as a capacitive voltage divider connected in series with a gate oxide capacitor.

[0045] A system **80** of coordinates represents the potential profile **82** counter to the direction of the normal to the surface of the substrate **14** in the capacitor **12**. A y axis **84** of the system **80** of coordinates shows the potential within the range of 0 volts to e.g. 5 volts. An x axis **86** of the system **80** of coordinates shows the spatial coordinate in the capacitor **12** with increasing distance from the silicide region **32**. Ground potential, that is to say zero volts, is present in the silicide region **32** and in the gate region **30**. The potential rises linearly in the dielectric **28**. The potential increases further linearly in the depletion layer **70** e.g. to four volts, but with a shallower rise than in the dielectric **28**. Because of the depletion layer **70**, therefore, the result is a potential rise **A** outside the dielectric **28** or in other words a reduction in voltage across the dielectric **28**.

[0046] A system **90** of coordinates represents the field strength profile **92** counter to the direction of the normal to the surface of the substrate **14** in the capacitor **12**. A y axis **94** of the system **90** of coordinates shows the field strength **E** within the range of 0 volts/nanometer to e.g. 2.5 volts/nanometer. An x axis **96** of the system **90** of coordinates shows the spatial coordinate in the capacitor **12** with increasing distance from the silicide region **32**. In the silicide region **32** and in the gate region **30**, the field strength **E** is zero volts/nanometer. In the dielectric, the field strength **E** has a value of e.g. two volts/nanometer. In the depletion layer, the value of the field strength is smaller than in the dielectric **28**, e.g. one volt/nanometer. In the n-type well **20**, the field strength **E** is again zero volts/nanometer.

[0047] Negative charges **100** and positive charges **102** illustrate the effect of the dielectric **28** and the depletion layer **70** as a capacitor dielectric. Moreover, FIG. 1 illustrates a p-n junction capacitor **104**, which is formed by the depletion layer between the n-type well and the substrate **14** and which is connected in parallel with the capacitor **12**, so that different types of capacitor are connected in parallel.

[0048] In another example arrangement, a metal electrode, e.g. made of aluminum, is used instead of the polysilicon for the gate region **30**. In other arrangements, the connection regions **22**, **24** are further away from the spacer elements **34** and **36**, see FIG. 2, connection regions **22b**, **24b**.

[0049] In some arrangements, the auxiliary doping region **26** extends only in a central region below the dielectric **28**, see side edges **110** and **112**. The distance between the side edge **110** and **112** of the auxiliary doping region **26** and the closest connection region **22** and **24**, respectively, in the case of absent extension regions or the closest extension region is e.g. at least 100 nanometers. The depletion layer **70** is formed thicker below the edge regions of the dielectric **28**, which increases the robustness against ESD.

[0050] FIG. 2 shows photolithographic masks which are used in the production of an n-type well capacitor **12b** of a circuit arrangement **10b** in a process with minimum photolithographic dimensions smaller than one micrometer. Apart from the deviations explained below, the same steps as in the production of the capacitor **12b** are carried out in the

production of the capacitor **12**. The circuit arrangement **10b** is constructed like the circuit arrangement **10**. The n-type well capacitor **12b** corresponds to the capacitor **12** apart from the differences explained below, so that identical parts are designated by identical reference symbols, but the latter are followed by the lower-case letter **b** to differentiate between the two capacitors **12** and **12b**.

[0051] The capacitor **12b** includes a substrate **14b**, a positive line **16b**, a ground line **18b**, a well **20b**, connection regions **22b**, **24b**, an auxiliary doping region **26b**, a dielectric **28b**, a gate region **30b**, a silicide region **32b**, spacer elements **34b**, **36b**, isolation trenches **40b**, **42b**, substrate connection regions **44b**, **46b**, intermediate regions **48b**, **50b**, and silicide regions **60b** to **66b**.

[0052] The capacitor **12b** has the following deviations in **30** comparison with the capacitor **12**. The connection regions **22b** and **24b** are arranged at a distance from the spacer elements **34b** and **36b**, respectively, so that no contact occurs and no overlap occurs as seen in the direction of the normal to the surface of the substrate **14**. The silicide regions **62b** and **64b** do not reach as far as the spacer elements **34b** and **36b**, respectively, and also cover only a partial region of the connection regions **22b** and **24b**, and the silicide region **32b** likewise covers only a partial region of the gate region **30b**.

[0053] Because of the set-back connection regions **22b** and **24b** or LDD regions and also because of the set-back silicide regions **62b**, **64b** and **32b**, in the ESD case there is a reduction of the field strength occurring in the dielectric **28b** at the edges of the gate region **30b**, as a result of which the breakdown voltage of the capacitor **12b** rises. This statement holds true assuming that under the ESD condition a certain current (tunneling current) flows via the gate oxide or the dielectric **28** and additional voltage drops therefore occur with respect to the potential conditions shown in FIG. 1. For the rest, the increased ESD strength and the high area capacitance of the capacitor **12b** are based on the relationships explained above with reference to FIG. 1 for the capacitor **12**.

[0054] In the production of the capacitor **12** and **12b**, the position of the active regions and thus also the position of the isolation trenches **40b** and **42b** are defined with the aid of a mask **140** using a resist. The isolation trenches **40b** and **42b** are etched, filled and planarized. The n-type well **20b** is then implanted, a resist layer (not illustrated) is exposed with a mask **150**, the mask structure **152** of which predefines the position of the well **20**.

[0055] Afterward, with a mask (not illustrated), the position of the auxiliary doping region **26b** is predefined with a resist. The resist is developed. After development, the auxiliary doping region **26b** is doped with the aid of an implantation. The mask for the auxiliary doping region **26b** contains, in the region of the n-type well **20b**, a mask structure lying e.g. at the same location as the mask structure **152** in the mask **150**. In other regions, however, the two masks have mask structures that deviate from one another. In an example arrangement with a shortened auxiliary doping region as explained with reference to FIG. 1, the mask for the auxiliary doping region **26** defines the position of the edges **110** and **112**. The implantation for the auxiliary doping region **26** and **26b** is effected simultaneously with implantations for setting the threshold voltage in field effect transistors of the circuit arrangement and **10b**, respectively.

[0056] The dielectric **28b** is subsequently grown thermally on the silicon surface. Afterward, the polycrystalline layer for the gate region **30b** is deposited and doped in situ or subsequently, e.g. when carrying out one or more of the implantations, such as an implantation for extension regions, an implantation for the connection regions **22b**, **2024b** or some other implantation.

[0057] The position of the gate region **30b** is then defined with the aid of a mask **170**. The polycrystalline layer is then patterned in an etching process, preferably simultaneously with the dielectric **28b**.

[0058] The implantation for extension regions is carried out at this point in time for the circuit arrangement **10**, but not for the circuit arrangement **10b**. Prior to carrying out these implantations, in the production of the circuit arrangement **12b**, the spacer elements **34b** and **36b** are produced in a self-aligning manner by layer deposition and anisotropic etching.

[0059] After the production of the spacer elements **34b** and **36b**, a mask **175** is used to define the position of the connection regions **22b** and **24b**. After the development of a resist, the implantation for the connection regions **22b** and **24b** and also extension regions (here congruent with **22b** and **24b**) is carried out.

[0060] The production of the connection regions **22b** and **24b** is followed by the production of the silicide regions **18b** and **60b** to **66b**. For blocking the siliciding in specific regions, blocking regions in which e.g. a previously applied nitride layer is intended to remain are defined with the aid of a mask **180**. A thin metal layer of e.g. tens of nanometers is then sputtered onto the wafer surface. Suitable metals are e.g. titanium, cobalt or nickel. During a heat treatment step, the silicide is formed in regions at which the metal makes contact with silicon. The silicide reduces the contact resistance, so that signals at high frequencies can be processed. Afterward, the metal that has not been converted into silicide and the residues of the nitride layer are removed.

[0061] The set-back silicide regions likewise reduce the field strength in the dielectric in the vicinity of the edges of the gate region **30b**. Experimentally, 0.5 volts higher transient breakdown voltages could be achieved by the silicide blocking. Series resistances thus form which, in the ESD case, counteract tunneling currents that damage the dielectric **28b**.

[0062] The masks **175** and **180** are not used in the production of the capacitor **12**, since no set-back connection regions have to be produced nor is there a need for blocking siliciding. The implantation of the connection regions **22** and **24** and also the formation of the silicide regions **32** and **60** to **66** are carried out in a self-aligning manner with respect to the spacer elements **34** and **36**.

[0063] In some arrangements, the siliciding is blocked only at a portion of the gate region or only at a portion of the connection regions. In a further example arrangement, a gate region made of metal is used instead of polycrystalline gate region **30b**, siliciding being unnecessary on this region.

[0064] FIG. 3 shows a circuit arrangement **10c** containing an n-type well capacitor **12c** with dual gate oxide. The circuit arrangement **10c** is constructed like the circuit arrangement **10**. The n-type well capacitor **12c** corresponds

to the capacitor **12** apart from the differences explained below, so that identical parts are designated by identical reference symbols, but the latter are followed by the lower-case letter *c* to differentiate between the two capacitors **12** and **12c**.

[0065] The capacitor **12c** includes a substrate **14c**, a well **20c**, connection regions **22c**, **24c**, a gate region **30c**, a silicide region **32c**, spacer elements **34c**, **36c**, isolation trenches **40c**, **42c**, substrate connection regions **44c**, **46c**, intermediate regions **48c**, **50c**, and silicide regions **60c** to **66c**.

[0066] The capacitor **12c** comprises an operating potential line **200** that leads to the silicide regions **62c** and **64c**, an operating potential line **202** that leads to the silicide regions **32c**, with the operating potential lines **200** and **202** carrying potentials that are different from one another. The silicide regions **60c** and **66c** are at ground potential for both types of polarization. Thus, both types of polarization are used as a polarization for which the potential of the operating potential line **202** is greater than the potential of the operating potential line **200**.

[0067] Illustrated in the capacitor **12c** are n-doped LDD regions **204** and **206** or extension regions lying beneath the spacer elements **34c** and **36c**. The dopant concentration of the LDD regions **204**, **206** lies e.g. within the range of 5×10^{18} to 1×10^{20} dopant atoms per cubic centimeter, and an auxiliary doping region corresponding to the auxiliary doping region **26b** is absent in the capacitor **12c**. In some systems, however, such an auxiliary doping region is present.

[0068] In the capacitor **12c**, a dielectric having a thin central dielectric region **208** and a thick edge dielectric regions **210** is present instead of the dielectric **28b** having a uniform thickness. The thickness of the central dielectric region **208** corresponds to the thickness of the thinnest dielectric present in the circuit arrangement **10c**. The thickness of the central dielectric region **208** is 2 nanometers. The thin dielectric region **208** ensures a high capacitance per unit area of the capacitor **12c**.

[0069] The thickness of the edge dielectric region **210** corresponds to the thickness of a further dielectric in the circuit arrangement **10c** and is 5 nanometers, by way of example. The thick edge dielectric region **210** ensures a high ESD strength of the capacitor **12c**.

[0070] In other example arrangements, the measures explained with reference to FIGS. 1 and 3 or the measures explained with reference to FIGS. 2 and 3 are combined to increase the ESD strength further.

[0071] In other example arrangements, PCAPs are produced instead of the NCAPs explained with reference to FIGS. 1 to 3, given a choice of the respective other doping type in the regions and given opposite polarization of the capacitor. In further example arrangements, connection regions of the other doping type are used with otherwise identical dopings.

[0072] Instead of a doped well, use may be made of a doped region on an insulating region, as is the case in Silicon On Insulator (SOI) technology.

[0073] It is therefore intended that the foregoing detailed description be regarded as illustrative rather than limiting,

and that it be understood that it is the following claims, including all equivalents, that are intended to define the spirit and scope of this invention.

1. An integrated circuit arrangement comprising:

a reference operating potential line operable to carry a basic potential during operation of the circuit arrangement;

a positive operating potential line operable to carry a more positive potential in comparison with the basic potential during operation of the circuit arrangement; and

a capacitor connected between the operating potential lines, said capacitor including the following regions:

a basic doping region doped in accordance with a basic doping with a basic doping type and including a region with a maximum dopant concentration;

at least one connection region doped in accordance with a connection doping with the basic doping type, the maximum dopant concentration of said connection region being higher than the maximum dopant concentration in the basic doping region;

an electrode region arranged at a distance from the basic doping region; and

a dielectric arranged between the electrode region and the basic doping region;

in which either given an n-type basic doping type the connection region is electrically conductively connected to the positive operating potential line and the electrode region is electrically conductively connected to the reference operating potential line,

or in which case given a p-type basic doping type the connection region is electrically conductively connected to the reference operating potential line and the electrode region is electrically conductively connected to the positive operating potential line

2. The circuit arrangement of claim 1, wherein the electrode region is doped with a maximum dopant concentration of greater than 1×10^{18} dopant atoms per cubic centimeter or in that the electrode region includes a metallic region at its side facing the dielectric.

3. The circuit arrangement of claim 2, wherein the electrode region is doped with a maximum dopant concentration of greater than 1×10^{18} dopant atoms per cubic centimeter at a side facing the dielectric.

4. The circuit arrangement of claim 1, further comprising an auxiliary doping region doped in accordance with an auxiliary doping with the basic doping type arranged between the basic doping region and the dielectric, the maximum dopant concentration of said auxiliary doping region being equal to the maximum dopant concentration in the basic doping region or the maximum dopant concentration of said auxiliary doping region being greater than the maximum dopant concentration in the basic doping region.

5. The circuit arrangement of claim 4, wherein the maximum dopant concentration of the auxiliary doping region is at least twice as high as the maximum dopant concentration in the basic doping region, and the maximum dopant concentration of the auxiliary doping region is at most half as high as the maximum dopant concentration in the connection region.

6. The circuit arrangement of claim 4, further comprising at least one further connection region arranged in a manner adjoining the basic n-type doping region, the basic p-type doping region or the auxiliary doping region arranged between the connection regions, and a metallic line connecting the connection regions.

7. The circuit arrangement of claim 1, wherein the connection region is arranged in a self-aligning manner neither with respect to the electrode region or with respect to a spacer element arranged on the electrode region.

8. The circuit arrangement of claim 4, wherein the auxiliary doping region adjoins the connection region or an extension region formed at the connection region, or wherein in that the auxiliary doping region is formed only at a central region of the dielectric and not in an edge region of the dielectric, part of the basic doping region arranged at the edge region.

9. An integrated circuit arrangement comprising:

two operating potential lines that carry potentials that are different from one another during operation of the circuit arrangement; and

a capacitor connected between the operating potential lines, said capacitor including:

a basic doping region doped in accordance with a basic doping type;

at least one doped connection region, the maximum dopant concentration of which is higher than the maximum dopant concentration in the basic doping region;

an electrode region arranged at a distance from the basic doping region; and

a dielectric arranged between the electrode region and the basic doping region;

the dielectric, in a region near the connection region, being at least twice as thick as in a central region of the dielectric.

10. The circuit arrangement of claim 9, further comprising at least one spacer element arranged laterally with respect to the electrode region, the thicker region of the dielectric adjoining the spacer element.

11. The circuit arrangement of claim 9, wherein the connection region is doped in accordance with the basic doping type, or in that the connection region is doped in accordance with a different doping type than the basic doping type.

12. The circuit arrangement of claim 9, wherein the thick dielectric is thinner than 100 nanometers, and in that the circuit arrangement includes at least one field effect transistor whose dielectric has the thickness of the thin dielectric, and includes at least one field effect transistor whose dielectric has the thickness of the thick dielectric.

13. The circuit arrangement of claim 12, wherein the silicide regions are arranged at the connection regions, a silicon region not covered with a silicide region lying between the silicide regions.

14. The circuit arrangement of claim 10, wherein at least one of:

the operating potential lines lead to connections via which an external operating voltage is applied during operation of the circuit arrangement;

the basic doping region is formed as a well that is arranged in a substrate doped in accordance with a different doping type than the basic doping region; and

the capacitor comprises a planar component arranged in a plane arranged parallel to at least one metallization layer of the integrated circuit arrangement.

15. A method for the production of a circuit arrangement comprising a capacitor, the method comprising:

forming a basic doping region of a capacitor, doped in accordance with a basic doping type;

forming a connection region of the capacitor, forming a dielectric of the capacitor;

forming an electrode region of the capacitor, said electrode region being spaced apart from the basic doping region, forming a reference operating potential line, which carries a basic potential during operation of the circuit arrangement, and which is electrically conductively connected to the electrode region given an n-type basic doping type, or which is electrically conductively connected to the connection region given a p-type basic doping type,

forming a positive operating potential line, which carries a more positive potential in comparison with the basic potential during operation of the circuit arrangement, and which is electrically conductively connected to the connection region given an n-type basic doping type, or which is electrically conductively connected to the electrode region given a p-type basic doping type.

16. The method of claim 15, further comprising producing the connection region with a dedicated mask step,

and forming an auxiliary doping region of the capacitor, which is doped in accordance with the basic doping type and when the maximum of the dopant concentration is equal to or higher than the maximum of the dopant concentration in the basic doping region.

17. The method for the production of a circuit arrangement comprising a capacitor, the method comprising:

forming a basic doping region of a capacitor, doped in accordance with a basic doping type, forming a connection region of the capacitor;

forming a thin dielectric of the capacitor in a central region of the dielectric of the capacitor;

forming a dielectric that is at least twice as thick in comparison with the thin dielectric of the capacitor in an edge region of the dielectric of the capacitor;

forming an electrode region of the capacitor, said electrode region being spaced apart from the basic doping region.

18. The method of claim 17, further comprising:

forming two operating potential lines that carry potentials that are different from one another during operation of the circuit arrangement, one operating potential line electrically conductively connected to the connection region and the other operating potential lines electrically conductively connected to the electrode region.

19. The method of claim 17, further comprising producing the dielectric prior to forming a spacer element at the electrode region of the capacitor.

20. The method claim 17, further comprising forming the thin dielectric simultaneously with a layer of the thick dielectric that is near the basic doping region or prior to forming the thick dielectric, or forming the thin dielectric after forming a layer of the thick dielectric that is near the basic doping region.

21. An integrated circuit arrangement comprising:

means for carrying potentials that are different from one another during operation of the circuit arrangement; and

means for storing electrical energy connected between the operating potential lines, said means for storing electrical energy including:

a basic doping region doped in accordance with a basic doping type;

at least one doped connection region, the maximum dopant concentration of which is higher than the maximum dopant concentration in the basic doping region;

an electrode region arranged at a distance from the basic doping region; and

a dielectric arranged between the electrode region and the basic doping region;

the dielectric, in a region near the connection region, being at least twice as thick as in a central region of the dielectric.

22. The circuit arrangement of claim 21, further comprising at least one spacer element arranged laterally with respect to the electrode region, the thicker region of the dielectric adjoining the spacer element.

23. The circuit arrangement of claim 21, wherein the connection region is doped in accordance with the basic doping type, or in that the connection region is doped in accordance with a different doping type than the basic doping type.

24. The circuit arrangement of claim 21, wherein the thick dielectric is thinner than 100 nanometers, and in that the circuit arrangement includes at least one field effect transistor whose dielectric has the thickness of the thin dielectric, and includes at least one field effect transistor whose dielectric has the thickness of the thick dielectric.

* * * * *