



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
01.05.2013 Bulletin 2013/18

(51) Int Cl.:
D06F 58/24 (2006.01)

(21) Application number: **12190446.0**

(22) Date of filing: **29.10.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(71) Applicant: **Samsung Electronics Co., Ltd**
Gyeonggi-do 443-742 (KR)

(72) Inventor: **Susumu, Kitamura**
Osakabu (JP)

(74) Representative: **Taor, Simon Edward William et al**
Venner Shipley LLP
200 Aldersgate
London EC1A 4HD (GB)


(30) Priority: **31.10.2011 JP 2011238345**
23.08.2012 KR 20120092569

(54) **Clothes dryer**

(57) A dryer (100) capable of reducing the number of the frequencies of raising condensed water (W) to a high position while reducing the malfunction or noise of a drain pump (6), the dryer (100) provided with a heat pump cycle (1) having a compressor (11), a condenser (12) and an evaporator (13); and a blower passage (2) to allow an air stream to pass in an order of the condenser (12), a drum (14) to accommodate clothes to be dried, and the evaporator (13), the dryer including a first water storage tank (3) configured to store condensed water (W) generated as the air stream passes through the evapo-

rator (13), a second water storage tank (5) connected to the first water storage tank (3), having a capacity larger than a capacity of the first water storage tank (3), and configured to store the condensed water (W) transferred from the first water storage tank (3), a drain pipe (7) having one end opening at a position higher than the second water storage tank (5), and a drain pump (6) connected to the second water storage tank (5) and the other end of the drain pipe (7), and configured to discharge the condensed water (W) stored in the second water storage tank (5) from the one end of the drain pipe (7) to an outside.

FIG. 1

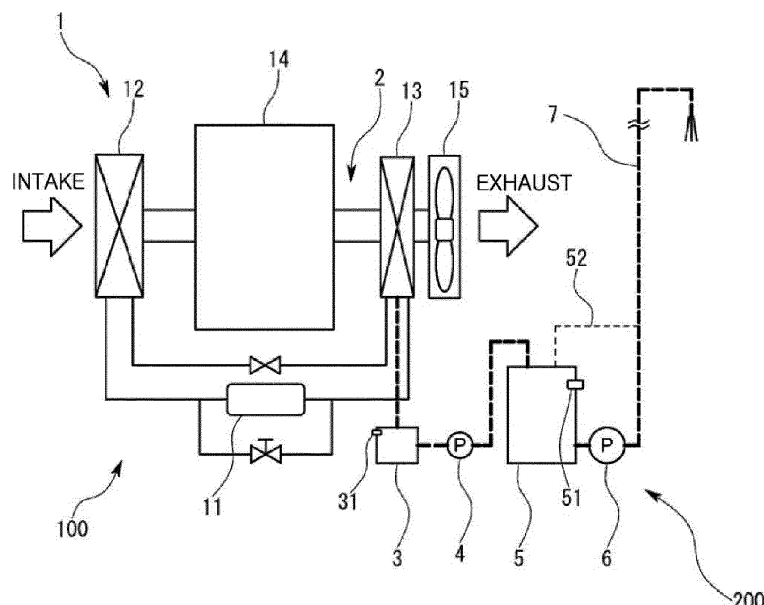

Description

[0001] Embodiments of the present disclosure relate to a dryer provided with a heat pump cycle, and more particularly, to a dryer provided with a structure capable of discharging condensed water generated from an evaporator.

[0002] One type of a dryer to dry clothes is provided with a heat pump cycle including a compressor, a condenser, and an evaporator. The dryer as such has a blower passage that allows an air stream to pass in the order of the condenser, a drum to accommodate wet clothes, and the evaporator through a blower. The dryer is configured such that the air stream circulated or taken is heated in the condenser, and the moisture of the clothes in the drum is evaporated by the heat of the heated air, while the evaporator collects the heat from the air that has acquired a large amount of moisture by passing through the drum. However, if the evaporator collects the heat from the air, the temperature of the air is lowered, so the moisture contained in the air is condensed, producing condensed water.

[0003] The condensed water is temporarily stored in a condensed water storage installed at a lower portion of the dryer or the evaporator, and is discarded by a user at a later time, or, if the dryer is configured as an integral unit with a washing machine, is discharged together with the washing water. For example, in a case of Japan, a drain mechanism is provided at a floor of the room where a washing machine or a dryer is installed, so the condensed water is flown downward by gravity from the condensed water storage to a drain-outlet.

[0004] Meanwhile, in the houses of Europe and the United States, different from Japan, a washing machine or a dryer is commonly installed at a basement where a drain mechanism such as a drainage fan is not installed. Accordingly, in order to have the condensed water of the dryer to flow through a drainpipe that is installed near to the ground, the condensed water needs to be pumped upward about 3 meters to be near the ground.

[0005] A technology of pumping condensed water W, while the height of water raised is low, is disclosed in the Japanese Unexamined Patent No. 2006-087672 that includes a drain mechanism in which a drain pump 6 raises the condensed water W stored in a condensed water storage 3 (see FIG. 5) to a height where a drum 14 is installed, such that the condensed water W is dropped and flown at an inside a drain hose 7 connected to a drain-outlet of the floor.

[0006] However, a structure of raising the condensed water W through a drain pump (see FIG. 6) disclosed in the Japanese Unexamined Patent No. 2006-087672 has a drain mechanism including a water storage tank 3 to store the condensed water W at a lower portion of the evaporator 13, and a drain pump 6 using a high power to raise the condensed water W by 3 meters at the point of time when the condensed water W is fully filled in the water storage tank 3 and to drain the condensed water

W. The drain mechanism as such has the following drawbacks.

[0007] First, as shown in FIG. 6, the water storage tank 3 is configured to store the condensed water W, which is generated from the evaporator 13, in a manner to drop the condensed water W by gravity. The storage tank 3 is needed to be installed at a lower portion of the drum 14 or the evaporator 13. Since the height of the drum 14 is established in advance due to the limitation for use, the height of the water storage tank 3 is difficult to be increased as a means to enlarge the volume available for storage, thereby resulting in the smallness of the volume of the water storage tank 3.

[0008] As shown in (a) of FIG. 6, the condensed water (W) fully filled and stored in the water storage tank 3 is drained through the drain hose 7 by the drain pump 6 using a high power, but as shown in (b) of FIG. 6, at the point of time when the condensed water W is completely drained from the water storage tank 3, the drain pump 6 is needed to be stopped to prevent the idling, the malfunction, or the noise. As shown in (c) of FIG. 6, the stopping of the drain pump 6, commonly having a length of about 3m and an inner diameter of about 13mm, causes a large amount of condensed water W, for example, 0.4L to return back to the water storage tank 3. That is, once the drain tank 3 starts the draining, most of the water storage tank 3 makes a dead volume, causing the condensed water W to be kept stored without being drained, so that the amount of condensed water W to be stored is becoming reduced. Along with the limitation of a volume of the water storage tank 3, the volume of the water storage tank 3 acting for draining is reduced, so that the water storage tank 3 is rapidly filled with the condensed water W, while having a demand for operating the drain pump 6 in more frequent manner. Since the ON/OFF frequency per unit time is increased, the drain pump 6 is broken earlier. In addition, noise is increased due to the frequent operation of the drain pump 6 using a high power.

[0009] Therefore, it is an aspect of the present disclosure to provide a dryer capable of reducing the number of operations of raising the condensed water generated from an evaporator up to a high position, and capable of reducing the malfunction and the noise of a drain pump.

[0010] Additional aspects of the disclosure will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the disclosure.

[0011] In accordance with one aspect of the present disclosure, a dryer provided with a heat pump cycle having a compressor, a condenser, and an evaporator; and a blower passage to allow an air stream to pass through in an order of the condenser, a drum to accommodate clothes to be dried, and the evaporator, the dryer includes a first water storage tank configured to store condensed water generated as the air stream passes through the evaporator, a second water storage tank connected to the first water storage tank having a capacity larger than

a capacity of the first water storage tank while configured to store the condensed water transferred from the first water storage tank, a drain pipe having one end opening at a position higher than the second water storage tank, and a drain pump connected to the second water storage tank and the other end of the drain pipe while configured to discharge the condensed water stored in the second water storage tank from the one end of the drain pipe to an outside.

[0012] According to the structure as such, the condensed water generated at the evaporator is primarily collected in the first water storage tank, and is transferred to the second water storage tank that is larger than the first water storage tank, whenever the amount of the condensed water W accommodated in the first water storage tank reaches a predetermined level, thereby storing a large amount of condensed water in the second water storage tank when compared to the capacity of the first water storage tank. Accordingly, in a case where the condensed water is raised to a high position for draining via the drain pipe by use of the drain pump, the condensed water is drained in bulk as being added at each delivery, thereby decreasing the number of ON/OFF conversions of the drain pump. In addition, the decreasing of the number of ON/OFF conversions of the drain pump reduces the power consumption, degradation and the malfunction of the drain pump. In addition, since the number of operations of the drain pump is reduced, even if the drain pump is needed to have a high power to raise the condensed water to a high position, the noise of the drain pump is reduced.

[0013] In addition, since the condensed water is stored in the second water storage tank, the first water storage tank has a small volume, and is easily installed in a spatially limited area, such as the lower side of the drum or the evaporator.

[0014] In addition, the second water storage tank, while being spaced apart from the first water storage tank, is installed in a spacious area inside the dryer, and has a large volume. Since the volume of the second water storage tank is increased, the condensed water returning from the drain pipe when the drain pump is stopped is taken in a spared space in the second water storage tank.

[0015] The first water storage tank is integrally installed at a lower portion of the evaporator case to accommodate the evaporator, so that the condensed water generated from the evaporator is stored in the first water storage tank in a simple configuration, and a pipe or a seal between a case to accommodate the evaporator and the first water storage tank is omitted to reduce the manufacturing cost.

[0016] In order to reduce the power consumption or the noise generated when the condensed water is delivered from the first water storage tank to the second water storage tank, the delivery pump is further provided to deliver the condensed water from the first water storage tank to the second water storage tank. The delivery pump is not needed to raise the condensed water while the

delivery pump is installed between the first water storage pump and the second water storage pump, and thus the delivery pump is provided in a small size and produces a small noise. In a case when the noise may be decreased, the delivery pump may be enabled to be operated at all times, so that the miniaturization of the first water storage tank may be conveniently made while having no spatial limitation.

[0017] As for the configuration of each pump, in order to reduce the noise or the malfunction, the drain pump may be configured to have a high head and a large flow rate when compared to the delivery pump.

[0018] In order to deliver the condensed water from the first water storage tank to the second water storage tank by use of one drain pump while reducing the manufacturing cost, the drain pump is provided with a conversion mechanism to convert between a first state, in which the drain pump is connected to the second water storage tank and the drain pipe, and a second state, in which the drain pump is connected to the first water storage tank and the second water storage tank.

[0019] In order to reduce the number of ON/OFF operations of each pump per unit time while automatically processing the condensed water stored in each water storage tank, the dryer may further be provided with a first water level detection unit configured to detect a water level of the first water storage tank, a second water level detection unit configured to detect a water level of the second water storage tank, and a drain control unit configured to operate the delivery pump or the drain pump for a first predetermined time in a case of when the water level of the first water storage tank is detected as a first predetermined water level by the first water level detection unit, such that the condensed water is delivered from the first water storage tank to the second water storage tank, and to operate the drain pump for a second predetermined time in a case of when the water level of the second water storage tank is detected as a second predetermined water level by the second water level detection unit, such that the condensed water is discharged from the second water storage tank to an outside.

[0020] In order to prevent water leakage due to the backflow of the condensed water to the first water storage tank or the evaporator, the second predetermined water level may be set to be lower than a highest water level of the second water storage tank by a water level corresponding to a volume of the drain pipe. Accordingly, the second water storage tank has a capacity standing the backflow from the drain pipe.

[0021] In order to reduce the possibility that the delivery pump and the drain pump are simultaneously driven while maximizing the volume available to discharge the condensed water from the second water storage tank to an outside, the drain control unit, upon initiation of the operation of the dryer, is configured to operate the drain pump for a third predetermined time regardless of an output of the second water level detection unit.

[0022] In order to reduce the resistance when the con-

densed water is delivered from the first water storage tank to the second water storage tank while facilitating the decreasing of the size the delivery pump, the second water storage tank is provided with an air discharge pipe.

[0023] In order to prevent water leakage while reducing the manufacturing cost of the air discharge pipe, the air discharge pipe is connected to the drain pipe at a position higher than a highest water level of the second water storage tank.

[0024] According to a first aspect, there is provided a drier as set out in claim 1. Preferred features are set out in claims 2 to 11.

[0025] As described above, a first water storage tank and a second water storage tank are provided, and when the second water storage tank set to have a larger capacity is stored with a large amount of condensed water, the large amount of condensed water is raised at a single operation to a high position for draining, so that the number of conversions of ON/OFF of the drain pump per unit time is reduced. Accordingly, the malfunction, the degradation, and the power consumption of the drain pump are reduced.

[0026] These and/or other aspects of the disclosure will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

FIG. 1 is a view illustrating the configuration of a dryer in accordance with a first embodiment of the present disclosure;

FIG. 2 is a graph showing the amount of condensed water generated according to the drying time in accordance with the first embodiment of the present disclosure;

FIG. 3 is a view illustrating the configuration of a dryer in accordance with a second embodiment of the present disclosure;

FIGs. 4A and 4B are a views illustrating the configuration of a dryer in accordance with a third embodiment of the present disclosure;

FIG. 5 is a view illustrating an example of raising and draining condensed water in a conventional dryer; and

FIGs. 6A to 6C are views illustrating a back flow of the condensed water generated in a case where a drain mechanism of the conventional dryer is used to drain the condensed water at a high position.

[0027] Reference will now be made in detail to the embodiments of the present disclosure, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to like elements throughout.

[0028] Hereinafter, the first embodiment of the present

disclosure will be described with reference to drawings.

[0029] A dryer 100 in accordance with the first embodiment of the present disclosure uses a heat pump cycle 1 including a compressor 11, a condenser 12, and an evaporator 13, and is configured to dry wet clothes.

[0030] As shown in FIG. 1, the dryer 100 is provided with a blower passage 2 that allows an air stream to pass through in the order of the condenser 12, a drum 14 to accommodate clothes, and the evaporator 13. The air stream is formed by a blower mechanism 14 installed at a lower portion of the evaporator 13. According to the configuration as such, the air stream is heated by the heat received from the condenser 12, and evaporates moisture in the clothes in the drum 14. The air stream containing the moisture is exhausted from the blower mechanism 15 while being deprived of the heat at the evaporator 13. In addition, as the temperature of the air stream is lowered, condensed water S is condensed at the evaporator 13.

[0031] The dryer 100 in accordance with the first embodiment of the present disclosure is provided with a drain mechanism 200 to discharge the condensed water W generated at the evaporator 13 to an outside. In addition, the draining of the dryer 100 is not performed toward a drain-outlet that is positioned lower than the dryer 100, but is performed by raising condensed water W to a drainage portion that is installed higher than the dryer 100 by about 3 meters and by discharging the condensed water W.

[0032] The drain mechanism 200, as shown in FIG. 1, includes a first water storage tank 3, a delivery pump 4, a second water storage pump 5, a drain pump 6, and a drain hose 7 that are installed from the evaporator 13 to a drainage portion to an outside the dryer 100. In addition, the drain mechanism 200 is provided with a drain control unit (not shown) to control the delivery pump 4 and the drain pump 6. The components of the dryer 100 will be described in brief. The first water storage tank 3 is configured to temporarily accommodate the condensed water W generated at the evaporator 13. The condensed water W is delivered by the delivery pump 4 from the first water storage tank 3 to the second water storage tank 5 at the point of time when the condensed water W is fully filled in the first water storage tank 3 or reaches a predetermined amount. The delivery of the condensed water W is repeated in a number of times, and if the condensed water W is fully filled in the second water storage tank 5 or reaches a predetermined amount, the condensed water W is discharged by the drain pump 6 or by the drain hose 7 of an outside the dryer 100. In addition, the drain hose 7 has one end opening at a position higher than the installation position of the second water storage tank 5 by about 3 meters, and the other end installed at the drain pump 6.

[0033] Hereinafter, the components of the dryer 100 will be described in detail.

[0034] The first water storage tank 3 connects between an evaporator case 131 to accommodate the evaporator

13 and the drain pump 6 through a pipe. The first water storage tank 3 is installed at a lower side of the evaporator 13. That is, the water droplets of the condensed water W generated at the evaporator 13 is collected at the first water storage tank 3 through a movement by gravity. As for the shape and the size of the first water storage tank 3, the first water storage tank 3 is provided in a rectangular parallel-piped shape available to be accommodated a lower side of the evaporator 13 inside a housing of the dryer 100. The first water storage tank 3 has a volume smaller than the second water storage tank 5, that is to be described later, and is sufficiently small to be disposed at a position suitable for collecting the condensed water W from the evaporator 13. A first water level detection unit 31 is provided at an upper side of the first water storage tank 3 to detect whether the condensed water W is fully filled or reaches a first predetermined amount in the first water storage tank 3. A liquid level detecting sensor may be used as an example of the first water level detection unit 31. The first water level detection unit 31 in accordance with the embodiment serves to detect whether a water level of the first water storage tank 3 corresponds to the first predetermined water level, but the present disclosure is not limited thereto, and the first water level detection unit in accordance with another embodiment may sequentially detect other water levels.

[0035] The delivery pump 4 is a small capacity-compact type pump when compared to the drain pump 6 that is to be described later, and is configured to deliver the condensed water W from the first water storage tank 3 to the second water storage tank 5. The delivery pump 4 has a capability to raise the condensed water W to a position of the housing of the dryer 100, but lower than 3 meters.

[0036] The second water storage tank 5 is installed at a portion assuring a large space while avoiding the lower side of the evaporator 13 inside the housing of the dryer 100, so as to have a volume larger than that of the first water storage tank 3. If the first water storage tank 3 has a volume of about 0.1L, the second water storage tank 5 may have a volume of about 1.0L. That is, the second water storage tank 5 is configured to have a volume about ten times larger than that of the first water storage tank 3. The first water storage tank 3 and the second water storage tank 5 have sizes set based on an assumption, as shown in FIG. 2, the 3.6kg of clothes is dried as the total amount of the condensed water W is about 1000mL, and the amount of condensed water W generated for one minute is about 50mL/min. In addition, the second water storage tank 5 is also configured to a rectangular parallel-piped shape, and a second water level detection unit 51 is installed at an upper side of the second water storage tank 5 to detect whether the condensed water W is fully filled or reaches a second predetermined amount in the second water storage tank 5. A liquid level detecting sensor may be used as an example of the second water level detection unit 31. Alternatively, a water level detector or a water quantity detector may be used as an ex-

ample of the second water level detection unit 31.

[0037] When described for the installation position of the second water level detection unit 51 in more detail, the second predetermined level is provided at a position lower than a maximum water level of the second water storage tank 5 by a predetermined level, such that the second water level detection unit 51, while the condensed water W is being discharged from the drain hose 7 to an outside by the drain pump 6, absorbs the condensed water W in spite of a backflow of the amount of a volume of the condensed water W contained in the drain hose 7, that is, the amount of a volume of the drain hose 7. In addition, an opening is provided at an upper surface of the second water storage tank 5 to discharge the inside air to an outside even if the condensed water W is introduced into the inside the second water storage tank 5. An air discharge pipe 52 is installed at the opening. The air discharge pipe 52 is installed so as to join the drain hose 7 at a position which is higher than the maximum water level of the second water storage tank 5.

[0038] The drain pump 6 has a capability to raise the condensed water W collected in the second water tank 5 by 3 meters, and to discharge the condensed water W to an outside. That is, when compared to the delivery pump 4, the drain pump 6 has a higher head and a larger flow rate. In detail, the delivery pump 4 has a head of about 0.5m and a flow rate of about 0.5L/min, while the drain pump 6 has a head of about 3m and a flow rate of about 10L/min.

[0039] The drain control unit is configured to control the operation of the delivery pump 4 and the drain pump 6, and is implemented using a computer or a microcomputer provided with input/output parts, for example, a central processing unit (CPU), a memory, and an A/D converter. In detail, the drain control unit is configured to operate the delivery pump 4 or the drain pump 6 for a first predetermined time in a case when the water level of the first water storage tank 3 is detected as the first predetermined water level by the first water level detection unit 31, such that the condensed water W is delivered from the first water storage tank 3 to the second water storage tank 5, and to operate the drain pump 6 for a second predetermined time in a case when the water level of the second water storage tank 5 is detected as a second predetermined water level by the second water level detection unit 51, such that the condensed water W is discharged from the second water storage tank 5 to an outside.

[0040] The first predetermined time represents a time taken for the water level of the first water storage tank 3 to change from the first predetermined water level to nearly zero as the delivery pump 4 is driven, and the first predetermined time may be set through an experiment. In addition, the second predetermined time represents a time taken for the water level of the second water storage tank 6 to change from the second predetermined water level to nearly zero as the drain pump 6 is driven, and the second predetermined time may be set through an

experiment. As described above, the draining operation is controlled not on the basis of the water level measured when the delivery pump 4 and the drain pump 6 having been operated are stopped, but on the basis of the time of the operation of the delivery pump 4 and the drain pump 6. Accordingly, the condensed water W is effectively discharged in a simple configuration.

[0041] In addition, the drain control unit, upon starting of an initial operation of the dryer 100, is configured to drive the drain pump 6 for a third predetermined time regardless of the output of the first water level detection unit 31 and the output of the second water level detection unit 51. By driving the drain pump 6 for the third predetermined time at the starting of the initial operation of the dryer 100, the second water storage tank 5 empties the second water storage tank 5 to store a reasonable amount of condensed water W. Accordingly, both of the delivery pump 4 and the drain pump 6 are prevented from being driven due to the mismatch in a starting timing of the delivery pump 4 and the drain pump 6, thereby preventing the noise from occurring as both of the delivery pump 4 and the drain pump 6 are driven.

[0042] As described above, the dryer 100 in accordance with the first embodiment of the present disclosure, the condensed water W generated at the evaporator 13 is collected in the first water storage tank 3, which is installed at a lower side of the evaporator 13 and having a small size, by gravity without using a driving force. In addition, whenever the condensed water W is stored to the first predetermined water level in the first water storage tank 3, the condensed water W is delivered to the second water storage tank 5 by the delivery pump 4 having a small size and a small output to be added into a large amount, and the large amount of condensed water W is raised high to be discharged to an outside. That is, the condensed water W is not raised in small units, but is collected into a large amount in the second water storage tank 5 and is discharged, thereby reducing the number of operation times of the drain pump 6. Accordingly, the lifespan of the drain pump 6 is prevented from being decreased due to the frequent operation of the drain pump 6 while significantly reducing the noise of the drain pump 6 generated from the many of operation times of the drain pump 6.

[0043] In addition, the second water storage tank 5 has a large volume when compared to the first water storage tank 3, and has a capability to a large amount of condensed water W until the discharge, thereby significantly reducing the ratio of the volume of the condensed water W, which flows backward from a higher position to the second water storage tank 5 when the drain pump 6 is stopped, to the volume of the condensed water W, which is discharged at a single discharge, and also reducing the volume of the condensed water W making the dead volume. Accordingly, the drain hose 7 has an end opening at a higher position when compared to the conventional cloth dryer, and the condensed water W is effectively discharged to an outside even in a case when the

condensed water W is needed to be raised to a high position to be discharged.

[0044] In addition, since the dryer 100 is provided with the first water storage tank 3 and the second water storage tank 5, the first water storage tank 3 is configured to be miniaturized so as to be installed at a small area suitable for collecting the condensed water W generated at the evaporator 13 while the second water storage tank 5 is configured to be as large as possible to store the condensed water W.

[0045] Accordingly, despite the limitation in installing a main member, such as the drum 14 or the housing inside the dryer 100, the first water storage tank 3 having a small size is installed. That is, the design flexibility of the first water storage tank 3 and the second water storage tank 5 are improved.

[0046] According to a modified example of the first embodiment, differently from the first embodiment of the present disclosure where the delivery pump 4 is driven only if the water level of the first water storage tank 3 reaches the first predetermined water level for a predetermined time, the delivery pump 4 may be driven at all times if the noise is small.

[0047] Hereinafter, a dryer 100 in accordance with the second embodiment of the present disclosure will be described. Identical elements as in the previous embodiment of the present disclosure have been designated by the same reference numerals.

[0048] As shown in FIG. 3, a drain mechanism of the dryer 100 in accordance with the second embodiment of the present disclosure has a first water storage tank 3 installed in a different manner from the first embodiment of the present disclosure. In detail, in the second embodiment of the present disclosure, the first water storage tank 3 is integrally installed with a lower portion of the evaporator case 131, differently from the first embodiment of the present disclosure wherein the evaporator case 131 is separately installed from the first water storage tank 3.

[0049] According to the structure as above, the first water storage tank 3 is further miniaturized and the condensed water W is effectively collected. In addition, the integral installation of the first water storage tank 3 eliminates the need to install a pipe connecting the evaporator case 131 to the first water storage tank 3 or to install a seal configured to prevent water leakage, thereby assuring a simpler structure.

[0050] Hereinafter, a dryer 100 in accordance with the third embodiment of the present disclosure will be described. Identical elements as in the previous embodiment of the present disclosure have been designated by the same reference numerals.

[0051] A drain mechanism 200 of the dryer 100 in accordance with the third embodiment of the present disclosure is different from the first embodiment in a way that the delivery pump 4 is not installed, and by the use of the drain pump 5 only, the delivery from the first water storage tank 3 to the second water storage tank 5 and

the discharge of the condensed water W to an outside are achieved.

[0052] That is, the drain mechanism 200 is provided with a conversion mechanism to convert between a first state, in which the drain pump 6 is connected to the second water storage tank 5 and the drain hose, and a second state, in which the drain pump 6 is connected to the first water storage tank 3 and the second water storage tank 5.

[0053] In detail, as shown in FIG. 4, the first water storage tank 3 is connected to the drain pump 6 and a lower portion of the second water storage tank 5 via a pipe through a first conversion valve 81 that is represented as a three-way valve. In addition, the drain pump 6 is connected to the other end of the drain hose 7 and to an upper portion of the second water storage tank 5 via a pipe through a second conversion valve 82. In addition, the drain control unit is configured to control the conversion of the connection of each member by controlling the direction of the first conversion valve 81 and the second conversion valve 82.

[0054] The drain control unit, if the first water storage tank 3 reaches the first predetermined water level and the condensed water W is delivered from the first water storage tank 3 to the second water storage tank 5 as shown in (a) of FIG. 4, controls the first conversion valve 81 such that the first water storage tank 3 is communicated with the drain pump 6 while the pipe directed toward the second water storage tank 5 is closed. In addition, as shown in (b) of FIG. 4, the drain control unit controls the second conversion valve 82 such that the drain pump 6 is communicated with the second water storage tank 5 while the pipe directed toward the drain hose 7 is closed. Thereafter, the drain control unit operates the drain pump 6.

[0055] The drain control unit, if the condensed water W is delivered from the second water storage tank 5 to the outside through the drain hose 7, controls the first conversion valve 81 such that the second water storage tank 5 is communicated with the drain pump 6 and the pipe directed toward the first water storage tank 3, and controls the second conversion valve 82 such that the drain pump 6 is communicated with the drain hose 7 while the pipe directed toward the second water storage tank 5 is closed. Thereafter, the drain control unit discharges the condensed water W to an outside by operating the drain pump 6.

[0056] According to the dryer 100 in accordance with the present disclosure, the delivery from the first water storage tank 3 to the second water storage tank 5 and the discharge of the condensed water W to an outside from the second water storage tank 5 are performed while reducing the number of pumps.

[0057] Hereinafter, other embodiments of the present disclosure will be described. The drain hose has been provided as a drain passage to discharge the condensed water W from the second water storage tank to an outside, but according to another embodiment of the present

disclosure, a drain pipe may be implemented as the drain passage.

[0058] In addition, the shape of the first water storage tank and the second storage tank is not limited thereto, and may be alternately modified depending on the disposition of the drum or the evaporator as long as the volume of the second water storage tank is configured to be larger than the volume of the first water storage tank.

[0059] Although a few embodiments of the present disclosure have been shown and described, it would be appreciated by those skilled in the art that changes may be made in these embodiments without departing from the principles of the disclosure, the scope of which is defined in the claims and their equivalents.

Claims

1. A dryer provided with a heat pump cycle having a compressor, a condenser and an evaporator; and a blower passage to allow an air stream to pass in an order of the condenser, a drum to accommodate clothes to be dried, and the evaporator, the dryer comprising:

a first water storage tank configured to store condensed water generated as the air stream passes through the evaporator;

a second water storage tank connected to the first water storage tank, having a capacity larger than a capacity of the first water storage tank, and configured to store the condensed water transferred from the first water storage tank;

a drain pipe having one end opening at a position higher than the second water storage tank; and a drain pump connected to the second water storage tank and the other end of the drain pipe, and configured to discharge the condensed water stored in the second water storage tank from the one end of the drain pipe to an outside.

2. The dryer of claim 1, wherein the first water storage tank is integrally installed with a lower portion of an evaporator case that accommodates the evaporator.
3. The dryer of claim 1 or 2, further comprising a delivery pump to deliver the condensed water from the first water storage tank to the second water storage tank.
4. The dryer of claim 3, wherein the drain pump has a higher head and a large flow rate when compared to the delivery pump.
5. The dryer of any one of claims 1 to 4, further comprising a converter mechanism configured to convert between a first state, in which the drain pump is connected to the second water storage tank and the

drain pipe, and a second state, in which the drain pump is connected to the first water storage tank and the second water storage tank.

6. The dryer of any one of claims 1 to 5, further comprising:

a first water level detection unit configured to detect a water level of the first water storage tank;
a second water level detection unit configured to detect a water level of the second water storage tank; and
a drain control unit configured to operate the drain pump for a first predetermined time in a case when the water level of the first water storage tank is detected as a first predetermined water level by the first water level detection unit, such that the condensed water is delivered from the first water storage tank to the second water storage tank, and to operate the drain pump for a second predetermined time in a case when the water level of the second water storage tank is detected as a second predetermined water level by the second water level detection unit, such that the condensed water is discharged from the second water storage tank to an outside.

7. The dryer of claim 6, wherein the second predetermined water level is set to be lower than a highest water level of the second water storage tank by a water level corresponding to a volume of the drain pipe.

8. The dryer of claim 6 or 7, wherein the drain control unit, upon starting of an initial operation of the dryer, is configured to operate the drain pump for a third predetermined time regardless of an output of the second water level detection unit.

9. The dryer of any one of claims 3 to 5 when dependent on claim 3, further comprising:

a first water level detection unit configured to detect a water level of the first water storage tank;
a second water level detection unit configured to detect a water level of the second water storage tank; and
a drain control unit configured to operate the delivery pump or the drain pump for a first predetermined time in a case when the water level of the first water storage tank is detected as a first predetermined water level by the first water level detection unit, such that the condensed water is delivered from the first water storage tank to the second water storage tank, and in a case when

the water level of the second water storage tank is detected as a second predetermined water level by the second water level detection unit, the drain control unit is configured to operate the drain pump for a second predetermined time, such that the condensed water is discharged from the second water storage tank to an outside.

10. The dryer of any one of claims 1 to 9, wherein the second water storage tank has an air discharge pipe.

11. The dryer of claim 10, wherein the air discharge pipe is connected to the drain pipe at a position higher than a highest water level of the second water storage tank.

FIG. 1

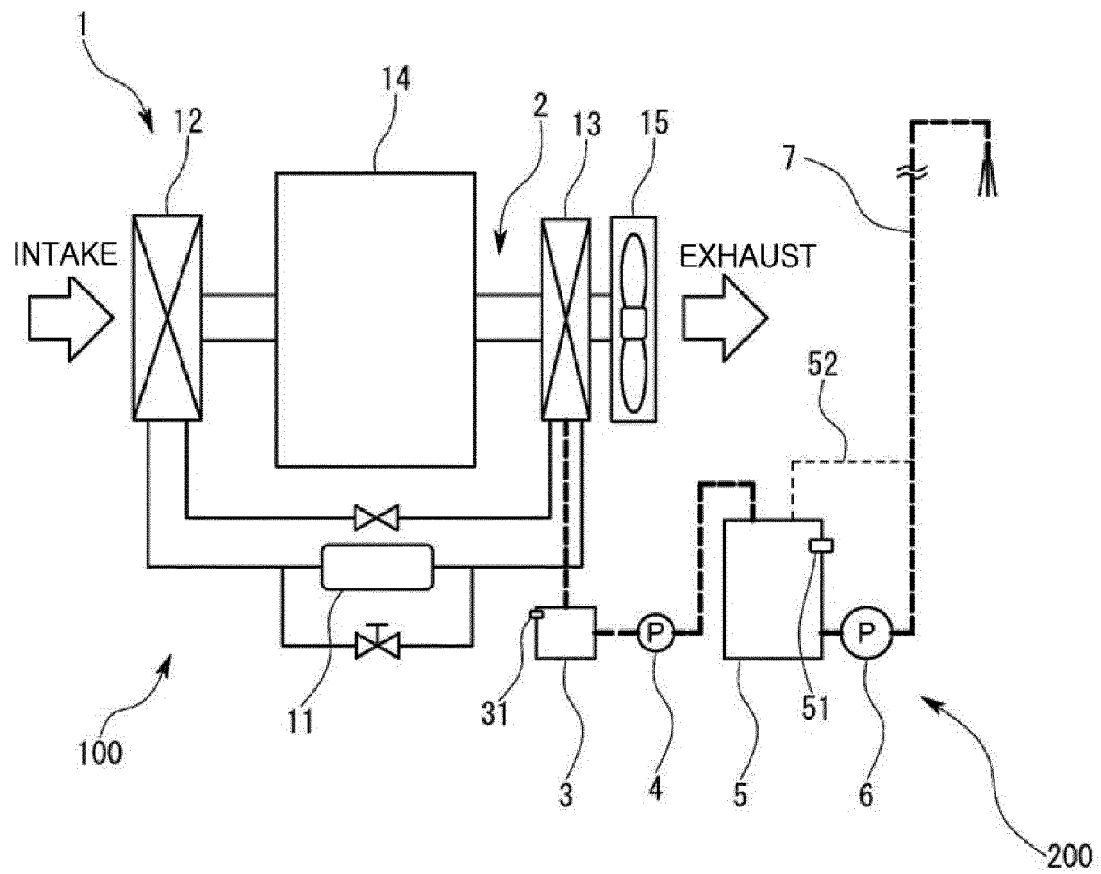


FIG. 2

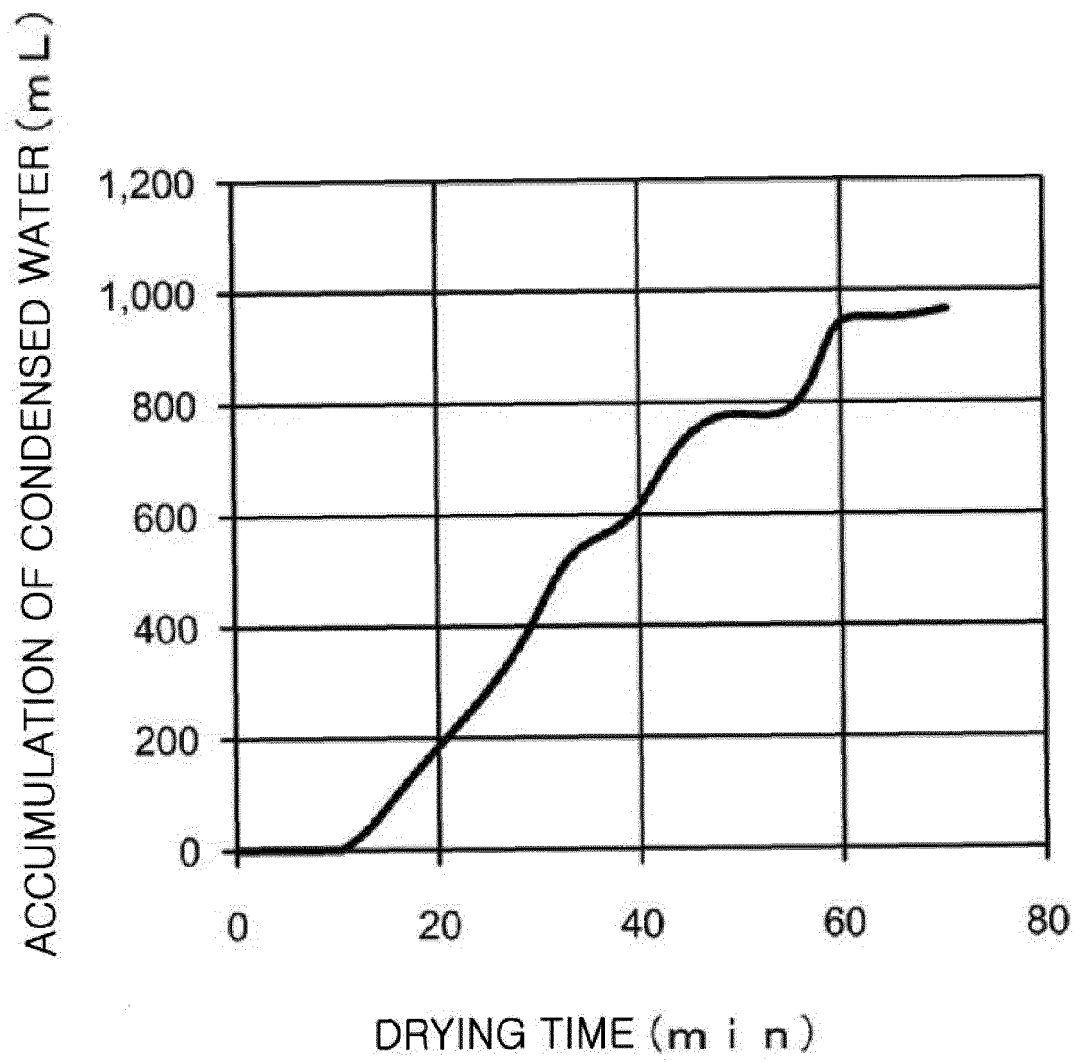


FIG. 3

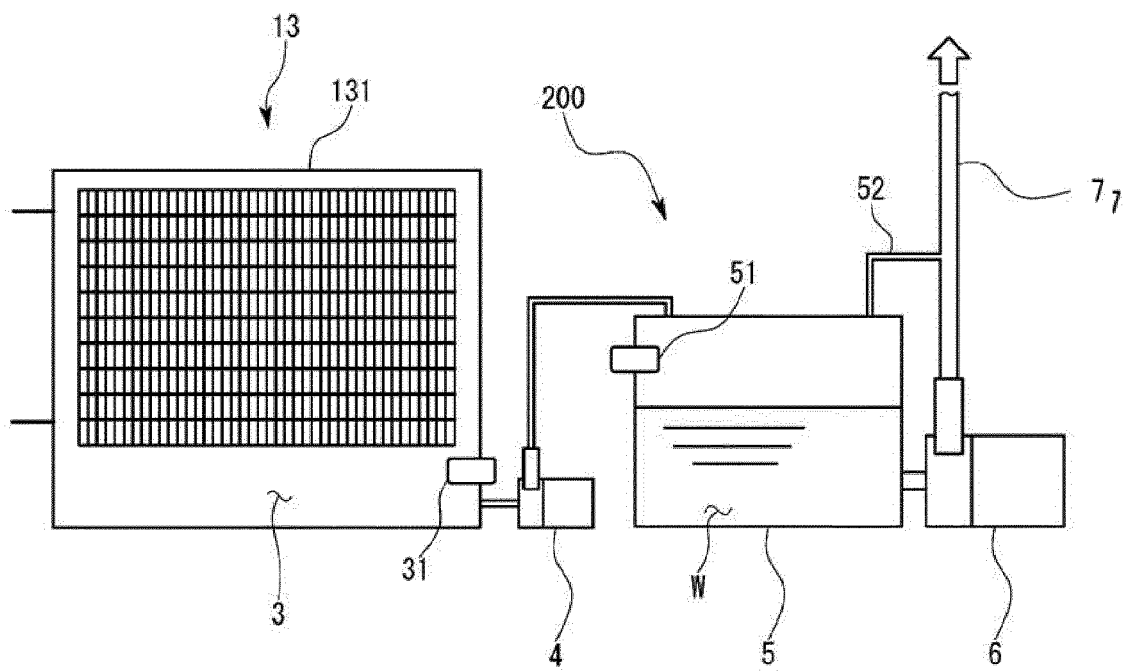


FIG. 4A

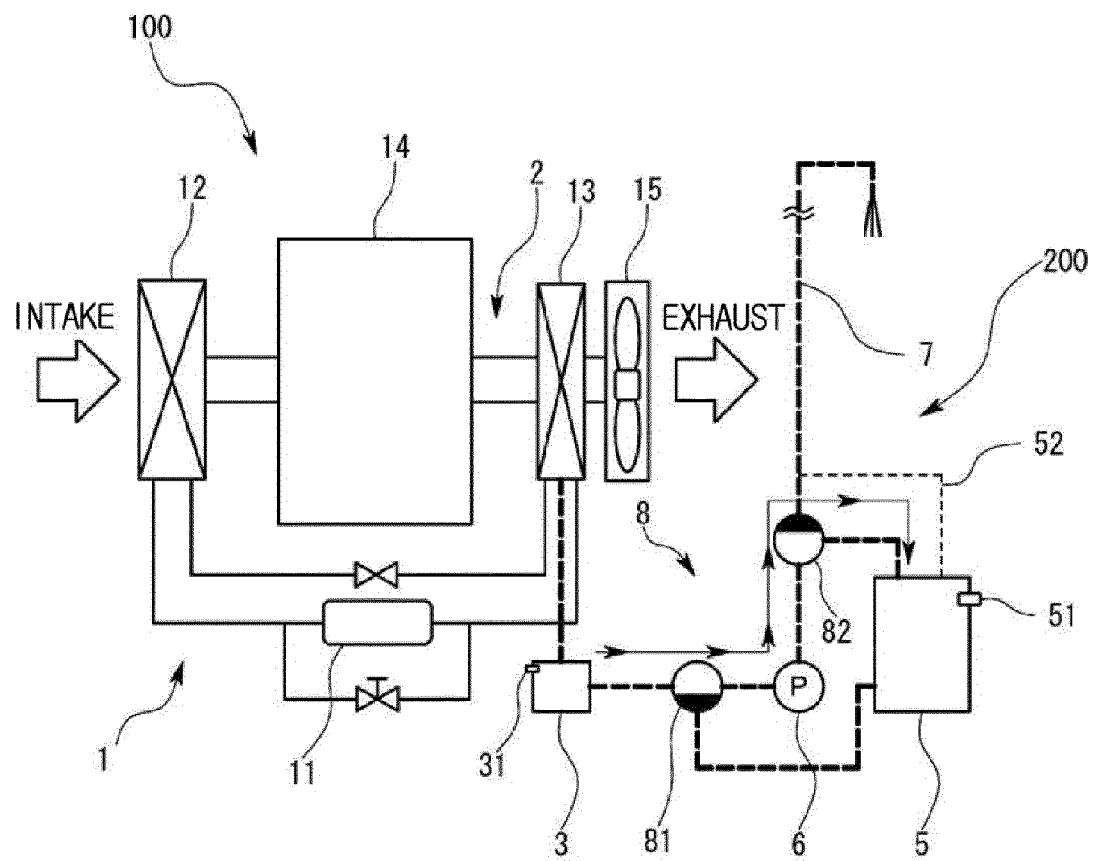


FIG. 4B

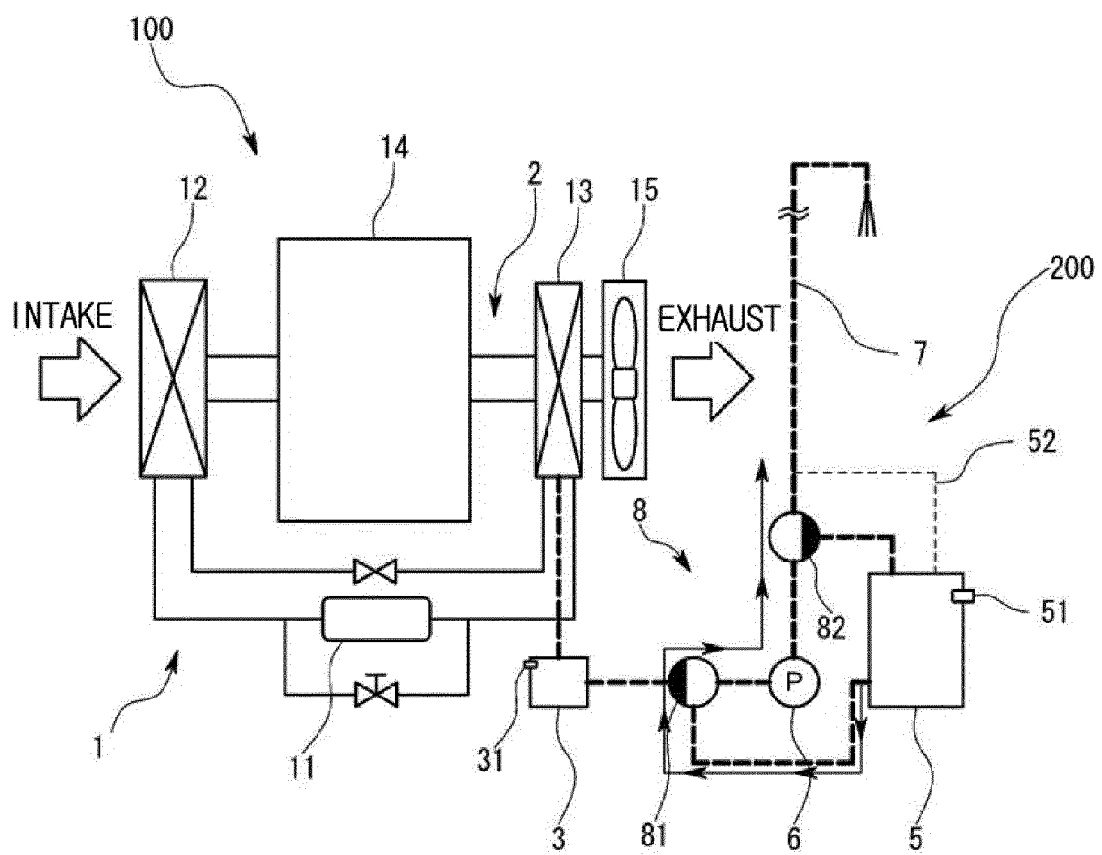


FIG. 5

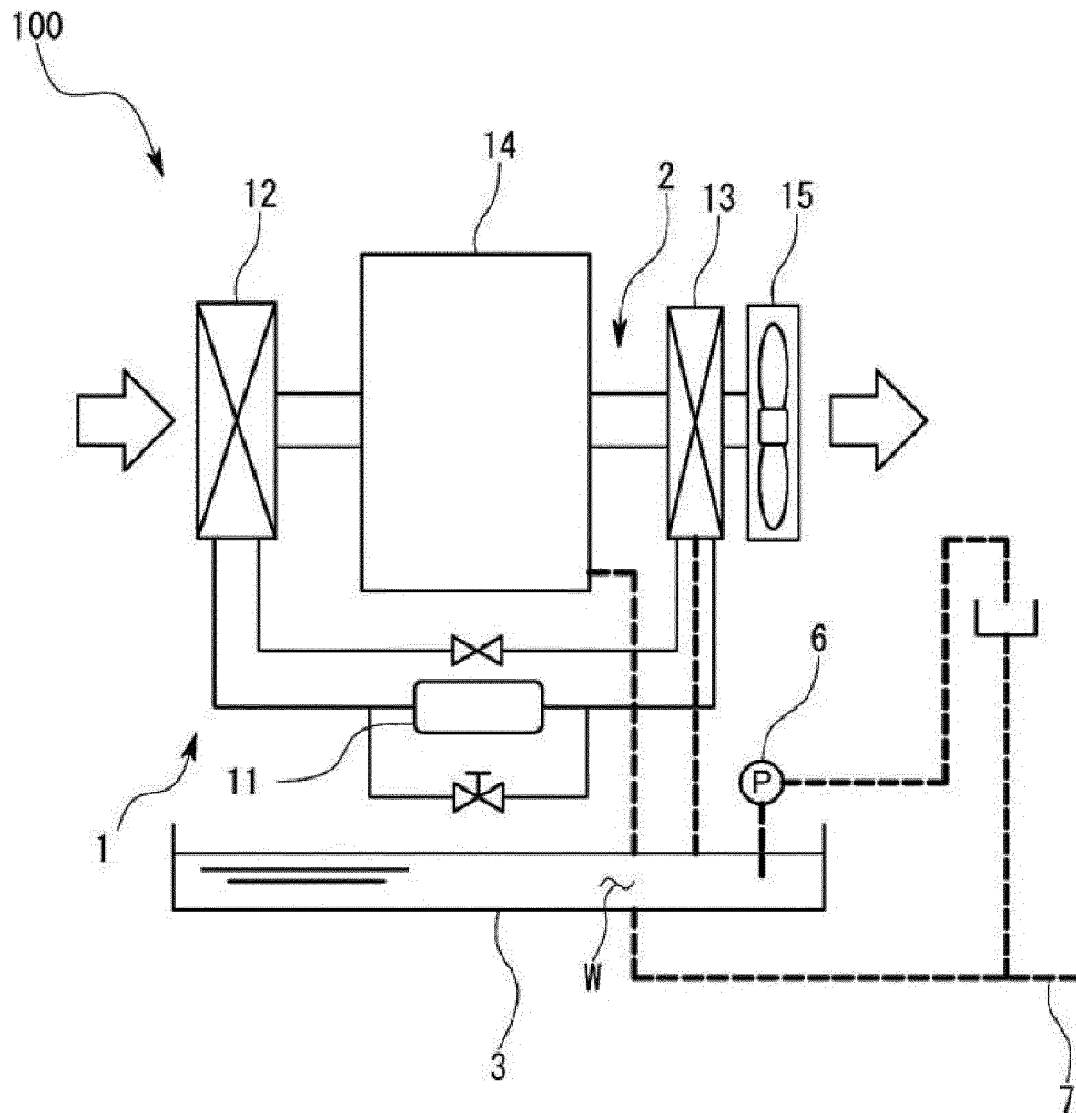


FIG. 6A

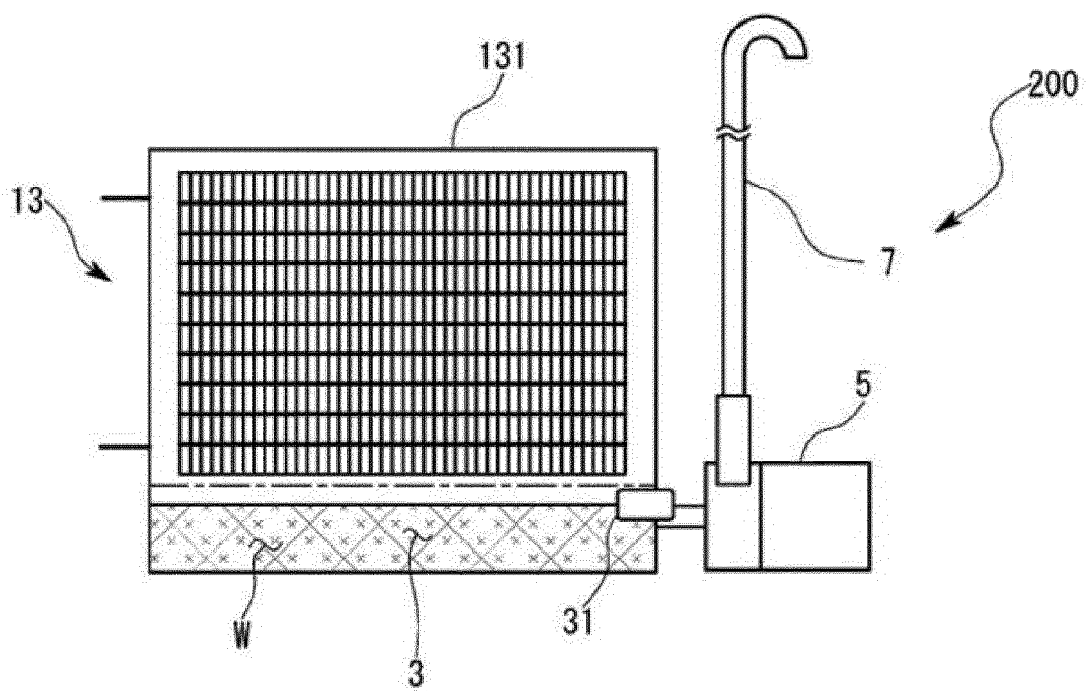


FIG. 6B


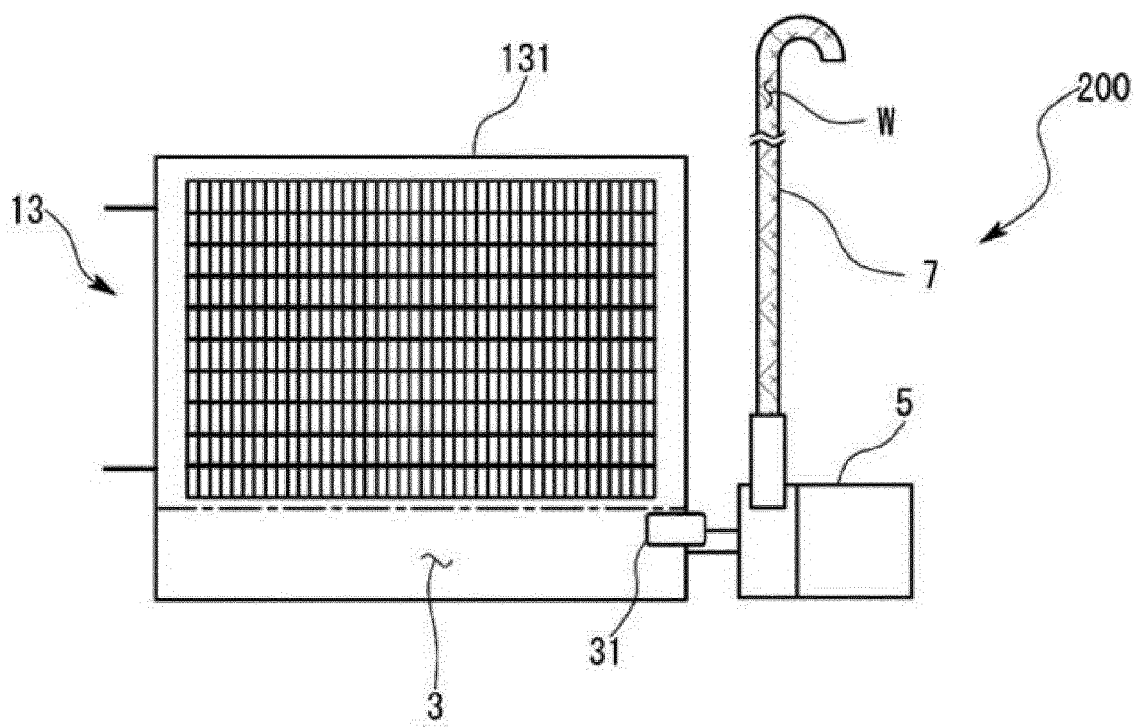


FIG. 6C



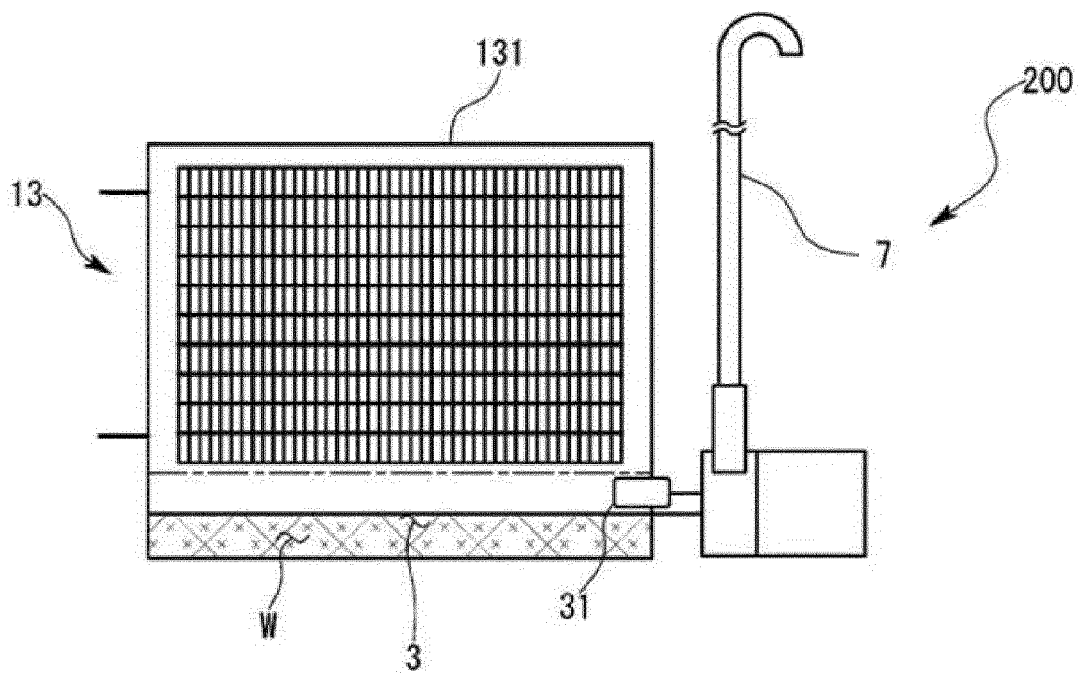

EUROPEAN SEARCH REPORT

Application Number
EP 12 19 0446

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y,D	JP 2006 087672 A (MATSUSHITA ELECTRIC IND CO LTD) 6 April 2006 (2006-04-06) * paragraphs [0022] - [0023], [0027] * * paragraphs [0041] - [0046] * * abstract; figures 1-10 *	1-4,6, 8-11	INV. D06F58/24
Y	DE 10 2008 054832 A1 (BSH BOSCH SIEMENS HAUSGERAETE [DE]) 1 July 2010 (2010-07-01) * paragraphs [0017] - [0021] * * paragraphs [0029] - [0032], [0038] * * figures 1,3 *	1-4,6, 8-11	
A	DE 10 2009 045470 A1 (BSH BOSCH SIEMENS HAUSGERAETE [DE]) 20 May 2010 (2010-05-20) * paragraphs [0009] - [0017] * * paragraphs [0027] - [0028] * * paragraphs [0034] - [0036], [0039] * * figures 1-3 *	1,3,6,9	
A	DE 43 00 694 A1 (BOSCH SIEMENS HAUSGERAETE [DE]) BSH BOSCH SIEMENS HAUSGERAETE [DE]) 14 July 1994 (1994-07-14) * column 1, line 11 - column 1, line 37 * * column 1, line 63 - column 2, line 45 * * figures 1-3 *	1,3,6,9	TECHNICAL FIELDS SEARCHED (IPC) D06F
A	DE 22 32 911 B1 (LICENTIA PATENT-VERWALTUNGS-GMBH [DE]) 27 September 1973 (1973-09-27) * column 2, line 5 - column 2, line 49 * * column 3, line 1 - column 4, line 34 * * figure 1 *	1,6,9	
A	DE 22 19 889 B1 (LICENTIA PATENT-VERWALTUNGS-GMBH [DE]) 24 May 1973 (1973-05-24) * column 1, line 35 - column 2, line 60 * * claims 1-4; figure 1 *	1	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 8 February 2013	Examiner Weinberg, Ekkehard
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 19 0446

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2006087672 A	06-04-2006	NONE	
DE 102008054832 A1	01-07-2010	NONE	
DE 102009045470 A1	20-05-2010	NONE	
DE 4300694 A1	14-07-1994	NONE	
DE 2232911 B1	27-09-1973	NONE	
DE 2219889 B1	24-05-1973	CH 568429 A5	31-10-1975
		DE 2219889 B1	24-05-1973
		DK 136280 B	19-09-1977
		FR 2182459 A5	07-12-1973
		IT 984065 B	20-11-1974
		NL 7305560 A	24-10-1973
		SE 380297 B	03-11-1975

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2006087672 A [0005] [0006]