




(86) Date de dépôt PCT/PCT Filing Date: 2015/06/01
(87) Date publication PCT/PCT Publication Date: 2016/12/08
(45) Date de délivrance/Issue Date: 2020/01/07
(85) Entrée phase nationale/National Entry: 2017/03/07
(86) N° demande PCT/PCT Application No.: CN 2015/080490
(87) N° publication PCT/PCT Publication No.: 2016/192007

(51) Cl.Int./Int.Cl. *H02J 7/00* (2006.01)
(72) Inventeur/Inventor:
ZHANG, JIALIANG, CN
(73) Propriétaire/Owner:
GUANGDONG OPPO MOBILE
TELECOMMUNICATIONS CORP., LTD., CN
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : CIRCUIT DE CHARGE ET TERMINAL MOBILE
(54) Title: CHARGING CIRCUIT AND MOBILE TERMINAL

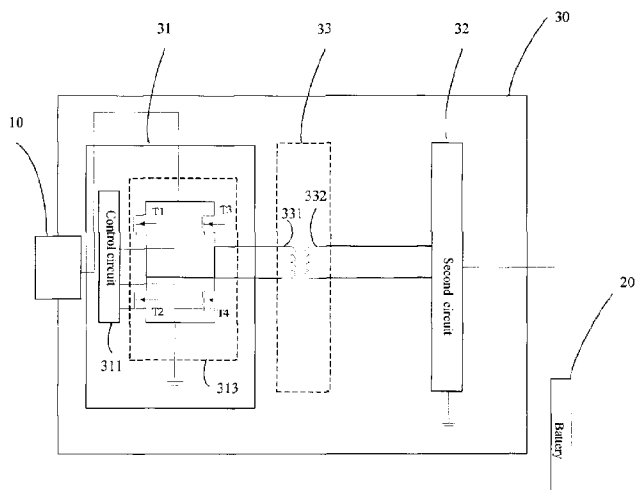

(57) **Abrégé/Abstract:**

It is provided a charging circuit and a mobile terminal. The charging circuit is arranged between a charging interface and a battery of the mobile terminal. The charging circuit comprises a first circuit, a magnetic coupling element, and a second circuit connected in series successively between the charging interface and the battery. According to embodiments of the present disclosure, a DC path of the charging circuit is separated by the magnetic coupling element. That is to say, there is no DC path in the charging circuit. DC current from the charging interface would not be output directly to the second circuit and the battery upon failure of the first circuit, whereby reliability of the charging circuit is improved.

ABSTRACT

It is provided a charging circuit and a mobile terminal. The charging circuit is arranged between a charging interface and a battery of the mobile terminal. The charging circuit comprises a first circuit, a magnetic coupling element, and a second circuit connected in series successively between the charging interface and the battery. According to embodiments of the present disclosure, a DC path of the charging circuit is separated by the magnetic coupling element. That is to say, there is no DC path in the charging circuit. DC current from the charging interface would not be output directly to the second circuit and the battery upon failure of the first circuit, whereby reliability of the charging circuit is improved.

CHARGING CIRCUIT AND MOBILE TERMINAL

TECHNICAL FIELD

[0001] The present disclosure relates to mobile terminal field, and particularly to a charging circuit and a mobile terminal.

BACKGROUND

[0002] With the growing popularity of mobile terminal use, terminal charging has become a focused issue of mobile terminal providers.

[0003] FIG. 1 is a circuit diagram illustrating a charging circuit used in a mobile terminal in the related art. This charging circuit is known as BUCK circuit, which includes a MOS transistor, a control circuit, a diode, an inductor, and a battery. Upon charging, the control circuit controls the MOS transistor to turn-on/turn-off to generate a changing square wave current. The square wave current flows to the inductor from the MOS transistor, and then flows to the battery after voltage stabilization conducted by the inductor.

[0004] The above mentioned charging process has a risk of MOS transistor breakdown. Upon MOS transistor breakdown, the current will flow through the inductor, a current/voltage detecting circuit, and the battery directly; this will cause the battery to exceed a limit voltage and may even lead to more serious consequences.

[0005] The cause of the damage to the MOS transistor can be as follows.

[0006] The MOS transistor is mis-energized; the voltage at both ends of the MOS transistor exceeds a maximum voltage that can be withstood; electrostatic breakdown or surge.

[0007] The MOS transistor is of poor quality; or, there is an integrated manufacture technology issue.

[0008] There can be other defects.

[0009] In order to avoid the above problems and improve the reliability of the MOS transistor, the value of on-resistance (RDSON) of the MOS transistor has been increased so as to improve the voltage resistance of the MOS transistor. On the other

hand, high resistance, in turn, would cause the charging circuit to be easy to heat, low energy transmission efficiency and so on.

SUMMARY

[0010] The present disclosure provides a charging circuit and a mobile terminal, with the aim of improving the reliability of a charging circuit in a mobile terminal.

[0011] According to a first aspect, it is provided a charging circuit. The charging circuit arranged between a charging interface and a battery of a mobile terminal, and includes: a first circuit, a magnetic coupling element, and a second circuit connected in series successively between the charging interface and the battery. The first circuit is configured to receive a first current from the charging interface and convert the first current to a second current with changed magnitude and/or direction. The magnetic coupling element includes a first coil and a second coil; the first coil connects with the first circuit, and the second coil connects with the second circuit, the first coil and the second coil separated from each other so as to disconnect a direct-current (DC) path of the charging circuit. The magnetic coupling element is configured to transfer energy from the first coil to the second coil in an electromagnetic induction manner by utilizing the second current with changed magnitude and/or direction, so as to generate a third current. The second circuit is configured to adjust the third current to a fourth current which is suitable for battery charging, so as to charge the battery.

[0012] Based on the first aspect, in one implementation, the first circuit includes a half-bridge circuit and a control circuit controlling the half-bridge circuit. The half-bridge circuit includes a first switch transistor and a second switch transistor. A first end of the first switch transistor connects with the charging interface, a second end of the first switch transistor connects with a first end of the first coil, and a control end of the first switch transistor connects with the control circuit. A first end of the second switch transistor connects with the second end of the first switch transistor, a second end of the second switch transistor connects to ground, and a control end of the second switch transistor connects with the control circuit. A second end of the first coil connects to ground.

[0013] Based on the first aspect or any of the above implementations, in another implementation, the first circuit includes a full-bridge circuit and a control circuit controlling the full-bridge circuit. The full-bridge circuit includes a first switch transistor, a second switch transistor, a third switch transistor, and a fourth switch transistor. A first end of the first switch transistor connects with the charging interface, a second end of the first switch transistor connects with a second end of the first coil, and a control end of the first switch transistor connects with the control circuit. A first end of the second switch transistor connects with the second end of the first switch transistor, a second end of the second switch transistor connects to ground, and a control end of the second switch transistor connects with the control circuit. A first end of the third switch transistor connects with the charging interface, a second end of the third switch transistor connects with a first end of the first coil, and a control end of the third switch transistor connects with the control circuit. A first end of the fourth switch transistor connects with the second end of the third switch transistor, a second end of the fourth switch transistor connects to ground, and a control end of the fourth switch transistor connects with the control circuit.

[0014] Based on the first aspect or any of the above implementations, in another implementation, the first circuit includes a switch transistor and a control circuit controlling the switch transistor. A first end of the switch transistor connects with the charging interface, a second end of the switch transistor connects with a first end of the first coil, and a control end of the switch transistor connects with the control circuit. A second end of the first coil connects to ground.

[0015] Based on the first aspect or any of the above implementations, in another implementation, the switch transistor in the first circuit is metal oxide semiconductor field effect transistor (MOSFET).

[0016] Based on the first aspect or any of the above implementations, in another implementation, the second circuit includes a rectifier circuit and a filter circuit.

[0017] According to a second aspect of the present disclosure, it is provided mobile terminal. The mobile terminal includes a charging interface, a battery, and a charging circuit according to the first aspect or any implementation of the first aspect. The charging circuit is arranged between the charging interface and the battery.

[0018] Based on the second aspect, in one implementation, the charging interface is a USB interface.

[0019] Based on the second aspect or any of the above implementations, in one implementation, the battery is lithium battery.

[0020] Based on the second aspect or any of the above implementations, in one implementation, the mobile terminal supports a normal charging mode and a quick charging mode, wherein charging current is larger in the quick charging mode than in the normal charging mode.

[0021] In the technical schemes described above, a DC path of the charging circuit is separated by the magnetic coupling element. That is to say, there is no DC path in the charging circuit. DC current from the charging interface would not be output directly to the second circuit and the battery upon failure of the first circuit, whereby reliability of the charging circuit is improved.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] In order to illustrate the technical solutions of the present disclosure or the related art more clearly, a brief description of the accompanying drawings used herein is given below. Obviously, the drawings listed below are only examples, and a person skilled in the art should be noted that, other drawings can also be obtained on the basis of these exemplary drawings without creative work.

[0023] FIG. 1 is a circuit diagram illustrating a charging circuit in the related art.

[0024] FIG. 2 is a block schematic diagram illustrating a charging circuit according to an embodiment of the present disclosure.

[0025] FIG. 3 is a circuit diagram illustrating a charging circuit according to an embodiment of the present disclosure.

[0026] FIG. 4 is a circuit diagram illustrating a charging circuit according to an embodiment of the present disclosure.

[0027] FIG. 5 is a block schematic diagram illustrating a mobile terminal according to an embodiment of the present disclosure.

DETAILED DESCRIPTION OF ILLUSTRATED EMBODIMENTS

[0028] Technical solutions of the embodiments of the present disclosure will be described clearly and completely taken in conjunction with the accompanying drawings; it will be apparent to one of ordinary skill in the art that, the embodiments described below are merely a part of the disclosure and other embodiments obtained out of them without creative work will fall into the protection range of the present disclosure either.

[0029] FIG. 2 is block schematic diagram illustrating a charging circuit according to an embodiment of the present disclosure. As shown in FIG.2, a charging circuit 30 is arranged between a charging interface 10 and a battery 20 of a terminal. The charging interface 30 includes a first circuit 31, a magnetic coupling element 33, and a second circuit 32 connected in series successively between the charging interface 10 and the battery 20.

[0030] The first circuit 31 is configured to receive a first current from the charging interface 10 and convert the first current to a second current with changed magnitude and/or direction.

[0031] The magnetic coupling element 33 includes a first coil 331 and a second coil 332. The first coil 331 connects with (in other words, coupled to) the first circuit 31, and the second coil 332 connects with the second circuit 32, the first coil 331 and the second coil 332 separated apart from each other so as to disconnect a direct-current (DC) path of the charging circuit 30. The magnetic coupling element 33 is configured to transfer energy from the first coil 331 to the second coil 332 in an electromagnetic induction manner by utilizing the second current with changed magnitude and/or direction, so as to generate a third current (in other words, the third current is generated at the second coil 332 and is output to the second circuit 32).

[0032] The second circuit 32 is configured to adjust alternating current (AC), which is coupled to the second circuit 32 by the first circuit 31 through the magnetic coupling element 33, to DC which is suitable for battery charging.

[0033] In this technical scheme, a DC path of the charging circuit is separated by the magnetic coupling element. That is to say, there is no DC path in the charging circuit. DC current from the charging interface would not be output directly to the second

circuit and the battery upon failure of the first circuit, whereby reliability of the charging circuit is improved.

[0034] As an embodiment, as shown in FIG.3, the first circuit 31 includes a half-bridge circuit 312 and a control circuit 311 controlling the half-bridge circuit. The half-bridge circuit 311 includes a first switch transistor T1 and a second switch transistor T2. A first end of the first switch transistor T1 connects with the charging interface 10, a second end of the first switch transistor T2 connects with a first end of the first coil 331, and a control end of the first switch transistor T1 connects with the control circuit 311. A first end of the second switch transistor T2 connects with the second end of the first switch transistor T1, a second end of the second switch transistor T2 connects to ground, and a control end of the second switch transistor T2 connects to the control circuit 311. A second end of the first coil 331 connects to ground. Furthermore, two ends of the second coil 332 can connect with the second circuit 32 and ground respectively. Besides, the second circuit 32 can be grounded.

[0035] In the embodiment of the present disclosure, a switch transistor (such as a MOS transistor), which is easy breakdown, is arranged within the first circuit. When breakdown of the switch transistor occurs, the first circuit could not convert DC to AC via the switch transistor; this cause DC input at the charging interface being applied to a subsequent component of the charging interface or a battery directly. However, with the aid of the magnetic coupling element arranged between the first circuit and the second circuit, a DC path of the charging circuit can be disconnected. That is to say, DC input at the charging interface cannot flow to the second circuit or the battery even if the switch transistor in the first circuit is broke down or failure, whereby the reliability of the charging circuit of the mobile terminal can be improved.

[0036] In addition, the magnetic coupling element has good isolation performance. Thus, instead of increasing the on-resistance so as to increase the voltage resistance of the MOS transistor and then improve the reliability of the circuit like in the prior art, in embodiments of the present disclosure, a lower on-resistance of the switch transistor in the first circuit is allowed, and this will improve the energy transfer efficiency of the whole charging circuit while reducing heating and loss.

[0037] As an embodiment, the first circuit includes a full-bridge circuit 313 and a control circuit 311 controlling the full-bridge circuit. The full-bridge circuit 313 includes a first switch transistor T1, a second switch transistor T2, a third switch transistor T3, and a fourth switch transistor T4. A first end of the first switch transistor T1 connects with the charging interface 10, a second end of the first switch transistor T1 connects with a second end of the first coil 331, and a control end of the first switch transistor T1 connects with the control circuit 311. A first end of the second switch transistor T2 connects with the second end of the first switch transistor T1, a second end of the second switch transistor T2 connects to ground, and a control end of the second switch transistor T2 connects with the control circuit 311. A first end of the third switch transistor T3 connects with the charging interface 10, a second end of the third switch transistor T3 connects with the first end of the first coil 331, and a control end of the third switch transistor T3 connects with the control circuit 311. A first end of the fourth switch transistor T4 connects with the second end of the third switch transistor T3, a second end of the fourth switch transistor T4 connects to ground, and a control end of the fourth switch transistor T4 connects with the control circuit 311. In addition, two ends of the second coil 332 can connect with the second circuit 32, and the second circuit can be grounded.

[0038] In the embodiment of the present disclosure, a switch transistor (such as a MOS transistor), which is easy breakdown, is arranged within the first circuit. When breakdown of the switch transistor occurs, the first circuit could not convert DC to AC via the switch transistor; this cause DC input at the charging interface being applied to a subsequent component of the charging interface or a battery directly. However, with the aid of the magnetic coupling element arranged between the first circuit and the second circuit, a DC path of the charging circuit can be disconnected. That is to say, DC input at the charging interface cannot flow to the second circuit or the battery even if the switch transistor in the first circuit is broke down or failure, whereby the reliability of the charging circuit of the mobile terminal can be improved.

[0039] In addition, the magnetic coupling element has good isolation performance. Thus, instead of increasing the on-resistance so as to increase the voltage resistance of the MOS transistor and then improve the reliability of the circuit like in the prior art,

in embodiments of the present disclosure, a lower on-resistance of the switch transistor in the first circuit is allowed, and this will improve the energy transfer efficiency of the whole charging circuit while reducing heating and loss.

[0040] As an embodiment, the first circuit 31 includes a switch transistor and a control circuit controlling the switch transistor. A first end of the switch transistor connects with the charging interface 10, a second end of the switch transistor connects with a first end of the first coil 311, and a control end of the switch transistor connects with the control circuit. A second end of the first coil connects to ground.

[0041] Technical schemes of the embodiments of the present disclosure can improve the reliability of the charging circuit through a minor modification to the related art.

[0042] As an embodiment, the switch transistor in the first circuit includes multiple metal oxide semiconductor field effect transistors (MOSFET).

[0043] As an embodiment, the second circuit includes a rectifier circuit and a filter circuit.

[0044] FIG. 5 is a block schematic diagram illustrating a mobile terminal according to an embodiment of the present disclosure. As shown in FIG. 5, a mobile terminal 50 includes a charging interface 51, a battery 52, and a charging circuit 53. The charging circuit 53 can adopt any of the implementations of the charging circuit 30 described above.

[0045] In the technical scheme described above, a DC path of the charging circuit is separated by the magnetic coupling element. That is to say, there is no DC path in the charging circuit. DC current from the charging interface would not be output directly to the second circuit and the battery upon failure of the first circuit, whereby reliability of the charging circuit is improved.

[0046] As an embodiment, the charging interface 51 is a USB interface.

[0047] As an embodiment, the battery 20 is lithium battery.

[0048] As an embodiment, the mobile terminal 50 supports a normal charging mode and a quick charging mode, wherein charging current is larger in the quick charging mode than in the normal charging mode.

[0049] It should be understood that the phenomenon of MOS transistor breakdown is particularly serious in the mobile terminal which supports quick charging. As to the

problem of circuit unreliability upon quick charging caused by MOS transistor breakdown, the mobile terminal according to the embodiment of the present disclosure can be a good solution.

[0050] A person skilled in the art will understand, exemplary units or algorithm steps described in any of the embodiments can be achieved via electronic hardware or a combination of electronic hardware and computer software. Whether hardware or software should be adopted depends on design constraints and specific applications of the technical schemes. Respective specific application can use different methods or manners to achieve the function described in the embodiments, which will fall into the protection scope of the present disclosure.

[0051] Specific operations of the device, system, and the unit or module can refer to corresponding description of the method according to the embodiment, and will not go into much detail here.

[0052] In the embodiments of the present disclosure, the device, system, and method described herein can be achieved in other manners. The configuration of the device according to the embodiment described above is only exemplary; the division of units in the device is a kind of division according to logical function, therefore there can be other divisions in practice. For example, multiple units or components can be combined or integrated into another system; or, some features can be ignored while some units need not to be executed. On the other hand, various function units can be integrated into one processing unit; two or more than two units can be integrated into one unit; or, each unit is physically separate.

[0053] Furthermore, various function units can be integrated into one processing unit; two or more than two units can be integrated into one unit; or, each unit is physically separate.

[0054] Operations or functions of technical schemes according to the embodiments of the present disclosure, when achieved in the form of software functional units and sold or used as an independent product, can be stored in a computer readable storage medium. According to this, all or a part of the technical schemes of the present disclosure can be realized in the form of software products which can be stored in a storage medium. The storage medium includes USB disk, Read Only Memory (ROM),

Random Access Memory (RAM), magnetic disk, CD, and any other medium that can be configured to store computer-readable program code or instructions. The computer-readable program code, when executed on a data-processing apparatus (can be personal computer, server, or network equipment), adapted to perform all or a part of the methods described in the above-mentioned embodiments.

[0055] The foregoing descriptions are merely preferred embodiments of the present disclosure, rather than limiting the present disclosure. Various modifications and alterations may be made to the present disclosure for those skilled in the art. Any modification, equivalent substitution, improvement or the like made within the spirit and principle of the present disclosure shall fall into the protection scope of the present disclosure.

WHAT IS CLAIMED IS:

1. A charging circuit configured to be placed inside a mobile terminal and arranged between a charging interface and a battery of the mobile terminal, comprising: a first circuit, a magnetic coupling element, and a second circuit connected in series successively between the charging interface and the battery; wherein

the first circuit is configured to receive a first current from the charging interface and convert the first current to a second current with at least one of changed magnitude and direction, said first current is a direct current, said second current is an alternating current of which at least one of the magnitude and direction being changed; the first circuit comprises at least one switch transistor and a control circuit for controlling the at least one switch transistor, and the first current is converted to the second current by turning on or off the at least one switch transistor under controlling of the control circuit;

the magnetic coupling element comprises a first coil and a second coil; the first coil connects with the first circuit, and the second coil connects with the second circuit, when the at least one switch transistor is failure, the first coil and the second coil separated from each other so as to disconnect a direct-current (DC) path of the charging circuit; when the at least one switch transistor is operative, the magnetic coupling element is configured to transfer energy from the first coil to the second coil in an electromagnetic induction manner by utilizing the second current with the at least one of the changed magnitude and direction, so as to generate a third current; and

the second circuit is configured to adjust the third current to a fourth current which is suitable for battery charging, so as to charge the battery, wherein, the second circuit comprises a rectifier circuit and a filter circuit, and the third current is adjusted to the fourth current via the rectifier circuit and the filter circuit.

2. The charging circuit of claim 1, wherein the first circuit comprises a half-bridge circuit and a control circuit controlling the half-bridge circuit; the half-bridge circuit comprises the at least one switch transistor that includes a first switch transistor and a second switch transistor; wherein

the first switch transistor has a first end configured to connect with the charging interface, a second end connected with a first end of the first coil, and a control end connected with the control circuit;

the second switch transistor has a first end connected with the second end of the first switch transistor, a second end configured to connect to ground, and a control end connected with the control circuit; and

the first coil has a second end configured to connect to ground.

3. The charging circuit of claim 1, wherein the first circuit comprises a full-bridge circuit and a control circuit controlling the full-bridge circuit, the full-bridge circuit comprises the at least one switch transistor that includes a first switch transistor, a second switch transistor, a third switch transistor, and a fourth switch transistor; wherein

the first switch transistor has a first end configured to connect with the charging interface, a second end connected with a second end of the first coil, and a control end connected with the control circuit;

the second switch transistor has a first end connected with the second end of the first switch transistor, a second end configured to connect to ground, and a control end connected with the control circuit;

the third switch transistor has a first end configured to connect with the charging interface, a second end connected with a first end of the first coil, and a control end connected with the control circuit; and

the fourth switch transistor has a first end connected with the second end of the third switch transistor, a second end configured to connect to ground, and a control end connected with the control circuit.

4. The charging circuit of any one of claims 1-3, wherein

the at least one switch transistor has a first end configured to connect with the charging interface, a second end connected with a first end of the first coil, and a control end connected with the control circuit; and

the first coil has a second end configured to connect to ground.

5. The charging circuit of any one of claims 1-4, wherein the switch transistor in the first circuit is metal oxide semiconductor field effect transistor, MOSFET.

6. A mobile terminal, comprising a charging interface, a battery, and a charging circuit according to any one of claims 1-5, wherein the charging circuit is arranged between the charging interface and the battery.
7. The mobile terminal of claim 6, wherein the charging interface is a USB interface.
8. The mobile terminal of claim 6 or 7, wherein the battery is lithium battery.
9. The mobile terminal of any one of claims 6-8, wherein the mobile terminal supports a normal charging mode and a quick charging mode, and wherein a charging current is larger in the quick charging mode than in the normal charging mode.

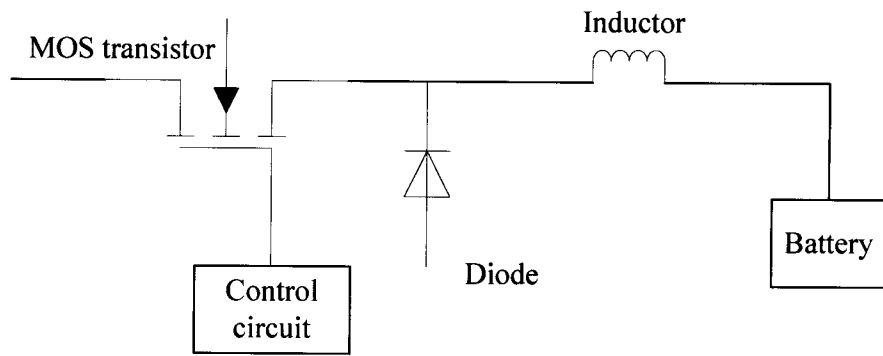


FIG. 1

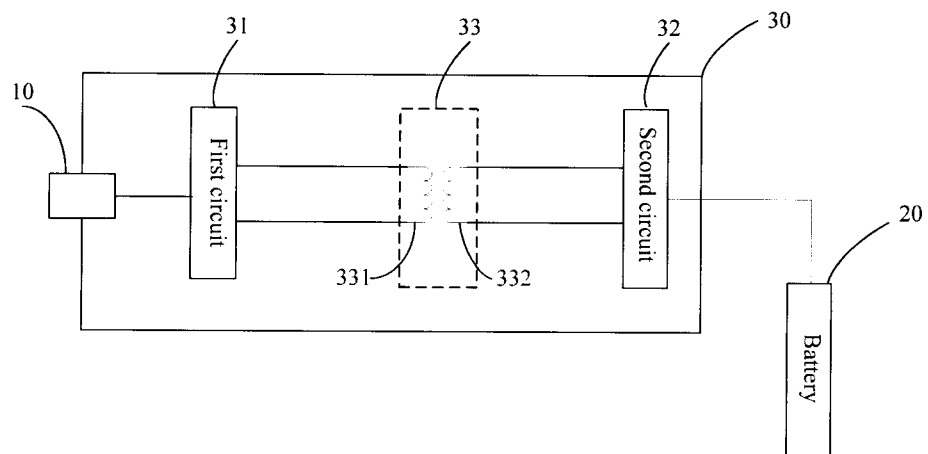


FIG. 2

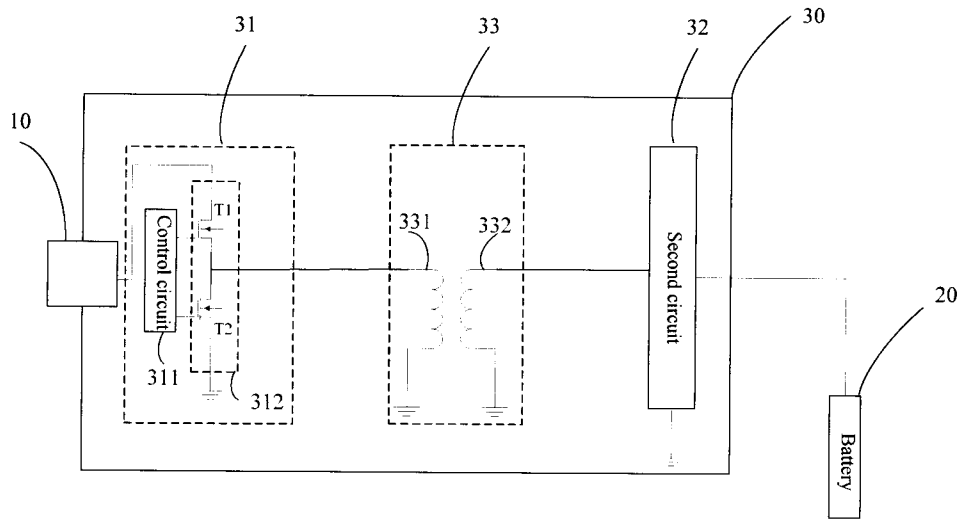


FIG. 3

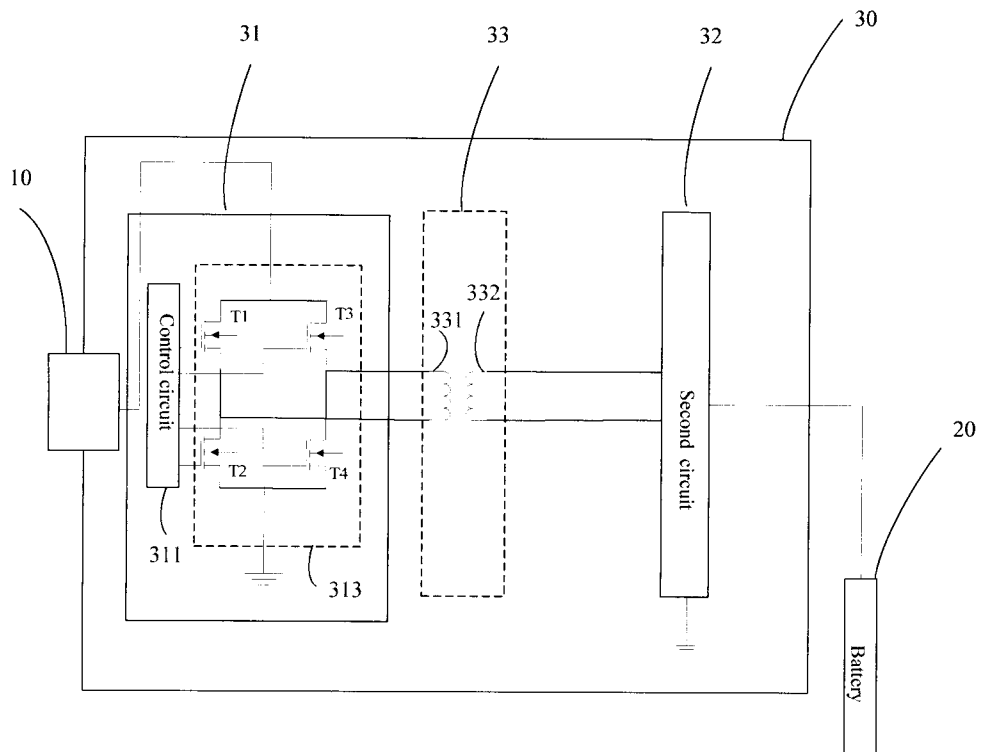


FIG. 4

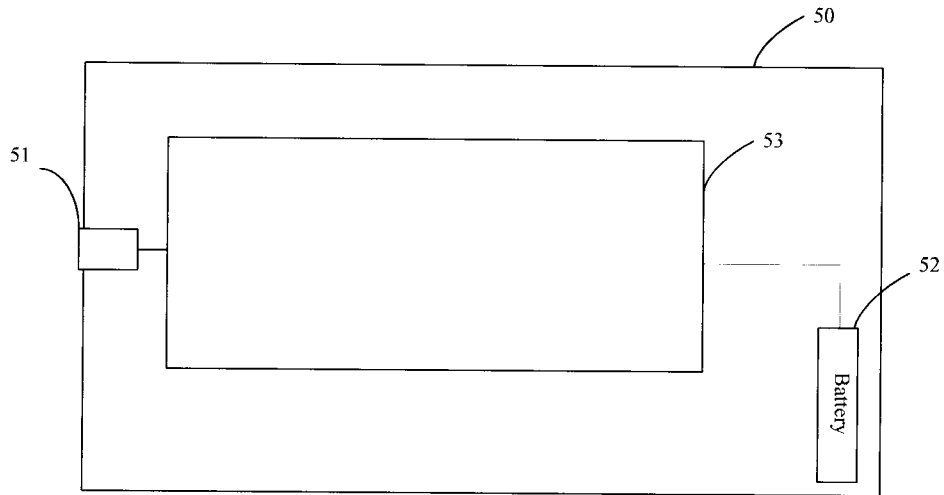


FIG. 5

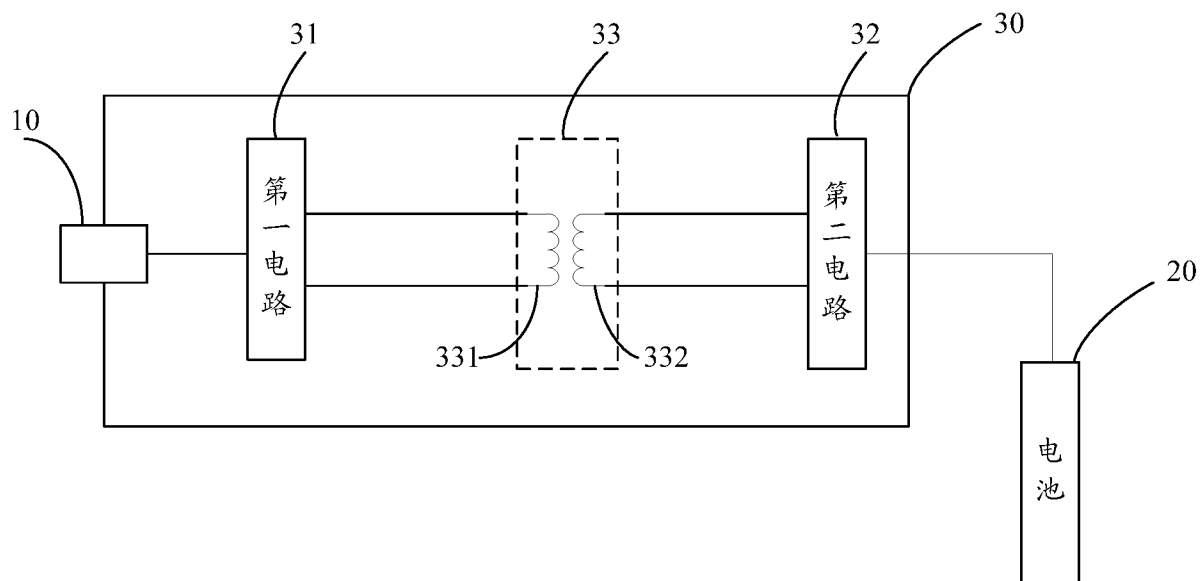


图 2

20 BATTERY

31 FIRST CIRCUIT

32 SECOND CIRCUIT