

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2007 (10.05.2007)

PCT

(10) International Publication Number
WO 2007/052005 A1

(51) International Patent Classification:
G03B 21/28 (2006.01) **A63J 23/02** (2006.01)

(21) International Application Number:
PCT/GB2006/004054

(22) International Filing Date: 31 October 2006 (31.10.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0522150.2 31 October 2005 (31.10.2005) GB

(71) Applicant (for all designated States except US): **MUSION SYSTEMS LIMITED** [GB/GB]; Covden House, 7a Langley Street, London WC2H 9JA (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **O'CONNELL, Ian** [GB/GB]; Musion Systems Limited, Covden House, 7a Langley Street, London WC2H 9JA (GB). **ROCK, James** [GB/GB]; Musion Systems Limited, Covden House, 7a Langley Street, London WC2H 9JA (GB).

(74) Agent: **GIBSON, Mark**; Barker Brettell, St John's Innovation Centre, Cowley Road, Cambridge CB4 0WS (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROJECTION APPARATUS AND METHOD

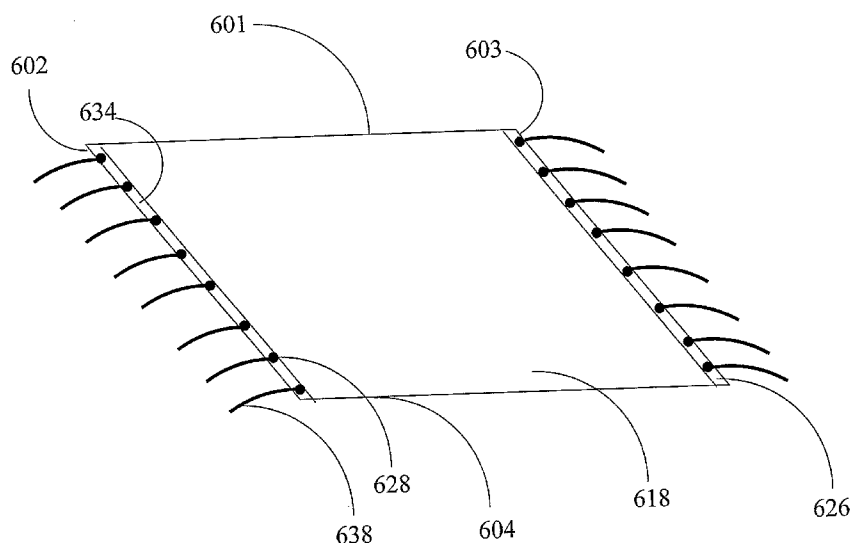

(57) Abstract: The invention relates to a projection apparatus and method. More particularly, but not exclusively, it relates to a projection apparatus arranged to project an image of an object upon an inclined, partially reflective, screen which is held under tension along side edge regions of the screen and a method for constructing such an apparatus.

WO 2007/052005 A1

PROJECTION APPARATUS AND METHOD

The invention relates to a projection apparatus and method. More particularly, but not exclusively, it relates to a projection apparatus
5 arranged to project an image of an object upon an inclined, partially reflective, screen which is held under tension along side edge regions of the screen and a method for constructing such an apparatus.

The projection of an image upon a partially reflective screen such that is
10 observable by a viewer positioned in front of the screen is known as the so-called "Peppers ghost" arrangement from fairground shows.

This has been applied to publicity and promotional displays where a presenter resides behind an inclined, partially reflective screen, typically
15 a tensioned foil, onto which an image of, for example, a motor vehicle is projected, via at least one reflective surface, see for example EP 0799436. The location of the presenter behind the projected image has a number of inherent advantages over systems where the presenter stands in front of a screen, not least of which is that the presenter does not obscure
20 the projected image when walking across the projected image. Additionally, the use of an inclined screen results in a viewer of the image perceiving the image as having depth rather than merely being a two dimensional image, for example where a motor vehicle is seen to rotate upon a turntable.

25

However, current image projection apparatus' do have a number of problems associated with them, for example, mounting of the foil can prove difficult which in turn leads to uneven tensioning of the foil and wrinkles upon the foil, that impair the viewed quality of the image
30 projected onto the foil. Also, in mounting the foil the foil must be laid out upon a clean dust free piece of cloth or plastic sheet, which is larger

than the foil, in order to prevent particles adhering to the foil, such particles can scratch the surface of the foil and impair the viewed quality of the projected image or act as scattering centres from which projected light is incoherently scattered, thereby detracting from the viewed quality
5 of the image as this scattered light does not contribute to the viewed image.

Also, as the illusion of peppers ghost relies on the reflected image formed by light contrasting with its immediate surroundings and background. The
10 stronger the reflected image, the more solid that reflected image looks, the more vibrant the colours will be, and the more visible the reflected image is to an audience. In circumstances where the presenter may be unable to control high levels of ambient light forward of the foil, e.g. from an auditorium at a trade show, the high level of ambient light results
15 in significant levels of reflection of the ambient light from the screen detracting from the strength of the reflected image over the background. In these circumstances a bright projector (8000 lumens+) is desirable. However, the use of a bright projector results in unwanted light hitting the projection surface and reflecting through the foil to create a milky hue
20 upon the stage and around the area where the reflected image appears.

Another problem with current image projection apparatus is that projectors used with such apparatus are very powerful, typically 8,000 to 27,000 lumens and consequently project a significant amount of light into
25 areas of an image where there is no object within the image. This is an inherent feature of projectors and results in low contrast ratios which leads to a milky hue spread over the part of the film where the projector is creating an image when the projector is switched on. The milky hue is clearly undesirable as it detracts from the viewer's perception that there is
30 no screen present.

The level of the milky hue relative to the brightness of the image is, at least partially, determined by the level of contrast ratio offered in the projector. The higher the contrast ratio, the brighter the image can be relative to the brightness level of the milky hue. Even projectors with
5 contrast ratios as high as 3000:1 still emit a milky light hue when used in a “Pepper’s Ghost” arrangement.

A further problem associated with some projectors is the “keystone” effect, in which distorted, typically elongated, images (up and down)
10 occur due to angled projection. This is of particular relevance where depth perception is of importance. The solution employed in modern, expensive projectors is to employ digital correction of keystone distortions. However, older, less-expensive or even some specialist High Definition projectors do not employ such digital keystone correction and
15 are therefore difficult to configure for use with current image projection apparatus. High definition (HD) projectors do not offer keystone adjustment because when keystone correction is attempted in conjunction with the increased number of pixels about an image’s edge causes the pixels about the edge of the image to appear ‘crunched’. Additionally,
20 when processing moving images HD projectors compromise projector processing speed. When the processing power is used to carry out both keystone correction and motion processing the image is seen to jerk during movements, an effect known as “chokking”. In general, it can be said that the use of electronic keystone correction to alter a video image
25 will result in the degradation of picture quality compared to an image which is not subject to such a process.

Additionally, current systems do not allow for the projected image to apparently disappear and re-appear from behind a solid 3D object placed
30 upon the stage, as the screen lies in front of the presenter and closest to the viewing audience.

A further disadvantage with existing systems is that they are based solely around theatre, stage and auditorium environments and do not readily lend themselves to *ad hoc* image projection in more unconventional
5 settings, e.g. shopping malls, shop windows, airport lounges and the like.

According to a first aspect of the present invention there is provided an image projection apparatus comprising a projector, a frame, a light source and an at least partially transparent screen having an upper, a lower and
10 two side edges:

the frame being arranged to retain the screen under tension in a region of said two side edges, such that the screen is inclined at an angle with respect to a plane of emission of light from the projector;

the light source arranged to illuminate at least part of the apparatus;
15 the screen having a front surface arranged such that light emitted from the projector is reflected therefrom; and

the projector being arranged to project an image such that light forming the image impinges upon the screen such that a virtual image is created from light reflected from the screen, the virtual image appearing to be
20 located behind the screen.

Such an apparatus differs over present systems, such as those disclosed in WO 2005/096095 and EP 0 799 436, by providing a screen tensioned by a frame at both side edges rather than at the upper and lower edges. This
25 difference provides significant advantages in flexibility of construction. For example, the tensioning points can be more easily masked when attached at the side edges of the screen than when attached at the upper and lower edges of the screen. In particular, it can be extremely burdensome to mask attachment means located at the upper edge of the
30 screen which often disrupts the projected illusion. The present arrangement therefore allows a much greater variety of screen sizes by

providing attachment at the sides of the stage rather than being restricted to attachment at the floor and ceiling of a stage. The present apparatus therefore provides significantly greater flexibility with respect to the location of the image projection apparatus. A further advantage of the present invention is that elimination of retention means at the upper edge of the screen enable sound projecting means or other ceiling mounted devices typically used during projection (e.g. lights and props etc) to be more easily employed without impinging on the screen.

10 The screen may be a foil. The foil may be rolled about a cylinder when not in use. The screen may be inclined at approximately 45° to the plane of emission of light from the projector. The screen may comprise a partially reflective layer upon the front surface.

15 The use of a foil screen reduces the weight of the apparatus, this allows ready transportation of the apparatus between sites. Rolling the foil onto a cylinder when not in use serves to protect the foil from damage during transportation and also allows ready transportation of the apparatus between sites. The use of a partially reflective screen can increase the degree of light reflected from the screen and can increase the audience
20 perceived strength of the virtual image.

The frame may comprise first and second retention members arranged to sandwich a side edge region of the screen therebetween. The frame may
25 generally be arranged to retain the screen under tension at a plurality of positions along a side edge region of said screen.

At least one of the first and second retention members may comprise an abrasive coating, typically sandpaper, arranged to contact the screen. The first and second retention members are each attached to tensioning straps.
30 The first and second retention members may also comprise respective

openings therethrough that may be arranged to collocate with openings in the screen, the openings may be arranged to receive a fixing means so as to clamp the screen between the first and second retention members. The tensioning straps may be attached to a truss arrangement and may be

5 adjustable such that the tension of the screen within the truss arrangement can be varied about the periphery of the screen. Preferably, the retention members are substantially parallel to truss members comprising the truss arrangement.

10 The use of a variable tensioning arrangement allows wrinkles upon the screen to be minimised, and ideally eradicated to present a smooth surface for upon which the image can be projected. An abrasive surface upon at least one of the retention members increases the grip between the retention member and the screen thereby reducing the likelihood of the

15 screen slipping when held by the retention member. Tensioning the side edge regions of the screen in accordance with the procedures described herein surprisingly enable wrinkle-free screen widths of up to approximately 6 metres.

20 It will be appreciated that wrinkle-free screen widths of greater than 6 metres may also be achieved in accordance with the invention. For example, in a further embodiment, an upper and/or lower edge of the screen may be affixed to a solid substrate (e.g. a roof or floor member) by transparent fixing means. Such transparent fixing means will ideally

25 not be visible to the human eye when viewed from more than approximately 1 metre from the surface of the screen. This embodiment retains the advantages of the invention that a wrinkle-free screen is provided without requiring substantial masking at the upper and/or lower edge to disguise tensioning means in order to maintain the illusion. In a

30 further embodiment, the transparent fixing means is one or more sections of transparent wire (e.g. fishing line). In a further embodiment, the lower

edge of the screen may be affixed to a solid substrate (e.g. a floor member) by non-transparent fixing means (e.g. by one or more gripping members or clamps). It will be appreciated that this embodiment is only suitable for the lower edge of the screen and only in an arrangement wherein the lower edge of the screen is not visible to a viewer (i.e. wherein the lower edge of the screen does not require additional masking). Advantageously, such embodiments have been found to result in wrinkle-free screen widths of 16 metres without the need to provide a mask at the upper edge of the screen.

10

The apparatus may comprise a pigmented reflective member in an optical pathway between the projector and the screen. The pigmented member may reflect only part of the visible spectrum of light, typically the pigmented member will appear grey or white to a viewer.

15

It has been found that the use of a grey reflective member in the optical pathway between the projector and the screen reduces the outline of the reflective member upon the screen compared to when a white reflective member is used, and also reduces the level of the milky white hue associated with the projector emitting light where there is no image of an object to be projected.

20

The pigmented reflective member may be inclined at an angle with respect to the plane of emission of light from the projector. The angle of inclination of the member with respect to the plane of emission of light from the projector may be variable. The member may comprise a plurality of sections each of which may have an independently variable angle of inclination with respect to the plane of emission of light from the projector.

25

30

The inclination of the reflective member can compensate, at least partially and in some instances completely, for keystone effect. The variation of the angle of inclination or distance of the reflective member allows for a variation of the apparent depth and/or position of an object when
5 projected upon the screen. This is because the virtual image appears as far behind the screen as the real image is in front of the screen.

There may be a reflective device, typically a mirror, arranged to direct light projected from the projector on to the reflective member. Typically,
10 the reflective device is mounted upon an upper part of the framework. The reflective member may be parallel, or substantially parallel, to the reflective device. In some embodiments the projector may be mounted upon an upper truss of the framework and may be aligned with the horizontal, typically light projected from the projector is directed on to
15 the reflective device.

Such an arrangement compliments the keystone correction achievable by the inclination of the screen and the reflective member and is particularly useful where an HD projector is used in order to compensate for the
20 keystone effect without the use of the projector's processing power.

The reflective member may comprise a mask corresponding to the apparent location of a prop in the screen to an audience. Typically, the mask will absorb light over at least a fraction of the visible spectrum and
25 preferably the mask will be black. The mask may be arranged to produce an area upon the screen upon which the image is not projected. The mask may vary in extent and shape, for example by the use of a sliding element that is moved in and out of position upon the reflective member.

The mask can be used to make the illusion of an article disappearing and reappearing behind a prop that is placed upon a stage, either behind or in front of the screen.

- 5 The apparatus may comprise a light source arranged to selectively illuminate an area of stage comprising the prop. The light source may be a white light source.

Lighting the prop causes the prop to become more visible and better defined against the dark, typically black, background. This enhances the three dimensional effect of the projected image interacting with the prop. Also directing bright light upon the prop serves to reduce the contrast ratio of the projected image upon the prop, which typically remains slightly visible even when a mask is used in the prop's shadow upon the reflective member, thus enhancing the illusion of the projected image disappearing behind the prop.

The apparatus may comprise a light source arranged to illuminate at least part of a stage. The light source may be located to the rear of the screen, typically along a top edge of the frame and/or along either side of the stage. The apparatus may comprise a plurality of light sources. The apparatus may comprise a lighting desk equipped with faders arranged to control the level of each light source, or selection means arranged to selectively control the supply of power to each light source.

25

Such a light source is used in order that the colour and light levels of the area immediately surrounding the peppers ghost image, the stage background, can most closely match the colour of the projection surface background, excluding the area on both which is carrying the image. This, reduces the milky hue perceived by the audience. The use of a plurality of light sources increases the uniformity of lighting of the stage,

in order to produce a similar effect to the way light emitted from a projector hits the projection screen. By controlling each light source separately the lighting levels upon the stage can be controlled to closely match the levels of light as dictated by the show performance, or the
5 levels of unwanted light hitting the projection surface of the screen.

The projector may comprise a standard projector, for example a JVC ML4000, or a Barco G5. Alternatively, the projector may comprise an LCD, or a television display. The display may comprise at least one
10 element arranged to be non-emitting in response to control from a processor. The at least one element may form a mask arranged to produce an area upon the screen upon which the image is not projected. The mask may correspond to the shape and location of a prop upon stage. The prop may be three dimensional.

15

According to a second aspect of the present invention there is provided an image projection apparatus comprising a projector, a frame, and an at least partially transparent screen:

the frame being arranged to retain the screen under tension, such that the
20 screen is inclined at an angle with respect to a plane of emission of light from the projector;

the screen having a front surface arranged such that light emitted from the projector is reflected therefrom; and

the projector comprising a light emitting diode (LED) panel having a
25 plurality of LEDs, being arranged to project an image such that light forming the image impinges upon the screen such that a virtual image is created from light reflected from the screen, the virtual image appearing to be located behind the screen.

30 It will be appreciated that the plane of light emitted by each LED bulb may be at an angle other than that perpendicular to the plane of the LED

panel. Further, each bulb may be partially shielded by a hood, which helps direct the emitted light in the required plane towards the screen and also serves to obscure the LED bulb from the viewing audience.

- 5 This aspect of the invention provides a significant advantage with respect to projection in areas of high background light (e.g. shop window displays).

According to a third aspect of the present invention there is provided a
10 method of providing a projection apparatus comprising the steps of:

- (i) resting a frame upon a number of elevation means;
- (ii) attaching leg sections to the frame;
- (iii) increasing the height of the elevation means;
- (iv) adding further leg sections;
- 15 (v) attaching a first side edge region of a screen to a first side piece of the frame; and
- (vi) attaching a second side edge region of the screen to a second side piece of the frame.

- 20 The method may comprise providing the elevation means in the form of a jack.

The method may comprise providing the screen in the form of a film. The method may comprise removing a roll of screen film from a protective
25 cylindrical casing. The method may comprise laying the screen upon a dust-free protective sheet.

The method may comprise placing a first side edge region of the screen between jaws of a first retention member and may further comprise
30 securing the screen in position using a fixing means passing through the retention member and the screen and a locking means arranged to lock the

fixing means being arranged to secure the locking means in position. The method may comprise providing the fixing means in the form of a bolt and the locking means in the form of a nut.

- 5 The method may comprise attaching tensioning means to the retention member adjacent at least some of the fixing means.

The method may comprise attaching the tensioning means to the first side piece of the frame.

10

The method may comprise attaching a second retention member to a second side edge region of the film screen, typically in the same manner as the first retention member is attached to the first side edge region. The method may comprise attaching tensioning means to the second retention member. The method may comprise providing the tensioning members in the form of ratchet straps.

15

The method may include tensioning each of the tensioning means such that the screen is flat and substantially wrinkle free.

20

The method may include depending a projector from an upper portion of the frame.

- 25 The method may include placing a pigmented reflective board between the screen and a front edge of the frame. The method may comprise reflecting light emitted by the projector from the board onto the screen.

The method may comprise forming the frame from a truss work.

According to a fourth aspect of the present invention there is provided a projection apparatus constructed according to the third aspect of the present invention.

- 5 The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a schematic representation of one embodiment of a known projection apparatus;

10

Figure 2 is a side view of a the projection apparatus of **Figure 1** showing a pigmented reflective member in first and second positions;

15

Figure 2a is a schematic representation of an alternative known projection arrangement, suitable for use with the apparatus of **Figures 1** and **2**;

20

Figure 3 is a schematic representation of a further embodiment of a known projection apparatus;

Figure 4 is a perspective view of a screen clamping arrangement of **Figures 1, 2** and **3**;

25

Figure 5 is a schematic view of a projection apparatus being constructed according to known procedures; and

30

Figure 6 is a perspective view of a first embodiment of a projection apparatus according to at least an aspect of the present invention.

The description of Figures 1 to 5 may be used to allow a skilled person to make embodiments of the invention, although some of the drawings and description describe known projection apparatus in which the screen is retained at upper and lower regions. It will be readily apparent how to
5 modify this to provide embodiments of the invention.

Referring first to Figures 1, 2 and 4, a projection apparatus 100 comprises a box frame 102 formed of trusses 104, a projector 106, a support frame 108, a screen 110 held within the support frame 108 and a
10 grey pigmented reflective board 112.

The projector 106 depends from a front upper cross-piece truss 104a of the box frame 102. The board 112 lies below the projector 106 at the base of the box frame 102. The screen 110, is inclined at approximately 45° to
15 the horizontal and the front edge of the screen 110 is proximate the front upper cross-piece truss 104a of the box frame 102 and the rear edge of the screen is proximate a stage 109 that lies to the rear of the box frame 102.

20 The screen 110 is typically a polymeric foil, which can have a partially reflective coating upon a front face of the foil. The screen 110 is retained within the box frame 102 by means of tensioning straps 114 attached to the box frame 102, at the top and bottom edges of the screen 110. At a free end of each of the tensioning straps 114 there is pair of clamp jaws
25 116 which have respective openings 118,120 passing therethrough. The faces of the jaws 116 are optionally coated with an abrasive 121, such as sandpaper, in order to enhance the grip of the jaws 116 upon the screen 110.

30 Edges of the screen 110 are placed between the jaws 116 and a bolt 122 is placed through the openings 118, 120 and passes through the screen 110.

A nut 124 is threaded onto the bolt 122 and tightened to hold the screen 110 between the jaws 116. The tensioning straps 114 pass through the trusses 104 and are tightened using a friction locking buckle arrangement 128.

5

Each of the tensioning straps 114 can be tightened or loosened individually so as to allow an even tension to be applied over the whole surface of the screen 110 thereby reducing, and ideally eliminating, the formation of wrinkles upon the screen 110 which reduce the quality of an image projected upon the screen 110.

10

The reflective board 112 lies below the projector 106 adjacent to a lower front cross-piece truss 104b of the box frame 102. The projector 106 is directed such that light emitted by the projector 106 strikes the reflective board 112. The board 112 is inclined so that the light emitted by the projector 106 is reflected upwards from the board 112 onto the screen 110. The use of a grey, or otherwise coloured board 112 reduces the milky hue associated with light from the projector where there is no image to be projected.

15

20

A fraction of the projected light striking the screen 110 is reflected from the front surface of the screen 110 where it can be viewed by an audience. A presenter upon the stage 109 behind the screen 110 can also be viewed by the audience but does not interfere with the viewing of the image by the audience.

25

The board 112 is connected to a hinge arrangement 130 along a rear edge thereof. The hinge arrangement 130 allows the board 112 to be raised and lowered, typically by a hydraulic ramp 132 controlled by a computer 134, in order to compensate for the 'keystone' effect. Alternatively, the board

30

112 can be raised and lowered by the person pulling upon a string, or an electric motor to drive the board up and down.

The raising and lowering of the board 112 also allows for the audience's
5 perception of the positional depth upon the stage of an element of a projected image to be altered by varying the height of the element of the image upon the screen 110. It is envisaged that the board 112 may comprise a number of individual sections each of which may be raised and lowered individually in order to allow the perceived depth of an
10 individual element of an image to be varied independently of other elements of the image.

A non-reflective mask 136 in the shape of a prop 138, in this example a rock, is placed upon the board 112. The prop 138 is placed upon the stage
15 109, typically behind the screen 110. The mask 136 is placed such that the board 112 is obscured in a region corresponding to where the prop 138 is located with respect to the screen 110. This arrangement of mask 136 and prop 138 results in an image, or part of the image, projected upon the screen 110 apparently disappearing as the image, or part of the
20 image, passes over prop 138 and reappearing once the image, or part of the image has passed over the prop 138 as the mask 136 prevents light being reflected onto the region of the screen 110 corresponding to the location of the prop 138. The mask 136 can be variable in size and shape, for example by means of a sliding panel that is moved into location and
25 varied in size according to the size of the prop 138. This also allows for the depth perception of props to be varied as their apparent effect upon variable depth image elements, as discussed hereinbefore, can be varied appropriately, for example a given size of rock will obscure proportionately more of a distant image than the same rock will of a near
30 image.

A light source 140 is mounted upon the box frame 102 and illuminates the prop 138 in order to reduce the effect of any residual light reflected from the board 112 onto the prop.

5 Referring now to Figure 2a, an alternative projection arrangement 200, suitable for use with the apparatus of Figure 1 and 2 with an additional truss, comprises the projector 106 depending from a truss 202 forward of the screen 110, an inclined mirror 204 of variable inclination depending from a second truss 206 forward of projector 110. The projector 106
10 projects an image on to the mirror 204 such that the image is projected on to the reflective board 112 and on to the screen 110. The mirror 204 is typically arranged to be perpendicular to the board 112, and in embodiments where the board 112 has a variable angle of inclination the mirror 204 will usually be arranged to track, synchronously, with any
15 variation in the angle of inclination of the board 112.

It will be appreciated that the term mirror is used herein to describe any reflective surface that reflects substantially all, typically in excess of 50% preferably in excess of 80%, light impinging upon it.

20

Referring now to Figure 3, a projection apparatus 300 is substantially similar to that of Figures 1 and 2 accordingly identical parts to those of Figures 1 and 2 are accorded similar reference numerals in the three hundred series.

25

A projection screen 306 resides in front of the screen 310 adjacent the lower front cross-piece truss 304b. The projection screen 306 is typically a liquid crystal display (LCD) screen or a television screen. The projection screen 306 projects an image upwards onto the front surface of
30 the screen 310. The use of a projection screen 306 removes the 'keystone' effect associated with conventional projectors.

A mask 336 can be formed upon the screen by use of a computer 340 to control the projection screen 306 to black out the appropriate part of the projection screen 306 electronically. This removes the need for a physical mask to be produced. The computer 340 can be used to switch off areas of the projection screen 306 which do not contain part of an image to be projected, this reduces the milky white hue associated with such areas when using conventional projectors. Also, the use of a computer 340 to control the projection screen 306, together with image sizing in relation to image movement allows an image to be readily scaled and positioned upon the projection screen 306 to enhance an audience's perception of depth and movement of a projected image using known image processing techniques. Alternatively, the projection screen 306, or sections of the projection screen 306, can be raised and lowered under the control of the computer 340 in order to enhance the audience's perception of depth of the projected image.

Referring now to Figure 5, a box truss framework 500 comprises a square upper truss work 502 and leg trusses 504. In constructing the framework 500 the upper truss work 502 rests upon a number of jacks 506. First sections 508 of the leg trusses 504 that extend at right angles to the upper truss work 502 are added at the corners of the upper truss work 502. The height of the jacks 506 is increased to allow additional sections 510 of the leg trusses 504 to be added until the desired height of the box truss framework 500 is achieved.

A cross-piece truss 512 is fixed to two of the leg trusses 504 such that it horizontally spans the gap therebetween at a height close to, and typically slightly below, the level of a stage floor 514. The leg trusses 504 spanned by the cross-piece truss 512 constitute the rear legs of the framework 500 and are located adjacent the front of the stage floor 514.

A dust-free protective plastic sheet 515 is laid across the width of the stage floor 514 in front of the rear legs of the framework 500. A roll of screen film 518 is removed from a protective cylindrical casing 520 and is
5 unwound across the width of the stage floor 514. The film 518 is placed upon the sheet 515 in order to prevent damage to the surface from dust particles or other sharp protrusions.

A lower edge 522 of the film 518 is placed between jaws 524a,b of a
10 retention member 526, each jaw 524a,b having opposed openings therethrough spaced at approximately 0.5m intervals. Bolts 528 are placed through the openings, and through the film 518, and secured in position using respective nuts. Ratchet straps 532 are attached to the retention member 526 adjacent alternate bolts 528, having a spacing of
15 approximately 1m, and are then attached to the cross-piece truss 512.

A second retention member 534 is attached to an upper edge 536 of the film 518 in a similar manner to how the retention member 526 is attached to the lower edge 522. Ratchet straps 538 are attached to the second
20 retention member 534.

A rope 540 is tied to the second retention member 534 and is passed over the upper truss work 502 opposite the cross-piece truss 512. The film raised into position using the rope 540 and the ratchet straps 538 are
25 attached to the upper truss work 502. Both sets of ratchet straps 532, 538 are tightened individually until the screen film is tensioned such that the film 518 is flat and, ideally, free from wrinkles.

A projector 542 is depended from the upper truss work 502 and a
30 pigmented reflective board 544 is placed between the screen 518 and the front edge of the box truss framework 500 such that light emitted by the

projector 542 is reflected from the board 544 onto the screen 518. The screen 518 reflects at least part of the light from a front surface thereof away from the stage and into an auditorium to be viewed by and audience.

- 5 In order to prevent the audience observing the projection apparatus both side and front drapes 546 are used to screen the apparatus from the audience.

Figure 6 shows an example of a side edge attachment embodiment of the
10 invention, wherein a screen 618 has an upper edge 601, a lower edge 604,
a first side edge 602 and a second side edge 603. The first and second
side edges 602, 603 are positioned between jaws of a first and second
retention member 634, 626 having opposed openings therethrough spaced
at appropriate intervals (e.g. approximately 0.5 metre). Bolts 628 are
15 positioned through the openings, and through the screen 618 and secured
into position using respective nuts. Ratchet straps 638 are attached to the
first and second retention members 634, 626 and may then be attached to
a solid substrate (e.g. between two walls).

CLAIMS

1. An image projection apparatus comprising a projector, a frame, a light source and an at least partially transparent screen having an upper, a lower and two side edges:
the frame being arranged to retain the screen under tension in a region of said two side edges, such that the screen is inclined at an angle with respect to a plane of emission of light from the projector;
the light source arranged to illuminate at least part of the apparatus;
the screen having a front surface arranged such that light emitted from the projector is reflected therefrom; and
the projector being arranged to project an image such that light forming the image impinges upon the screen such that a virtual image is created from light reflected from the screen, the virtual image appearing to be located behind the screen.
2. An apparatus according to claim 1 wherein the frame comprises first and second retention members each arranged to sandwich a side edge region of the screen therebetween.
3. An apparatus according to claim 1 or claim 2 wherein the frame is arranged to retain the screen under tension at a plurality of positions along each side edge region of said screen.
4. An apparatus according to any preceding claim wherein at least one of the first and second retention members comprises an abrasive coating arranged to contact the screen.
5. An apparatus according to any preceding claim wherein at least one of the first and second retention members are each attached to tensioning straps.

6. An apparatus according to claim 5 wherein the first and second retention members comprise respective openings therethrough arranged to collocate with respective openings in the screen.
- 5
7. An apparatus according to claim 6 wherein the openings are arranged to receive a fixing means so as to clamp the screen between the first and second retention members.
- 10
8. An apparatus according to any one of claims 5 to 7 wherein the tensioning straps are attached to a truss arrangement or a fixed mounting point located in a permanent structure such as a wall, floor or ceiling and are adjustable such that the tension of the screen within the truss arrangement can be varied about the periphery of the screen.
- 15
9. An apparatus according to claim 8 wherein the retention members are substantially parallel to truss members comprising the truss arrangement.
- 20
10. An apparatus according to any preceding claim wherein an upper and/or lower edge of the screen may be affixed to a solid substrate by transparent fixing means.
11. An apparatus according to any preceding claim wherein the screen
- 25 is a foil.
12. An apparatus according to any preceding claim wherein the screen is inclined at approximately 45° to the plane of emission of light from the projector.

13. An apparatus according to any preceding claim wherein the light source is located to the rear of the screen, along a top edge of the frame and/or along either side of a stage.

5 14. An apparatus according to any preceding claim which comprises a pigmented reflective member in an optical pathway between a lens of the projector and the screen.

10 15. An apparatus according to claim 14 which comprises an adjustably angled, mirrored surface in an optical pathway between the lens of the projector and the pigmented reflective member.

15 16. An apparatus according to claim 14 or claim 15 wherein the pigmented reflective member is inclined at an angle with respect to the plane of emission of light from the projector.

17. An apparatus according to claim 16 wherein the angle of inclination of the member with respect to the plane of emission of light from the projector is variable.

20 18. An apparatus according to any of claims 14 to 17 wherein the pigmented reflective member comprises a plurality of sections each of which has an independently variable angle of inclination with respect to the axis perpendicular to the plane of emission of light from the
25 projector.

19. An apparatus according to any preceding claims which comprises at least one non-emitting element in response to control from a processor.

20. An apparatus according to claim 19 wherein the at least one non-emitting element forms a mask arranged to produce an area upon the screen upon which the image is not projected.

5 21. A method of providing the frame and screen according to any preceding claim comprising the steps of:

- (i) resting a frame upon a number of elevation means;
- (ii) attaching leg sections to the frame;
- (iii) increasing the height of the elevation means;
- 10 (iv) adding further leg sections;
- (v) attaching a first side edge region of a screen to a first side piece of the frame; and
- (vi) attaching a second side edge region of the screen to a second side piece of the frame.

15

22. The method of claim 21 comprising securing the screen in position using respective fixing means passing through a first and second retention member and the screen, and respective locking means arranged to lock the respective fixing means in position.

20

23. The method of claim 22 comprising attaching tensioning means to either, or both, of the respective retention members.

24. The method of claim 23 comprising attaching the tensioning means
25 adjacent at least some of the respective fixing means.

25. The method of claim 23 or claim 24 comprising attaching the tensioning means associated with a first retention member attached to the first side edge region of the screen to a first side piece of the frame in
30 step (v).

25

26. The method of claim 23 or claim 24 comprising attaching the tensioning means associated with a second retention member attached to the second side edge region of the screen to a second side piece of the frame in step (vi).

5

27. The method of any of claims 23 to 26 comprising providing the tensioning members in the form of ratchet straps.

28. The method of any one of claims 23 to 27 comprising tensioning
10 each of the tensioning means such that the screen is flat and substantially wrinkle free.

29. A frame and screen constructed according to any one of claims 21
to 28.

15

1/5

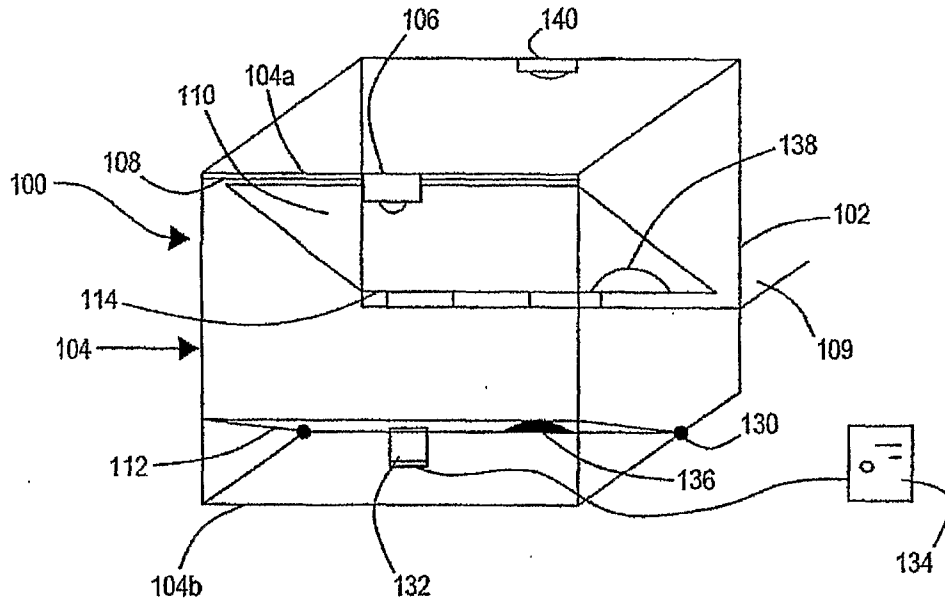


Fig. 1

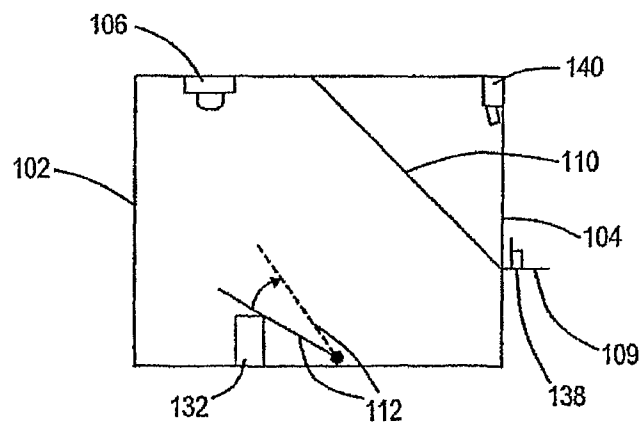


Fig. 2

2/5

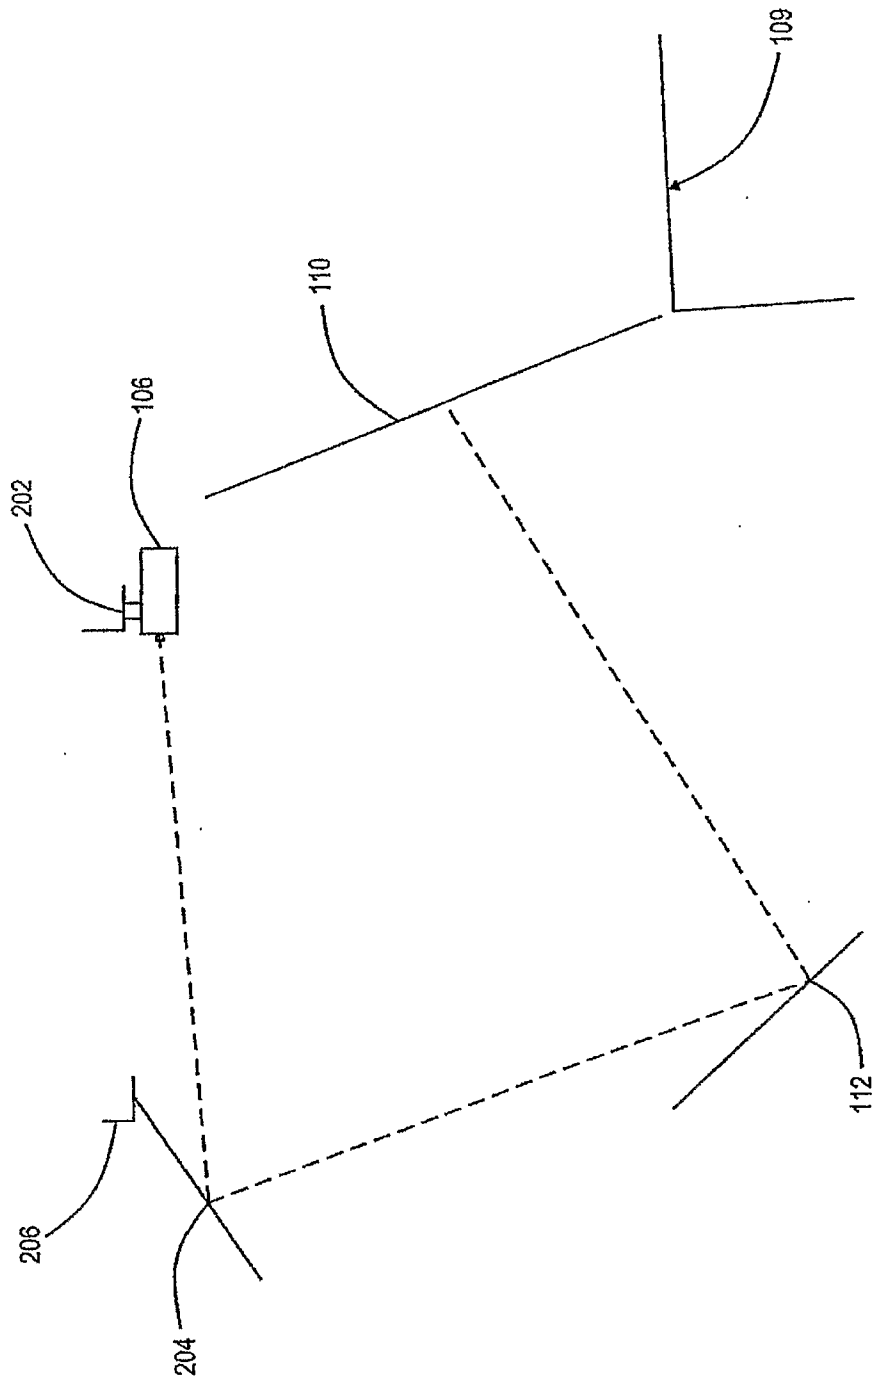
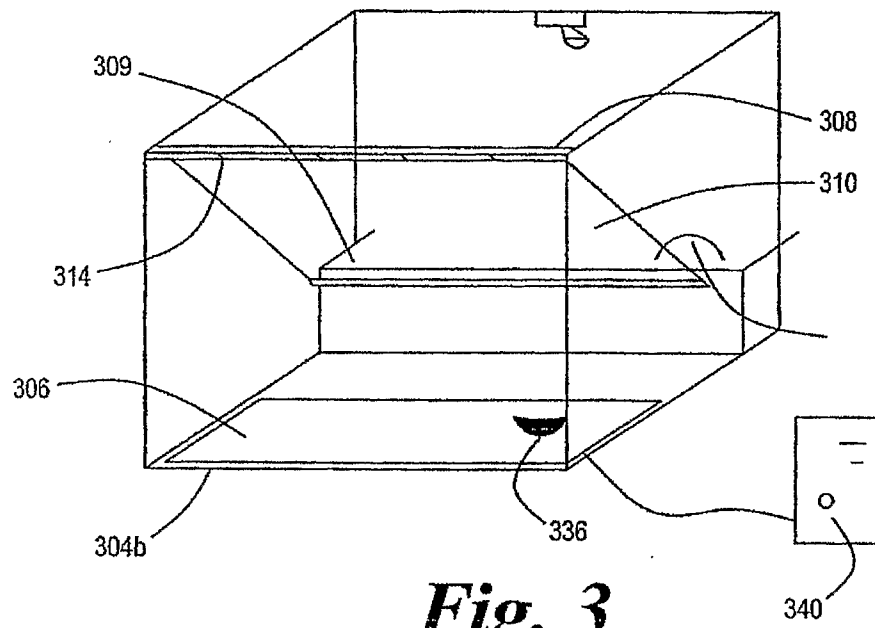
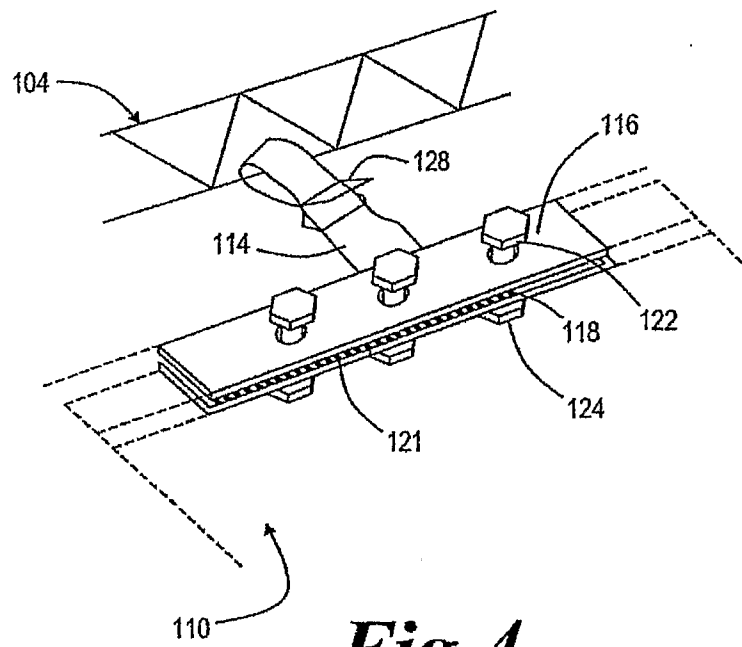


Fig. 2a

3/5

*Fig. 3**Fig. 4*

4/5

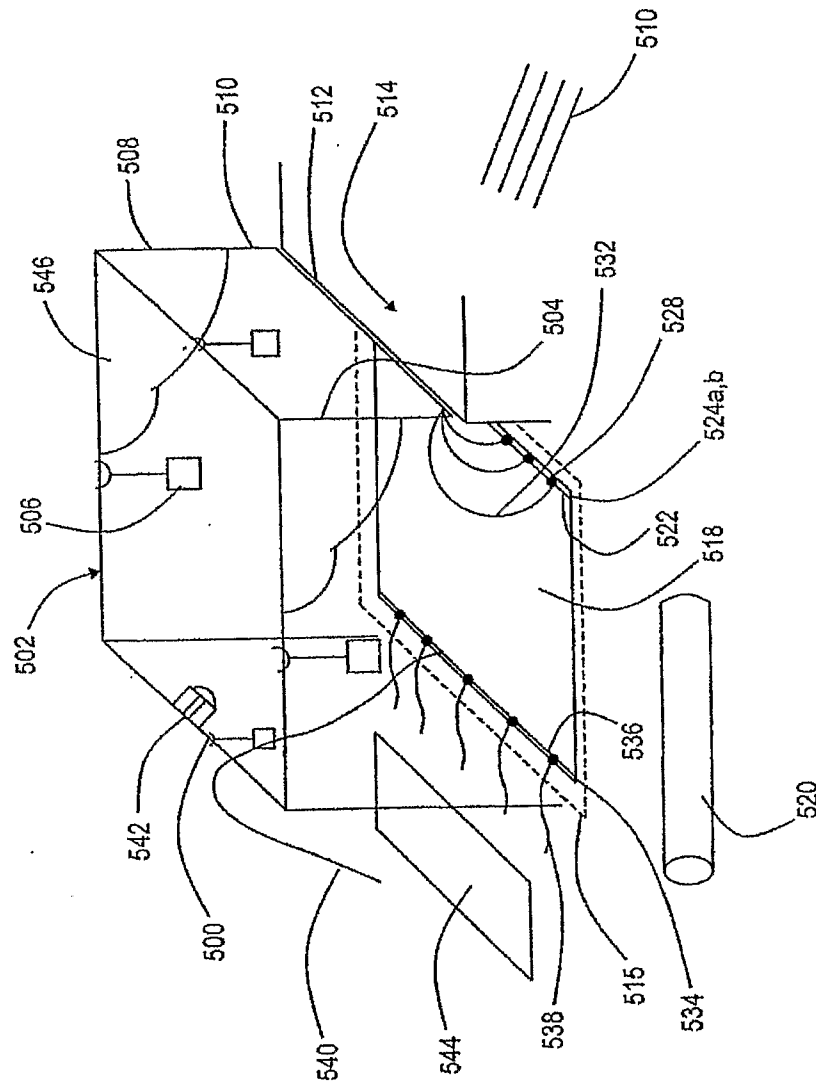


Fig. 5

5/5

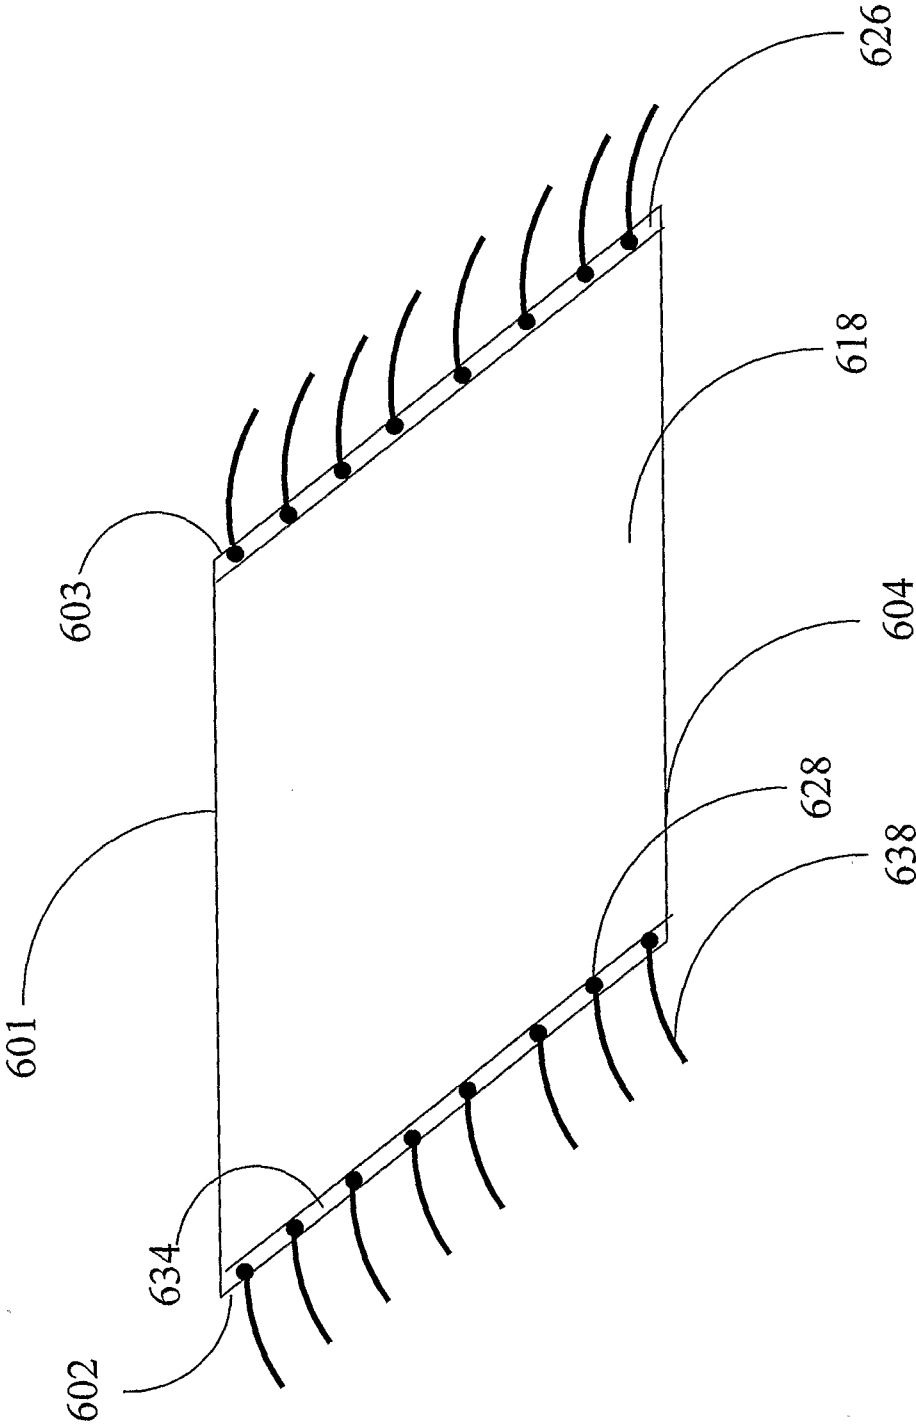


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2006/004054

A. CLASSIFICATION OF SUBJECT MATTER
INV. G03B21/28 A63J23/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G03B A63J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2005/096095 A (MUSION SYSTEMS LTD [GB]; O'CONNELL IAN [GB]; ROCK JAMES [GB]) 13 October 2005 (2005-10-13)	1,2,4-20
Y	page 1, line 3 - page 17, line 22; figures 1-5	1-29
Y	US 5 865 519 A (MAASS UWE [DE]) 2 February 1999 (1999-02-02) column 3, line 51 - column 4, line 57; compounds 1-6 ----- -/--	1,3,9, 11,12, 15,16, 21-26, 28,29

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

16 January 2007

Date of mailing of the international search report

26/01/2007

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Piedrafita, Aurelio

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2006/004054

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 519 632 A (NAT SCREEN SERVICE LTD; CECIL MILTON HEPWORTH; PAUL KIMBERLEY) 2 April 1940 (1940-04-02) column 3, line 51 - column 4, line 57; figures 1-6 -----	1-29
Y	WO 2004/055590 A2 (VIZOO INVEST APS [DK]; SIMONSEN PETER ALLAN [DK]; CORELL MORTEN [DK]) 1 July 2004 (2004-07-01) page 7, line 1 - page 8, line 12; figures 8-14 -----	1-29
Y	JP 11 160796 A (SONY CORP) 18 June 1999 (1999-06-18) abstract -----	1-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2006/004054

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2005096095	A	13-10-2005	AU 2004318064 A1 EP 1733279 A1 GB 2427708 A	13-10-2005 20-12-2006 03-01-2007
US 5865519	A	02-02-1999	AT 175783 T AU 694997 B2 AU 6930696 A CA 2206887 A1 CN 1166210 A CZ 9701543 A3 DE 29515073 U1 DK 799436 T3 WO 9711405 A1 EP 0799436 A1 ES 2129987 T3 HU 9702116 A2 JP 2930219 B2 JP 10509535 T NO 972230 A NZ 316949 A PL 320418 A1 SK 62197 A3	15-01-1999 06-08-1998 09-04-1997 27-03-1997 26-11-1997 17-09-1997 07-12-1995 06-09-1999 27-03-1997 08-10-1997 16-06-1999 28-04-1998 03-08-1999 14-09-1998 17-07-1997 27-04-1998 29-09-1997 09-09-1998
GB 519632	A	02-04-1940	NONE	
WO 2004055590	A2	01-07-2004	AU 2003287910 A1 EP 1583995 A2 US 2005078365 A1	09-07-2004 12-10-2005 14-04-2005
JP 11160796	A	18-06-1999	NONE	