



(51) International Patent Classification:

B01J 29/85 (2006.01) **B01J 35/00** (2006.01)
B01D 53/94 (2006.01) **C01B 39/54** (2006.01)

(21) International Application Number:

PCT/IB2016/050461

(22) International Filing Date:

29 January 2016 (29.01.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/109,362 29 January 2015 (29.01.2015) US

(71) Applicant: **JOHNSON MATTHEY PUBLIC LIMITED COMPANY** [GB/GB]; 5th Floor, 25 Farringdon Street, London EC4A 4AB (GB).(72) Inventors: **CASCI, John**; 501 West Dyke Road, Redcar, Cleveland TS10 4QL (GB). **TURRINA, Alessandro**; 52 Main Street, Strathkinness, Fife KY16 9SA (GB). **WRIGHT, Paul**; 1 Pipeland Farm Steading, St Andrews, Fife KY16 8NL (GB).(74) Agent: **NUNN, Andrew**; Johnson Matthey Public Limited Company, Gate 20, Orchard Road, Royston Hertfordshire SG8, 5HE (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DIRECT INCORPORATION OF IRON COMPLEXES INTO SAPO-34 (CHA) TYPE MATERIALS

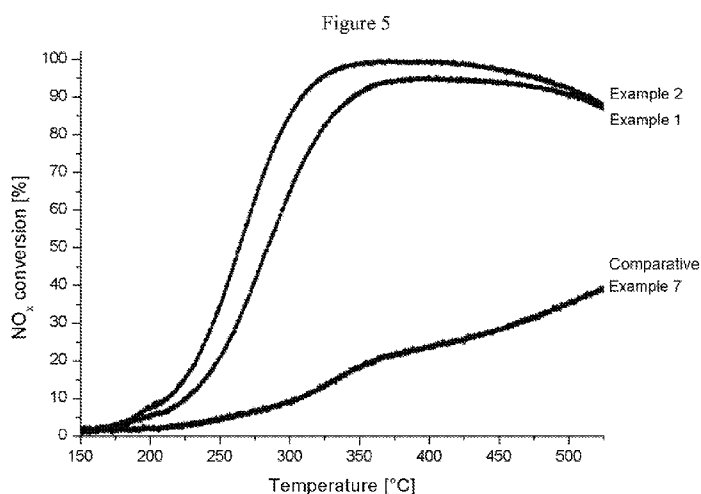

(57) Abstract: Fe-SAPO-34 silicoaluminophosphates having Fe²⁺ organic complexes and methods for their direct synthesis in the absence of a co-templating agent are described. Fe-SAPO-34 silicoaluminophosphate having Fe³⁺ located in extra-framework locations within the pores of cages of the crystal are described. They are prepared by calcining the Fe-SAPO-34 silicoaluminophosphates containing Fe²⁺ polyamine complexes. Methods of using the Fe-SAPO-34 having Fe³⁺ located in extra-framework locations within the pores of cages of the crystal in the treatment of exhaust gases are described.

Direct Incorporation of Iron Complexes into SAPO-34 (CHA) Type Materials

FIELD OF INVENTION

The invention relates to iron-containing silicoaluminophosphate (Fe-SAPO-34)

5 molecular sieves, processes for manufacturing iron-containing silicoaluminophosphate molecular sieves and methods of using such molecular sieves in reducing nitrogen oxides (NOx) in exhaust gases.

BACKGROUND OF THE INVENTION

10 Silicoaluminophosphates (SAPOs) are synthetic materials having a three-dimensional microporous aluminophosphate crystalline framework with silicon incorporated into the framework. The framework structure consists of PO_2^+ , AlO_2^- , and SiO_2 tetrahedral units. The empirical chemical composition, on an anhydrous basis, is:



15 wherein, R represents at least one organic templating agent present in the intracrystalline pore system; m represents the moles of R present per mole of $(\text{Si}_x\text{Al}_y\text{P}_z)\text{O}_2$ and has a value from zero to 0.3; and x, y, and z represent the mole fractions of silicon, aluminum, and phosphorous, respectively, present as tetrahedral oxides. These compounds were disclosed in U.S. Pat. No. 4,440,871 as being a class of silicon-substituted aluminophosphates, which are both crystalline
20 and microporous and exhibit properties characteristic of both aluminosilicate zeolites and aluminophosphates. The general principles of zeolite synthesis are well documented, e.g. "Synthesis of High-silica Aluminosilicate Zeolites", Study of Surface Science and Catalysis, vol. 33, Elsevier, 1987 and "Synthesis of Aluminosilicate Zeolites and Related Silica-based Materials", Catalysis and Zeolites: Fundamentals and Applications, Springer, 1999.

25 U.S. Pat. Nos. 6,773,688 and 7,052,664 disclose a process for manufacturing a SAPO-34 silicoaluminophosphate molecular sieve, the process comprising the steps of: (a) providing sources of aluminum, of phosphorus and of silicon, wherein the source of silicon is in solution with a water-miscible organic base; (b) forming a synthesis mixture from the sources; and (c) treating the synthesis mixture for a period of time and at a temperature sufficient to form the
30 silicoaluminophosphate molecular sieve. These patents also disclose:

In the manufacture of SAPO-34, it has proved advantageous to use a mixture of templates. For example, a suitable template mixture is TEAOH, which is readily soluble in water, and DPA, which dissolves in water with some difficulty.

5

U.S. Pat. No. 7,459,136 discloses a process for manufacturing a silicoaluminophosphate molecular sieve, the process comprising the steps of: (a) dissolving a silicon source into a solution containing a structure-directing template at conditions sufficient to establish a dissolved silicon concentration of at least 0.05 wt. %; (b) adding at least one aluminum source and at least one phosphorus source to at least a portion of the solution of step (a) to form a synthesis mixture, wherein at least the major portion of the aluminum source and phosphorus source are added to the solution after the solution has reached a dissolved silicon concentration of at least 0.03 wt. %; and (c) treating the synthesis mixture at a temperature sufficient to form the silicoaluminophosphate molecular sieve, wherein the silicoaluminophosphate molecular sieve comprises at least one intergrown phase of molecular sieves having AEI and CHA framework types, wherein the intergrown phase has an AEI/CHA mass ratio of from about 5/95 to 40/60 as determined by DIFFaX analysis.

U.S. Patent No. 7,645,718 discloses a process for preparing Fe-exchanged SAPO-34 by a liquid phase ion-exchange method using an iron salt solution. Only small amounts of Fe ($\leq 1.4\%$) were exchanged onto SAPO-34 using liquid phase ion exchange.

The process for preparing Fe-SAPO-34 by sublimation of FeCl_3 for use in SCR applications is disclosed in Kuchеров et al., Catalysis Letters 56 (1998) 173-181. The dispersion of Fe in SAPO-34 is not as good as on the medium pore ZSM-5 using the sublimation method.

U.S. Patent No. 7,785,554 discloses a process for manufacturing a silicoaluminophosphate molecular sieve comprising at least one intergrown phase of AEI and CHA framework types, the process comprising the steps of: (a) combining at least one silicon source, at least one phosphorus source, at least one aluminum source, and at least one structure-directing-agent (R) to form a mixture; and (b) treating the mixture at crystallization conditions sufficient to form the silicoaluminophosphate molecular sieve, wherein the mixture prepared in step (a) has a molar composition of: $(n)\text{SiO}_2/(\text{Al}_2\text{O}_3)/(m)\text{P}_2\text{O}_5/(x)\text{R}/(y)\text{H}_2\text{O}$ wherein n ranges from about 0.005 to about 0.6, m ranges from about 0.6 to about 1.2, x ranges from about 0.5 to about 0.99, and y ranges from about 10 to about 40.

25
30

U.S. Patent No. 8,541,331 discloses a method for preparing iron-containing aluminosilicate zeolites having both framework iron and iron cations on ion-exchange sites.

U.S. Patent No. 8,603,432 discloses a method for preparing Fe-SAPO-34 from a slurry of SAPO-34 in a ferric nitrate solution.

5 U.S. Patent Application Publication No. US 2012/0251422 A1 discloses an Fe-SAPO-34 molecular sieve, where the molecular sieve contains both framework iron and iron cations at ion-exchange sites. A method of making a catalyst comprising Fe-SAPO-34 comprises mixing sources of an iron salt, alumina, silica, phosphate, at least one organic structural directing agent and water to form a gel; heating the gel in an autoclave at a temperature ranging from 140 to 220
10 °C to form a crystalline Fe-SAPO-34 product; calcining the product; and contacting the product with acid or steam.

The literature also describes iron being loaded into SAPO-34 using different iron salts. (Y. Wei et al., Catalysis Today, 131, 2008, 262-269; M. Kang et al., Journal of Molecular Catalysis A: Chemical 160, 2000, 437-444; M. Kang et al., Environ. Eng. Res, 3, 3, 175-182, 1998; and M.
15 Heon et al., Korean Journal of materials research, 9, 8, 1999)

There is a need for an improved and simplified method of making Fe-SAPO-34 that does not require ion-exchange or impregnation, where the Fe-SAPO-34 displays good catalytic activity and stability. The Inventors have discovered a method of directly synthesizing Fe-SAPO-34 that contains both framework iron and iron cations at ion-exchange sites and various
20 forms of the Fe-SAPO-34 produced by the methods.

SUMMARY OF THE INVENTION

In one aspect of the invention, compositions comprise organic complexes of Fe in a SAPO-34 structure where the Fe is present as Fe⁺² cations. These complexes have a purple color
25 and a band with a peak at around 550 nm in the UV-visible adsorption spectra. These cations can be present in two possible environments. The Fe-complexes can function as a reversible O₂ carrier.

In another aspect of the invention, calcined compositions comprise Fe-SAPO-34 where the iron is present as Fe⁺³ and the iron cations are located mainly in extra-framework positions. These
30 compositions have a broad band from 300-700 nm in the UV-visible spectra. The calcined compositions are catalytically active in converting NO_x.

In yet another aspect of the invention, Fe-SAPO-34 is prepared using Fe-complexes as structure-directing agents. The complexing ligands described herein can be used to control the incorporation of iron cations in extra-framework position.

In still another aspect of the invention, Fe-containing SAPO-34 having the iron is present as Fe^{+3} with these cations located mainly in extra-framework positions can be used to convert NO_x from exhaust gases.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1A-1H show the XRD spectra of as-prepared and calcined material from Examples 1-12.

Figures 2A-2F illustrates SEM results from calcined material of Examples 1-5 and Comparative Example 7.

Figure 3A shows the UV-Visible absorption spectra of octahedral high spin and low spin $\text{Fe}(\text{TEPA})$ species. Figure 3B shows the UV-Visible absorption spectra of as-prepared and calcined materials from Example 1. Figure 3C shows the UV/Visible absorption spectra of various compounds incubated under various conditions. Figure 3D shows the UV-Visible absorption spectra of as-prepared and calcined materials from Example 2. Figures 3E and 3F show the UV-Visible absorption spectra of as-prepared and calcined materials, respectively, from Examples 3, 4 and 5. Figures 3G and 3H show the UV-Visible absorption spectra of as-prepared and calcined material from Examples 6 and 7, respectively. Figure 3I and 3J show the UV-Visible absorption spectra of as-prepared and calcined material, respectively, from Examples 8-12.

Figures 4A-4C shows Mössbauer absorption spectra from the as-prepared and calcined samples of Examples 1, 2 and 7 measured at 300 K.

Figure 5 shows the amount of NO_x conversion using material of Examples 1, 2 and 7 at various temperatures.

DETAILED DESCRIPTION OF THE INVENTION

As used in this specification and the appended claims, the singular forms "a", "an" and "the" include plural referents unless the context clearly indicates otherwise. Thus, for example, reference to "a catalyst" includes a mixture of two or more catalysts, and the like.

As used herein, the term “calcine”, or “calcination”, means heating the material in air or oxygen. This definition is consistent with the IUPAC definition of calcination. (IUPAC. Compendium of Chemical Terminology, 2nd ed. (the "Gold Book"). Compiled by A. D. McNaught and A. Wilkinson. Blackwell Scientific Publications, Oxford (1997). XML on-line corrected version: <http://goldbook.iupac.org> (2006-) created by M. Nic, J. Jirat, B. Kosata; updates compiled by A. Jenkins. ISBN 0-9678550-9-8. doi:10.1351/ goldbook.) Calcination is performed to decompose a metal salt and promote the exchange of metal ions within the catalyst and also to adhere the catalyst to a substrate. The temperatures used in calcination depend upon the components in the material to be calcined and generally are between about 400 °C to about 900 °C for approximately 1 to 8 hours. In some cases, calcination can be performed up to a temperature of about 1200 °C. In applications involving the processes described herein, calcinations are generally performed at temperatures from about 400 °C to about 700 °C for approximately 1 to 8 hours, preferably at temperatures from about 400 °C to about 650 °C for approximately 1 to 4 hours.

As used herein, the term “about” means approximately and refers to a range that is optionally $\pm 25\%$, preferably $\pm 10\%$, more preferably, $\pm 5\%$, or most preferably $\pm 1\%$ of the value with which the term is associated.

When a range, or ranges, for various numerical elements are provided, the range, or ranges, can include the values, unless otherwise specified.

The invention includes methods of preparing Fe-SAPO-34 via direct synthesis using different metal complexes that are formed by adding an iron complex, such as a complex formed by a polyamine and iron(II) acetate, directly to the silicoaluminophosphate and the synthesis is performed in the absence of a co-templating agent.

The term "template(s)" typically refer to structure directing agent(s) (SDA) that is(are) used to form channels or tunnel-like structures (also called microporous structure) within the molecular sieve composition. For the SAPO materials to be used as catalyst compositions, however, the template must be removed to open up the channels or tunnel-like structures. Typically, this is done during the preparation of a SAPO-containing catalyst by calcining the template-containing SAPO powder.

A co-templating agent is defined herein as an organic additive that, together with the main structure directing agent (SDA), drives the formation of a specific framework type. The co-templating agent may template the same cage or channel of the SDA in a cooperative effect, or template a second different cage (like TEAOH within STA-7). [Picone, A. L.; Warrender, S. J.; Slawin, A. M. Z.; Dawson, D. M.; Ashbrook, S. E.; Wright, P. A.; Thompson, S. P.; Gaberova, L.; Llewellyn, P. L.; Moulin, B.; Vimont, A.; Daturi, M.; Park, M. B.; Sung, S. K.; Nam, I.; Hong, S. B. *Microporous Mesoporous Mater.* 2011, 146, 36-47.] In the syntheses of Cu-SAPO-34 by Deka [U. Deka, I. Lezcano-Gonzalez, S.J. Warrender, A. Lorena, P.A. Wright, B.M. Weckhuysen, A.M. Beale, *Microporous Mesoporous Mater.* 2013, 166, 144-152] and Franco [R. M.-Franco, M.

Moliner, C. Franch, A. Kustov, A. Corma, *Appl. Catal., B* **2012**, 127, 273-280] tetraethylammonium hydroxide and diethylamine have been used as co-templating agents, in each case together with the copper-amine complex. Both are well known to be suitable SDAs on their own for the preparation of SAPO-34. B. M. Lok, C. A. Messina, R. L. Patton, R. T. Gajek, T. R. Cannan, E. M. Flanigen, *J. Am. Chem. Soc.* **1984**, 106, 6092-6093; B. M. Lok, R. L. Patton, R. T. Gajek, T. R. Cannan and E. M. Flanigen, *US Patent. 4,440,871* **1984**; G. Liu, P. Tian, J. Li, D. Zhang, F. Zhou and Z. Liu, *Microporous Mesoporous Mater.* **2008**, 111, 143-149. In the absence of these co-templating agents the Cu-SAPO-34 phases obtained with the copper amine precursors are less crystalline suggesting that the Cu²⁺-complexes do not have an optimum "fit" within the CHA cages of SAPO-34.

"Direct synthesis" refers to a method that does not require an iron-doping process after the SAPO-34 has been formed, such as a subsequent ion-exchange or impregnation method.

"Selective Catalytic Reduction" or "SCR" refers to the reduction of NO_x (typically with ammonia or urea) in the presence of oxygen to form nitrogen (N₂) and water (H₂O).


"Exhaust gas" refers to any waste gas formed in an industrial process or operation and by internal combustion engines, such as from any form of motor vehicle.

In one aspect of the invention, compositions comprise organic complexes of Fe in a SAPO-34 structure, where the Fe is present as Fe⁺² cations. These cations can be present in two possible environments, as indicated by isomers shifts in analysis of the compositions using Mössbauer spectroscopy. These compositions do not contain Fe³⁺ in their structures, when analysed using Mössbauer spectroscopy (< 3%, the limit of detection). When a sample was

analysed by Mössbauer spectroscopy at the temperature of liquid helium temperature, only Fe^{2+} species were observed. This indicates that the amount of Fe^{3+} in the sample, if any, would have to be less than the experimental uncertainty, 3% of the total amount of iron present. These complexes have a purple color and a band with a peak at around 550 nm is present in the UV-visible adsorption spectra. The Fe-complexes can function as a reversible O_2 carrier.

In another aspect of the invention, calcined compositions comprise Fe-SAPO-34, where the iron is present as Fe^{+3} and the iron cations are located mainly in extra-framework positions, as indicated by analysis of the compositions using Mössbauer spectroscopy and UV-visible spectra. These compositions have a broad band from 300-700 nm in the UV-visible spectra. The calcined compositions are catalytically active in converting NO_x .

In yet another aspect of the invention, Fe-SAPO-34 is prepared using Fe-complexes as structure-directing agents. The complexing ligands described herein can be used to control the incorporation of iron cations in extra-framework position. Fe-SAPO-34 compositions comprising polyamine complexes of Fe in a SAPO-34 structure, where the Fe is present as Fe^{+2} cations, can be prepared by adding the polyamine and an Fe^{2+} salt directly to a silicoaluminophosphate gel rather than as a preformed metal complex. The polyamine, which acts as a template in the formation of the Fe-SAPO-34, is preferably a liner polyamine, or a salt or mixture thereof. Preferably, the polyamine is diethylenetriamine (DETA); triethyletetramine (TETA); tetraethylenepentamine (TEPA); pentaethylenhexamine (PEHA) or mixtures thereof. When an Fe^{2+} salt is mixed with a polyamine, an organic complex is formed. The organic complexes formed from the above preferred polyamines are shown below.

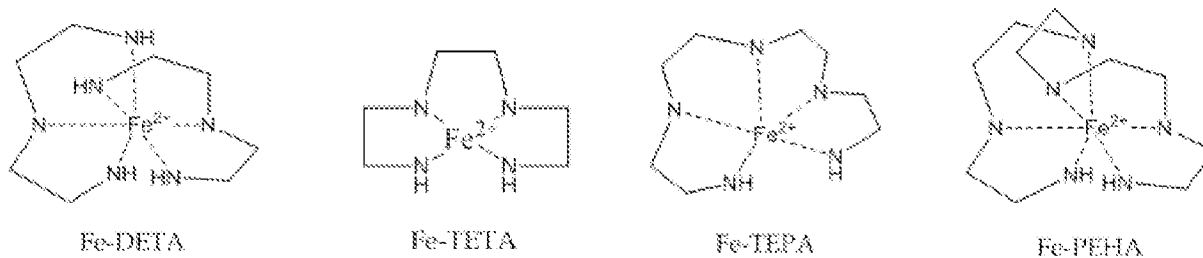

The silicoaluminophosphate gel can be formed by mixing orthophosphoric acid, silica and aluminum hydroxide in deionized water. After the polyamine is added to the mixture, additional polyamine or a solution of an appropriate base, such as a compound that forms an

alkylammonium salt, such as tetrabutylammonium hydroxide, can be added to adjust the pH of the gel to a pH of between about 6 to about 8, inclusive, preferably to a pH of about 7. The ratio of Fe^{2+} : polyamine can be about 0.1 to about 1, preferably about 0.1 to about 0.5, most preferably about 0.1 to about 0.3, where these values are inclusive. The mixture can be seeded with SAPO-34 and/or Fe-SAPO-34 crystals that had been prepared previously. The SAPO-34 or Fe-SAPO-34 crystals may be “as made” (that is template containing) or calcined. Preferably the seeding is performed using about 2.0 wt. % of the previously formed crystals based on the SiO_2 content of the gel. By seeding the gel with the SAPO-34 crystals and then varying the length of the crystallization time it is possible to reduce the crystal size without affecting the crystallinity of the final product. For example, by adding 2% wt. of SAPO-34 previously prepared into the starting gel, it was possible to reducing the crystallization time from 2 days to 10 hours to obtain highly crystalline SAPO-34 of the same size crystals.

The mixture of the silicoaluminophosphate gel, the polyamine and the iron salt, which formed a sol gel, can be stirred for about 90 minutes, and then heated at a temperature for a sufficient time for the formation of the desired product. In one embodiment, the mixture is heated at about 220 °C for about 10 hours to 2 days. The crystalline product can then be separated from fine grained amorphous solid that forms. This can be done by suspending the products in water, sonicating the mixture to separate the crystalline material from fine grained amorphous solid, and removing the crystalline by decanting. The crystalline material can then be collected by filtration, washed and dried. Preferably, the crystalline material is washed with deionized water. The crystalline material can be dried at an elevated temperature, preferably at about 80 °C, for a time sufficient to produce dried samples. The material produced had a purple color.

When the above procedure was performed using tetraethylammonium hydroxide in place of the polyamine in the synthesis, SAPO-34 was formed without iron in the crystals.

The use of DETA resulted in fewer intergrown crystals, as observed by SEM measurements, compared to the use of other polyamines.

Methods of making Fe^{+3} SAPO-34 compositions

In still another aspect of the invention, calcined compositions comprising Fe-SAPO-34, where the iron is present predominantly as Fe^{+3} and the iron cations are located mainly in extra-

framework positions are made by calcining a composition comprising organic complexes of Fe in a SAPO-34 structure, where the Fe is present as Fe^{2+} cations. The Fe^{2+} in the material to be calcined has the Fe^{2+} complexed with a polyamine. This material has the Fe^{2+} in extra framework positions. During calcination, the linear polyamine is removed, the Fe^{2+} ions are oxidized to Fe^{3+} ions and the Fe^{3+} ions remain in the extra framework positions.

Compositions comprising organic complexes of Fe in a SAPO-34 structure, where the Fe is present as Fe^{3+} cations, are not formed when Fe^{3+} (for example as FeCl_3) is used in place of Fe^{2+} in making the gel. Instead, the Fe^{3+} becomes reduced to Fe^{2+} and becomes complexed by the amine, giving purple products similar to those prepared when starting with Fe^{2+} salts in the sol gel. This is because the formation constant of Fe^{3+} with polyamines is much lower than the formation constant of Fe^{2+} with polyamines and (2) the synthesis conditions are reducing.

In still another aspect of the invention, the method produces a calcined Fe-SAPO-34 silicoaluminophosphate comprising Fe^{3+} or a mixture of Fe^{2+} and Fe^{3+} , wherein the Fe^{3+} is present in an amount greater than or equal to 90% of the total amount of Fe in calcined Fe-SAPO-34 silicoaluminophosphate. The composition can comprise up to about 8% by weight, preferably from 0-5% by weight, based on the total weight of the composition. The method comprises calcining an Fe-SAPO-34, where the Fe is only present as Fe^{2+} when analyzed by Mössbauer spectroscopy, the Fe^{2+} is located in extra-framework locations and the Fe^{2+} is present in a polyamine complex, at a temperature and for a time sufficient to remove the polyamine from the polyamine complex and oxidize the Fe^{2+} to Fe^{3+} . The calcined Fe-SAPO-34 silicoaluminophosphate can comprise iron in various states that is substantially free from Fe^0 . In a preferred embodiment, the calcination is performed at 560 °C for 12 hours in dry oxygen.

In another aspect of the invention, an article comprises a catalyst composition comprising calcined Fe-SAPO-34 silicoaluminophosphate comprising Fe^{3+} or a mixture of Fe^{2+} and Fe^{3+} , wherein the Fe^{3+} is present in an amount greater than or equal to 90% of the total amount of Fe in calcined Fe-SAPO-34 silicoaluminophosphate, and the calcined Fe-SAPO-34 silicoaluminophosphate does not comprise Fe^0 .


In still another aspect of the invention, Fe-containing SAPO-34 having the iron present as Fe^{+3} with these cations located mainly in extra-framework positions can be used to convert NOx from exhaust gases by contacting the exhaust gas with a calcined Fe-SAPO-34 silicoaluminophosphate comprising Fe^{3+} or a mixture of Fe^{2+} and Fe^{3+} , where the Fe^{3+} is present in an amount greater than or equal to 90% of the total amount of Fe in calcined Fe-SAPO-34 silicoaluminophosphate, and the calcined Fe-SAPO-34 silicoaluminophosphate does not comprise Fe^0 .

The following examples illustrate the invention; the skilled person will recognize many variations that are within the spirit of the invention and scope of the claims.

Examples

Example 1 (Purple sample)

Orthophosphoric acid (85%), fumed silica powder (0.007 μm), aluminum hydroxide, deionized water, tetraethylenepentamine (TEPA) and iron (II) acetate were mixed together. An excess of the tetraethylenepentamine (TEPA) was added dropwise to adjust the gel pH to 7. The mixture was seeded (2.0 wt. % of the SiO_2 content) with calcined Fe-SAPO-34 that had been prepared previously. The mixture of these components formed a sol gel. These components were present in the sol gel in a ratio of:



The mixture was stirred for 90 minutes, and then placed in an oven at 220 °C for 10 hours. The resultant products were suspended in water and sonicated to force separation of crystalline from fine grained amorphous solid, which was removed by decanting. Then, the crystalline materials were collected by filtration, washed with deionized H_2O , and dried in air at 80 °C for 12 hours. This material, referred to herein as “as-prepared”, had a purple color.

A portion of the dried product was then calcined in a tube furnace at 560 °C, with a heating rate of 20 °C min^{-1} , for 14 hours in a stream of dry oxygen. This material, referred to herein as “calcined”, had an ochre (a light brownish-yellow) color.

The resulting product had the XRD pattern of SAPO-34, a Si/(Al+P+Si) ratio of 0.14, and contained 4.0 wt. % of Fe, determined by XRF and AAS, respectively.

Figure 1A shows the X-ray diffraction patterns of the as-prepared and calcined materials. The calcined sample had a surface area of 274 m²/g and a micropore volume of 0.14 cm³/g. The SEM (Figure 2A) shows intergrown crystals with an average linear dimension of 20 - 25 μm.

As-prepared 'wet', dried and calcined materials from Example 1 were analysed by solid state UV-Visible absorption spectroscopy (Figures 3A 3B). The as-prepared wet sample (after filtration) is white in color while after overnight drying at 50 °C in air the color changes to pink. However, the color does not change if the sample is dried in a vacuum. The absorption band around 900 nm is very intense in the white sample. This has been attributed to an Fe²⁺ high spin, octahedral complex, in which the iron cation is coordinated to 5 N atoms of polyamine and one water molecule. (D. M. Templeton, Molecular and cellular iron transport, Marcel Dekker, 2002). The pink sample shows a strong *d-d* transition band at 550 nm that we attribute to the entry of O₂, in substitution of the water molecule, in the coordination sphere of the iron. (I. V. Korendovych, O. P. Kryatova, W. M. Reiff, E. V. Rybak-Akimova, Inorganic Chemistry, 2007, 46, 4197–4211; J.E. Boldwin, J.Huff, JACS, 1973, 95(17), 5757-5759). The change of ligands causes a reduction of the crystal field splitting Δ (O₂ is a weaker ligand than H₂O) with consequent stabilization of the low spin configuration.

In order to prove the coordination of molecular O₂, the as-prepared pink samples have been dehydrated/deoxygenated in a tube furnace at 160 °C under N₂ flow: the color changed from pink to light brown. The spectrum in Figure 3C shows a decrease of the absorption band at 550 nm and an increase for that at 350 nm. After flowing O₂ at 50 °C overnight on the light brown sample the color changed to violet with consequent reappearance of a strong band at 550 nm. Different cycles have been successfully repeated proving the reversibility of the system. Thus Fe-SAPO-34 prepared using the methods described in this patent is suitable as a reversible O₂ carrier.

After the removal of the organic ligand upon calcination the absorption band at 550 nm disappears (Figure 3B). The spectrum of the calcined material shows a broad band between 350 - 700 nm due to the presence of extra-framework iron species including isolated and/or hydrated Fe³⁺ cations, and/or dimeric or oligomeric Fe³⁺ species. It is possible that a small portion of the iron could also be incorporated within the SAPO-34 framework.

Mössbauer absorption spectra from the as-prepared hydrated and dehydrated and calcined samples of Example 1, measured at 300 K, are shown in Figures 4A. The fitted parameters of the Mössbauer absorption spectra for the as-prepared and calcined samples of Example 1 are given in Table 1.

5

Table 1. Mössbauer spectral fit parameters for Example 1 in as-prepared and calcined forms at 300 K.

		IS	QS	Γ	Spectral contribution	
<u>Sample</u>		<u>(mm s⁻¹)</u>	<u>(mm s⁻¹)</u>	<u>(mm s⁻¹)</u>	<u>Species</u>	<u>%</u>
10	Example 1, as-prepared - hydrated					
	Component 1	1.15	2.23	0.51	Fe ²⁺	59
	Component 2	0.87	2.22	0.54	Fe ²⁺	41
	Example 1, as-prepared - dehydrated					
15	Component 1	1.32	2.23		Fe ²⁺	10
	Component 2	0.98	2.16		Fe ²⁺	90
	Example 1, calcined					
	Component 1	0.38	0.92	0.66	Fe ³⁺	96
20	Component 2	1.22	3.43	0.66	Fe ²⁺	4

Experimental uncertainties: Isomer shift (IS): ± 0.01 mm s⁻¹; Quadrupole Splitting (QS): ± 0.01 mm s⁻¹; Line width (Γ): ± 0.01 mm s⁻¹; Hyperfine field: ± 0.1 T; Spectral contribution: $\pm 3\%$

25 Mössbauer analysis of the as-prepared hydrated material of Example 1 shows that the material contained iron in the form of Fe²⁺, with the iron being present as two different species (locations) at about 60% and 40%, respectively. Both the contributions has been assigned to Fe²⁺-TEPA complex, respectively the 40% to [Fe(TEPA)O₂]²⁺ complex and the 60% to [Fe(TEPA)H₂O]²⁺ complex.

30 Clear differences were observed in the Mössbauer spectrum measured on the as-prepared sample after a drying treatment in air (120 °C, 3 h), compared to the fresh sample. The initial


octahedral $[\text{Fe}(\text{TEPA})\text{H}_2\text{O}]^{2+}$ species (59%) are now reduced to 10% while the I.S. value of the remaining signal is 0.98 mm s^{-1} . The increase of the isomer shift value is related to a decrease in the s-electron density at the iron nucleus that might be due to the absence of O_2 or H_2O in the coordination sphere of Fe^{2+} .

5 When an as-prepared sample was analysed by Mössbauer spectroscopy at the temperature of liquid helium temperature, only Fe^{2+} species were observed. This indicates that the amount of Fe^{3+} in the sample, if any, would have to be less than the experimental uncertainty, 3% of the total amount of iron present.

 The Mössbauer analysis of calcined material of Example 1 shows that upon calcination
10 almost all the iron contained in the material (96%) has been oxidized to Fe^{3+} . This contribution has been attributed to Fe^{3+} well-dispersed ($\Gamma 0.66 \text{ mm s}^{-1}$) in extra-framework positions.

Example 2. ("pale purple")

 Example 2 was made with a different procedure in which an iron-amine complex is
15 prepared before being added to a mixture of phosphoric acid, silica and aluminium hydroxide. A mixture of aluminum hydroxide, orthophosphoric acid (85%) and water was stirred for 1 hour, then fumed silica powder ($0.007 \mu\text{m}$) was added and the mixture was stirred for 1 hour. A structure-directing agent of a metal complex of Fe^{2+} with tetraethylenepentamine, formed by adding iron (II) acetate to tetraethylenepentamine, was added to the mixture along with sufficient
20 tetraethylenepentamine ($\sim 0.15 \text{ ml}$) to increase the pH to 7. The mixture of these components formed a sol gel. These components were present in the sol gel a ratio of:



 Seeds of Fe-SAPO-34 (3.0% wt. respect to SiO_2) were added to the mixture, the mixture
25 was stirred for 2 hours, and then placed in an oven at 220°C for 1 day.

 The resultant product was treated, collected and dried as described in Example 1. This material is referred to herein as "as-prepared" and it shows a pale purple color.

 A portion of the dried product was then calcined in a tube furnace at 550°C , with a
30 heating rate of $20^\circ\text{C min}^{-1}$, for 12 hours in a stream of dry oxygen. This material is referred to herein as "calcined" and it shows an ochre color.

The resulting product had the XRD pattern of SAPO-34, had a Si/(Al+P+Si) ratio of 0.10, and contained 2.9 wt. % of Fe, determined by XRF and AAS respectively.

Figure 1B shows the XRD patterns of the as-prepared material and the calcined material.

The calcined sample had a surface area of 131 m²/g and a micropore volume of 0.06
5 cm³/g.

The SEM (Figure 2B) shows rhombic crystals with a range of sizes (8 - 25 μm).

The UV-visible spectra of the as-prepared and calcined materials are shown in Figure 3D. The as-prepared material shows the characteristic band of low spin [Fe(TEPA)O₂]²⁺ complex.

The absorption band at 550 nm is completely absent from the UV-Vis spectra of calcined
10 samples. The weak broad band between 350 – 700 nm suggests that less iron is present in extra-framework positions than in Example 1. As in the Example 1 a little fraction of Fe²⁺ could also being incorporated within the SAPO-34 framework.

Mössbauer absorption spectra from as-prepared and calcined samples of Example 2 are shown in Figure 4B. The fitted parameters of the Mössbauer absorption spectra for the as-
15 prepared and calcined samples of Example 2 are shown in Table 2.

Table 2. Mössbauer spectral fit parameters for Example 5 in as-prepared and calcined forms at 300 K. (Pale purple)

<u>Sample</u>	<u>IS</u>	<u>QS</u>	<u>Γ</u>	<u>Spectral contribution</u>	
	<u>(mm s⁻¹)</u>	<u>(mm s⁻¹)</u>	<u>(mm s⁻¹)</u>	<u>Species</u>	<u>%</u>
Example 2, as-prepared					
Component 1	1.13	2.18	0.56	Fe ²⁺	67
Component 2	0.83	2.14	0.53	Fe ²⁺	33
Example 2, calcined					
Component 1	0.39	0.84	0.73	Fe ³⁺	93
Calcined	0.87	2.97	0.73	Fe ²⁺	7

Experimental uncertainties: Isomer shift (IS): ± 0.01 mm s⁻¹; Quadrupole Splitting (QS): ± 0.01 mm s⁻¹; Line width (Γ): ± 0.01 mm s⁻¹; Hyperfine field: ± 0.1 T; Spectral contribution: ± 3%

The Mössbauer spectra of as-prepared Example 2 shows the presence of only Fe^{2+} , which is present as two species in approximate amounts of 67% and 33%, as described in Example 1. Mössbauer analysis of the calcined material of Example 2 shows that upon calcination almost all the iron contained in the material (93%) has been oxidized to Fe^{3+} .

Examples 3-5 (use of different polyamines as complexing ligands)

Examples 3-5 are materials comprising Fe-SAPO-34 made using different structure-directing agents (SDA), where each structure-directing agent was a metal complex of Fe^{2+} with one of the linear polyamines diethylenetriamine (DETA) (Example 3), triethylenetetramine (TETA) (Example 4), or pentaethylenehexamine (PEHA) (Example 5). The materials of Examples 3-5 were made using the same general procedure described for Example 1.

The gel composition used for all the three examples was:

$\text{Al}(\text{OH})_3 : 0.62 \text{ H}_3\text{PO}_4 : 0.25 \text{ SiO}_2 : 40 \text{ H}_2\text{O} : 0.1 \text{ Fe}^{2+} : 0.27 \text{ polyamine}$

The mixture was placed in an oven at 220 °C for 2 days. The resultant product was treated, collected and dried as described in Example 1. These materials are referred to herein as “as-prepared.”

A portion of the dried products was then calcined in a tube furnace at 560 °C, with a heating rate of 20 °C min^{-1} , for 12 hours in a stream of dry oxygen. These materials are referred to herein as “calcined.”

The as-prepared materials produced using each of the three structure-directing agents had a purple color.

Figures 1C and 1D show the XRD pattern of the as-prepared materials and calcined materials, respectively. The XRD powder patterns of the as-prepared samples show that a pure SAPO-34 phase has been obtained in each of the materials produced using one of the three polyamines. Crystallinity was retained in each of the materials after removal of the structure-directing agent by calcination.


The resulting products had Si/Al+P+Si ratio of 0.11, 0.13, 0.09 and contained 2.2, 2.4, 1.7 wt. % of Fe, respectively for Example 3, Example 4 and Example 5. The final compositions were determined by EDX.

The SEMs of as-prepared samples show the morphologies of all crystals observed. The average crystals size is about 50 μm for all three materials. Fe-SAPO-34 crystals obtained using Fe^{2+} -DETA (Figure 2C) as the SDA have a clearly defined cubic morphology. However, material produced using Fe^{2+} -TETA (Figure 2D) or PEHA (Figure 2E) as structure directing agents are crystals showing a highly intergrown morphology. Experiments (not provided) have shown that it is possible to reduce the crystal size of the material by altering the crystallization temperature and/or by the addition of SAPO-34 seeds within the starting gel.

The UV-visible spectra of the as-prepared and calcined materials are shown in Figures 3E and 3F, respectively. All three as-prepared materials show the absorption band at $\lambda_{\text{max}} = 550 \text{ nm}$, characteristic of low spin $[\text{Fe}(\text{polyamine})\text{O}_2]^{2+}$ complexes. The variation in absorbance of this band between the three different materials has been attributed to the different tendency of the Fe^{2+} complexed by the three polyamines to coordinate molecular O_2 . A strong band at 900 nm, characteristic of $[\text{Fe}(\text{polyamine})\text{H}_2\text{O}]^{2+}$, is present for all three complexes. The absorption band at 550 nm is completely absent in the UV-Vis spectra of calcined samples. The broad band between 350 – 700 nm has been assigned as in Example 1. As in the Example 1 a little fraction of Fe^{2+} could also being incorporated within the SAPO-34 framework.

Comparative Example (6). Synthesis performed in absence of complexing ligand and using TEAOH as SDA

Orthophosphoric acid (85%), fumed silica powder (0.007 μm), aluminum hydroxide, deionized water and iron (II) acetate were mixed together. Tetraethylammonium hydroxide (TEAOH) was added dropwise until the final gel reached a pH of 7. The mixture of these components formed a sol gel. These components were present in the sol gel a ratio of:



The mixture was stirred for 2 hours, and then placed in an oven at 190 $^\circ\text{C}$ for 8 days. The resultant product was treated, collected and dried as described in Example 1. This material is

referred to herein as “as-prepared” and it shows a light yellow color.

A portion of the dried product was then calcined in a tube furnace at 560 °C, with a heating rate of 20 °C min⁻¹, for 12 hours in a stream of dry oxygen. This material is referred to herein as “calcined” and it shows a yellow color.

5 The resulting product had the XRD pattern of SAPO-34, had Si/Al+P+Si ratio of 0.12, and contained 0.61 wt. % of Fe, determined by EDX.

Figure 1E shows the X-ray diffraction patterns of the as-prepared and calcined materials.

No evident changes have been detected between the UV-visible absorption spectra of as-prepared and calcined samples (Figure 3G). These results, together with the methodology used
10 to synthesize the material suggest that iron cations might be incorporated mostly in intra-framework positions.

It appears clear that using Fe²⁺-complexes as described in Example 1-5 we can introduce and prove the incorporation of iron cations in extra-framework position.

15 Comparative Example 7

The material produced in this example was made as described for Example 4 in U.S. Published Patent Application 2012/0251422 (the “’422 application”), except that a P₂O₅ : Al₂O₃ ratio of 0.8 was used instead of the 1.1 ratio used in the application. If the ratio used was higher, AlPO-5 appeared as an additional phase). The sample made by Example 4 in the ’422 application
20 is comparative Example 7.

The material produced by the method of Example 4 of the ’422 application was a pale white powder. The material was confirmed as having a pure SAPO-34-type structure by powder XRD analysis, as shown in Figure 1F. The composition of Example 7 shows a Si/(Al+P+Si) ratio of 0.12 and 2.2 wt. % of Fe, determined by XRF and AAS respectively. The SEM image in
25 Figure 2F shows the crystal morphology.

The calcined sample had a surface area of 427 m²/g and a micropore volume of 0.23 cm³/g.

Solid state UV-Visible absorption spectra of the as-prepared Example 7 have narrow bands only at 250 nm and 290 nm (F. Wang, L. Liang, J. Ma, J. Sun, Mater. Lett., 2013, 111, 201–203). There are no evident changes between UV-visible spectra of as-prepared and calcined
30 samples (Figure 3H). These results are strongly different from what is observed for Example 1,

where a broad absorption band is observed for the calcined material. Considered together with the methodology used to synthesize the materials suggests many fewer of the iron cations are incorporated in extra-framework positions in Example 7.

The Example 7 was analyzed by Mössbauer spectroscopy. Mössbauer absorption spectra from as-prepared and calcined material of Example 7 is shown in Figure 4C. The Mössbauer absorption spectra parameters for the materials of Example 7 are shown in Table 4.

Table 4. Mössbauer spectral fit parameters for Fe²⁺ and Fe³⁺ species for Example 7 in as-prepared and calcined forms at 300 K.

<u>Sample</u>	<u>IS</u> (mm s ⁻¹)	<u>QS</u> (mm s ⁻¹)	<u>Γ</u> (mm s ⁻¹)	<u>Spectral contribution</u>	
				<u>Phase</u>	<u>%</u>
Example 7, as-prepared					
Species 1	1.12	2.13	0.82	Fe ²⁺	36
Species 2	0.37	0.76	0.71	Fe ³⁺	64
Example 7, calcined					
Species 1	0.36	0.85	1.05	Fe ³⁺	95
Species 2	1.50	1.43	1.05	Fe ²⁺	5

Experimental uncertainties: Isomer shift (IS): ± 0.01 mm s⁻¹; Quadrupole Splitting (QS): ± 0.01 mm s⁻¹; Line width (Γ): ± 0.01 mm s⁻¹; Hyperfine field: ± 0.1 T; Spectral contribution: $\pm 3\%$

The as-prepared material of Example 7, which has prepared using the method described in the '422 application, contained two species of iron: Fe³⁺ and Fe²⁺, with Fe³⁺ and Fe²⁺ accounting for 64% and 36% of the total amount of iron, respectively. Both the components have been attributed to octahedral Fe²⁺ and Fe³⁺ incorporated within SAPO-34 with two water molecules to complete the 6-fold coordination.

The calcined material of Example 7, which has been prepared using the method described in the '422 application, contained mainly Fe³⁺ 95%, while the residual 5% belongs to Fe²⁺. Comparing the main contribution with that of Example 1 clearly shows a difference in the line width Γ: the smaller value measured for the Example 1 (0.66 mm s⁻¹) indicating the presence of better dispersed Fe species in that Example.

Examples 8-12 (Use of different iron sources)

Examples 8-12 are materials comprising Fe-SAPO-34 made using different iron sources that include: iron(II) oxalate dihydrate (Example 8), iron(II) chloride (Example 9), iron(II) sulfate heptahydrate (Example 10), iron(III) chloride hexahydrate (Example 11) iron(III) nitrate nonahydrate (Example 12). The materials of Examples 8-12 were made using the same general procedure described for Example 1.

The gel composition used for each of these three examples was:

$\text{Al}(\text{OH})_3 : 0.62 \text{ H}_3\text{PO}_4 : 0.25 \text{ SiO}_2 : 40 \text{ H}_2\text{O} : 0.1 \text{ Fe}^{2+} : 0.27 \text{ tetraethylenepentamine}$

The mixture was placed in an oven at 220 °C for 1 day. The resultant products were treated, collected and dried as described in Example 1. These materials are referred to herein as “as-prepared.”

A portion of the dried products was then calcined in a tube furnace at 560 °C, with a heating rate of 20 °C min⁻¹, for 12 hours in a stream of dry oxygen. These materials are referred to herein as “calcined.”

The as-prepared materials produced using each of the three structure-directing agents had a purple color.

Figures 1G and 1H show the XRD pattern of the as-prepared materials and calcined materials, respectively. The XRD powder patterns of the as-prepared samples show that a pure SAPO-34 phase has been obtained in each of the materials produced using different iron sources. Crystallinity was retained in each of the materials after removal of the structure-directing agent by calcination.

The resulting products had Si/Al+P+Si ratio of 0.13, 0.13, 0.14, 0.14, 0.13 and contained approximately 2.3, 2.6, 2.3, 3.4, 3.2 wt. % of Fe, respectively for Example 8, Example 9, Example 10, Example 11 and Example 12. The final composition has been determined by EDX.

The UV-visible spectra of the as-prepared and calcined materials are shown in Figures 3I and 3J, respectively. All the as-prepared materials show the absorption band at $\lambda_{\text{max}} = 550 \text{ nm}$, characteristic low spin $[\text{Fe}(\text{polyamine})\text{O}_2]^{2+}$ complexes. This band is weak in Example 11. All the materials show a band at 900 nm, characteristic of $[\text{Fe}(\text{polyamine})\text{H}_2\text{O}]^{2+}$. The absorption band at 550 nm is completely absent in the UV-Vis spectra of calcined samples. The broad band

between 350 – 700 nm, assigned as in Example 1, is very intense for Example 8 and 10, weaker for Example 9 and 12 and almost absent for Example 11. As in the Example 1 a little fraction of Fe^{2+} could also being incorporated within the SAPO-34 framework.

5 Analysis of Catalytic Activity of Samples

Powder samples of calcined material described above were obtained by pelletizing the original samples, crushing the pellets and then passing the powder obtained through a 255 and 350 micron sieves to obtain a powder having particle size between 255 and 350 microns. The powder samples were loaded into a reactor and tested using the following synthetic diesel exhaust gas mixture (at inlet) including nitrogenous reductant: 350 ppm NO, 385 ppm NH_3 , 12% O_2 , 4.5% H_2O , 4.5% CO_2 , 200 ppm CO, balance N_2 at a space velocity of 330 liters per gram of powder catalyst per hour. The samples were heated ramp-wise from about 150 to about 550°C at 5 °C/min and the composition of the off-gases were analyzed. The activity of the calcined materials of Examples 1, 2, and 7 to promote NOx conversion was then determined.

As shown in Figure 5, the catalytic activity of the calcined materials for NOx conversion from the materials of Example 1 and 2 was much greater than the catalytic activity of Example 7, which was prepared using the method of Example 4 in the '422 application. The material of Example 1 provided approximately 50% NOx conversion at about 280 °C, about 75% NOx conversion at about 320°C, and about 90% NOx conversion at about 350°C. Example 2 provided 50% NOx conversion at about 260 °C, 75% NOx conversion at about 280 °C, and from greater than 90% to about 100% NOx conversion from about 300 °C to about 550 °C. Example 7, which was prepared using the method of Example 4 in the '422 application, showed less than 10% NOx conversion up to about 300 °C, about 20% NOx conversion starting at about 350 °C and about 30% NOx conversion starting at about 475 °C. The compositions of Examples 1 and 2 provided over twice the NOx conversion provided by Example 7, which was prepared using the method of Example 4 in the '422 application, from about 250 °C to about 500 °C.

CLAIMS:

1. An uncalcined Fe-SAPO-34 silicoaluminophosphate molecular sieve, wherein the Fe is only present as Fe^{2+} when analyzed by Mössbauer spectroscopy and UV-visible spectroscopy and the Fe^{2+} is in extra-framework locations.
2. The uncalcined Fe-SAPO-34 silicoaluminophosphate molecular sieve of claim 1, wherein the Fe^{2+} is present in a polyamine complex.
3. The uncalcined Fe-SAPO-34 silicoaluminophosphate molecular sieve of claim 1 or 2, wherein the Fe^{2+} is present in two environments when analyzed by Mössbauer spectroscopy, with one environment having an isomer shift at about 1.15 mm s^{-1} and another environment having an isomer shift at about 0.87 mm s^{-1} .
4. The uncalcined Fe-SAPO-34 silicoaluminophosphate molecular sieve of claim 3, wherein the Fe^{2+} in the phase having an isomer shift at about 1.15 mm s^{-1} represents over 50% of the Fe^{2+} in the Fe-SAPO-34 silicoaluminophosphate molecular sieve.
5. The uncalcined Fe-SAPO-34 silicoaluminophosphate molecular sieve of any preceding claim having a solid state UV-Vis absorption spectrum with an absorbance maximum at about 550 nm.
6. A calcined Fe-SAPO-34 silicoaluminophosphate molecular sieve comprising Fe^{3+} or a mixture of Fe^{2+} and Fe^{3+} , wherein the Fe^{3+} is present in an amount greater than or equal to 90% of the total amount of Fe in the calcined Fe-SAPO-34 silicoaluminophosphate molecular sieve, and the calcined Fe-SAPO-34 silicoaluminophosphate molecular sieve is substantially free from Fe^0 .
7. The calcined Fe-SAPO-34 silicoaluminophosphate molecular sieve of claim 6, wherein the Fe^{3+} is present in an amount greater than or equal to 95% of the total amount of Fe.

8. The calcined Fe-SAPO-34 silicoaluminophosphate molecular sieve of claim 6 or 7 having a solid state UV-Vis absorption spectrum having a continual decrease in absorption from 450 nm to 700 nm.
9. The calcined Fe-SAPO-34 silicoaluminophosphate molecular sieve of claim 6, 7 or 8, wherein Fe^{3+} is present in the calcined solid at from greater than 0% to 5% based on the weight of the composition.
10. A method of preparing a Fe-SAPO-34 silicoaluminophosphate molecular sieve where the Fe is only present as Fe^{2+} when analyzed by Mössbauer spectroscopy and the Fe^{2+} is located in extra-framework locations, the method comprising forming a mixture of phosphoric acid, silica, aluminium hydroxide, water, an organic linear polyamine and an iron salt.
11. The method of claim 10, wherein the mixture does not comprise a co-templating agent.
12. The method of claim 10 or 11, wherein the organic linear polyamine is diethylenetriamine (DETA), triethylenetetramine (TETA), tetraethylenepentamine (TEPA), pentaethylenehexamine (PEHA), or mixtures thereof.
13. The method of claim 10, 11 or 12, wherein the Fe-SAPO-34 silicoaluminophosphate molecular sieve formed has a purple colour.
14. A method of reducing the levels of NO_x in an exhaust gas, the method comprising contacting an exhaust gas with a catalyst of any of claims 6, 7, 8 or 9.

Figure 1A

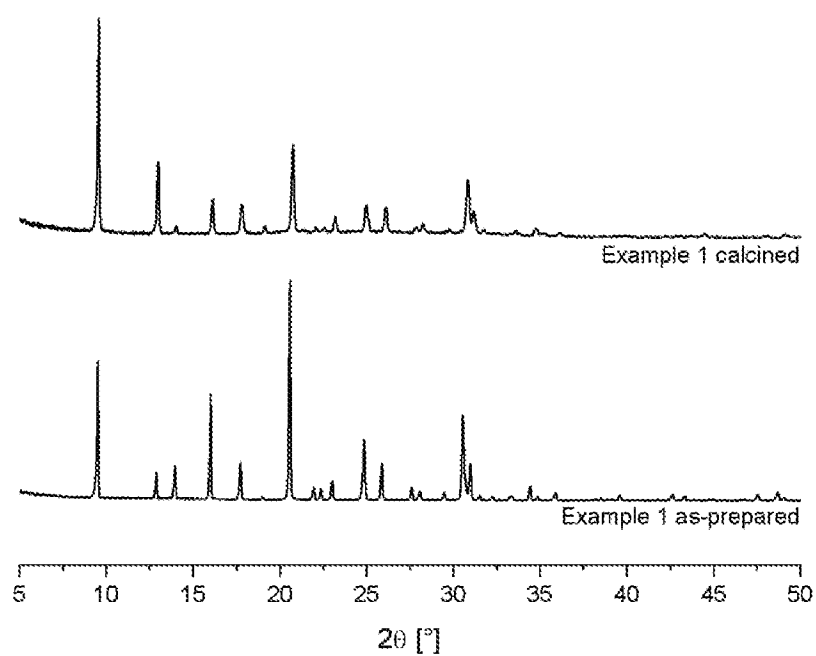


Figure 1B

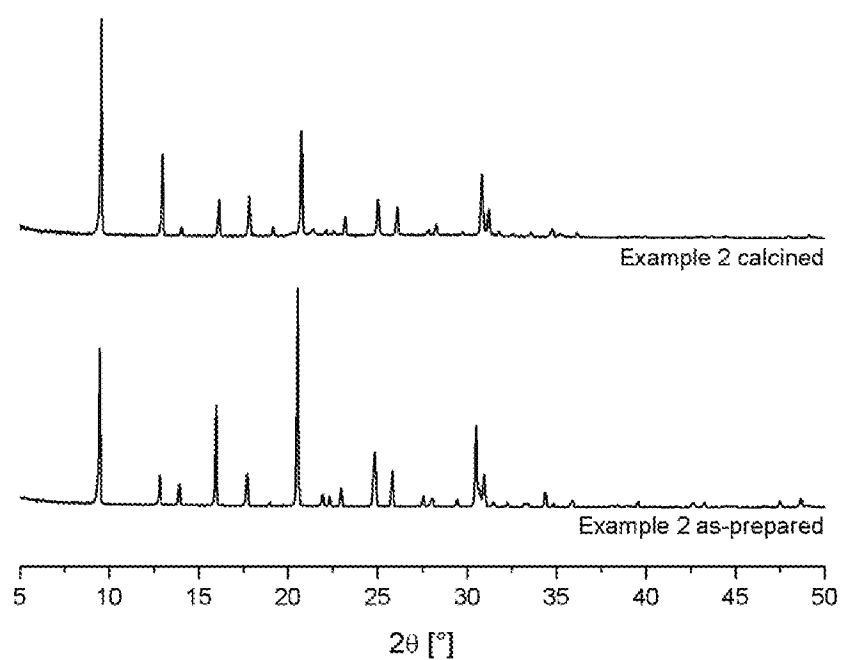


Figure 1C

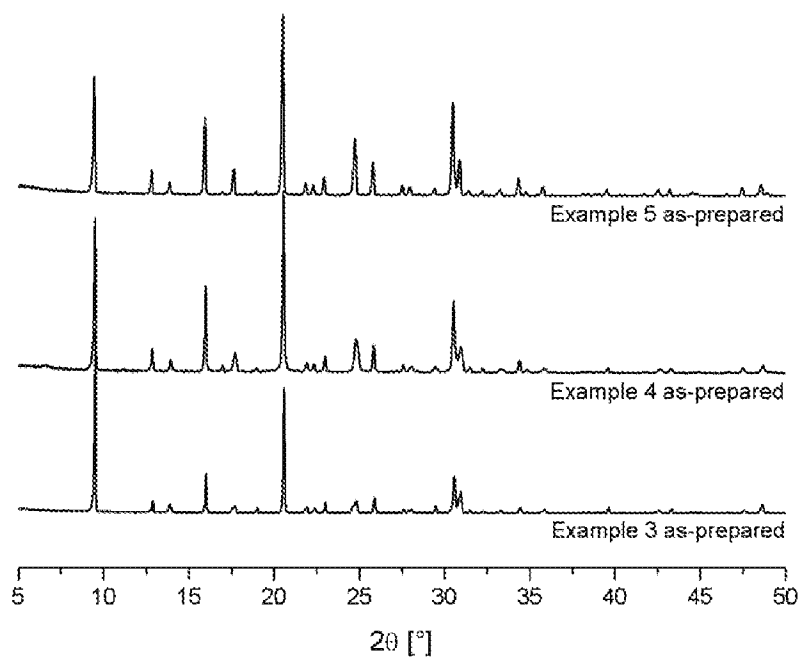


Figure 1D

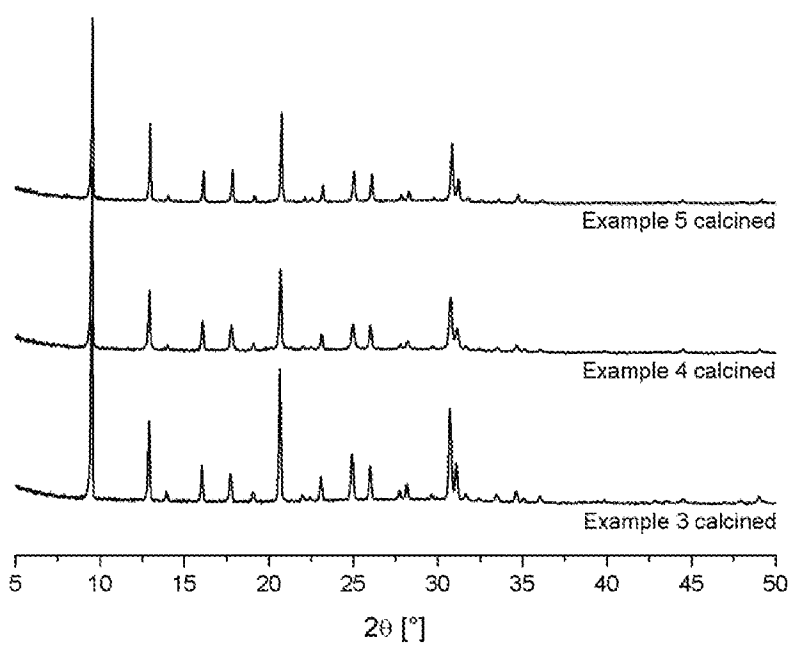


Figure 1E

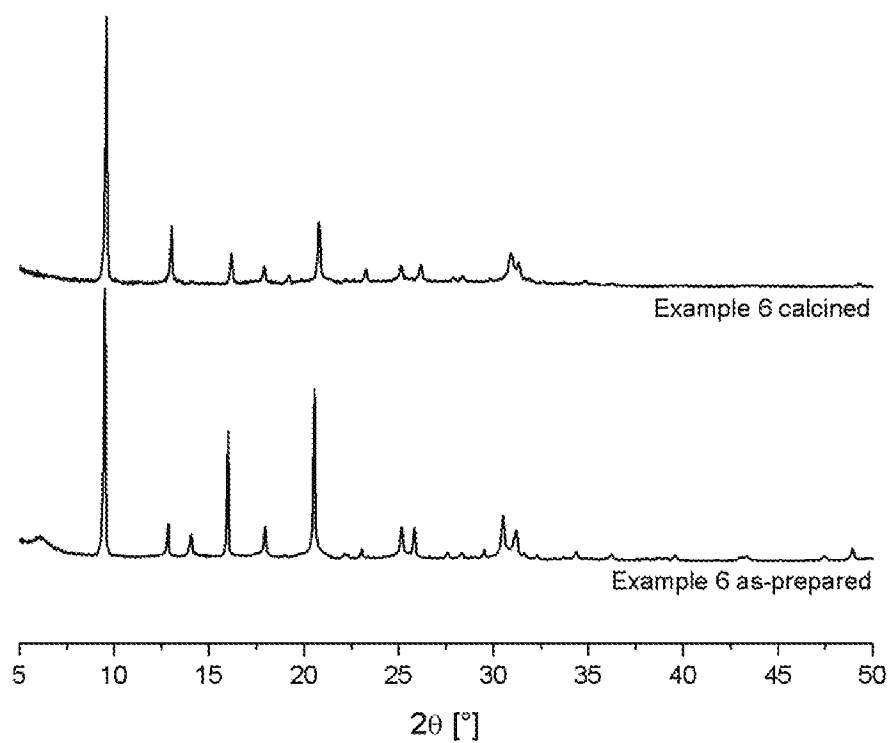


Figure 1F

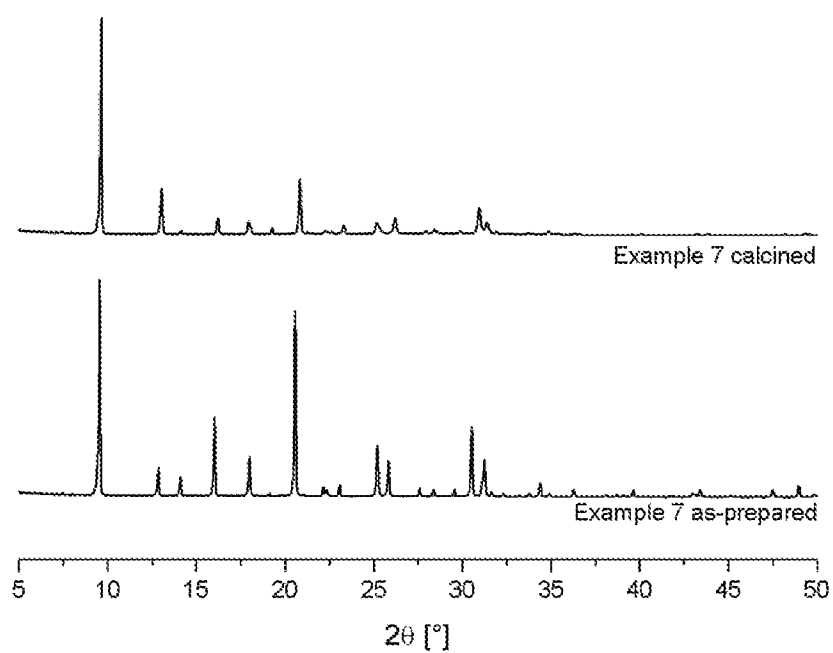


Figure 1G

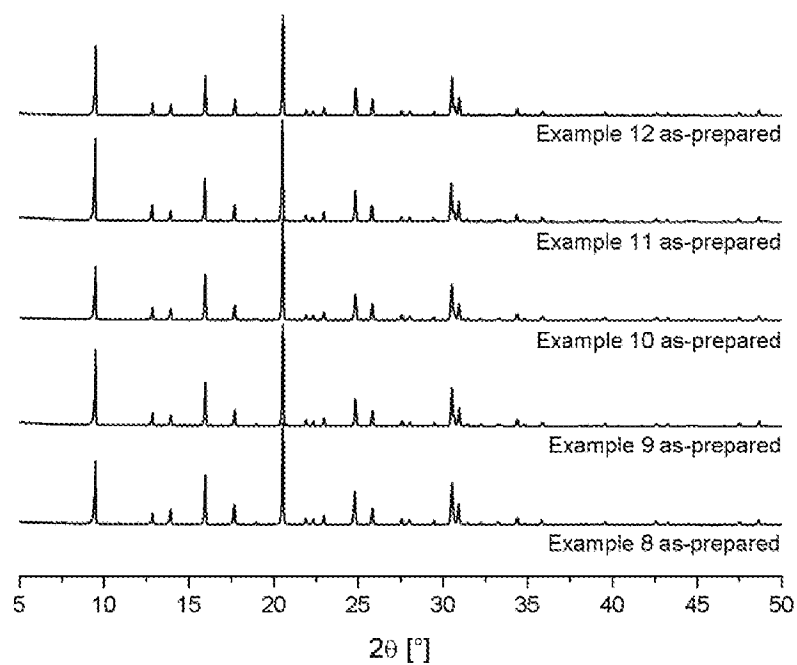


Figure 1H

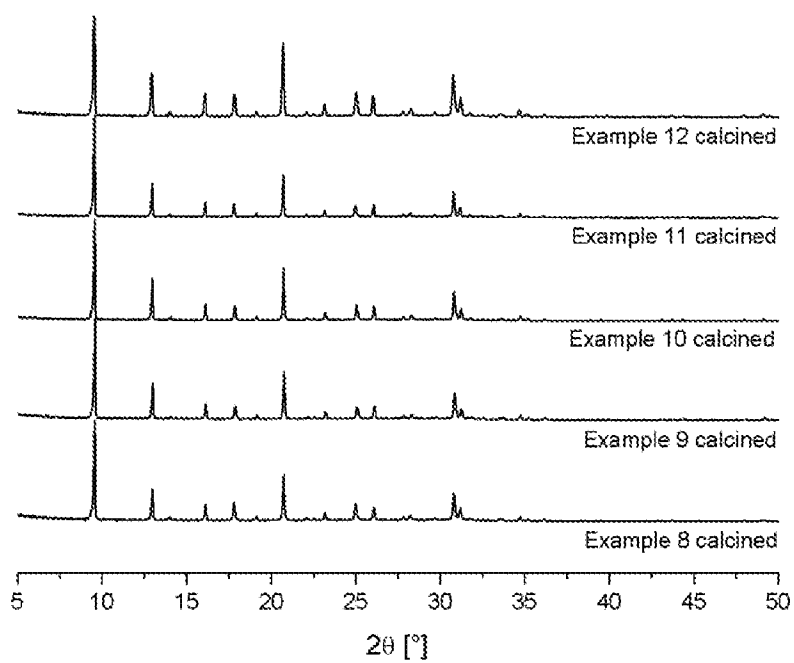


Figure 2A

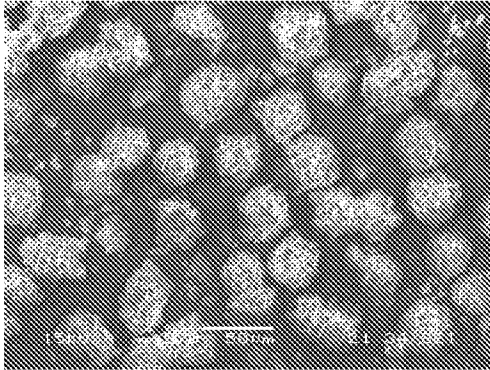


Figure 2B

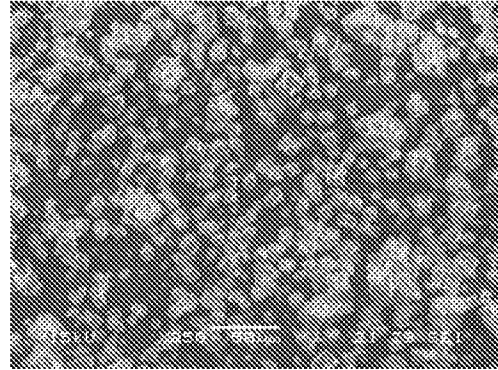


Figure 2C

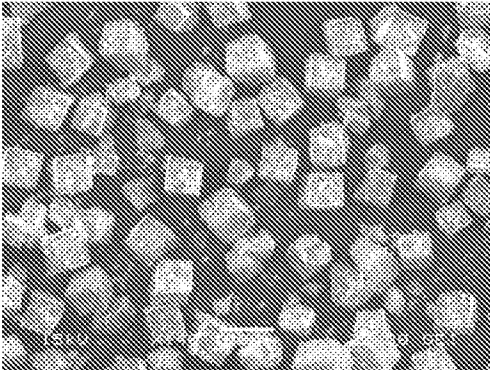


Figure 2D

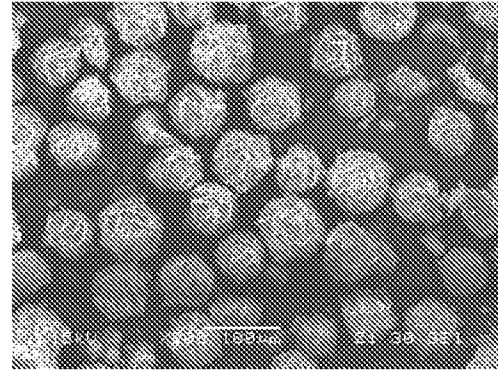


Figure 2E

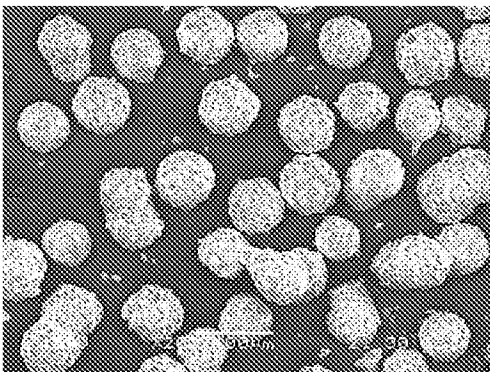


Figure 2F

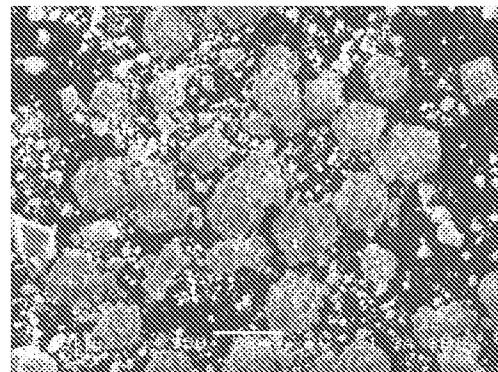


Figure 3A

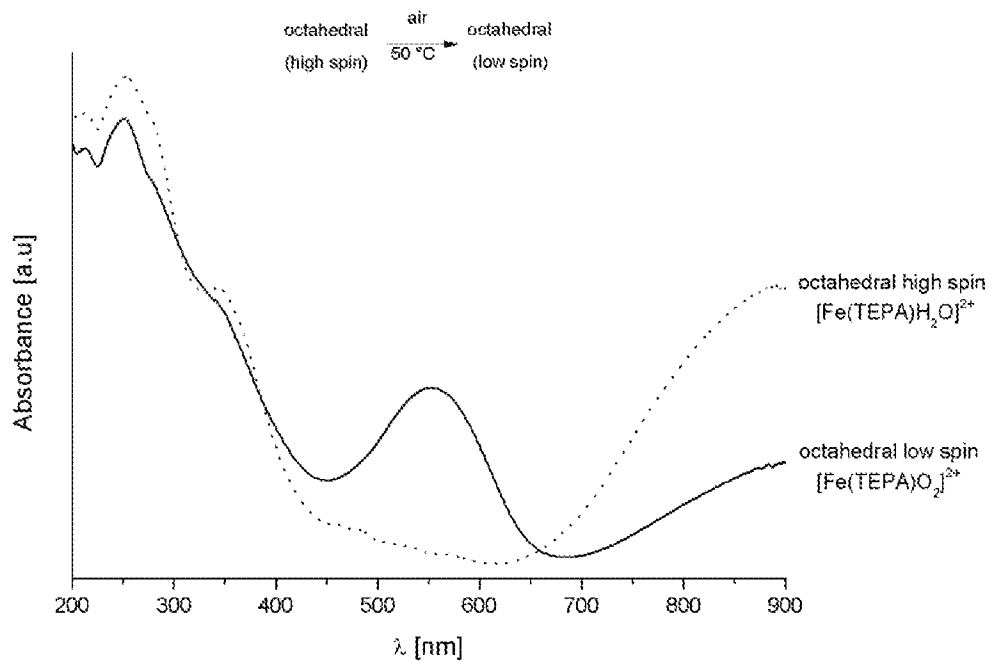


Figure 3B

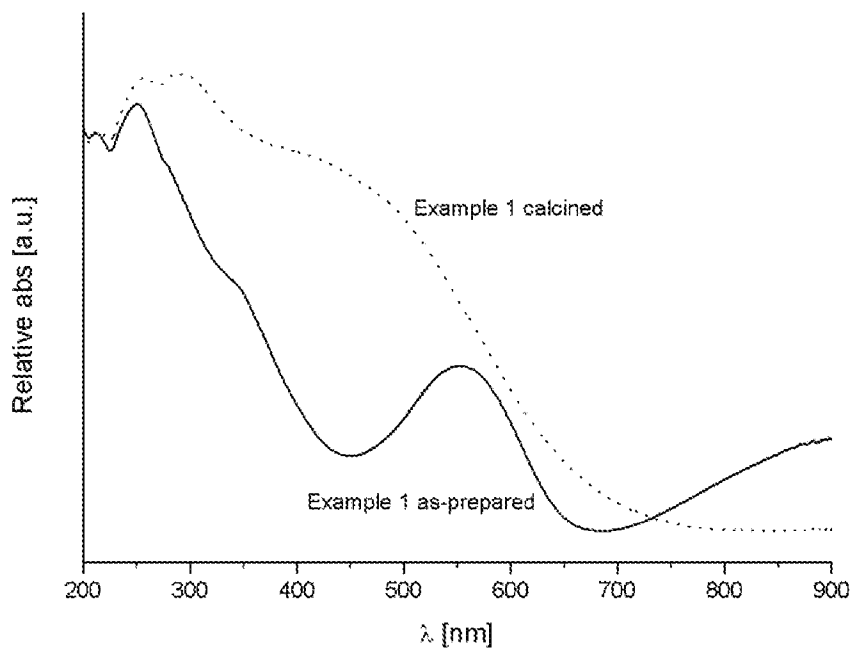


Figure 3C

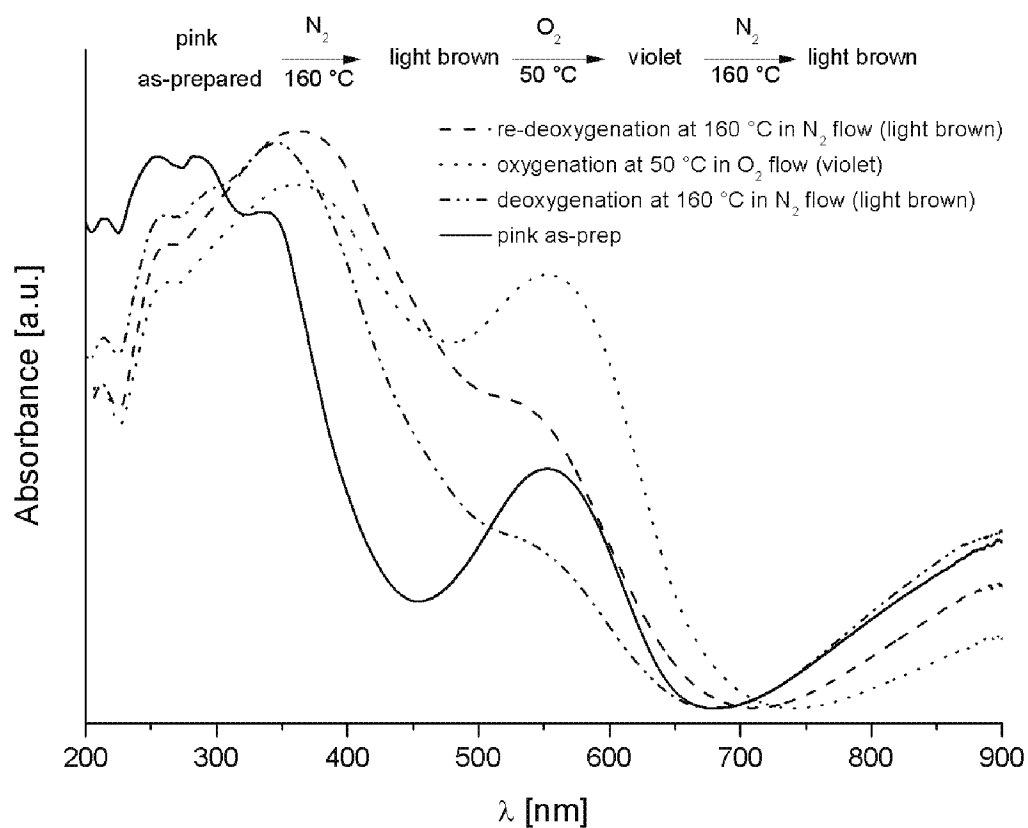


Figure 3D

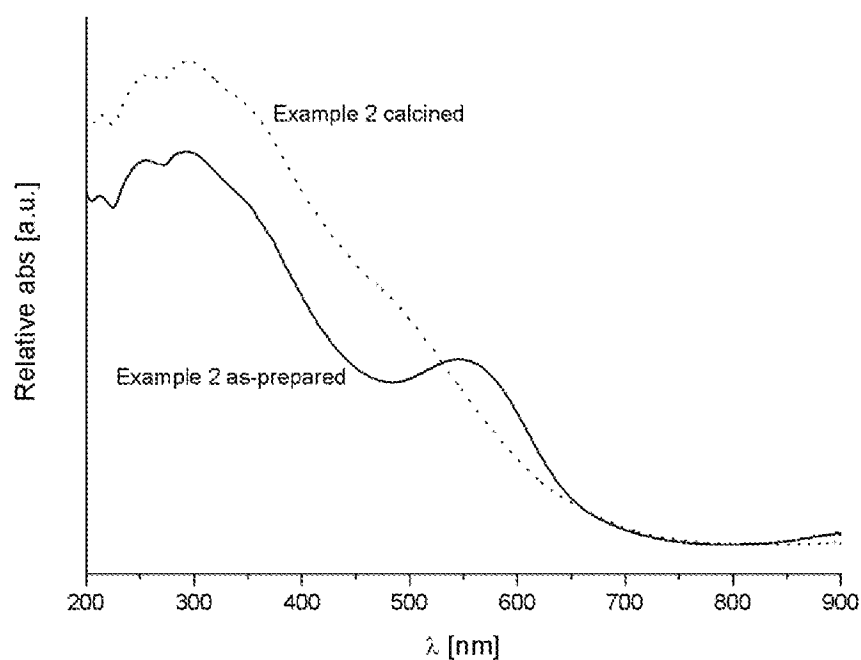


Figure 3E

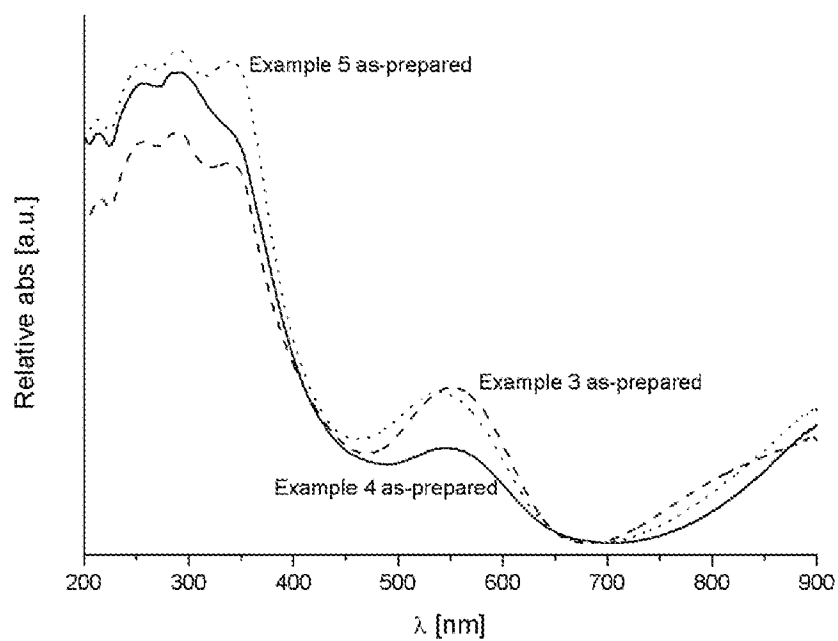


Figure 3F

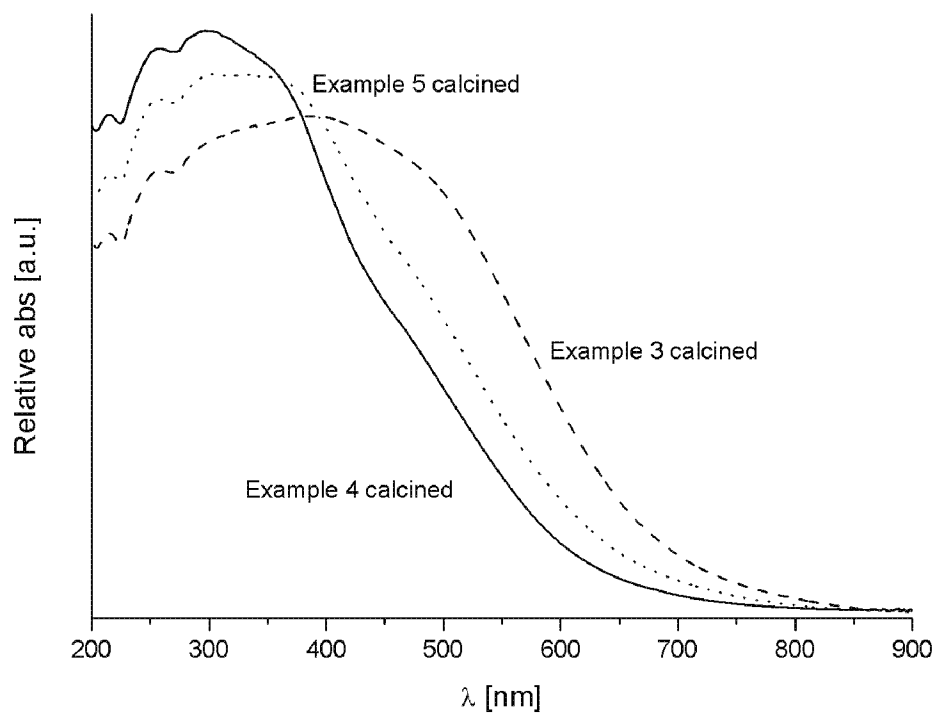


Figure 3G

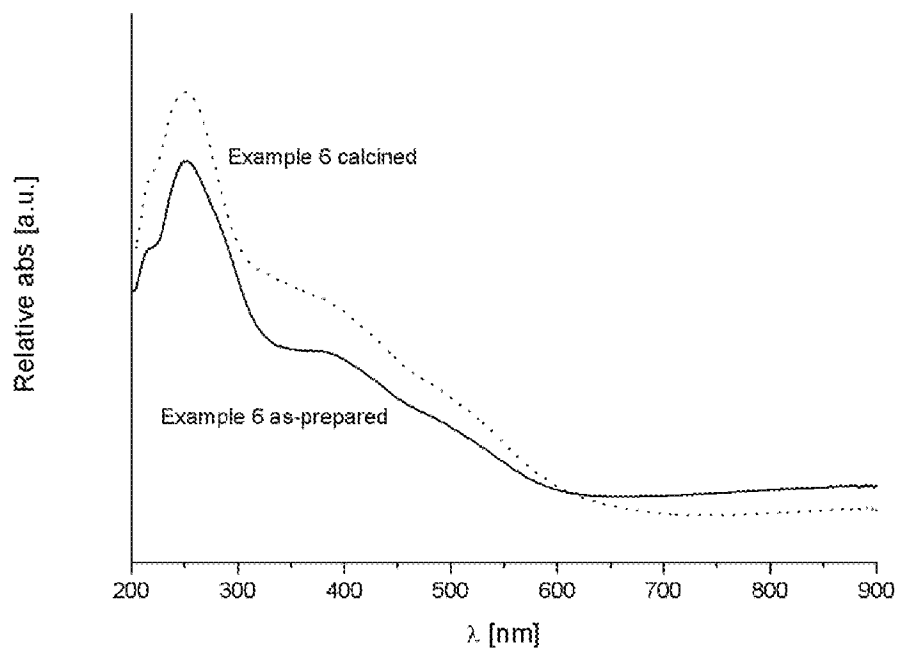


Figure 3H

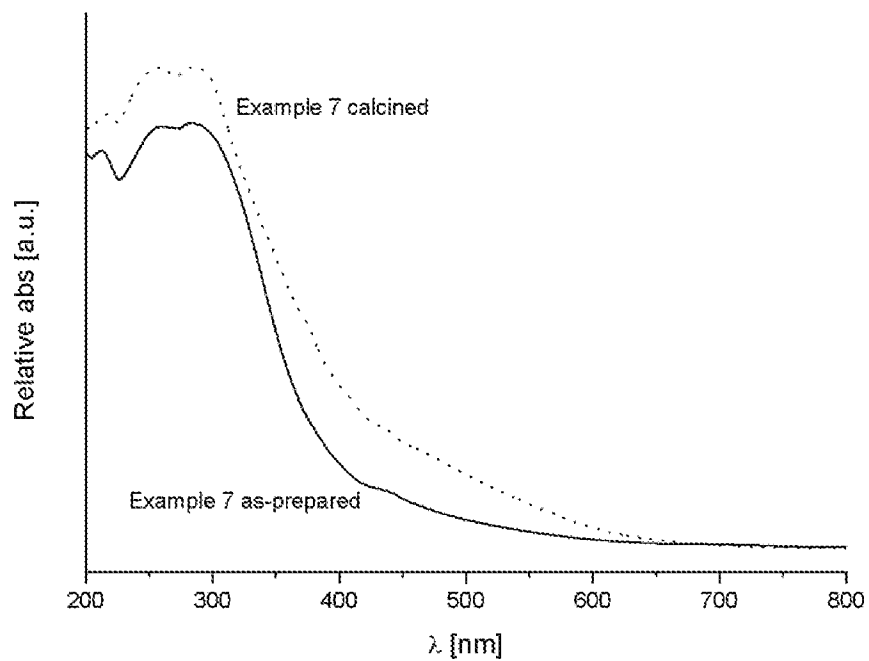


Figure 3I

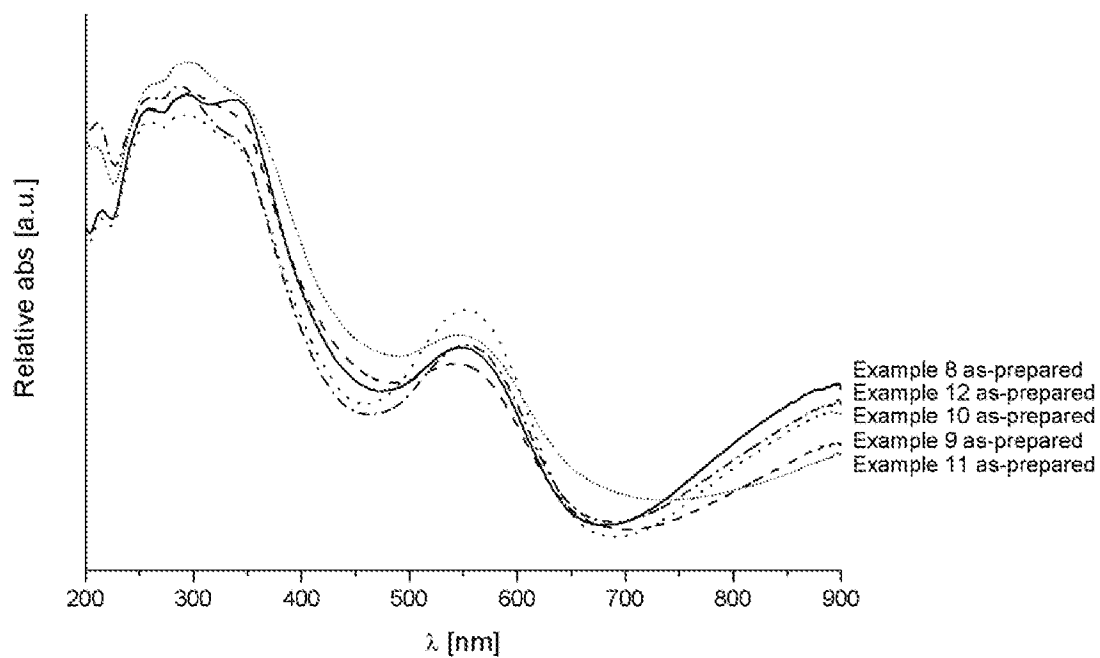


Figure 3J

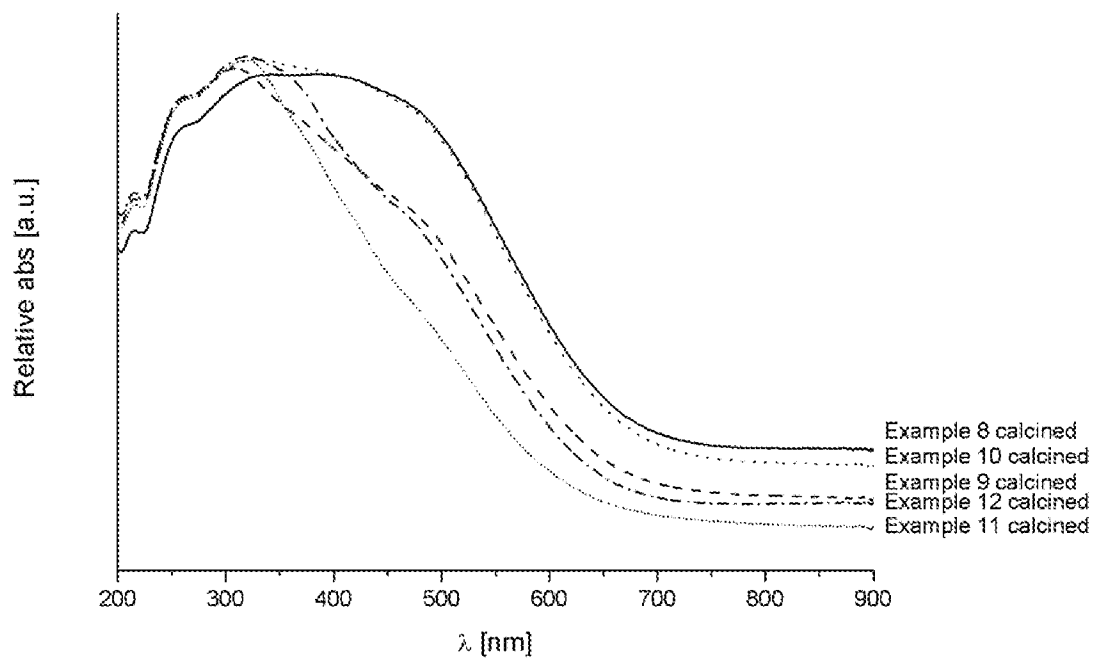


Figure 4A

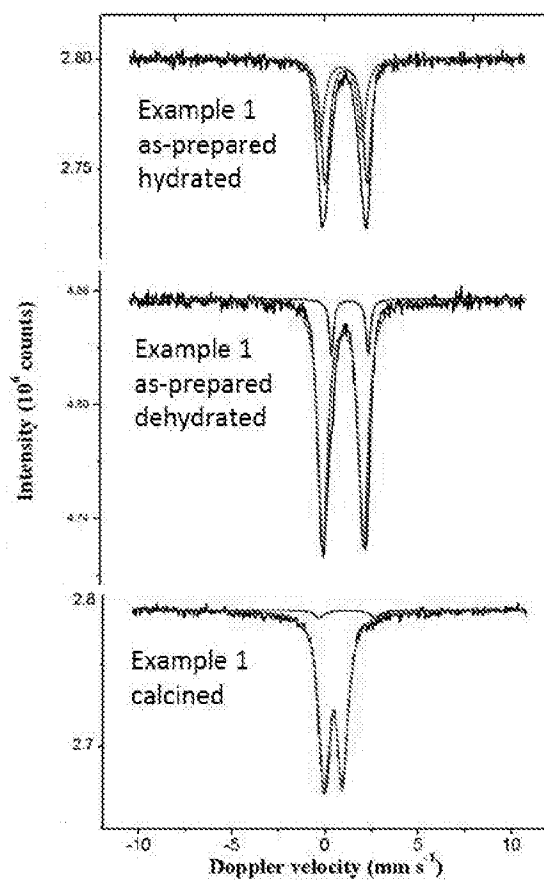


Figure 4B

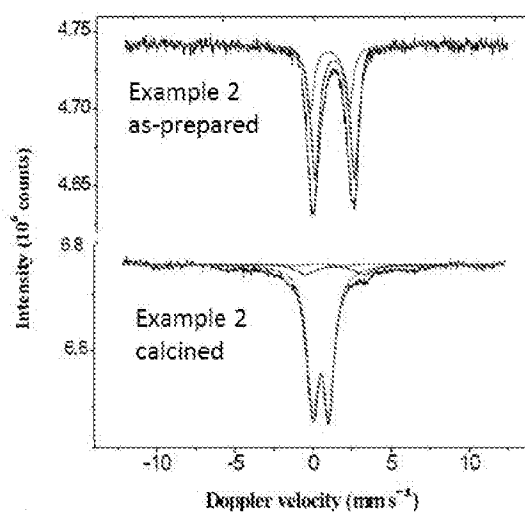


Figure 4C


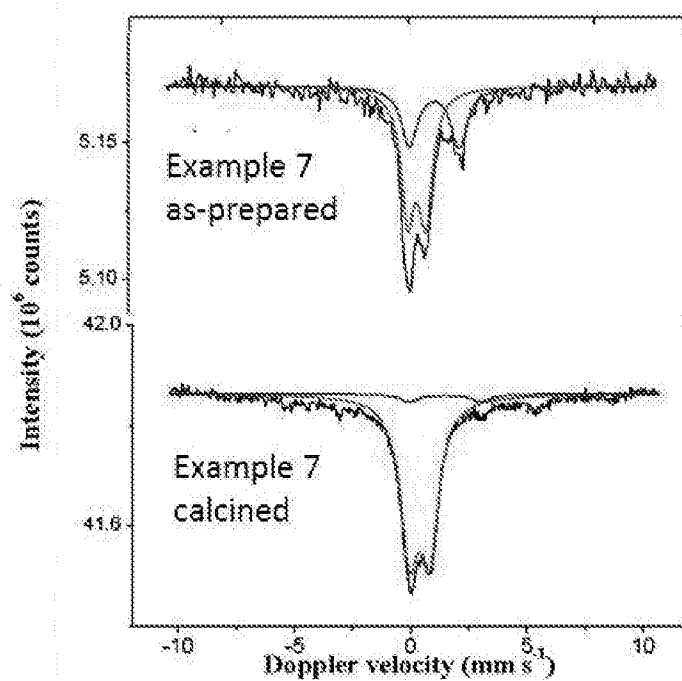


Figure 5

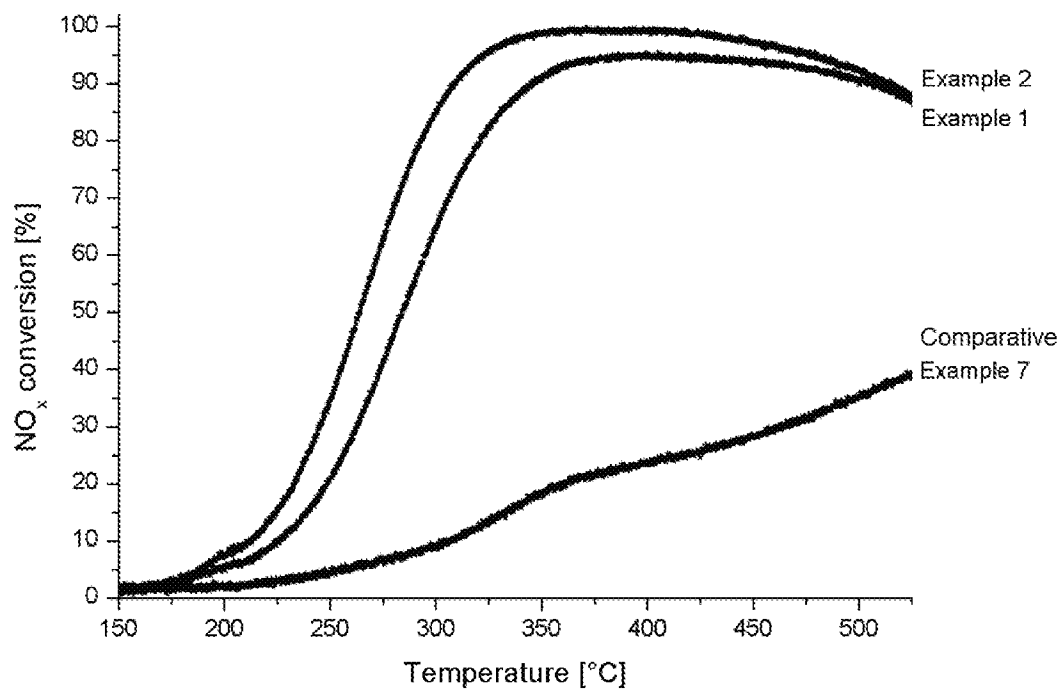

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2016/050461

A. CLASSIFICATION OF SUBJECT MATTER INV. B01J29/85 B01D53/94 B01J35/00 C01B39/54 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B01J B01D C01B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 724 983 A1 (MITSUBISHI PLASTICS INC [JP]) 30 April 2014 (2014-04-30) examples 7-8 paragraph [0153] - paragraph [0166] paragraph [0140]	1-14
X	----- US 2014/161718 A1 (QI GONGSHIN [US] ET AL) 12 June 2014 (2014-06-12) examples paragraph [0042]	1-14
X	----- WO 2012/138652 A1 (PQ CORP [US]; LI HONG-XIN [US]; CORMIER WILLIAM E [US]; MODEN BJORN [U]) 11 October 2012 (2012-10-11) cited in the application abstract examples ----- -/-	6-9,14
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 20 April 2016		Date of mailing of the international search report 29/04/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Omegna, Anna

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2016/050461

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	A V Kuchеров ET AL: "In situ high-temperature ESR characterization of FeZSM-5 and FeSAPO-34 catalysts in flowing mixtures of NO, C ₃ H ₆ , and O ₂ ", Catalysis Letters, 1 January 1998 (1998-01-01), pages 173-181, XP055222188, Retrieved from the Internet: URL:http://rd.springer.com/content/pdf/10.1023/A:1019002322340.pdf cited in the application par.3 "Experimental" par. 4 "Results" par. 4.4."High temperature interaction of FeZSM-5 and FeSAPO-34 with O ₂ +NO+C ₃ H ₆ gas mixtures" -----	6-9,14
X	US 8 603 432 B2 (FEDEYKO JOSEPH MICHAEL [US] ET AL) 10 December 2013 (2013-12-10) cited in the application examples -----	6-9,14
A	Missok Kang: "Methanol conversion on metal-incorporated SAPO-34s (MeAPSO-34s)", 1 January 2000 (2000-01-01), pages 437-444, XP055027454, Retrieved from the Internet: URL:http://144.206.159.178/FT/616/20531/370338.pdf [retrieved on 2012-05-16] cited in the application par. 2.1 "Preparation of catalyst" -----	1-13
A	HALL W K ET AL: "PROBLEMS IN PREPARATION OF FEZSM-5 CATALYSTS", CATALYSIS LETTERS, SPRINGER NEW YORK LLC, UNITED STATES, vol. 52, no. 1/02, 1 June 1998 (1998-06-01), pages 13-19, XP000777696, ISSN: 1011-372X, DOI: 10.1023/A:1019090529783 the whole document -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2016/050461

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2724983	A1	30-04-2014	EP 2724983 A1 30-04-2014
		US 2013266785 A1	10-10-2013
		US 2015218007 A1	06-08-2015
		WO 2013002059 A1	03-01-2013

US 2014161718	A1	12-06-2014	DE 102013224532 A1 12-06-2014
		US 2014161718 A1	12-06-2014

WO 2012138652	A1	11-10-2012	EP 2694208 A1 12-02-2014
		JP 2014514147 A	19-06-2014
		KR 20140022043 A	21-02-2014
		US 2012251422 A1	04-10-2012
		WO 2012138652 A1	11-10-2012

US 8603432	B2	10-12-2013	BR PI0810133 A2 29-10-2014
		CA 2685009 A1	06-11-2008
		CN 101730575 A	09-06-2010
		CN 102974390 A	20-03-2013
		CN 102974391 A	20-03-2013
		DK 2150328 T3	08-06-2015
		DK 2517776 T3	22-09-2014
		DK 2517778 T3	19-05-2014
		EP 2150328 A2	10-02-2010
		EP 2517773 A2	31-10-2012
		EP 2517774 A2	31-10-2012
		EP 2517775 A2	31-10-2012
		EP 2517776 A1	31-10-2012
		EP 2517777 A2	31-10-2012
		EP 2517778 A1	31-10-2012
		EP 2786796 A1	08-10-2014
		JP 5777339 B2	09-09-2015
		JP 2010524677 A	22-07-2010
		JP 2015027673 A	12-02-2015
		KR 20100017347 A	16-02-2010
		RU 2009143682 A	10-06-2011
		US 2010290963 A1	18-11-2010
		US 2011250127 A1	13-10-2011
		US 2012301378 A1	29-11-2012
		US 2012301379 A1	29-11-2012
		US 2012301380 A1	29-11-2012
		US 2012301381 A1	29-11-2012
		US 2015078968 A1	19-03-2015
		US 2015110682 A1	23-04-2015
		US 2015118114 A1	30-04-2015
		US 2015118115 A1	30-04-2015
		US 2015118121 A1	30-04-2015
		WO 2008132452 A2	06-11-2008
