




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F01D 11/00	A1	(11) International Publication Number: WO 97/44570 (43) International Publication Date: 27 November 1997 (27.11.97)
<p>(21) International Application Number: PCT/CA97/00339</p> <p>(22) International Filing Date: 20 May 1997 (20.05.97)</p> <p>(30) Priority Data: 08/650,441 20 May 1996 (20.05.96) US</p> <p>(71) Applicant: PRATT & WHITNEY CANADA INC. [CA/CA]; 1000 Marie Victorin Boulevard, Longueuil, Quebec J4G 1A1 (CA).</p> <p>(72) Inventors: PIZZl, Antonio; 201 Club Marin #708, Nun's Island, Quebec H3E 1T4 (CA). CRONE, James, C.; 15 Montague, Kirkland, Quebec H9J 2M1 (CA).</p> <p>(74) Agent: ASTLE, Jeffrey, W.; Pratt & Whitney Canada Inc., (01BE5), 1000 Marie Victorin Boulevard, Longueuil, Quebec J4G 1A1 (CA).</p>	<p>(81) Designated States: CA, CN, CZ, JP, KR, PL, RU, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: GAS TURBINE ENGINE SHROUD SEALS

(57) Abstract

A seal assembly for a turbine blade tip shroud including a one-piece bent metallic sheet inter-segment seal having an axial component and a vertical component adapted to fit in a groove formed in the end walls of each shroud segment, wherein the shroud segment has a platform and radially extending ribs, and the seal fits tightly in the groove providing an axial and a radial component to the seal. A ring seal is also provided for sealing a joint between the shroud and a mounting structure where an annular gap is formed having an "L" shaped cross section, the ring seal having a "C" shaped configuration and one of the legs of the "C" extending within an axial component of the "L" shaped gap. The leg has a wave pattern with the peaks of the wave in contact with opposite radial walls of the axial component of the gap for creating a gas seal at the joint.

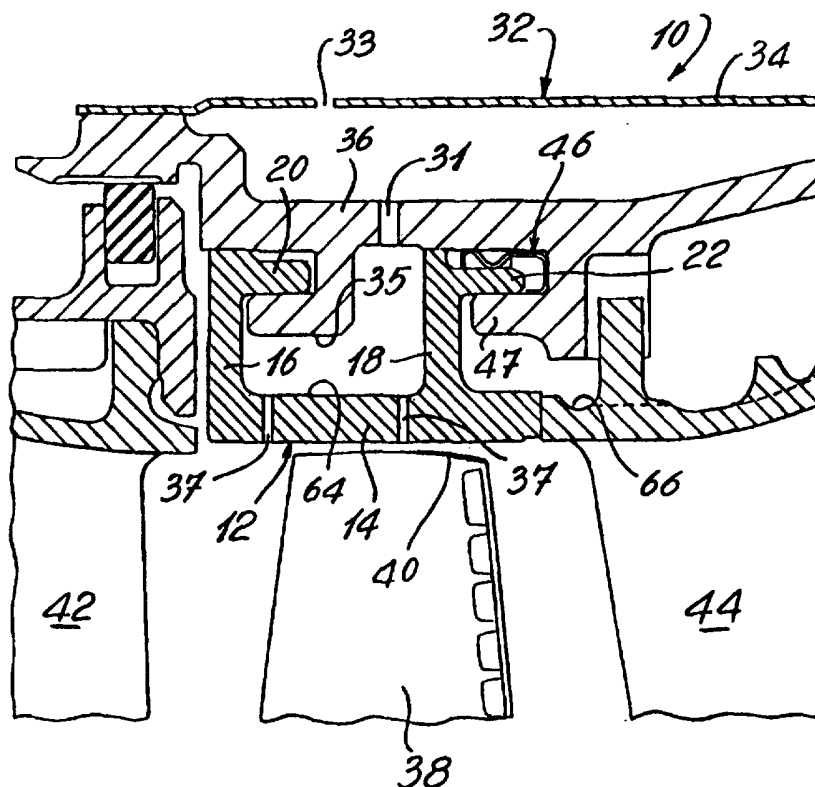

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

GAS TURBINE ENGINE SHROUD SEALSBACKGROUND OF THE INVENTION1. Field of the Invention

5 The present invention relates to gas turbine engines, and more particularly, to turbine blade shroud seals for reducing the leakage of cooling fluid in the casing surrounding the turbine blades.

2. Description of the Prior Art

10 There have been many attempts to improve the sealing capabilities of annular shrouds surrounding the tips of turbine blades. The engine casing surrounds the turbine section of an aircraft engine and is constructed to conduct cooling gases within the casing
15 to various elements, such as the shrouds themselves. The turbine section of the engine, which is concentric to the casing, is in the path of very hot gases. It is preferred that the surrounding casing structure be maintained relatively cool.

20 The annular shroud for the turbine blade tips is normally segmented in the circumferential direction. Seals are required to prevent gas leakage at the gaps formed between the ends of the shroud segments. U. S. Patents 4,767,260 to Clevenger et al,
25 issued August 30, 1988, and 5,158,430 to Dixon et al, issued October 27, 1992, show variations on feather seals placed between the platforms of the vane assemblies. U. S. Patent 4,573,866 to Sandy, Jr. et al, issued March 4, 1986, shows a feather seal in a
30 radial plane between the ends of the blade tip shrouds. U. S. Patent 5,318,402 to Bailey et al, issued June 7, 1994, shows a spline or feather seal and a circumferential spacer band that locks the shrouds and the feather seals together.

35 Different sealing rings are also required for different shroud and casing configurations. For

- 2 -

instance, in a configuration involving a split joint with a groove having an axial component, it is conventional to use a "C" shaped ring. In U. S. Patent 4,573,866, a bellows type ring is utilized in such a groove. Although such ring seals provide excellent sealing qualities, they tend to be stiff in compression due to the radial cross-section thereof and are, therefore, not easily replaced during engine maintenance. In fact, special tools may be required to replace such a seal.

SUMMARY OF THE INVENTION

It is an aim of the present invention to provide an improved inter-shroud segment seal of the type having an axial component and a radial component.

It is a further aim of the present invention to provide a simple one-piece sheet seal for sealing the gap formed between the ends of circumferential shroud segments in order to reduce leakage of the cooling gases into the hot gas path.

It is a further aim of the present invention to provide a ring seal for sealing annular joints formed with an annular gap having an axial component.

It is a further aim of the present invention to have a ring seal formed of sheet metal that is readily compressible in the radial direction for easier installation.

It is a further aim of the present invention to provide an improved sealing arrangement for a turbine blade tip shroud assembly.

A construction in accordance with the present invention includes a seal for a turbine blade tip shroud for a gas turbine engine where the shroud is located between the axially directed hot gas path and a concentric cooling gas conduit formed between the shroud and an outer casing and wherein the shroud

- 3 -

includes a plurality of segments arranged circumferentially with each shroud segment having an axial platform and at least one radial rib extending from the platform, the shroud segments having end walls and a groove defined in the end wall portion corresponding to the platform and continuously in the end wall portion corresponding to the rib, the seal comprising a one-piece sheet member formed to the configuration of the continuous groove in the end wall portions such that a portion of the seal has an axial component and a portion of the same seal has a radial component.

In a more specific embodiment of the present invention, the vertical component of the sheet forming the seal is doubled over so that the vertical component is a resilient member providing a frictional engagement within the groove formed in the wall of the radial rib.

In another aspect of the present invention, a ring seal is provided for a gas turbine engine for sealing a joint between two annular engine parts when an annular gap is formed with an axial component, the axial gap having spaced-apart radial walls, wherein the ring seal has an axial portion including a wavy portion with one peak of the wavy portion in contact with one of the spaced-apart walls and another peak in contact with the other spaced-apart wall of the gap whereby the gap is sealed against leakage by gases flowing on either side of the joint and the wavy portion subtends an angle sufficient to allow the seal to be readily compressed radially.

In a more specific embodiment of the present invention, there is provided a ring seal for a turbine blade tip shroud for a gas turbine engine, where the shroud is located between the axially directed hot gas path and a concentric cooling gas conduit formed between the shroud and an outer casing and the shroud

- 4 -

includes a platform extending axially while at least a rib extends radially so that the rib may be connected to mounting means on the casing therefrom, wherein an annular gap has an axial component formed between the shroud and the mounting means of the casing, the annular gap having opposed radially spaced walls formed on the shroud and the mounting means and whereby the ring seal has a "C" portion with a leg of the "C" portion extending axially so that the "C" portion has a greater radial dimension than that of the axial leg and the "C" portion is located in the radial component of the gap and has a radial dimension less than the radial dimension of the gap, and the leg of the ring seal includes a wave pattern with alternating peaks and the peaks being in contact with the opposed radially spaced walls of the annular gap to provide a gas seal at the joint between the shroud and the mounting means in order to prevent leakage of the cooling gas flow, and the wave pattern subtending an angle sufficient to allow the seal to be readily compressed radially.

BRIEF DESCRIPTION OF THE DRAWINGS

Having thus generally described the nature of the invention, reference will now be made to the accompanying drawings, showing by way of illustration, a preferred embodiment thereof, and in which:

Fig. 1 is a fragmentary perspective view, partly exploded, showing an embodiment of one aspect of the present invention;

Fig. 2 is a front elevation of a detail shown in Fig. 1;

Fig. 3 is a perspective view, partly in cross section, of an embodiment of another aspect of the present invention;

- 5 -

Fig. 4 is an axial cross-section of the turbine section of a gas turbine engine showing a detail of the present invention; and

Fig. 5 is an enlarged fragmentary cross-sectional view taken in the same plane as Fig. 4 and showing a detail of Fig. 4.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings and in particular Figs. 1 and 2, there is shown a typical turbine blade shroud 12 for use in an engine 10. The shroud 12 includes a plurality of segments 12a...12n arranged circumferentially and concentric with the rotor on which turbine blades 38 are mounted (Figs. 1 and 4).

A shroud segment, as represented by the numeral 12 in Fig. 1, includes a platform 14 made up essentially of an annular flat plate-like member having an axial component and a pair of upstanding ribs 16 and 18 having flanges 20 and 22 respectively. The ribs 16 and 18 and respective flanges 20 and 22 act to support the shroud platform 14 as well as to define the cooling air passages and chambers. The flanges 20 and 22, as shown in Fig. 4, also serve to mount the shroud within the engine casing 32 and mounting structure 36 as will be described further. The wall 34 of engine casing 32 may be provided with a vent opening 33 to allow cool air to enter the space between the support structure and the casing 32. Ventilation openings 31 are also provided in the support structure 36 to allow this cool air to enter annular channel 35 formed between the shroud 12 and support structure 36. Finally, apertures 37 in the shroud 12 allow this cooling air to exhaust into the hot gas path.

In order to provide an inter-segment seal, the end walls of each shroud segment 12 are provided

with a continuous groove 26 which includes an axial component 26b and radial components 26a and 26c which correspond with the ribs 16 and 18 respectively. The seal 24 is made up of a sheet 24 of heat resistant alloy which has been bent to provide upstanding elements 28 and 30 and horizontal members 25 and 27 which correspond with the platform 14. The seal could, of course, be extruded or molded from any suitable heat resistant material.

Each of the upstanding elements 28 and 30 includes legs 28a and 28b and 38a and 38b which are slightly divergent and wider than the respective groove, as shown in Fig. 2. This configuration provides a degree of resilience to the upstanding elements 28 and 30 such that when the seal 24 is fitted into the groove 26 at the end of the shroud 12, the upstanding elements 28 and 30 must each be squeezed in order to be inserted into the upstanding groove segments 26a and 26c, thereby allowing a tight fit of the seal in the groove 26. In view of the resilience thereof, the segments can be easily assembled and then separated and the seal 24 replaced in the event of necessary maintenance.

Another aspect of the present invention is shown in Figs. 3 to 5. The turbine section of engine 10 is partly illustrated in Fig. 4 and, in addition to the turbine blades 38, stator vanes 42 and 44 are shown. Each stator vane has a shroud structure mounted thereto, while the shroud 12 surrounds the blade tips 40 of turbine blades 38.

As shown herein, the mounting structure 36 within the engine casing 32 supports the shroud 12, as illustrated in Figs. 4 and 5. The flange 22 of the shroud 12 may be supported on the flange 47 of the support structure 36, for instance. In the same manner, flange 20 may be supported by the flange of

- 7 -

support structure 36. The ribs 16 and 18 as well as the configuration of the support structure 36 allows for cooling channels to be formed in and around the shrouds. The air pressure in cooling channel 64 may be
5 different from that around channel 66, and thus these different channels or chambers must be sealed.

A ring seal 46 is provided in the gap or annular recess 48 formed by the groove formed by flange 47. In this case, the recess 48, when flange 22 is
10 inserted, has an "L" shape with an axial component 48a and a radial component 48b. The ring seal 46 includes a "C" shaped portion 52 which has a smaller radial dimension than the recess 48 in the area of the radial component 48b. "C" shaped portion 52 includes legs 54
15 and 56. An extension of leg 54 has a wave pattern subtending flat angles to provide wave section 58 having peaks 60 and 62. The angle subtended by arms 58a and 58b is an obtuse angle. The angle may be acute, but it must be great enough that the seal is
20 readily compressible radially.

The configuration of wave section 58 is such that the radial extent between the peaks 60 and 62 is slightly greater than the radial dimension between walls 36a and 22a of the recess 48. Ring seal 46 is
25 made from a heat resistant material or alloy having an inherent elasticity suitable to maintain spring fitted continual contact with opposed walls 22a and 36a. Thus, the wave section 58 is spring fitted into the recess 48 so that the peaks 60 and 62 are in continual
30 contact with the opposed walls 22a and 36a.

Thus, because of the configuration of the ring seal 46, the ring seal can easily be fitted into the recess 48 before the shroud flange 22 is inserted therein during the assembly thereof. Ring seal 46 may
35 be constructed as an endless ring to be fitted into recess 48.

- 8 -

The flange 22 may be beveled, as shown, in order to enable its insertion against the spring seal 46 already in the recess 48. The radial resilience of the wave portion 58 will allow easy insertion of the
5 flange 22 as well as easy replacement of the ring seal 46 when the shroud is removed from the recess 48 during maintenance thereof.

Therefore, both seal 24 and ring seal 46 can cooperate with shroud 12 for easy assembly of the seals
10 and the shroud segments allowing for greatly facilitated maintenance of the shroud 12.

- 9 -

WE CLAIM:

1. A seal for a turbine blade tip shroud in a gas turbine engine, wherein the shroud is located between an axially directed hot gas path and a concentric cooling gas conduit formed between the shroud and an outer casing, and wherein the shroud includes a plurality of segments arranged circumferentially with each shroud segment having an axial platform and at least one radial rib extending from the platform, the shroud segments having end walls and a groove defined in each end wall corresponding to the platform and continuously in the end wall portion corresponding to the rib, the seal comprising a one-piece sheet member formed to the configuration of the continuous groove in the end walls such that a portion of the seal has an axial component and a portion of the same seal has a radial component.

2. The seal for a turbine blade tip shroud as defined in claim 1, wherein the sheet member forming the seal is of heat resistant material formed in the configuration of the upstanding rib such that the upstanding rib has a pair of divergent legs which can be resiliently compressed for a tight fit into the groove in the end wall of the shroud segment.

3. The seal as defined in claim 2, wherein the material is a heat resistant alloy bent to the required shape.

4. The seal for a gas turbine engine as defined in claim 2, wherein the shroud has a pair of spaced-apart parallel ribs upstanding from the platform and the continuous groove extends in both ribs of the shroud segments while the sheet member forming the seal includes a pair of parallel substantially identical spaced-apart upstanding portions both resilient to be

- 10 -

fitted within the continuous groove of the end walls of the shroud segments.

5. A seal for a gas turbine engine to seal a joint between two annular engine parts, the joint
5 between the two parts comprising an annular gap with an axial component and a radial component, each component including radially spaced-apart walls, wherein the seal includes a "C" portion having a radial extent less than walls of the radial component to fit within the radial
10 component of the annular gap, with a leg of the "C" extending axially within the axial component of the annular gap, the leg having a wavy construction with one peak of the wavy portion in contact with one of the spaced-apart walls of the axial component of the
15 annular gap and another peak in contact with the other of the spaced-apart walls of the axial component of the annular gap, whereby the gap is sealed against leakage by gases flowing on either side of the joint.

6. The seal for a gas turbine engine as defined
20 in claim 5, wherein the seal is an endless ring.

7. A ring seal for a gas turbine engine for sealing a joint between two annular engine parts, the joint between the two parts comprising an annular gap with an axial component with opposed radially spaced
25 walls, wherein the ring seal has an axial portion having a wave pattern with alternating peaks, the wave pattern subtending an angle sufficient to require radial compression of the peaks in contact with the opposed radially spaced walls of the annular gap to
30 provide a gas seal at the joint.

8. A seal for a gas turbine engine as defined in claim 7, wherein the annular gap further comprises a radial component with opposed radially spaced-apart walls, wherein the ring seal includes a "C" portion

- 11 -

having a radial extent less than opposed walls of the radial component to fit within the radial component of the annular gap, the axial portion of the seal comprising a leg of the "C" extending axially within
5 the axial component of the annular gap, the leg having a wavy portion with one peak of the wavy portion in contact with one of the spaced-apart walls of the axial component of the annular gap and another peak in contact with the other spaced-apart wall of the axial
10 component of the annular gap, whereby the annular gap is sealed against leakage by gases flowing on either side of the joint.

9. The ring seal as defined in claim 8, wherein the ring seal is made from a heat resistant, inherently
15 elastic material.

10. The ring seal as defined in claim 9, wherein the ring seal is made of a bent sheet of heat resistant alloy.

11. A ring seal for a turbine blade tip shroud
20 for a gas turbine engine having a hot gas flow path and an outer casing, wherein the shroud is located between the hot gas path and a cooling gas conduit formed between the shroud and the outer casing, the shroud including an axially extending platform engaging a
25 mounting structure within the engine casing to form an annular gap having an axial component between the shroud and the mounting structure, the annular gap having opposed radially spaced walls formed on the shroud and the mounting structure, whereby the ring
30 seal has an axially extending portion having a wave pattern with alternating peaks, the wave pattern subtending an angle sufficient to require radial compression of the peaks in contact with the opposed radially spaced walls of the annular gap to provide a

- 12 -

gas seal at the joint between the shroud and the mounting structure.

12. A ring seal for a turbine blade tip shroud for a gas turbine engine having a hot gas path and an outer casing, wherein the shroud is located between the hot gas path and a cooling gas conduit formed between the shroud and the outer casing, the shroud including an axially extending platform for engaging mounting structure within the engine casing to form an annular gap having an axial and a radial component between the shroud and the mounting structure, the annular gap having opposed radially spaced walls formed on the shroud and the mounting structure, the ring seal comprising a "C" portion having a greater radial dimension than that of the axially extending platform and less than the radial dimension of the gap, the "C" portion for location in the radial component of the annular gap with the "C" portion of the ring seal having a leg extending axially within the annular component of the gap, the leg including a wavy pattern with alternating peaks for contact with the opposed radially spaced walls of the annular gap to provide a gas seal at the joint between the shroud and the mounting structure.

13. The ring seal as defined in claim 12, wherein the ring seal is made from a bent sheet of inherently elastic, heat resistant alloy.

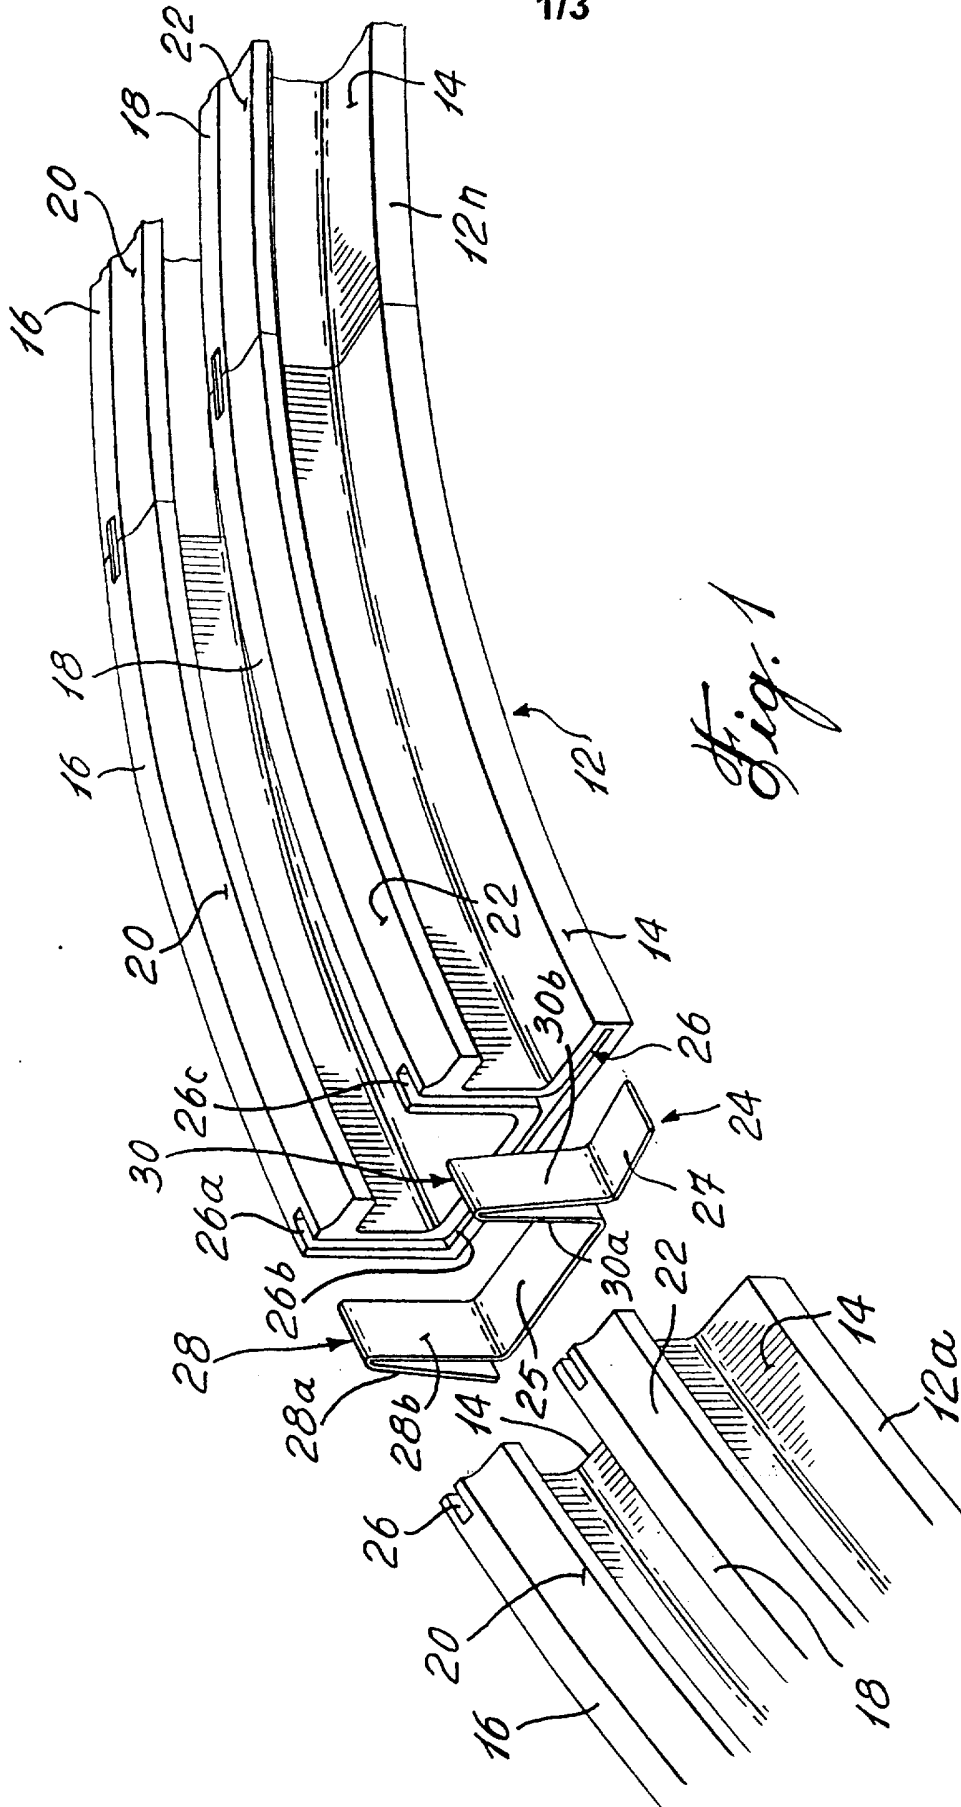


Fig. 1




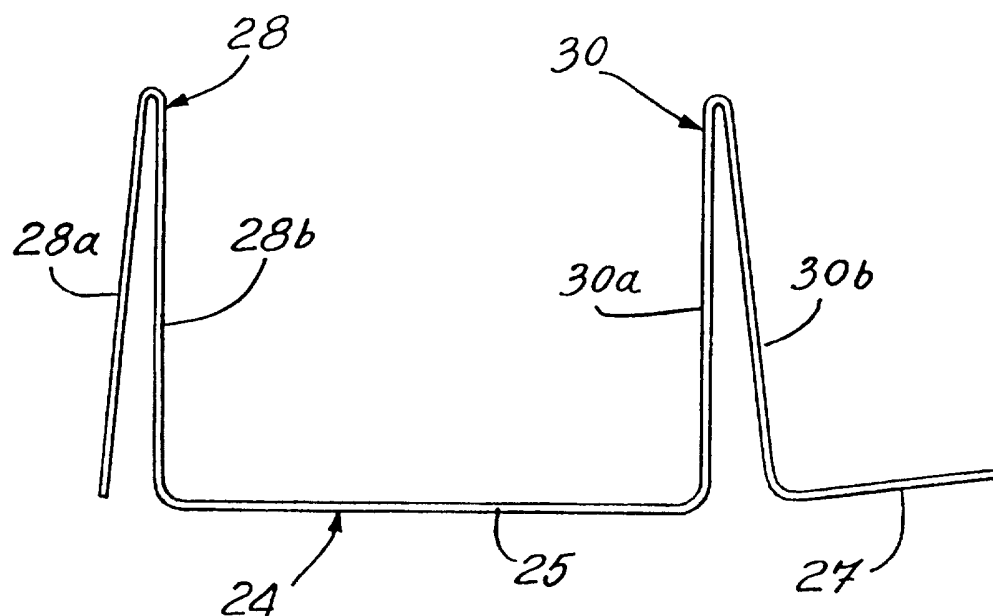


Fig. 2

3/3

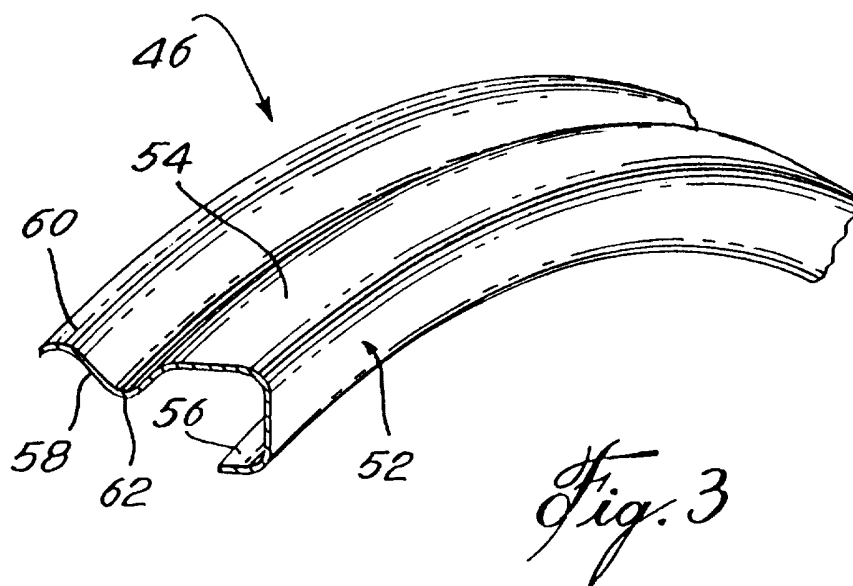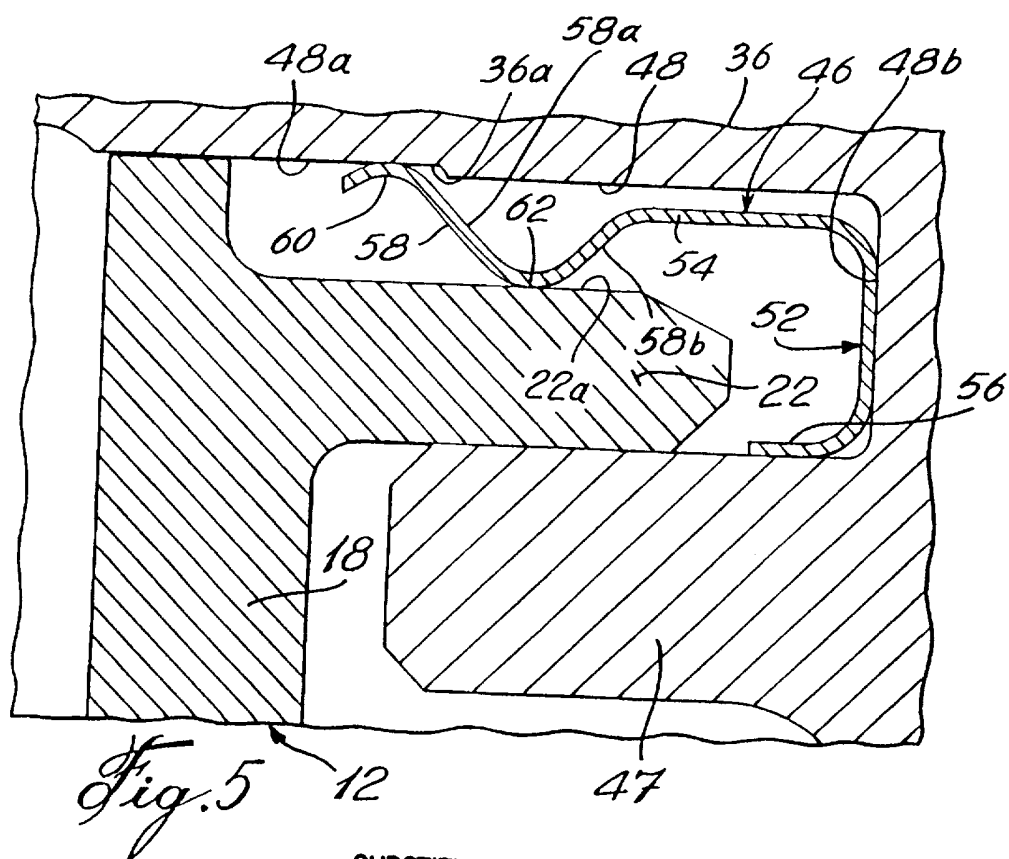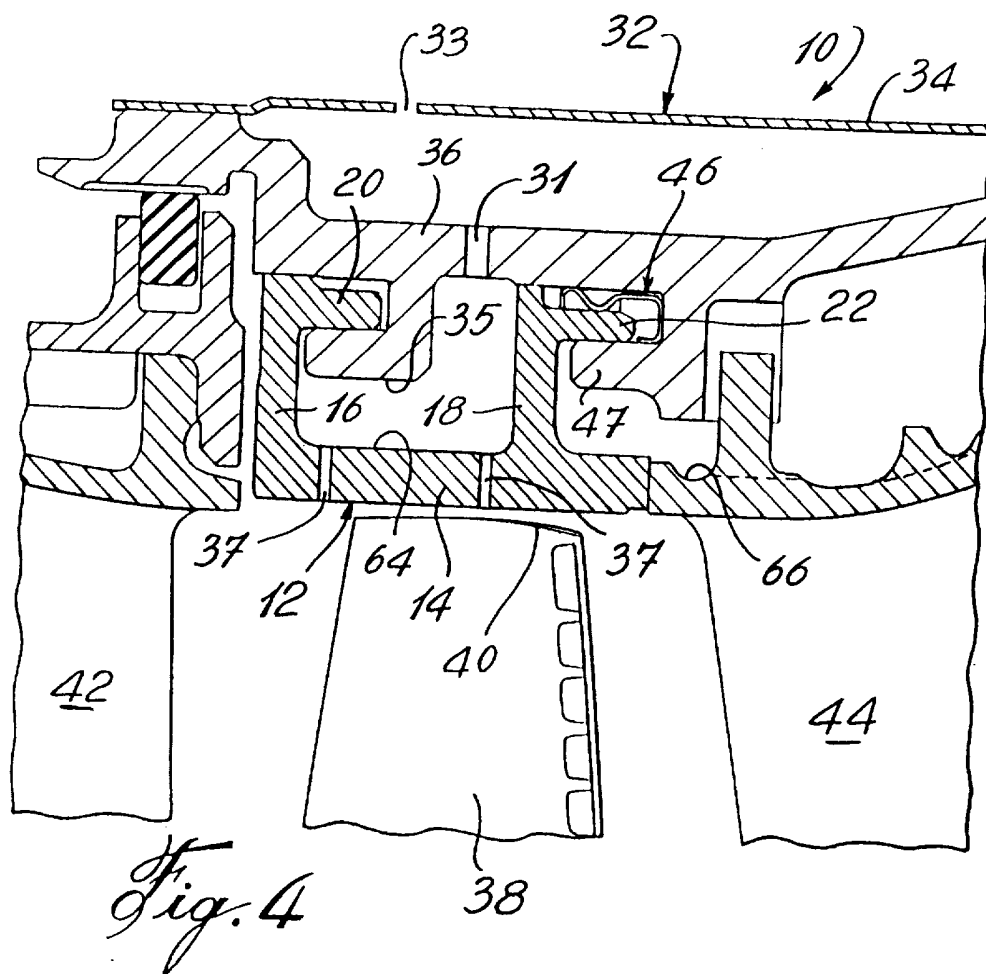

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 97/00339

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F01D11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 513 955 A (BARCZA WILLIAM K) 7 May 1996	1-3,5, 7-11
Y	see figure 6	1,4

X	EP 0 147 354 A (UNITED TECHNOLOGIES CORP) 3 July 1985	1-3
Y	see page 1, line 18; figure 1	1,4

X	WO 95 27841 A (UNITED TECHNOLOGIES CORP) 19 October 1995 see figure 1	1-3,5, 7-11

X	US 5 281 097 A (WILSON PAUL S ET AL) 25 January 1994 see figures 2,3	1-3

	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

11 August 1997

Date of mailing of the international search report

22.08.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Raspo, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 97/00339

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 743 164 A (KALOGEROS ROBERT R) 10 May 1988 see figure 2 ---	1-3
X	GB 1 331 209 A (SECR DEFENCE) 26 September 1973 see figure 3 ---	1-3
X	US 4 422 827 A (BUXE PAUL M ET AL) 27 December 1983 see figures 2,3 -----	1-3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 97/00339

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5513955 A	07-05-96	AU 3913495 A EP 0717170 A JP 8232601 A	20-06-96 19-06-96 10-09-96
EP 0147354 A	03-07-85	US 4524980 A BR 8406182 A JP 7030684 B JP 60138204 A US 4557412 A	25-06-85 24-09-85 10-04-95 22-07-85 10-12-85
WO 9527841 A	19-10-95	US 5460489 A EP 0752053 A	24-10-95 08-01-97
US 5281097 A	25-01-94	NONE	
US 4743164 A	10-05-88	CA 1284954 A DE 3786552 A DE 3786552 T EP 0297120 A JP 1501808 T KR 9506401 B WO 8805121 A	18-06-91 19-08-93 18-11-93 04-01-89 22-06-89 14-06-95 14-07-88
GB 1331209 A	26-09-73	DE 2052965 A FR 2066676 A GB 1232506 A US 3712757 A	13-05-71 06-08-71 19-05-71 23-01-73
US 4422827 A	27-12-83	DE 3303482 A JP 58155205 A	25-08-83 14-09-83