



US 20150163885A1

(19) **United States**
(12) **Patent Application Publication**
Gutstein et al.

(10) **Pub. No.: US 2015/0163885 A1**
(43) **Pub. Date: Jun. 11, 2015**

(54) **ELECTRICALLY ILLUMINATED FLAME SIMULATOR**

continuation of application No. 10/084,272, filed on Feb. 27, 2002, now Pat. No. 6,719,443.

(71) Applicant: **Winvic Sales Inc.**, Markham (CA)

Publication Classification

(72) Inventors: **Robert A. Gutstein**, Calabasas, CA (US); **Monita Liu**, Calabasas, CA (US)

(51) **Int. Cl.**
H05B 37/02 (2006.01)
H05B 33/08 (2006.01)
F21S 6/00 (2006.01)
F21S 10/04 (2006.01)
F21V 33/00 (2006.01)

(73) Assignee: **WINVIC SALES INC.**, Markham (CA)

(21) Appl. No.: **14/623,308**

(22) Filed: **Feb. 16, 2015**

(52) **U.S. Cl.**
CPC *H05B 37/0236* (2013.01); *F21S 10/04* (2013.01); *F21V 33/0028* (2013.01); *F21S 6/001* (2013.01); *H05B 33/0854* (2013.01); *F21W 2121/00* (2013.01)

Related U.S. Application Data

(63) Continuation of application No. 14/055,544, filed on Oct. 16, 2013, now Pat. No. 8,998,461, which is a continuation of application No. 13/449,100, filed on Apr. 17, 2012, now Pat. No. 8,562,186, which is a continuation of application No. 12/927,645, filed on Nov. 19, 2010, now Pat. No. 8,157,425, which is a continuation of application No. 12/586,933, filed on Sep. 30, 2009, now abandoned, which is a continuation of application No. 12/284,986, filed on Sep. 26, 2008, now abandoned, which is a continuation of application No. 11/881,303, filed on Jul. 26, 2007, now abandoned, which is a continuation of application No. 11/494,812, filed on Jul. 28, 2006, now abandoned, which is a continuation of application No. 10/822,392, filed on Apr. 12, 2004, now abandoned, which is a

(57) **ABSTRACT**

An electrically powered flame simulator comprises at least two light sources, an integrated circuit electrically connected to the light sources for intermittently illuminating at least one of the light sources independently of other light sources such that the light sources together provide the effect of a flickering movement, and a power source for providing power to the integrated circuit. The flame simulator may be mounted in a decorative or ornamental device such as a candle or fire log, or used on decorative clothing, or may be part of a hazard or warning system. One or more solid state light sources may also be used.

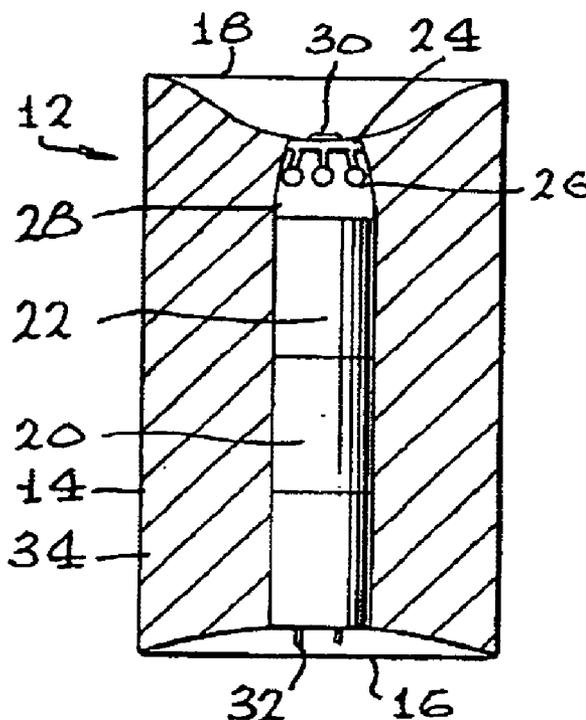


FIG. 1

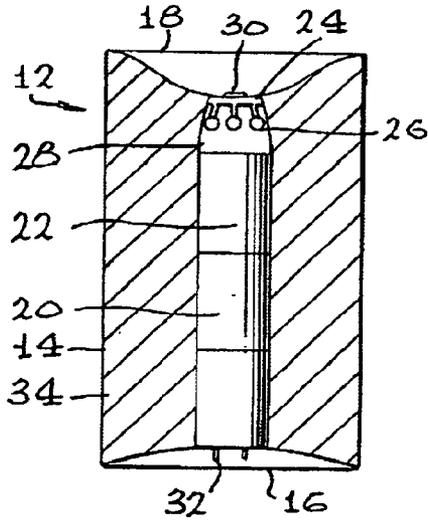


FIG. 3

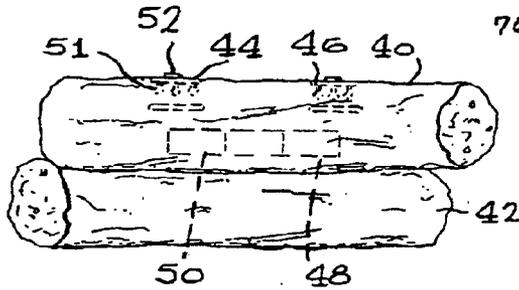
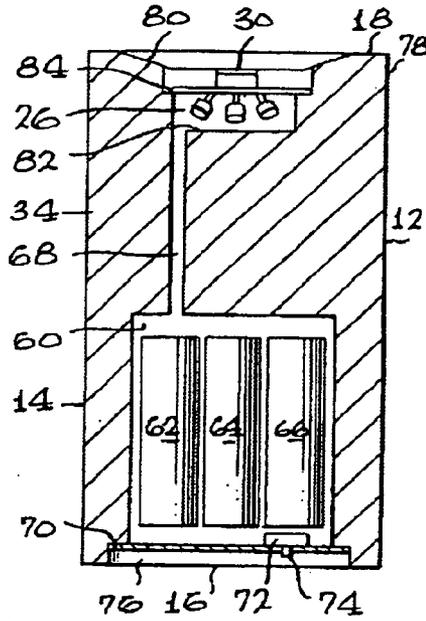


FIG. 2

FIG. 4

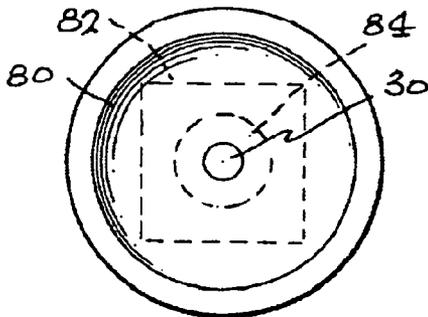
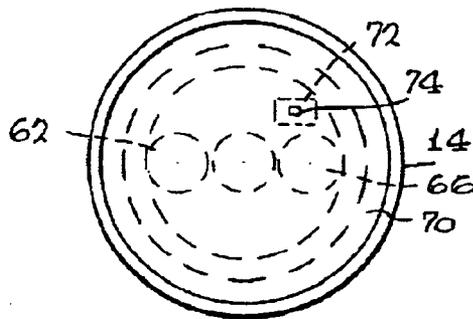


FIG. 5



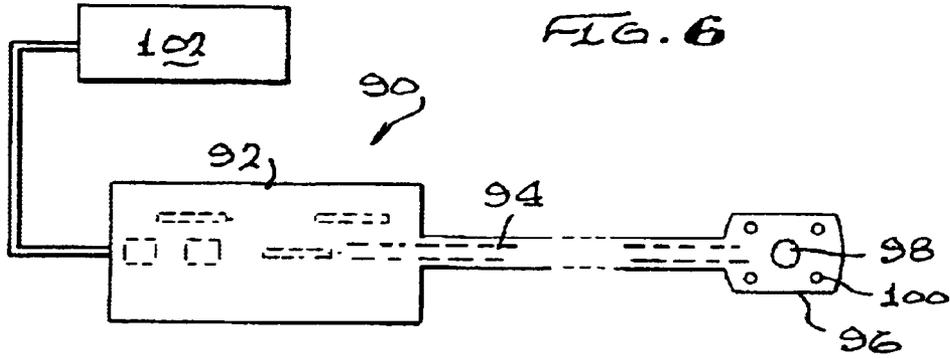


FIG. 6

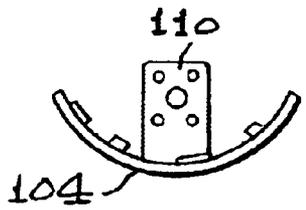


FIG. 8b

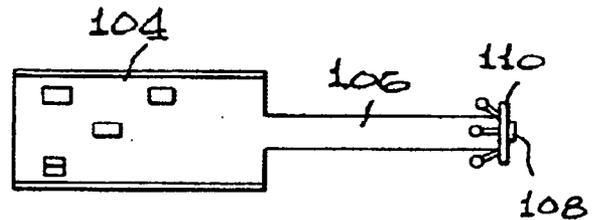


FIG. 8a

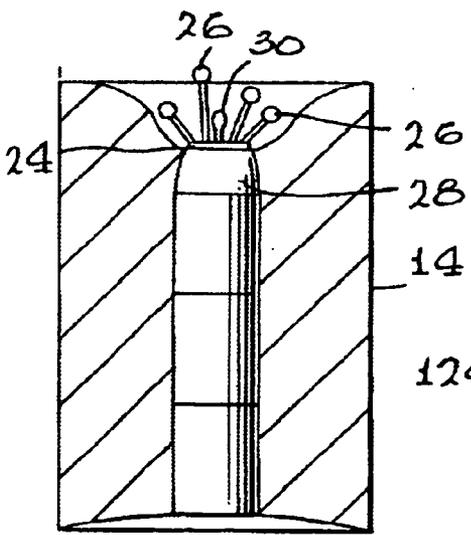


FIG. 9

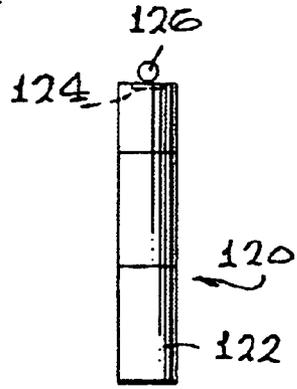


FIG. 10

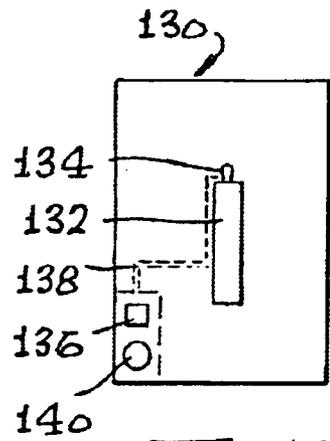


FIG. 11

ELECTRICALLY ILLUMINATED FLAME SIMULATOR

RELATED APPLICATIONS

[0001] This application is a continuation of U.S. application Ser. No. 14/055,544 filed Oct. 16, 2013, which is a continuation of U.S. application Ser. No. 13/449,100 filed Apr. 17, 2012, now U.S. Pat. No. 8,562,186, which is a continuation of U.S. application Ser. No. 12/927,645 filed Nov. 19, 2010, now U.S. Pat. No. 8,157,425, which is a continuation of U.S. application Ser. No. 12/586,933 filed Sep. 30, 2009, (now abandoned), which is a continuation of U.S. application Ser. No. 12/284,986 filed Sep. 26, 2008 (now abandoned), which is a continuation of U.S. application Ser. No. 11/881,303, filed Jul. 26, 2007 (now abandoned), which is a continuation of U.S. application Ser. No. 11/494,812 filed Jul. 28, 2006 (now abandoned), which is a continuation of U.S. application Ser. No. 10/822,392 filed Apr. 12, 2004 (now abandoned), which is a continuation of U.S. application Ser. No. 10/084,272 filed Feb. 27, 2002, now U.S. Pat. No. 6,719,443, all of which are incorporated herein by reference in their entirety. This application is also related to U.S. application Ser. No. 14/152,430 filed on Jan. 10, 2014, now U.S. Pat. No. 8,858,043 on Oct. 14, 2014, which is also a continuation of U.S. application Ser. No. 14/055,544.

FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] [Not Applicable]

MICROFICHE/COPYRIGHT REFERENCE

[0003] [Not Applicable]

BACKGROUND OF THE INVENTION

[0004] This invention relates to an electrically illuminated flame simulator. Particularly, the invention relates to decorative candles, fire logs, or other devices which may be illuminated so as to produce a flickering flame effect. The flame simulator of the invention would typically be electrically powered by batteries, either disposable or rechargeable, but may also be powered through a regular AC outlet, with or without an AC adaptor.

[0005] Candles, fire logs, specially created street lights and other devices which may be used, for example, on clothing, cycles or other products are commonly available and valued for their effect. However, in many instances, where candles, fire logs or related lighting fixtures are used, the lighting, produced is from a flame which may typically burn in an oil container, wax candle or the like. There are, of course, natural hazards associated with such a device, since they may result in fire accidents which, if unattended or not properly controlled, can produce extensive damage, smoke or pollution.

[0006] The invention therefore utilizes the concept of such decorative elements, but uses, instead of a flame, an electrically illuminated flame simulator which is programmed to operate so that, when observed, is shown to produce a light-flickering effect which is the same as or similar to a burning candle, fire log or the like. However, the invention is not limited to devices such as candles and fire logs, and the electrically illuminated flame simulator of the invention can be used in a wide array of products and conditions, such as in ornamental or decorative street lights, in clothing such as belts, shoes and caps, greeting cards, or on bicycles, scooters

and the like. Furthermore, the flickering effect of the flame simulator of the invention may be used to advantage as a hazard warning, such as on road hazard or emergency automobile lights.

[0007] Certain devices and methods are known which may have the effect of producing or simulating a real flame. For example, a single specially designed, unstable neon light bulb may be used. Such unstable neon bulbs, however, inherently produce an unnatural “jerky” flickering pattern that may not be easily controlled electronically, and must be operated by high voltage sources. At the least, this makes them generally unsuitable for battery operation. A further example can be found in a single incandescent light bulb whose light output may be modulated by varying the output of an AC or DC voltage source. Such incandescent light bulbs, however, are inherently limited in terms of flickering rate and effect due to retention of filament heat, and draw substantially more current than solid state light sources such as LED lights. Once more, this is not generally suitable for battery operation, at the least.

[0008] Where multiple light bulbs each switched on and off may be used for display and decorative purposes, there is an absence of the illusion of light movement characteristic of a flickering flame since the light bulbs are not switched or modulated in a manner which would generate light motion typical of that produced by a real flame.

[0009] Linear arrays of “traveling” or “chaser” lights are also known but these arrays are structured and controlled to generate the effect of a large magnitude of light motion in a linear direction, which is coincident with the linear array of such lights. Certainly, the effect produced by these linear arrays does not mimic the illusion of a flickering flame.

BRIEF SUMMARY OF THE INVENTION

[0010] In one aspect, the invention is for an electrically illuminated flame simulator. Preferably, the flame simulator of the invention is associated with an ornamental or decorative device, or with other devices such as hazard indicators. In one form, the flame simulator of the invention may constitute a part of an ornament or decoration such as a candle, fire log, or an indoor or outdoor lighting display, giving the appearance that the ornament is providing a natural flame. Other such decorative uses may make the flame simulator of the invention useful when associated with clothing, such as on belts or caps, greeting cards, or when incorporated into shoes.

[0011] When used as a hazard warning, the flame simulator of the invention may be used in conjunction with cycles or cycle clothing, or with road barriers, signs for warning motorists or as emergency lighting for vehicles.

[0012] In a preferred form, the electrically illuminated flame simulator is used with a decorative candle. The candle itself may be comprised of wax or other conventional materials from which candles are produced, or materials such as plastics which can emulate the look of a candle. The flame simulator of the invention would preferably be located within the candle body so that the flame simulator, when illuminated, can be seen not only from the top of the candle, but also as a glow or source of light emanating from within the candle.

[0013] According to another aspect of the invention, the flame simulator may also be used to provide an effect similar to that of a candle when used in a fake fire log intended to produce the effect of a natural burning log.

[0014] In one form, the flame simulator of the invention comprises at least two light sources, preferably four, such as

light bulbs, which may be randomly, sequentially, or semi-randomly illuminated to produce a flickering and moving light effect to resemble a real flame, for example a flame provided by a burning candle. The light sources are preferably light-emitting diodes (LEDs), randomly or semi-randomly illuminated electronically.

[0015] In another embodiment, the flame simulator of the invention comprises a single non-filament (solid state) light source, such as an LED light bulb, liquid crystal display, or electro luminescent material, in which such light source is driven by a randomly or semi-randomly modulated voltage source to provide a flickering effect to resemble a real flame.

[0016] Further, in another aspect of the invention, the illuminated source producing the flame-flickering effect may be operated (namely, activated and deactivated) by externally produced, preselected sounds. Therefore, the electrically illuminated flame simulator of the invention may have associated therewith a microphone integrated as part of the electronics, so that sounds or different frequencies may be programmed to produce a given result, such as the switching on or switching off of the flame simulator.

[0017] The flame simulator of the invention may also incorporate other features, including motion detectors, light sensors and the like, so that any ornament or decoration incorporating the flame simulator of the invention will operate automatically, for example, when ambient light conditions reach a certain level, and/or when movement is detected within a specific range.

[0018] According to one aspect of the invention, there is provided an electrically powered flame simulator comprising: at least two light sources; an integrated circuit electrically connected to the light sources for intermittently, such as systematically, randomly or semi-randomly, illuminating at least one of the light sources independently of other light sources such that the light sources together provide the effect of a flickering movement; and a power source for providing power to the integrated circuit. Preferably, the a flame simulator comprises at least four light sources.

[0019] The flame simulator preferably includes a switch means for activating and deactivating the integrated circuit. The switch means may have three positions comprising an on position, an off position, and an on-timed position where the flame simulator will remain activated for a predetermined length of time.

[0020] The flame simulator may further comprise a microphone connected to the integrated circuit wherein the microphone inputs preselected audio signals which are processed by the integrated circuit to switch the flame simulator between an on position, an off position, and an on-timed position where the flame simulator will remain activated for a predetermined length of time. Preferably, the integrated circuit processes signals from the microphone having a higher frequency, such as those produced by a finger snap, to place the flame simulator in the on position and processes lower frequency signals, such as those produced by blowing, to place the flame simulator in the off position.

[0021] The integrated circuit may illuminate the light sources in a random or semi-random operation, in a preselected, predetermined operation, and may function only when selected ambient sound or light conditions are present.

[0022] In one form, the flame simulator comprises a body in the shape of a candle in which the flame simulator is contained, the body having an upper end with a mounting means

for receiving the integrated circuit and light sources and a chamber therein for receiving the power source.

[0023] Preferably, the light sources are light emitting diodes (LEDs). The integrated circuit may be mounted on a rigid base, or on a flexible base which can be shaped so as to conform to the shape of at least a portion of the candle to conserve space.

[0024] According to another aspect of the invention, there is provided a candle having an electrically powered flame simulator comprising: a candle body having an upper portion, a lower portion and a chamber therein; and a flame simulator having at least two light sources located near the upper portion of the candle body, an integrated circuit within the candle body and electrically connected to the light sources for intermittently, such as by randomly or semi-randomly, illuminating at least one of the light sources independently of other light sources such that the light sources together provide the effect of a flickering movement, and a power source in the chamber of the candle body for providing power to the integrated circuit.

BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

[0025] FIG. 1 is a schematic side view of a candle with the electrically illuminated flame simulator of the invention;

[0026] FIG. 2 is a front view of artificial fire logs incorporating a flame simulator of the invention;

[0027] FIG. 3 is a schematic side view, showing various components, of an artificial candle with flame simulator of the invention;

[0028] FIG. 4 is a top view of the candle shown in FIG. 3 of the drawings;

[0029] FIG. 5 is a bottom view of the candle shown in FIG. 3 of the drawings;

[0030] FIG. 6 is a schematic view of the flame simulator of the invention, shown independent of any decorative ornament with which it may be associated;

[0031] FIG. 7 is a circuit diagram showing the electronics in one embodiment of the flame simulator of the invention;

[0032] FIGS. 8a and 8b show another embodiment of the flame simulator of the invention standing alone, shown as a front view and top view respectively;

[0033] FIG. 9 shows a schematic side view of a candle with the electrically illuminated flame simulator of the invention as illustrated in FIG. 1, but with LED light sources which face upwards;

[0034] FIG. 10 shows schematically a single "birthday" type candle in accordance with the present invention; and

[0035] FIG. 11 shows schematically a greeting card in accordance with the present invention; and

[0036] FIG. 12 shows a block diagram of one embodiment of a single light source flame simulator of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0037] The invention is for a flame simulator which is powered electrically, and comprises a series of bulbs or LEDs which are illuminated randomly, semi-randomly or in a predetermined manner to provide the visual effect of a flickering flame. The device is preferably coupled to an ornament such as a candle or fire log to enhance this effect.

[0038] FIG. 1 of the drawings shows schematically a candle 12, generally of cylindrical shape having side wall 14, a base 16, and a top surface 18. The candle 12 comprises a hollowed

out central portion 20, generally extending between the top surface 18 and the base 16, which, in the embodiment of FIG. 1, may accommodate a power source such as batteries 22. Near the top surface 18 there is located circuitry 24, the circuitry 24 being connected to LED light sources 26, four of which are shown in the embodiment in FIG. 1 of the drawings. The LED light sources 26 open into a chamber 28, generally formed between the top of the batteries 22 and the undersurface of the circuitry 24. In a variation, the LED light sources 26 may point upwardly.

[0039] The circuitry 24 further comprises a microphone 30, at least a portion of which is exposed and not embedded within the candle 12. The microphone 30 has an operative portion thereof exposed to the outside air and is capable of receiving and processing signals of various frequencies, as will be described, which are transmitted to and then processed by the circuitry 24, to activate the LED light sources 26 to provide a flickering flame effect.

[0040] At the lower end of the hollow central portion 20, electrical pins 32 are located, and these may be connectable to an electric source (not shown). Such pins 32 may be used for different purposes, such as for recharging the batteries 22 when they are of rechargeable type, or for providing power directly to the circuitry 24 and the LED light sources 26. The batteries could, of course, be disposable, and, in a further variation, the candle 12 would be able to accommodate both disposable and rechargeable batteries.

[0041] Preferably, the candle 12 is cylindrically shaped, and may be comprised of wax or a synthetic material which provides a candle-like appearance. The candle 12 may be of desired color or a combination of colors, and may be translucent or opaque. The material of the candle 12 is chosen, and its thickness selected, so that the possibility exists for light from the LED light sources 26 to be viewed not only from the top surface 18 of the candle 12, but also through the body 34 of the candle, possibly in a muted or semi-transparent manner to provide a glowing effect.

[0042] As will be described below, the LED light sources 26 may be illuminated randomly, semi-randomly, or in a predetermined pattern. However, the overall purpose of illuminating the LED light sources 26 is to do so in such a way that the modulated illumination of each of the LED light sources provides an aesthetic flickering effect when illuminated in combination with the other LED light sources being similarly illuminated, so that the light and movement produced thereby emulates a natural candle flame.

[0043] With reference to FIG. 2 of the drawings, there is shown a pair of synthetic fire logs 40 and 42, which may be comprised of conventional materials known to those skilled in the art, and having ornamentation and design features thereon which look like real fire logs. In FIG. 2, which shows only one embodiment of the invention, the fire log 40 has two electric circuits 44 and 46, both of which are substantially identical to each other, and each of which may be powered by battery power source 48. An AC power source may be utilized in an alternative embodiment. The battery power source 48 is preferably contained within a specially hollowed out portion 50 of the fire log 40, and is placed electrically in contact with the circuitry 44 and/or 46 in a conventional manner, not shown in FIG. 2.

[0044] Associated with each of the electrical circuits 44 and 46 is a series of LED light sources 51. Each of the electrical circuits 44 and 46 may also include a microphone 52. The electrical circuits 44 and 46, together with their associated

LED light sources 51 and microphone 52, operate in essentially the same manner as described with reference to FIG. 1 of the drawings. Thus, each of the LED light sources 51 in the array is activated to illuminate in a random or predetermined manner, so as to give off light at various points along the fire log 40 to provide the effect that the fire log 40 is glowing, or that flames are burning thereon.

[0045] Reference is now made to FIG. 3 of the drawings which shows, in side view, a diagrammatic representation of one embodiment of an ornamental candle incorporating the flame simulator of the invention. Where applicable, reference numerals will be used corresponding to those in FIG. 1 of the drawings. In FIG. 3, the candle 12 comprises side wall 14, a base 16, and a top wall 18. These various walls of the candle 12 define a candle body 34.

[0046] In the lower half of the candle 12, there is formed a hollow chamber 60 adapted to receive three batteries 62, 64 and 66, which form a battery or power pack. The chamber 60, at an upper portion thereof, leads into a wire channel 68 extending therefrom towards the circuits and light sources above, which will be described.

[0047] The chamber 60 is accessed through a removable cover plate 70 near the base 16 of the candle. The batteries 62, 64 and 66 are connected to a power switch 72, contained within the chamber 60, the power switch 72 having a switch lever 74 which extends from within the chamber 60 to outside of the candle 12, through the cover plate 70. In this way, the user has manual access to and control of the switch lever 74 for activating or deactivating the candle 12.

[0048] At the base 16 of the candle 12, there is a recessed portion 76, the recessed portion 76 leading to the chamber 60, but, in normal usage, sealed from the chamber 60 by means of the cover plate 70.

[0049] At the upper end 78 of the candle 12, there is an upper recess 80 leading into a LED chamber 82. A printed circuit board 84 or an integrated circuit mounted on a board 84 houses the electronics, one embodiment of which is described below, for activating the candle 12. Attached to the PC board 84 are four LED light sources 26, which extend from the PC board 84 into the LED chamber 82. A microphone 30 extends upwardly from the PC board 84, into the upper recess 80. The PC board 84 is electrically connected to the power source of batteries 62, 64 and 66 through appropriate electrical connectors which extend through the wire channel 68.

[0050] FIG. 6 shows, schematically, a flame simulator 90 independent of the body or ornament on which it may be mounted, including an integrated circuit 92, an arm 94 extending therefrom which supports or contains conductors, preferably flexible conductors, and a support plate 96 at the end of arm 94 which can be arranged at an angle to the arm 94, as required. The support plate 96 includes a microphone 98 and LEDs 100. The integrated circuit 92 is powered by a power source, indicated generally at 102.

[0051] With reference to FIG. 7 of the drawings a preferred circuit diagram showing some of the electronics and operation of the equipment is described.

[0052] The heart of the system is the integrated circuit IC1 connected to a number of LEDs, LD1-LD4. IC1 systematically or randomly or semi-randomly, at the designer's choice, turns on and off the LEDs simulating the flickering of the candle 12.

[0053] Power is applied to all electronic circuitry, where indicated by "VCC", by operation of a switch S1. The switch

S1 has three positions: “on”; “off”; and “timed”. In the “on” position of switch **S1**, the integrated circuit **IC1** operates in a continuous mode after enablement, and stops only when commanded to do so by the user. That is, in this mode, operation starts and stops under remote control by the user, as explained below. In the “off” position of switch **S1**, the entire system is shut down, since switch **S1** disconnects the battery from **VCC**. In the “timed” position of the switch **S1**, after starting operation, the integrated circuit **IC1** stops operation automatically after a predetermined time has passed.

[0054] In the “on” position of switch **S1**, typically at least 3 volts ($2 \times 1.5V$) from the batteries is routed through the switch **S1** and applied to all circuitry requiring **VCC**. All circuit points designated “GND” are connected together representing ground potential for the system. Ground potential (GND) is not switched by the switch **S1**, except in the “on” position of the switch **S1**, when GND is applied to a pin **17** of the **IC1** to set the functional operation of the **IC1** in a continuous mode of operation until a “stop” signal is received on the pin **18** to cease its operation. In the “timed” position of **S1**, **VCC** is applied to the pin **17** of the **IC1**, causing an internal timer in the **IC1** to time out and stop operation of the **IC1** after a predetermined delay time, e.g., three hours.

[0055] In the “on” position of the switch **S1**, all circuits are powered and in a standby mode, defining an initial quiescent state for the **IC1** in which none of the LEDs **LD1-LD4** are lit. However, upon the occurrence of a high frequency sound at the microphone **MIC1**, such as a hand clap or finger snap, a signal is generated at the output of the microphone **MIC1** and applied to the + terminal of an operational amplifier **IC2A**. The **IC2A** amplifies the sharp sound sensed by the microphone **MIC1**, and applies the amplified output signal simultaneously to the + input of an **IC3A** and to the – input of the **IC3B**, which enables **IC1** to begin modulating the LEDs to produce the flickering effect. The circuit may be modified to respond to different frequency signals without altering the principles of the present invention.

[0056] **R1, C3, R5; C4, C5, R2, R4; R11; and R7, R8** are coupling, frequency compensation, feedback, and biasing components, the functions and operations of which are familiar to a skilled worker and therefore need not be further described in detail herein. **C2** and **R6** define a high-pass filter, while **R10, C1, and R3** define a low-pass filter arrangement.

[0057] In the presence of a sharp, high frequency sound input to the microphone **MIC1**, high frequency signal components are present at the output of the **IC2A**, which signal components are passed on only to the – terminal of the **IC3B** through the high-pass filter **C2, R6**, i.e., the high frequency signal from the **IC2A** is blocked from reaching the + terminal of the **IC3A** due to the presence of the low-pass filter **R10, C1, R3**.

[0058] Thus, the **IC3B** amplifies its input signal and sends it to a pin **4** of the **IC1** as a “start” pulse, initiating the operation of the **IC1**. When in an operational mode, the **IC1**, either systematically (e.g., sequentially) or randomly, applies power sufficient to light the LEDs **LD1-LD4** individually via pins **6** and **13** for **LD1**, via pins **7** and **12** for **LD2**, via pins **8** and **11** for **LD3**, and via pins **9** and **10** for **LD4**.

[0059] In the “on” switch setting, this condition will continue until the switch **S1** is moved to the “off” position, or until a low frequency sound, such as that made by blowing or making a thud-like sound near the microphone **MIC1**, is sensed by the microphone **MIC1**.

[0060] In the presence of a low frequency sound input to the microphone **MIC1**, low frequency signal components are present at the output of the **IC2A**, which signal components are passed on only to the + terminal of the **IC3A** through the low-pass filter **R10, C1, R3**, i.e., the low frequency signal from the **IC2A** is blocked from reaching the – terminal of the **IC3B** due to the presence of high-pass filter **C2, R6**.

[0061] Thus, the **IC3A** amplifies its input signal and sends it to a pin **18** of the **IC1** as a “stop” pulse, ceasing the operation of the **IC1**, at which time, the circuitry is again returned to its quiescent state awaiting another high frequency sound in the vicinity of the microphone **MIC1**. As previously explained, other frequency sounds may be selected to control various functions including on and off functions.

[0062] When the switch **S1** is moved to the “timed” position, starting the operation of the **IC1** is accomplished in the same manner as described above, i.e., by the sensing of a high frequency sound present at the microphone **MIC1**. However, in the “timed” mode, **VCC** is applied to the pin **17** of the **IC1** through the switch **S1**. This **VCC** potential on the pin **17** sets an internal timer to run for the aforementioned predetermined delay time, after which the operation of the **IC1** is automatically terminated, and the circuitry is again returned to its quiescent state awaiting another high frequency sound in the vicinity of the microphone **MIC1**.

[0063] It is to be understood that the circuit diagram of FIG. 7 depicts a preferred embodiment for the electronics of the invention, and that other functions may be employed by either reconfiguring the connections to the **IC1** and/or by the use of additional, or other, electronic components. Examples of variations of the described circuit would be apparent to a person of ordinary skill in the art. For example, the switch **S1** could be modified, or a separate switch could be provided, to operate a modified electronic system in yet another mode in which the microphone **MIC1** is disconnected from the system, and starting and stopping operation of the **IC1** is accomplished solely by manual control. As another example, the delay for a timed stop could be made selectable with only minor modification of the circuit diagram and the provision of a manual delay time control device.

[0064] In FIGS. **8a** and **8b** there is shown a further embodiment of a circuit board **104**, which is arcuate in order to conform with the shape of a battery around which it may be located as a space-saving technique. An arm **106** (or simply wires which are flexible and may be in flexible tubing) preferably extends upwardly or away from the printed circuit board and circuitry **104**, and terminates in a support plate **110** substantially at right angles to the arm **106**. The plate **110** supports the microphone **108** and LED light sources which would be located, in use, near the upper portion of a candle.

[0065] FIG. 9 shows a view of a candle very similar to that illustrated in FIG. 1 of the drawings, but with the light sources **26** pointing upwardly for a slightly different effect. FIG. 10 shows schematically a “birthday” type candle **120** having a battery area **122**, a circuit **124** and an LED **126**. LED **126** may be substituted by an alternative form of light without altering the principles of the present invention.

[0066] A greeting card **130** is illustrated in FIG. 11 and includes a printed candle **132** having an LED light source **134** thereabove which is operated by a circuit **136** to which it is connected by embedded wires **138**. A power source **140** is also provided.

[0067] The circuit board may be comprised of a flexible material so that its shape can be easily manipulated to fit the

space in which it is to be mounted. The circuit board can be connected to the LED light sources through any appropriate electrical connection means so that it can be distanced therefrom, and this also functions as a space-saving technique for confining and mounting the electronics into smaller spaces.

[0068] In a preferred embodiment of the invention, there are at least two light bulbs, although more (such as four) are preferable, powered by randomly or sequentially generated voltage sources to produce the flickering effect. In a preferred embodiment, at least two pairs of output ports of a micro-controller may be programmed to provide a seven-segment LED/LCD 12-hour time clock multiplex function. An audio signal is processed, in one embodiment, by a high-frequency filtering circuit, the output of which provides a power-on signal which is responsive to a finger snap, handclap or the like, as described with reference to FIG. 7. Further, the audio signal may be processed by a low-frequency filtering circuit, the output of which provides a power-off signal, which is responsive to, for example, a blowing sound.

[0069] A mode switch or remote control device may be employed to select between the modes of power-off, power-on or power-on with various microphone functions, or power-on for a predetermined period of time.

[0070] Another preferred feature of the invention may include the use of LED-type light bulbs, generally in the manner described above, wherein such light bulbs radiate light in a non-parallel and substantially downward direction, so as to illuminate a translucent candle body, as briefly referenced in the description of FIG. 1 of the drawings. Incandescent or neon light bulbs may substitute one or more of the LED light bulbs, and non-micro controller circuitry may be used.

[0071] The two light bulbs may be operated by at least two voltage sources, where a voltage source is randomly generated, semi-randomly generated, or sequentially generated, thereby producing the flickering flame and moving light effect.

[0072] The flame simulator of the invention may have a signal produced by a microphone and microphone amplifier which triggers the modulated voltage sources into power on and power off states alternately. Frequency equalization may be applied to the amplifier such as to favor high frequency sounds (such as a finger snap or hand clap) in triggering the power on state, and the frequency equalization may also be applied to the amplifier such as to favor low frequency sounds

(such as blowing air) in triggering the power off state. Preferably, at least one of the light bulbs radiates light into or from a translucent candle body, and any two such light bulbs may radiate light in directions that are parallel or non-parallel to one another.

[0073] The invention is not limited to the precise details, and variations of the particular electronics and circuitry, as well as the ornaments or devices to which they may be attached, may vary within the disclosure herein. Further, additional features may form part of the invention. For example, a light sensor device may be associated and electrically connected to the circuitry of the invention. The light sensor senses the level of ambient light and may switch on the flame simulator, or place it in a mode receptive to audio signals as described above, only when light levels drop below a pre-selected intensity. In this way, the flame simulator of the invention would only operate during darker periods or in darker environments.

[0074] The invention may also include a motion detector associated therewith and electrically connected with the circuitry of the flame simulator of the invention. The inclusion of motion detector sensors would confine operation of the flame simulator of the invention to periods of time when movement, such as that made by people in the vicinity, is present and thereby save power by in operation when motion is not detected. Another option would be to incorporate heat sensors to restrict operation of the flame simulator to conditions when temperatures drop below or move above pre-selected levels.

1. A candle having an electrically powered flame simulator comprising:

- a substantially cylindrical body having permanent exterior surfaces comprising an upper portion having a rim on an upper surface that circumscribes a recess, a lower portion with a lower surface, and a chamber therein, wherein the substantially cylindrical body is self-supporting on the lower surface and has a circumference with a central axis extending through the center of the upper portion and center of the lower portion;
- a flame simulator located substantially within the recess;
- a circuit electrically connected to the flame simulator for intermittently illuminating the flame simulator;
- a power source for providing power to the circuit; and
- a microphone associated with the circuit through which audio sounds can be processed.

* * * * *