



(51) International Patent Classification:
A61N 5/10 (2006.01)

(21) International Application Number:
PCT/US2009/044410

(22) International Filing Date:
18 May 2009 (18.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/127,845 16 May 2008 (16.05.2008) US

(71) Applicant and

(72) Inventor: BIRNBACH, Curtis, A. [US/US]; 461 Pinebrook Blvd., New Rochelle, NY 10804 (US).

(74) Agent: BRUZGA, Charles, E.; 11 Broadway, Suite 715, New York, NY 10004 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— with amended claims (Art. 19(1))

(54) Title: FLASH X-RAY IRRADIATOR

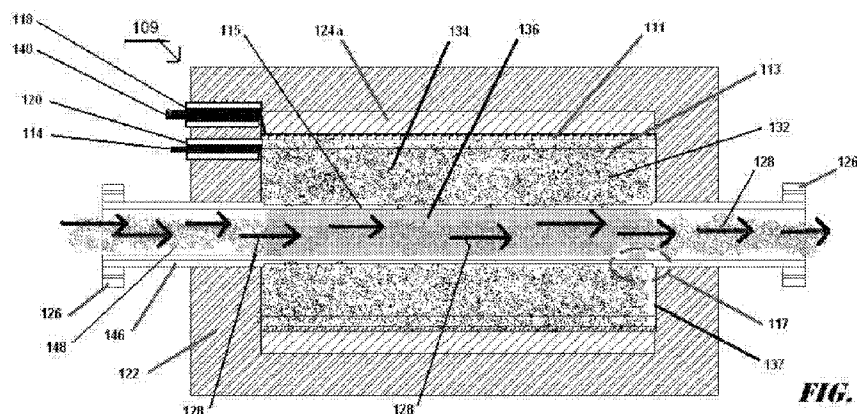


FIG. 1

(57) Abstract: An apparatus for Flash X-ray irradiation of material includes a Flash X-ray source comprised of an electron gun and an anode. The electron gun comprises a field emission cold cathode having an electrode emitting surface, and a grid for controlling electron flow from the cathode to the anode. The anode has an electron-receiving main surface and an X-ray emitting, oppositely facing main surface. The X-ray emitting surface emits X-radiation into an irradiation volume. The X-ray emitting surface of the anode has orthogonally oriented first and second dimensions of greater than 2 millimeters each. A high voltage pulse power supply powers the Flash X-ray source. The electron gun, anode and high voltage pulse power supply are so constructed as to create sufficient X-radiation in said irradiation volume to achieve a desired level of irradiation of material in said volume.



FLASH X-RAY IRRADIATOR

FIELD OF THE INVENTION

5 The present invention relates to apparatus for irradiation of materials. The invention relates more particularly to an apparatus that produces a high speed X-ray pulse or pulses for irradiation of materials.

BACKGROUND OF THE INVENTION

10 Sterilization of various materials by irradiation with high-energy radiation (gamma and X-ray) is a well-established technology. High-energy irradiation can break molecular bonds in various materials and decompose the toxic compounds into more benign compounds. Gamma sterilization has been considered the norm up until now because of the high energy and fluence (amount of radiation delivered per unit of time) of the source. Use of X-ray irradiation for manufacturing purposes such as the
15 manufacture of heat-shrink tubing for electronics is also known.

 For sterilization with gamma radiation, ^{60}Co has been the standard radioisotope of choice. ^{60}Co emits gamma rays at energies of 1.17 MeV and 1.33 MeV. The efficacy of radiation at these energies has been long established for these applications. One of the drawbacks to the use of ^{60}Co is that its higher energy line
20 (1.33 MeV) is above the energy level at which radioactivity is induced. There is a need for an irradiation apparatus whose maximum energy output is below the threshold of ^{60}Co , so as to avoid the problem of inducing radioactivity in material being irradiated. It would further be desirable to provide an apparatus for irradiation that altogether avoids the use of radioisotopes, so as simplify operation and licensing, and eliminate
25 the possibility of diversion of such radioisotopes for illegal purposes.

 Prior X-ray sources have not achieved a position of dominance due to the fact that although they can easily achieve higher energies, they have heretofore been unable to economically achieve the fluence of gamma sources. A need exists, therefore, for irradiation apparatus that can simultaneously achieve both the high
30 energy and fluence necessary for practical sterilization, decontamination, and environmental remediation applications.

BRIEF SUMMARY OF THE INVENTION

In a preferred form, the invention provides an apparatus for Flash X-ray irradiation of material, referred to in this description as a Flash X-ray Irradiator (FXI). The FXI includes a Flash X-ray source comprised of an electron gun and an anode.

5 The electron gun comprises a field emission cold cathode having an electrode emitting surface, and a grid for controlling electron flow from the cathode to the anode. The anode has an electron-receiving main surface and an X-ray emitting, oppositely facing main surface. The X-ray emitting surface emits X-radiation into an irradiation volume. The X-ray emitting surface of the anode has orthogonally oriented first and second

10 dimensions of greater than 2 millimeters each. A high voltage pulse power supply powers the Flash X-ray source. The electron gun, anode and high voltage pulse power supply are so constructed as to create sufficient X-radiation in said irradiation volume to achieve a desired level of irradiation of material in said volume.

In a preferred form, the FXI according to the invention provides a means for

15 rapidly irradiating large volumes of materials.

The Flash X-ray Irradiator has a maximum energy output below the threshold of ⁶⁰Cobalt, so as to avoid the problem of inducing radioactivity in material being irradiated. The Flash X-ray Irradiator also avoids the use of radioisotopes, as in the prior art use of ⁶⁰Cobalt for irradiation, so as simplify operation and licensing, and eliminate the

20 possibility of diversion of such radioisotopes for illegal purposes.

Unlike conventional X-ray sources, the Flash X-ray Irradiator can simultaneously achieve both the high energy and fluence necessary for practical sterilization, decontamination, and environmental remediation applications. It can also be used for various manufacturing processes.

25 BRIEF DESCRIPTION OF THE DRAWING

In the drawing figures, in which like reference numerals refer to like parts:

FIG. 1 shows a cross-sectional view of the cylindrical version of the Flash X-Ray Irradiator, with cross hatching omitted for various parts such as the anode.

FIG. 1A shows a detail view of the circled region 117 in **FIG. 1** showing the

30 interaction of electrons with the anode to create X-rays in the transmission mode.

FIG. 2 shows a cross-sectional view of the planar version of the Flash X-ray Irradiator.

FIG. 2A shows a detail view of the circled region 125 in FIG. 2 which is modified to include a supplementary energy storage capacitor.

5 FIG. 3 shows a schematic diagram of a cascade voltage amplifier used a high voltage pulse power supply.

FIG. 4A shows a schematic diagram of a two-stage asynchronous pulse modulator used a high voltage pulse power supply.

10 FIG. 4B shows a schematic diagram of a three-stage asynchronous pulse modulator used a high voltage pulse power supply.

FIG. 5 shows an upper plan view in diagrammatic form of a cylindrical Flash X-ray Irradiator mounted in a standard shipping container and integrated with a turbo-jet engine powered generator and a high voltage power supply.

15 FIG. 6 shows a cross-sectional view from the left side of a planar Flash X-ray Irradiator integrated into a postal mailbox, with various thin parts shown as single lines and with cross-hatching omitted on various surfaces.

FIG. 7 shows a side-plan view in diagrammatic form of a planar Flash X-ray Irradiator mounted on the underside of a truck, with associated equipment also mounted on the truck.

20 FIG. 8 shows a side-plan view in diagrammatic form of an underwater version of the planar Flash X-Ray Irradiator suspended from a crane on a boat, with associated equipment also mounted on the boat.

FIG. 9 shows a cross-sectional view of a spherical version of the Flash X-Ray Irradiator, with cross hatching omitted for various parts such as the anode.

25

DETAILED DESCRIPTION OF THE INVENTION

For convenience, a list of drawing numbers and associated parts for Figures 1-9 can be found near the end of this detailed description of the invention.

X-ray Generation Process

FIGS. 1 and 2 show two different embodiments of a Flash X-Ray Irradiator (FXI). An FXI is generally a transmission type X-ray tube. It is differentiated from the prior art by several features. The first is its electron gun, which, in **FIG. 1**, comprises a cathode 111 and a grid 113, and in **FIG. 2** comprises a cathode 112 and a grid 114. These electron guns can achieve current densities up to 80,000 Amps/cm² in the pulse mode, which ultimately result in high levels of irradiation. For instance, the FXI can achieve high energy of typically 0.1 – 5 MeV, a high beam current of typically 50 KiloAmp – 1 MegaAmp pulses, a high fluence of typically 16 KiloGrey/pulse, and a repetition rate typically up to 100 Hz.

The Flash X-ray Irradiator 109 of **FIG. 1** may advantageously include a supplementary energy storage capacitor 124a which would be coaxially wound around the cathode 111. This allows local storage of substantially greater amounts of energy without changing the physical size of the Flash X-ray Irradiator 109. Similarly, a planar implementation of a supplementary energy storage capacitor may be advantageously incorporated in the planar Flash X-ray Irradiator 110. With reference to **FIG. 2A**, which is modified to include a supplementary storage capacitor 124b between cathode support 144 and the cathode 112, for the same purpose as the supplementary storage capacitor 124a of **FIG. 1**.

Referring to both **FIGS. 1 and 2**, in operation, the cathode 111 or 112 is charged by the power supply 130a or 130b or 130c of **FIGS. 3 or 4A or 4B**, respectively. A bias resistor (not shown) is connected between the cathode 111 or 112 and the grid 113 or 114 and is used to create a voltage on the grid so that the tube is normally in a standoff condition (not conducting). When a control signal of ground potential is applied to the grid, it releases control of the cathode and the cathode discharges. Electrons then travel from the cathode to the anode 115 or 116. When they strike the anode, they create Bremsstrahlung X-radiation. Bremsstrahlung is German for "braking radiation" and is created when electrons 134 with a potential in excess of 23 kiloVolts are suddenly stopped, in this case by striking the anode. When they hit the anode, a mixture of X-radiation 136 and secondary electrons (not shown) are liberated from a X-ray emitting surface of the anode in an isotropic fashion. Since the anode is thin in comparison to the penetration depth of the incident electrons, there

is a preponderance of X-radiation transmitted from an electrode-receiving surface of the anode, through the anode, to an irradiation volume beyond.

Referring to both **FIGS. 1** and **2**, the thickness of the anode of the X-ray tube 109 or 110 is chosen to enable generation of a desired level of X-radiation. In particular, the thickness of the anode depends on a combination of factors, including the desired output voltage, the incident electron voltage, and the atomic number of the material from which it is fabricated, which number is typically over 50.

Further, the cathode and grid are fabricated to extremely tight tolerances, typically on the order of 25 microns on any dimension, even if the structure is meters long. The X-ray tube 109 or 110 is pumped to an extremely high vacuum, typically on the order of 1×10^{-9} Torr. Although not shown in **FIGS. 1** and **2**, X-ray 109 or 110 incorporate radiation shielding for protection of persons in the vicinity of the device. The material and thickness of the radiation shield is a function of the voltage applied to the tube.

In **FIG. 2**, the anode 116 is preferably flat. However, the anode 116 can be formed in various shapes, such as arcuate in cross section as long as the X-ray emitting surface of the anode 116 is shaped so as to not enclose the irradiation volume. Preferably, the anode is thin, by which is meant that one dimension is much smaller than the other two orthogonal dimensions, and receives electrons from the cathode on one main surface and emits X-rays from a second, oppositely facing main surface.

For irradiating a material 148, such material must pass through the irradiation volume mentioned above. This can occur in three general ways: (1) the material can be moved through a stationary irradiation volume; (2) the irradiation volume can be moved past stationary material; or (3) both the irradiation volume and material can move simultaneously. The embodiment of **FIG. 1** is particularly adapted to the first way (1), whereas the embodiment of **FIG. 2** is particularly adapted to the first (1) and second (2) ways. In this connection, as mentioned above, in the embodiment of **FIG. 2**, the X-ray emitting surface of the anode 116 is shaped so as to not enclose the irradiation volume. In contrast, in both **FIGS. 1** and **9**, the irradiation volume is enclosed.

FIG. 1A diagrammatically shows electrons 134 that strike anode 117 on an electron-receiving surface of the anode. This results in an opposite, main X-ray

emitting surface of the anode 117 emitting X-radiation 136 within the cylindrical inner volume of the anode. Similarly, in FIG. 2, electrons 134 that strike anode 116 cause a lower-shown, X-ray emitting surface of the anode to emit X-rays 136 that extend, typically below the depth shown, through an irradiation volume of material 148.

5 The X-ray emitting surface of the anode 115 (FIG. 1), 116 (FIG. 2) preferably has orthogonally oriented first and second dimensions of greater than 2 millimeters each. To achieve this, in the case of FIG. 1, the linear dimensions of the active portions of the cathode, grid and anode are the same; and in the case of FIG. 2, the length and width of the active portions of the cathode, grid and anode are the same.

10 The electron gun 111, 113 (FIG. 1) or 112, 114 (FIG. 2), anode 115 (FIG. 1) or 116 (FIG. 2) and high voltage pulse power supply 130 are so constructed as to create sufficient X-radiation in the irradiation volume mentioned above to achieve a desired level of irradiation of material 148 in that volume.

15 Referring to both FIGS. 1 and 2, to facilitate introduction of high voltage electrical signals through a conductive wall 137 to the cathode 111 or 112 and grid 113 or 114, vacuum-sealed insulated feedthroughs 118 and 120 are used. The anode 115 or 116 is connected to ground to complete the circuit. If needed, a cathode electrical lead (not shown) and a grid electrical lead (not shown) can be used to interconnect the vacuum-sealed insulated feedthroughs 118 and 120 to the cathode 111 or 112 and the
20 grid 113 or 114, respectively.

Referring to both FIGS. 1 and 2 as well to other figures herein showing FXI embodiments, the material to be irradiated 148 has motion relative to the irradiation volume and constitutes flowing material 128 through the irradiation volume.

25 There are several critical conditions that must be met when designing a grid for a FXI. They are.

- (1) The grid-cathode spacing must be constant across the length of the grid. This is usually accomplished by placing the grid under high tension or building it with a rigid structure.
- (2) The number of elements in the grid must be high enough to ensure a constant
30 and uniform electric field in the grid-cathode region.

(3) There must be no sharp edges or burrs anywhere in the grid structure, individual elements can be round, flat or high aspect-ratio elliptical shapes. All edges must be fully radiused. In this context, fully radiused means that the edge in question has a radius equal to half the thickness of the material.

5 The actual implementation of these design rules is determined by the size of the grid being built.

Cascade Voltage Amplifier

The Cascade Voltage Amplifier 130a of FIG. 3 provides a novel way to obtain high voltage pulses for operating the Flash X-Ray Irradiators described herein, and is
10 far more reliable and compact than the Marx generator circuit traditionally used for generating high voltage pulses. The circuit of 130a is the preferred embodiment for generating high voltage pulses for the FXI system.

In the first stage 135a, a negative high voltage power supply (not shown) is connected to input terminal 162 and is used to charge energy storage capacitor 152.
15 Cold Cathode Field Emission Triode 150a in conjunction with inductor 156a, resistor 158a, capacitor 154a and variable resistor 160a has dual functions. They are used to both form the pulse and to amplify it by anywhere from 3dB to 10dB depending on the gain of the tube 150a as manufactured. The variable resistor 160a is used to set the standoff bias voltage of the tube 150a. The inductor 156a is used to block DC
20 components from reaching the grid of tube 150a. The RC network of 158a and 154a is used to create a time constant to delay the conduction of the tube 150a.

Subsequent stages 135b, 135c and 135d are identical in function and operate as Class A amplifiers. The only differences are the voltage ratings. It is obvious that the voltage ratings of the components must be commensurate with the voltages
25 anticipated in that stage of the circuit. Similarly, the tubes 150b, 150c and 150d are progressively larger in size to accommodate the increasing voltage.

All stages of the circuit are connected to a common RF ground 164 in accordance with good RF design practice.

The inductor 156e is used to prevent reverse voltage from reaching the
30 charging power supply. This may be augmented by a series diode (not shown) of appropriate voltage for additional protection

The current shunt 168 is an extremely low inductance low value resistor, typically in the 50 to 100 micro-Ohm range. It is necessary to apply a skin depth calculation to the output of this shunt present at the Jack 171a to obtain a corrected and accurate current reading. The jack 171a is of a type that supports the anticipated
5 bandwidth of the signal generated by the current shunt 168 based on the rise time of such signal. The output signal of the current shunt 168 is typically matched to 50 Ohms impedance.

It is noted that it is possible to reach higher voltage by adding additional stages in series with the main circuit. Care must be taken to ensure that the voltage ratings
10 and insulation designs are commensurate with the voltages encountered. It is not uncommon to put a circuit of this type in an insulating oil tank for higher reliability.

Asynchronous Pulse Modulator Design

An alternative to the Cascade Voltage Amplifier 130a of FIG. 3 is the Asynchronous Pulse Modulator 130b or 130c of FIGS. 4A and 4B. The following
15 description of the Asynchronous Pulse Modulator refers to both FIGS. 4A and 4B. In these figures, in the first stage, a negative high voltage power supply (not shown) is connected to terminal 162. This power supply charges energy storage capacitor 162. A voltage-monitoring circuit consisting of resistor 158e, capacitor 154e, resistor 158f, capacitor 154f, variable capacitor 172a and cold cathode field emission triode 150f is
20 used to detect the charge state of energy storage capacitor 152. This measurement is made using a capacitive voltage divider consisting is 154e, 154f and 172a. When the voltage across the divider reaches a preset limit (determined by the setting of variable capacitor 172a), Cold Cathode Field Emission Triode 150f conducts and pulls the grid of cold cathode field emission triode 150e to ground. This causes Cold Cathode Field
25 Emission Triode 150e to go into conduction which, in turn, discharges energy storage capacitor 152 to discharge in to the primary of the pulse transformer 174a.

The second stage starts at the secondary of the pulse transformer 174a, which typically has a turns ratio in excess of 1:10. This transformer steps the voltage up to a desired value. This is detected by a second capacitive voltage divider consisting of
30 capacitor 154g and variable capacitor 172b. As is the case with the primary stage, when the network consisting of capacitor 154g, variable resistor 172b, resistor 158h, capacitor 154i, capacitor 154h, and Cold Cathode Field Emission Triode 150h reaches

a predetermined voltage, the tube 150h conducts, pulling the grid of Cold Cathode Field Emission Triode 150g to ground and causes this triode to go into conduction, allowing the pulse present from the secondary of the pulse transformer 174 to reach the output terminal.

5 It is noted that resistors 158e and 159g are bias resistors used to keep their
respective Cold Cathode Field Emission Triodes 150e and 150g in a standoff state in
until triggered by the Cold Cathode Field Emission Triodes 158f and 158h respectively.

The current shunt 168c is an extremely low inductance low value resistor, typically in the 50 to 100 micro-Ohm range. It is necessary to apply a skin depth calculation to the output of this shunt(s) present at the jack(s) 171b or 171c to obtain a corrected and accurate current reading.

It is possible to reach higher voltage by adding additional secondary stages in series with the main circuit as shown in FIG. 4B. In the Asynchronous Pulse Modulator of FIG. 4B, stages are separated by pulse transformers 174a and 174b. The additional stage following transformer 174b is the same as the stage between transformers 174a and 174b other than voltage ratings of components. Care must be taken to ensure that the voltage ratings and insulation designs are commensurate with the voltages encountered. It is not uncommon to put a circuit of this type in an insulating oil tank for higher reliability.

20 **Mobile Cylindrical Irradiator System**

As illustrated in FIG. 5, a practical configuration 176 of the Flash X-Ray Irradiator places a cylindrical FXI 109 in a standard shipping container 192 with all its support equipment integrated.

In the preferred embodiment, a small turbo-jet engine 188 is mounted to the floor of the container 192. The rotating shaft of the engine 188 is connected to an electrical generator 190 having an internal gearbox speed reducer. This configuration is well-known in the electric utility industry as a means for generating power to compensate for peak power surges. The exhaust of turbo-jet engine 188 is connected to a Venturi vacuum pump 180, which is, in turn connected to the input port of the FXI 109. This configuration of engine 188, pump 180 and generator 190 makes use of both the motive power of the pump for running the generator and of the exhaust of the pump to power a Venturi vacuum pump. Fuel tanks 186 provide a local source of fuel to

allow independent operation for some number of hours, which depends on the size of the jet engine and the fuel tanks.

5 The material to be irradiated 148 is drawn by suction into the Venturi inlet port 182. This flowing material 128 passes through the device 109 and is exposed to high-intensity X-rays 136 in the interior space of the FXI 109 and then exhausted through the output port 194. The material 148 may be of any form which will flow through a pipe. A high voltage power supply 130a, 130b or 130c etc., provides the necessary operating energy for the FXI 109. The high voltage power supply is powered by the output of the electrical generator 190.

10 The air inlet 198 draws in outside air and flows it over the generator 190 to cool said generator 190 prior to this air entering the air inlet 198 of the turbo-jet engine 188. This arrangement promotes energy efficiency in operating the FXI. There is an air filter 199 located in the air inlet 198 to keep airborne dirt from entering the turbo-jet engine 188 and generator 190.

15 Because the configuration 176 is mounted in a standard shipping container 192, it can be transported by tractor trailer, ship or air with great ease.

Irradiator for Mail-Receiving Device

As illustrated in FIG. 6, a practical configuration 200 of the Flash X-Ray Irradiator places a FXI 110 of FIG. 2 in a mail-receiving device. In use, a person opens
20 door 226 as shown by dashed-line arrow 226a and places some mail or other items 137 in the inlet chute 204. When the inlet door 226 closes, the upper door 208 to the irradiation chamber 205 opens as shown by dashed-line arrow 208a and the mail 137 drops into the irradiation chamber 205, and then the upper door 208 closes. The X-ray tube 110 turns on and saturates the mail 137 with high energy X-ray radiation such as
25 that circled at 136. A dosage monitor 218 embedded in the rear wall of the chamber detects the irradiation 136, and when the irradiation has reached a satisfactory level, shuts off the X-ray tube 110. The lower door 210 to the irradiation chamber 205 then opens as shown by dashed-line arrow 210a and the sterilized mail 137 drops into the storage bin 220 below to await collection by the postal carrier. The lower door 210
30 then closes, and the configuration 200 resets for the next use.

The upper door 208 is hinged and opens upward, while the lower door 210 is hinged and opens downward by actuators (not shown). There are seals on both the

upper door 208 and the lower door 210 which ensure an air-tight seal when the door is closed, to prevent biological contaminants from entering the storage bin 220. The storage bin may optionally be under slight positive pressure provided by the pressurizer 224 to further prevent secondary contamination of the mail. The sterilized mail is
5 removed from the large front-access door 222.

A high voltage power supply 130a etc. provides the operating voltages for the X-ray tube 110. The X-ray tube 110 and the irradiation chamber 205 are surrounded with radiation shields front shield 212, rear shield 216, left and right shields (not shown) and upper door 208 and lower door 210, which contain shielding.

10 The control circuitry will quarantine mail or other items 137 in the irradiation chamber 205 if a preset minimum dosage of X-rays 136 is not achieved, to prevent contamination of previously sterilized mail for any of several reasons. One such reason would be failure of the irradiation system, for any reason. Another reason is to prevent biotoxins contained in a shielded package from entering the storage bin.

15 The entire system may be housed in an enclosure that resembles a standard postal mailbox, vertical mail chutes as found in office and residential buildings, or mail slots as found in post offices and other locations.

Truck-Mounted FXI

A practical configuration 230 of the FXI is to mount it on the underside of a truck
20 as shown in FIG. 7. This configuration allows rapid decontamination of underground contamination in material 148 with X-rays 136. This is particularly useful for remediation of leaking gasoline and oil tanks at gasoline filling stations, refineries and storage yards.

In FIG. 7, a preferably planar FXI 110, such as described in connection with FIG.
25 2 above, is mounted to the underside of a truck 292 of sufficient load-bearing capacity. The FXI 110 is mounted to allow sufficient ground clearance when the truck is driven. X-rays 136 from an X-ray emitting surface of the anode (not shown) extend, typically below the depth shown, through an irradiation volume of material 148.

To prevent stray radiation from escaping from the FXI 110, a flexible multi-layer
30 radiation shield 234 may be mounted around the periphery of the FXI. This radiation shield is made from overlapping strips of a rubberized material that has a high content of lead, tungsten, molybdenum, or bismuth. There is a plurality of layers of such strips

disposed in such a fashion that one layer covers the slight gaps between strips on the adjacent layer. A radiation shield of this design is sufficiently flexible to allow the shield to conform to obstacles without compromising the radiation integrity of the system. The high voltage power supply 130, generator 190 and fuel tank 186 are mounted on the
5 bed of the truck 292.

Underwater Irradiation System

As shown in FIG. 8, a practical implementation of the FXI is a waterproof configuration 240 designed for operation submerged in water. This version is particularly useful in decontamination and remediation of river bottoms and coastal
10 waters by passing X-rays into material 148 to be irradiated. FIG. 8 shows X-rays 136 from an X-ray emitting surface of the anode (not shown) extend, typically below the depth shown, through an irradiation volume of material 148.

The high intensity radiation degrades organic hydrocarbon contaminants into more benign compounds.

15 A boat 242 contains a generator 190, a fuel tank 186, and a high voltage power supply 130. There is a crane and winch 246 mounted on the boat to allow raising and lowering the waterproof FXI 310. A cable 244 is connected between the winch and crane 246 and the FXI 310 to raise and lower the FXI 310, including raising it entirely out of the water. The winch and crane is capable of placing the FXI 310 on the deck of
20 the boat 242. The waterproof FXI 310 may be nearly identical to the standard planar FXI 110, except that it has fully waterproofed electrical connections (not shown).

To prevent stray radiation from escaping, there is a flexible multi-layer radiation shield 234 mounted around the periphery of the FXI. This radiation shield is made from overlapping strips of a rubberized material that has a high content of lead, tungsten,
25 molybdenum, or bismuth. There is a plurality of layers of such strips disposed in such a fashion that one layer covers the slight gaps between strips on the adjacent layer. A radiation shield of this design is sufficiently flexible to allow the shield to conform to obstacles without compromising the radiation integrity of the system. The rubberized material is not damaged by exposure to water.

30 Spherical FXI

It is possible to build the FXI in a spherical geometry as shown in FIG. 9. It is similar in construction to the cylindrical geometry version of the X-ray tube 109 of FIG.

1 except that it is curved in two dimensions instead of one. Operation is the same as the cylindrical FXI.

Referring to FIG. 9, the spherical FXI 250 is contained within a housing 252. There is a spherical cathode 258 which concentrically surrounds a spherical grid 256, which in turn concentrically surrounds a spherical anode 254. The interior volume of the spherical anode 254 is the irradiation volume 278. An electrical connection to the cathode 258 is provided via feedthrough 270 which contains the cathode terminal 272 that provides a connection to the cathode 258. An electrical connection is provided via feedthrough 266 for the grid 256 which contains the grid terminal 268 that provides a connection to the grid 256. An electrical connection is provided via feedthrough 262 for the anode 254 which contains the anode terminal 264 that provides a connection to the anode 254 via the internal anode lead 260. An inlet pipe 274 provides a means of introducing material 148 to be irradiated into the irradiation volume 278, and an outlet pipe 276 provides a means of egress for materials that have been irradiated.

In operation, the cathode 258 is charged by an external high voltage power supply 130a, 130b or 130c, etc. The grid 256 is connected to the cathode 258 by a bias resistor (not shown) to establish a standoff condition. When the grid terminal 264 is grounded, the electrons 134 flow to the anode 154. When the electrons strike the anode 254, they produce an X-ray flux 136 in the irradiation volume 278. The anode 154 is connected to ground 164 by internal anode lead 260 and anode terminal 264 contained within anode feedthrough 262. The entire interior volume of the housing 252 is held at a vacuum 132 of typically 1×10^{-9} Torr.

Other Applications of Flash X-ray Irradiator

In the case of bio-decontamination, no life-form can withstand exposure to radiation at the energies and fluences contemplated by the Flash X-ray Irradiator. An example of this is the Anthrax bacterium (*Bacillus Anthracis*). In recent years, as a result of the Anthrax attacks of 2001 in the United States, the use of high-energy radiation has become the standard for eradicating these bacteria. The Anthrax bacterium is killed with 100% reliability at a dosage of 16 KiloGreys. The high-energy radiation breaks bonds in the bacteria resulting in its destruction. These bacteria are regarded as the most resistant of all known bacteria, thus any treatment that is effective against them will also be effective against everything else.

The Flash X-ray Irradiator uses this principle in the decomposition of organic compounds. By breaking the bonds holding complex organics together, these compounds can be reduced to simpler, less hazardous and mostly benign compounds. An example of this is found in the decomposition of dioxin, which along with other
5 higher organic compounds, cause pollution of the waterways. Dioxin is a heterocyclic organic compound with the chemical formula $C_{12}H_{10}O_2$. Exposure to high energy radiation breaks this down to H_2O , CO_2 and HCl . The Flash X-ray Irradiator can also be implemented in an underwater housing and used to decontaminate river bottoms in situ (without dredging). The quality of remediation is significantly higher as a result of the
10 elimination of the release of plumes of contaminated material by the dredging process.

Sterilization & Environmental Remediation

The Flash X-Ray Irradiator in various configurations can be used in the areas of Decontamination and Remediation in applications such as sterilization of water, in-situ remediation of hydrocarbon contaminated soils (such as gas stations), safe
15 decomposition of all known hydrocarbon compounds, volatile organic compounds (VOCs) polychlorinated biphenyls (PCBs), dioxins, sewage outfall treatment, stormwater runoff treatment, in-situ remediation of riverbed contamination, medical waste stream treatment, oil and chemical spill cleanup, organic dye contaminated runoff, biologically contaminated gaseous waste streams such as output air from
20 biohazard research facilities and hospitals which may contain highly virulent species, decontamination of fish farming pens, decontamination of postal mail, decontamination of animal factory farm waste streams, sterilization of potable water, food processing waste treatment, sterilization of bilgewater of ocean-going vessels to prevent migration of alien biological species, sterilization of medical products, sterilization of
25 pharmaceuticals, sterilization of large swimming pools, sterilization of food products, irradiation of plastics and elastomers for electronics, reformation of waste products.

The applications can be further categorized into the four major sections of
1. Hydrocarbon Remediation, 2. Decontamination, 3. Sterilization and 4. Manufacturing.

1. Hydrocarbon Remediation

30 **Hydrocarbon contaminated soils (such as beneath gas stations and refineries):** One of the largest environmental problems that the global community faces is contamination of the ground beneath gas stations, oil terminals, or any oil handling

facility due to leaking tanks. Hundreds of millions of dollars are both spent and wasted in the U.S. due to the inefficient remediation techniques currently available. A portable system based on the Flash X-ray Irradiator technology is expected to be able to decompose all hydrocarbons in the soil either in situ or excavated from an average gas station in under one day. This compares favorably to the amount of time, often months to years, it currently takes to achieve the same end result. This reduction in remediation time leads to a dramatic savings in effective cost for the service stations, oil terminals or any oil handling facility. A similar situation exists with in-situ remediation of contaminated riverbed, or sea bed or lake bed of coastal waters.

- 10 **Safe Decomposition of Hydrocarbon & Organic Compounds:** The same technology and hardware used for hydrocarbon contaminated soils can be used to decompose all hydrocarbon compounds.

Volatile Organic Components: Volatile Organic Compounds (VOCs) represent a large regulated class of environmental contaminants. The Flash X-ray Irradiator safely decomposes VOCs rapidly and economically. This class of environmental contaminants is very large as the U.S. Environmental Protection Agency has reported at least 487 contaminants.

Polychlorinated Biphenyls: Polychlorinated Biphenyls (PCBs) are another environmental contaminant that is difficult to manage. While there has been a long-standing effort to remove these materials from the environment, the procedures are expensive and time-consuming. In many cases, the decision has been made to leave the PCBs in place as there has previously been no cost-effective method of removing and destroying them. In certain cases, Flash X-ray Irradiator technology can destroy the PCBs in situ, a capability which has never been available before.

25 **Dioxins:** Dioxin is a heterocyclic organic compound with the chemical formula $C_{12}H_{10}O_2$. Dioxins are a particularly noxious and toxic series of compounds. They are generally byproducts of other organic processes. Previous attempts to destroy dioxins by incineration have produced its own set of byproducts that are damaging the environment. Current scientific literature uses the name "dioxins" commonly for simplification to denote the chlorinated derivatives of dibenzo-*p*-dioxin, more precisely the polychlorinated dibenzodioxins (PCDDs). The polychlorinated dibenzodioxins, which can also be classified in the family of halogenated organic compounds

(halocarbons), have been shown to bioaccumulate in humans and wildlife due to their lipophilic (the ability of a chemical compound to dissolve in fats, oils, lipids, and non-polar solvents) properties, and are known teratogens, mutagens, and carcinogens. The Flash X-ray Irradiation process will efficiently decompose these dioxins into harmless compounds and gases.

2. Decontamination

Sewage Outfall Treatment: Sewage treatment plants are not completely effective in the removal of organic and biological contaminants. Most sewage treatment plants have some form of treatment process at the end of the process cycle to address this problem. Many known technologies such as the commonly used ultraviolet treatment are energy-inefficient and maintenance-intensive and none achieve total decontamination. The sludge (sewage outfall) contaminates the area into which it is discharged. The Flash X-ray Irradiator has the capability to resolve these problems by completely sterilizing the sludge, thereby mitigating the issues associated with its disposal.

Stormwater Runoff Treatment: The U.S. Environmental Protection Agency has recently mandated that all stormwater runoff be treated to remove all biological contamination. There is currently no technology available to efficiently perform this task. The Flash X-ray Irradiator can be produced in large quantities at sufficiently low cost to allow municipalities to install this technology to remediate this problem.

Medical Waste Stream Treatment: Due to the ability of the Flash X-ray Irradiator to generate radiation fluxes in the range of 16 KiloGreys per pulse, it is practical to consider the use of this technology to sterilize waste streams from hospitals to completely eliminate any pathogens. It is anticipated that the use of this technology would eliminate the need for special handling and disposal of medical wastes.

Oil and Chemical Spill Cleanup: Traditional approaches to oil spill cleanup are relatively crude. They consist of using floating booms to contain the spill and using slow-moving boats with specialized pickup systems (skimmers) to remove the oil from the surface of the water. However, these systems are only successful if promptly applied and used on calm water. With pumping velocities of 25,000 gallons per minute which allow for cleanup, the high volume processing capacity of the cylindrical Flash X-ray Irradiator changes the paradigm of oil and chemical spill mitigation.

Organic Dye Contaminated Runoff Treatment: Factories that either produce or use organic-based dyes represent another pollution source, which in some areas of the world constitutes the predominant source of pollution. Because these dyes (mostly used in fabric coloring and printing inks) are complex hydrocarbons, they can be readily decomposed into safe compounds for disposal.

Biologically Contaminated Gaseous Waste Stream Treatment: Output air from biohazard research facilities and infectious wards in hospitals contain highly virulent species which must be killed before the air is exhausted into the atmosphere. The cylindrical version of the Flash X-ray Irradiators when coupled with a high velocity air handling system is well suited for this application. The same system used for stormwater runoff treatment and similar applications can be effectively used for this application.

Decontamination of Fish Farming Pens: A novel application for the Flash X-ray Irradiator is in sterilizing the water in fish farming pens. The high throughput of the Flash X-ray Irradiator coupled with its high sterilizing efficiency offers a means to rescue this industry. Norway has had to cut down its production of farmed salmon due to contamination of the fish. The Flash X-ray Irradiator coupled with an efficient water pumping system will be effective in removing the biological contaminants, allowing farmers to produce a higher yield of healthy fish.

Decontamination of Postal Mail: Following the U.S. cases of Anthrax in 2001 and 2002, it was realized that postal mail was extremely vulnerable to bio-contamination. Many institutions in the U.S. have already installed irradiation systems to decontaminate their incoming postal mail. To achieve decontamination of mail, the planar Flash X-ray Irradiator configuration, a flat panel irradiator mounted over a conveyor belt, works best. The panel can be several meters wide and the belt speed is high. This application is similar to the food irradiation application, in that the significantly higher beam current of the Flash X-ray Irradiation technology will allow substantially higher throughput and lower operating costs. There are many more institutions that would benefit from adding this technology such as banks, credit card companies, insurance companies, or other organizations that handle large volumes of incoming mail.

Decontamination of Animal Factory Farm Waste Streams: A single large pig farm with 500,000 pigs produces more waste on a daily basis than the population of 10 million on the entire Island of Manhattan in New York. At one time, factory farms were located in remote areas and the waste was either stored in large retention ponds or injected into the ground. The expansion of urban areas has begun to encroach on the areas where factory farms are located. The odors associated with these farms are substantial and the health risks are enormous. The potential for groundwater contamination by deadly pathogens being introduced into the groundwater is an actual threat. Many phosphate contaminated waste streams can be treated using the Flash X-ray Irradiator. Both types of the Flash X-ray Irradiation system, cylindrical and planar, will be useful in this field. The cylindrical irradiator will be used in permanent and portable installations.

3. Sterilization

Sterilization of Potable Water: Providing clean, fresh water is a critical issue in every country. The Flash X-ray Irradiation technology can sterilize water more effectively than currently-used chlorine and ultraviolet remediation technologies. Its ability to process large volumes of water and its low maintenance requirements make it the preferred technology for potable water treatment. The pipe that the water flows through during the irradiation cycle is a stainless shell thus complying with all regulatory requirements for potable water systems. The Flash X-ray Irradiator is available in standard sizes up to 1 meter internal diameter. Larger sizes can be accommodated.

Food Processing: Commercial irradiation of food products is already a well-established process. The Flash X-ray Irradiator can effectively penetrate this market due to its lower operating cost and higher throughput. For example, current systems using electron beams or X-rays can generate a beam current of about 2 Amperes. By comparison, the similarly-sized Flash X-ray Irradiator system will produce a beam current in excess of 20,000 Amperes. This means that the time required to achieve the same level of processing is cut by a factor of 10,000. This factor, when combined with the significantly higher reliability, will solve the problem at a greatly reduced cost.

Sterilization of Bilgewater of Ocean-going Vessels: In order to prevent and treat the effects of migration of foreign biological species into the territorial waters of any other country, the Flash X-ray Irradiator can be installed on cargo ships. This is an

area that has received much attention in the environmental community. Cargo ships using seawater for ballast are required, in the U.S. and many other countries, to decontaminate ballast water prior to dumping at the destination port. Dumping of contaminated ballast has been proven to introduce harmful alien species of flora and fauna into destinations waters, with devastating results. So, there is a great need for the FXI technology.

Sterilization of Medical Products: Surgical instruments, bandages, sutures, medical procedure kits and a wide array of other medical products which are routinely sterilized by exposure to ⁶⁰Cobalt can be treated with the Flash X-ray Irradiator. The systems for sterilization with ⁶⁰Cobalt are expensive and cumbersome. The Flash X-ray Irradiator can replace these systems with both lower installed and operating costs and with equal sterilization efficiency.

Sterilization of Pharmaceuticals: The same techniques for sterilization of medical products and other bio-decontamination applications can be applied to pharmaceutical production. A wide array of pharmaceutical products is currently sterilized using various radiation and electron-beam sources. In this application, the Flash X-ray Irradiator offers higher throughput and lower operating and installed costs than existing technologies.

Sterilization of Large Swimming Pools: Swimming pools are subject to a large number of bio-contaminants including but not limited to urine, feces, blood, other bodily fluids and other random contaminants. While chlorine is traditionally used for decontamination of swimming pools, it is expensive, emits an unpleasant odor and chlorine dispensing systems require constant maintenance. Swimmers frequently find the residual smell of chlorine offensive, and bathing suits can decompose due to the acidic nature of the swimming pool water. Further, the human eye is susceptible to extreme irritation from chlorine. All of these problems can be mitigated by the use of a high throughput Flash X-ray Irradiator.

Sterilization of Food Products: The same arguments for sterilization of medical products, and other bio-decontamination applications can be applied to the processing of food products. Irradiation has been shown to increase the shelf life of products, eliminate the need for refrigeration in some products (by killing the bacteria that cause spoilage), and increase the safety of packaged foods in general. The same

set of advantages applies here as in other applications: higher throughput, lower operating and installed cost.

4. Manufacturing

Irradiation of Plastics and Elastomers for Electronics: There are many applications of irradiated plastics in electronic manufacturing. The largest application is the production of "heat-shrink" tubing by X-ray radiation-induced cross-polymerization. The Flash X-ray Irradiator technology can allow significantly higher production rates while simultaneously reduce manufacturing costs.

Reformation of Waste Products: The Flash X-ray Irradiator can combat air pollution caused by combustion gases from industrial plants. Typical byproducts of the decomposition of combustion gases are sulfur dioxide (SO₂) and nitrous oxides (NO_x). The Flash X-ray Irradiator is capable of reformation of certain waste products, for instance cellulosic waste, a byproduct of paper-making, into higher order hydrocarbons.

Long-Felt but Inadequately Solved Needs

Many of the foregoing applications of the X-Ray Irradiator relate to areas of long-felt and substantial need that lack a solution comparable to that of the X-Ray Irradiator. For instance, the problems associated with using the radioisotope ⁶⁰Cobalt for irradiation, as mentioned above, persist; and conventional X-ray sources lack the fluence necessary for practical sterilization, decontamination, environmental remediation and manufacturing applications.

Drawing Reference Numbers

The following is a list of drawing reference and associated parts for each figure, for convenience of reference:

Figures 1 and 2		Fig. 1	Fig. 2
25	Flash X-ray Irradiator	109	110
	Cathode	111	112
	Grid	113	114
	Anode	115	116
	Anode Thin Section Region	117	

	Cathode Feedthrough	118	
	Grid feedthrough	120	
	Radiation Shield	122	
	Supplementary Energy Storage Capacitor	124a	124b
5	Circled region in Fig. 2		125
	Pipe Flange	126	
	Flowing Material	128	128
	Power Supply	130	
	Vacuum Region	132	
10	Electrons	134	
	X-rays	136	
	Housing	137	138
	Cathode Electrical Lead	140	
	Grid Electrical Lead	142	
15	Cathode Support		144
	Pipe	146	
	Material to Be Irradiated	148	
	Figure 1A	Fig. 1A	
20	Cathode	117	
	Electrons	134	
	X-rays	136	
	Figure 2A	Fig. 2A	
25	Modification of circled region in Fig. 2	125	
	Cathode	112	

	Supplemental Energy Storage Capacitor	124b
	Electrons	134
	Cathode support	144
5	Figure 3	Fig. 3
	Cascade Voltage Amplifier	130a
	Cold Cathode Field Emission Triode	150 (a, b, c, d, etc.)
	Energy Storage Capacitor	152
	Circuit Capacitor	154 (a, b, c, d, etc.)
10	Inductor	156
	Fixed Resistor	158 (a, b, c, d, etc.)
	Variable Resistor	160 (a, b, c, d, etc.)
	HVDC Power Supply	162
	Ground	164
15	Current Measuring Shunt	168
	HV Output Terminal	170
	Current Shunt Output Jack	171a
	Figures 4A and 4B	Figs. 4A & 4B
20	Asynchronous Pulse Modulator	130a (Fig. 4A only)
	Asynchronous Pulse Modulator	130b (Fig. 4B only)
	HVPS	162
	HV Output Terminal	170
	Ground	164
25	Energy Storage Capacitor	152
	Circuit Capacitor	154 (a, b, c, d, etc.)

	Variable Capacitor	172a, 172b
	Resistor	158 (a, b, c, d, etc.)
	Current Measuring Shunt	168
	Pulse Transformer	174
5	Cold Cathode Field Emission Triode	150 (a, b, c, d, etc.)
	Current Shunt Output Jacks	171 b, c, d
	Figure 5	Fig. 5
	Vehicle-mounted configuration	176
10	Flash X-ray Irradiator	178
	HV Power Supply	130 ("a" or "b")
	Venturi	180
	Venturi Inlet	182
	Venturi Outlet	184
15	Fuel Tank	186
	Turbo-Jet Engine	188
	Generator	190
	Standard Shipping Container	192
	System Output	194
20	Dimension	196
	X-rays	136
	Material Flowing through Device	128
	Material to be Irradiated	148
	Air Inlet	198
25	Air Filter	199

	Figure 6	Fig. 6
	Configuration	200
	Housing	202
	Mail Chute Inlet	204
5	Irradiation Chamber	205
	FXI	206
	Upper Door	208
	Lower Door	210
	Front Shield	212
10	Side Shield	214
	Rear Shield	216
	Dosage Monitor	218
	Storage Bin	220
	Access Door	222
15	Pressurizer	224
	HVPS	130
	X-rays	136
	Mail Being Irradiated	137
	Inlet Door	226
20		
	Figure 7	Fig. 7
	Configuration	230
	Truck or tracked vehicle	232
	FXI	110
25	HVPS	130
	X-rays	136

	Flexible Radiation Shield	234
	Generator	190
	Fuel Tank	186
	X-rays	136
5	Material to Be Irradiated	148
	Figure 8	Fig. 8
	Configuration	240
	Boat	242
10	Generator	190
	Fuel Tank	186
	FXI in Underwater Housing	310
	HVPS	130
	Interconnecting Cable	244
15	Crane & Winch	246
	GPS Positioning System	248
	X-rays	136
	Material to Be Irradiated	148
20	Figure 9	Fig. 9
	Spherical FXI	250
	Housing	252
	Anode	254
	Grid	256
25	Cathode	258
	Internal Anode Lead	260

	Anode Feedthrough	262
	Anode Terminal	264
	Grid Feedthrough	266
	Grid Terminal	268
5	Cathode Feedthrough	270
	Cathode Terminal	272
	Vacuum	132
	Electrons	134
	X-rays	136
10	Inlet Pipe	274
	Outlet Pipe	276
	Irradiation Volume	278
	Radiation Shield	280
	HVPS	130
15	Ground	164

While the invention has been described with respect to specific embodiments by way of illustration, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all
20 such modifications and changes as fall within the true scope and spirit of the invention.

What is claimed is:

1. An apparatus for Flash X-ray irradiation of material, comprising:
 - a) a Flash X-ray source comprised of an electron gun and an anode;
 - b) the electron gun comprising a field emission cold cathode having an electrode emitting surface, and a grid for controlling electron flow from the cathode to the anode;
 - c) the anode having an electron-receiving main surface and an X-ray emitting, oppositely facing main surface; the X-ray emitting surface emitting X-radiation into an irradiation volume;
 - d) the X-ray emitting surface of the anode having orthogonally oriented first and second dimensions of greater than 2 millimeters each;
 - e) a high voltage pulse power supply for powering the Flash X-ray source;
 - f) the electron gun, anode and high voltage pulse power supply being so constructed as to create sufficient X-radiation in said irradiation volume to achieve a desired level of irradiation of material in said volume.
2. The apparatus of Claim 1, further comprising means for causing said material to pass through said irradiation volume.
3. The apparatus of Claim 2, wherein:
 - a) the anode has an elongated cylindrical shape, with said irradiation volume being in the cylindrical interior of said anode;
 - b) the cathode has an elongated cylindrical shape;
 - c) the grid has a cylindrical shape and acts as a gate interposed between said cathode and said anode; and
 - d) the cathode is axially symmetric to and encircles said anode and said grid.
4. The apparatus of Claim 3, wherein a supplementary energy storage capacitor is positioned on the side of the cathode facing away from the grid.
5. The apparatus of Claim 3, wherein:

- a) the means for causing said material to pass through said irradiation volume comprises a vehicle-mounted vacuum pump; and
 - b) the high voltage pulse power supply has means for connection to a vehicle-mounted electrical generator.
- 5 6. The apparatus of Claim 5, wherein:
- a) the generator and vacuum pump are powered by a turbo-jet engine; and
 - b) the turbo-jet takes in air that flows over the generator so as to cool the generator.
7. The apparatus of Claim 6, wherein the vacuum pump is a Venturi pump.
- 10 8. The apparatus of Claim 1, wherein:
- a) the X-ray emitting surface of the anode is shaped so as to avoid enclosing the irradiation volume; and
 - b) a supplementary energy storage capacitor is positioned on the side of the cathode facing away from the grid.
- 15 9. The apparatus of Claim 2, wherein:
- a) the X-ray emitting surface of the anode is shaped so as to avoid enclosing the irradiation volume; and
 - b) the means for causing said material to pass through said irradiation volume comprises a vehicle for transporting said Flash X-ray source in
- 20 such a way as to cause said irradiation volume to pass through in-situ material.
10. The apparatus of Claim 9, wherein the anode, grid and cathode are flat.
11. The apparatus of Claim 9, wherein the Flash X-ray source is adapted for underwater use with said X-ray emitter facing downwardly.
- 25 12. The apparatus of Claim 11, wherein the means for causing said material to pass through said irradiation volume includes means for vertically and horizontally positioning said X-ray emitter above material to be irradiated.
13. The apparatus of Claim 1, wherein:

- 5 a) the anode has a spherical shape, with said irradiation volume being in the spherical interior of said anode;
- b) the cathode has a spherical shape;
- c) the grid has a spherical shape and acts as a gate interposed between said cathode and said anode;
- d) the cathode, anode and grid being concentric to and encircling said anode and said grid; and
- e) the cathode, anode and grid having access ports for receiving a conduit for transport therethrough of material to be irradiated; the access ports for at least the cathode and grid being electrically insulated from said conduit.
- 10 14. The apparatus of Claim 1, wherein the high voltage power pulse power supply provides high voltage pulses in the range of approximately 1 to 100 nanoseconds.
- 15 15. The apparatus of Claim 2, wherein:
- a) the X-ray emitting surface of the anode is shaped so as to avoid enclosing the irradiation volume; and
- b) the means for causing said material to pass through said irradiation volume comprises a chute for receiving gravity-fed items; the chute containing said Flash X-ray source, having lateral sides and having alternately openable upper and lower doors for receiving the items within an irradiation volume; and the irradiation volume containing a dosage sensor for determining when a sufficient dosage of X-radiation has occurred within the irradiation volume.
- 20
- 25

AMENDED CLAIMS

received by the International Bureau on 7 October 2009 (07.10.2009)

What is claimed is:

1. An apparatus for Flash X-ray Irradiation of material, comprising:
 - a) a Flash X-ray source comprised of an electron source and an anode;
 - 5 b) the electron source comprising a field-emission cold-cathode having an electrode emitting surface, and a grid for controlling electron flow from the cathode to the anode; an electrical connection for biasing the grid; said electrical connection being free of a phase-matching network for assuring that an entire base of the grid responds to a control signal at the same moment;
 - 10 c) the anode having an electron-receiving main surface and an X-ray emitting, oppositely facing main surface; the X-ray emitting surface emitting X-radiation into an irradiation volume that is free of a lasing material;
 - 15 d) the X-ray emitting surface of the anode having orthogonally oriented first and second dimensions of greater than 2 millimeters each;
 - e) a high voltage pulse power supply for powering the Flash X-ray source; the power supply utilizing cold cathode field emission electron tubes as a primary switching means or a primary switching and amplification means;
 - 20 f) the electron source, anode and high voltage pulse power supply being so constructed as to create sufficient X-radiation in said irradiation volume to achieve a desired level of irradiation of material in said volume sufficient to induce a change in state of said material.
- 25 2. The apparatus of Claim 1, further comprising means for causing said material to pass through said irradiation volume.
3. The apparatus of Claim 2, wherein:
 - 30 a) the anode has an elongated cylindrical shape, with said irradiation volume being in the cylindrical interior of said anode; said anode being formed of a pipe having relatively thick first and second ends between which ends exists an integral, relatively thin central region containing the electron-receiving main surface;

- b) the cathode has an elongated cylindrical shape;
 - c) the grid has a cylindrical shape and acts as a gate interposed between said cathode and said anode; and
 - d) the cathode is axially symmetric to and encircles said anode and said grid.
- 5
4. The apparatus of Claim 3, wherein a supplementary energy storage capacitor is positioned on the side of the cathode facing away from the grid; said capacitor being located within a common vacuum enclosure with the cathode.
5. The apparatus of Claim 3, wherein:
- 10
- a) the means for causing said material to pass through said irradiation volume comprises a vehicle-mounted vacuum pump; and
 - b) the high voltage pulse power supply has means for connection to a vehicle-mounted electrical generator.
6. The apparatus of Claim 5, wherein:
- 15
- a) the generator and vacuum pump are powered by a turbo-jet engine; and
 - b) the turbo-jet takes in air that flows over the generator so as to cool the generator.
7. The apparatus of Claim 6, wherein the vacuum pump is a Venturi pump.
8. The apparatus of Claim 1, wherein:
- 20
- a) the X-ray emitting surface of the anode is shaped without a closed loop and is shaped so as to avoid enclosing that portion of the irradiation volume normal to the foregoing surface; and
 - b) wherein a supplementary energy storage capacitor is positioned on the side of the cathode facing away from the grid; said capacitor being
- 25
- located within a common vacuum enclosure with the cathode.
9. The apparatus of Claim 2, wherein:
- a) the X-ray emitting surface of the anode is shaped without a closed loop and is shaped so as to avoid enclosing that portion of the irradiation volume normal to the foregoing surface; and

- b) the means for causing said material to pass through said irradiation volume comprises a vehicle for transporting said Flash X-ray source in such a way as to cause said irradiation volume to pass through in-situ material.

- 5 10. The apparatus of Claim 9, wherein the anode, grid and cathode are flat.
11. The apparatus of Claim 9, wherein the Flash X-ray source is adapted for underwater use with said X-ray emitter predominantly facing downwardly downward.
- 10 12. The apparatus of Claim 11, wherein the means for causing said material to pass through said irradiation volume includes means for vertically and horizontally positioning said X-ray emitter above material to be irradiated.
13. The apparatus of Claim 1, wherein:
- a) the anode has a spherical shape, with said irradiation volume being in the spherical interior of said anode;
 - 15 b) the cathode has a spherical shape;
 - c) the grid has a spherical shape and acts as a gate interposed between said cathode and said anode;
 - d) the cathode, anode and grid being concentric to and enclosing said anode and said grid; and
 - 20 e) the cathode, anode and grid having access ports for receiving a conduit for transport therethrough of material to be irradiated; the access ports for at least the cathode and grid being electrically insulated from said conduit.
- 25 14. The apparatus of Claim 1, wherein the high voltage power pulse power supply provides high voltage pulses in the range of approximately 1 to 100 nanoseconds.
15. The apparatus of Claim 2, wherein:
- a) the X-ray emitting surface of the anode is shaped without a closed loop and is shaped so as to avoid enclosing that portion of the irradiation volume normal to the foregoing surface; and
 - 30

- 5 b) the means for causing said material to pass through said irradiation volume comprises a chute for receiving gravity-fed items; the chute containing said Flash X-ray source, having lateral sides and having alternately openable upper and lower doors for receiving the items within an irradiation volume; and the irradiation volume containing a dosage sensor for determining when a sufficient dosage of X-radiation has occurred within the irradiation volume.
- 10 16. The apparatus of Claim 1, wherein the electron source is constructed in such a way that the electron source has the capability to achieve current densities of 80,000 Amps per square centimeter.

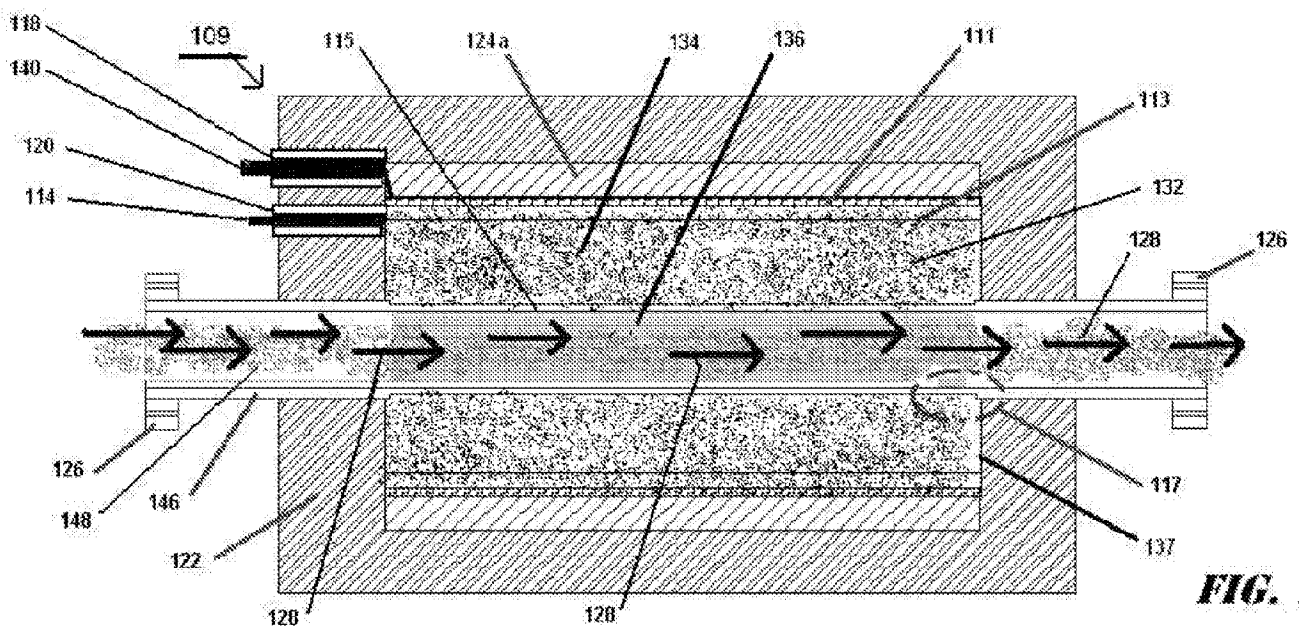
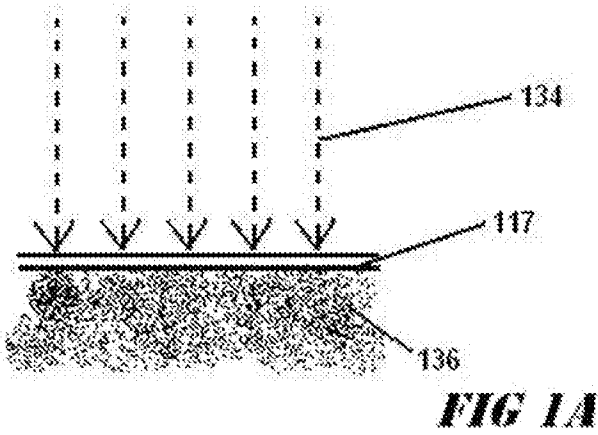
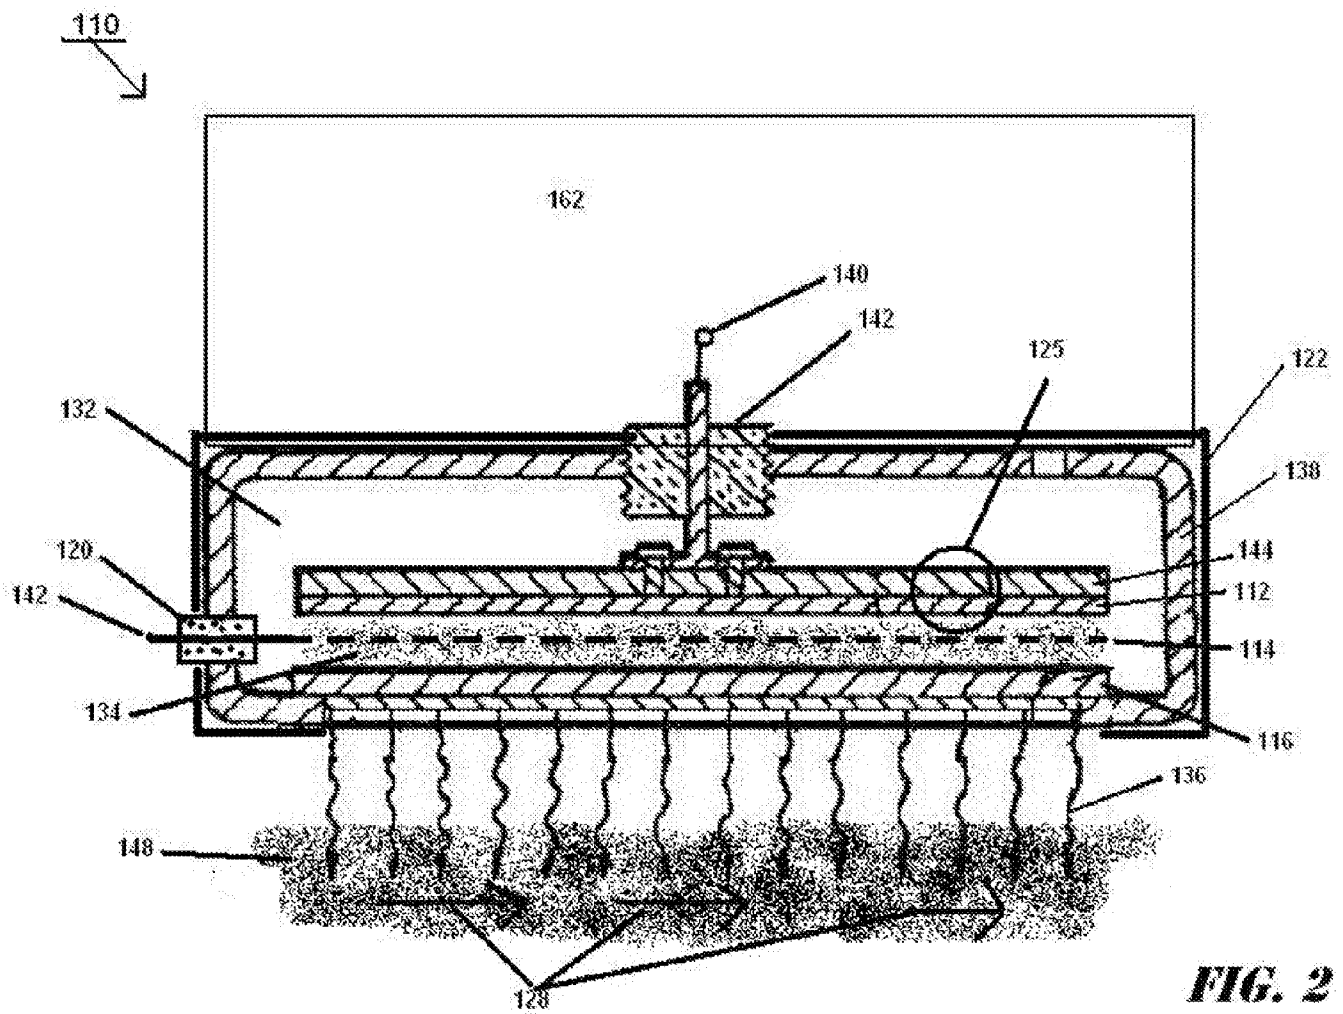


FIG. 1





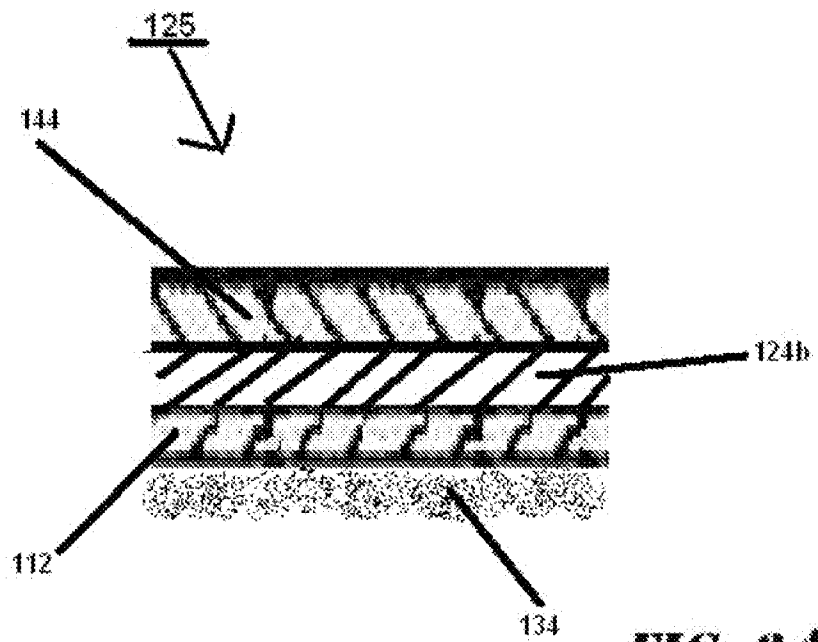


FIG. 2A

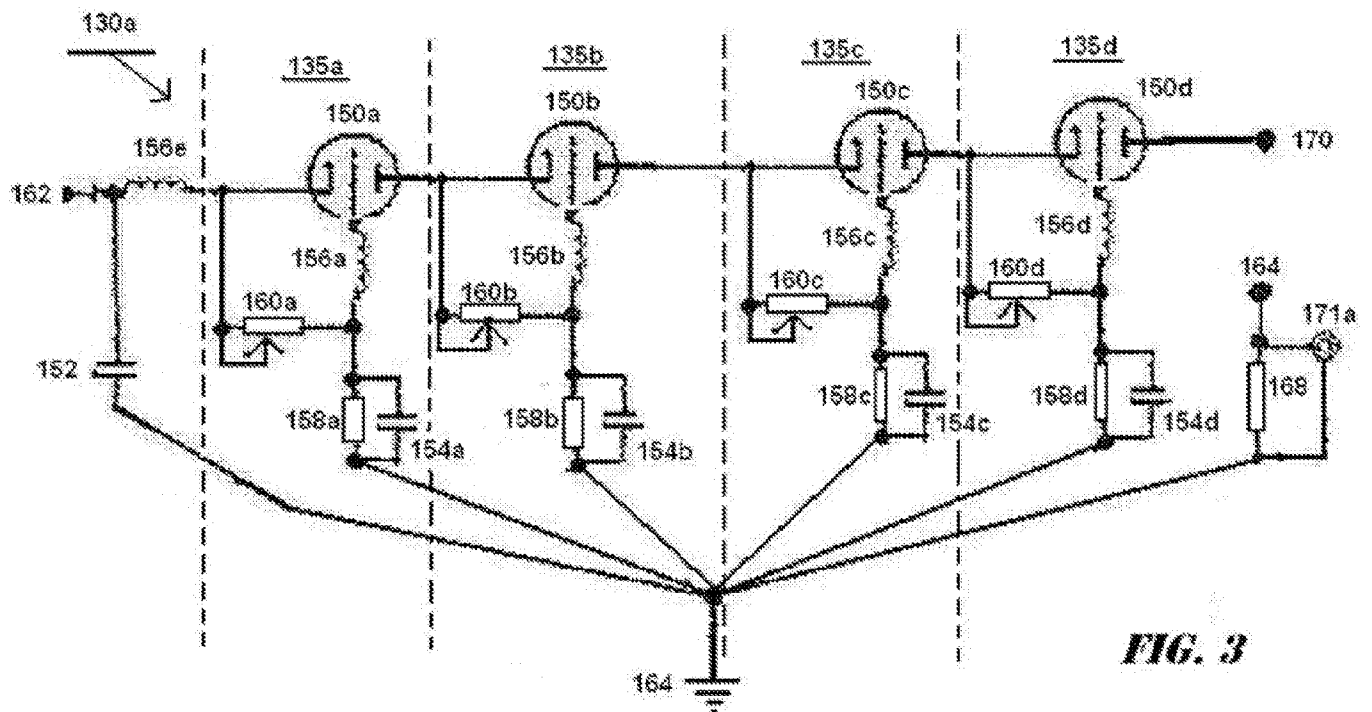


FIG. 3

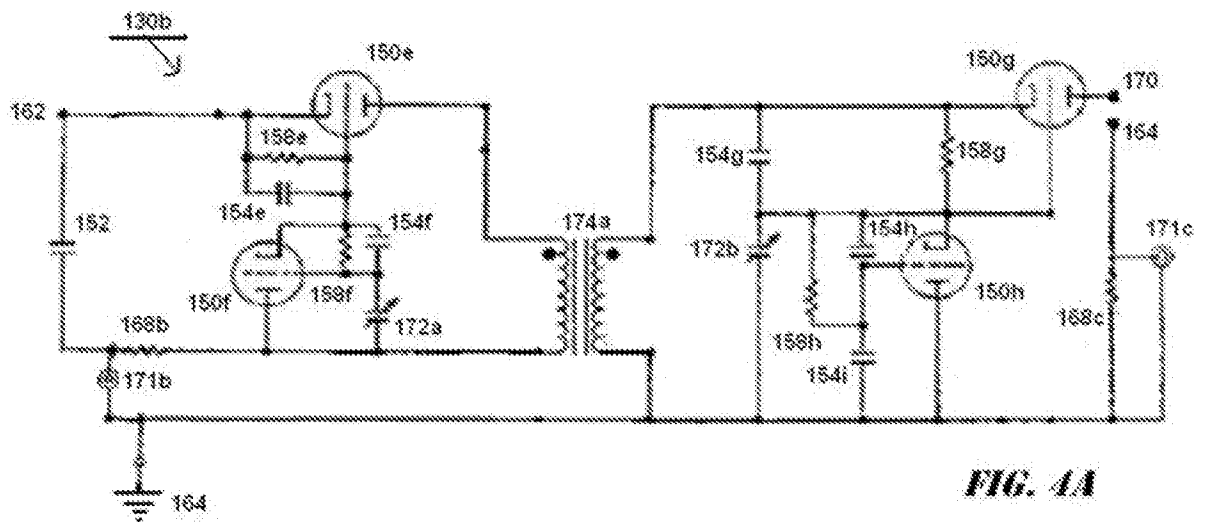
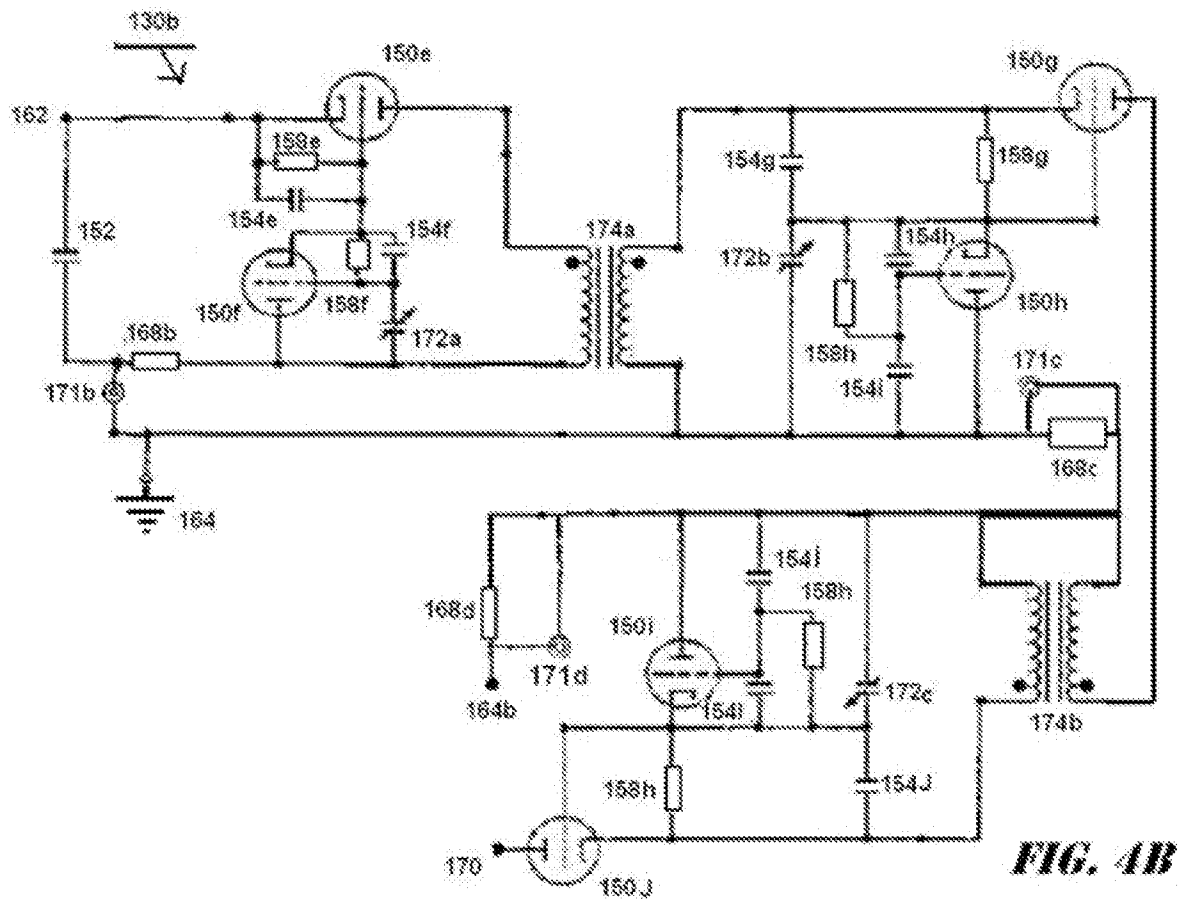
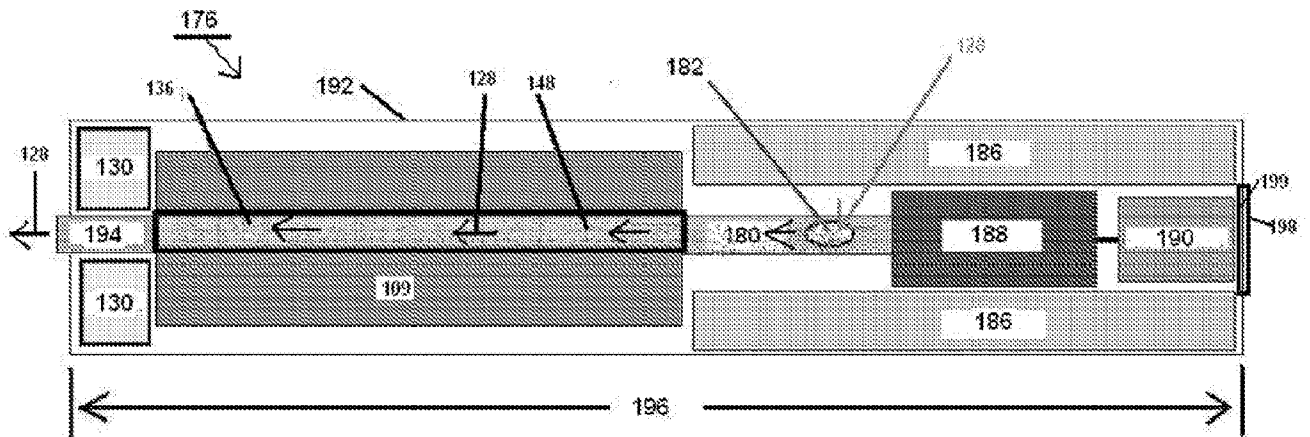
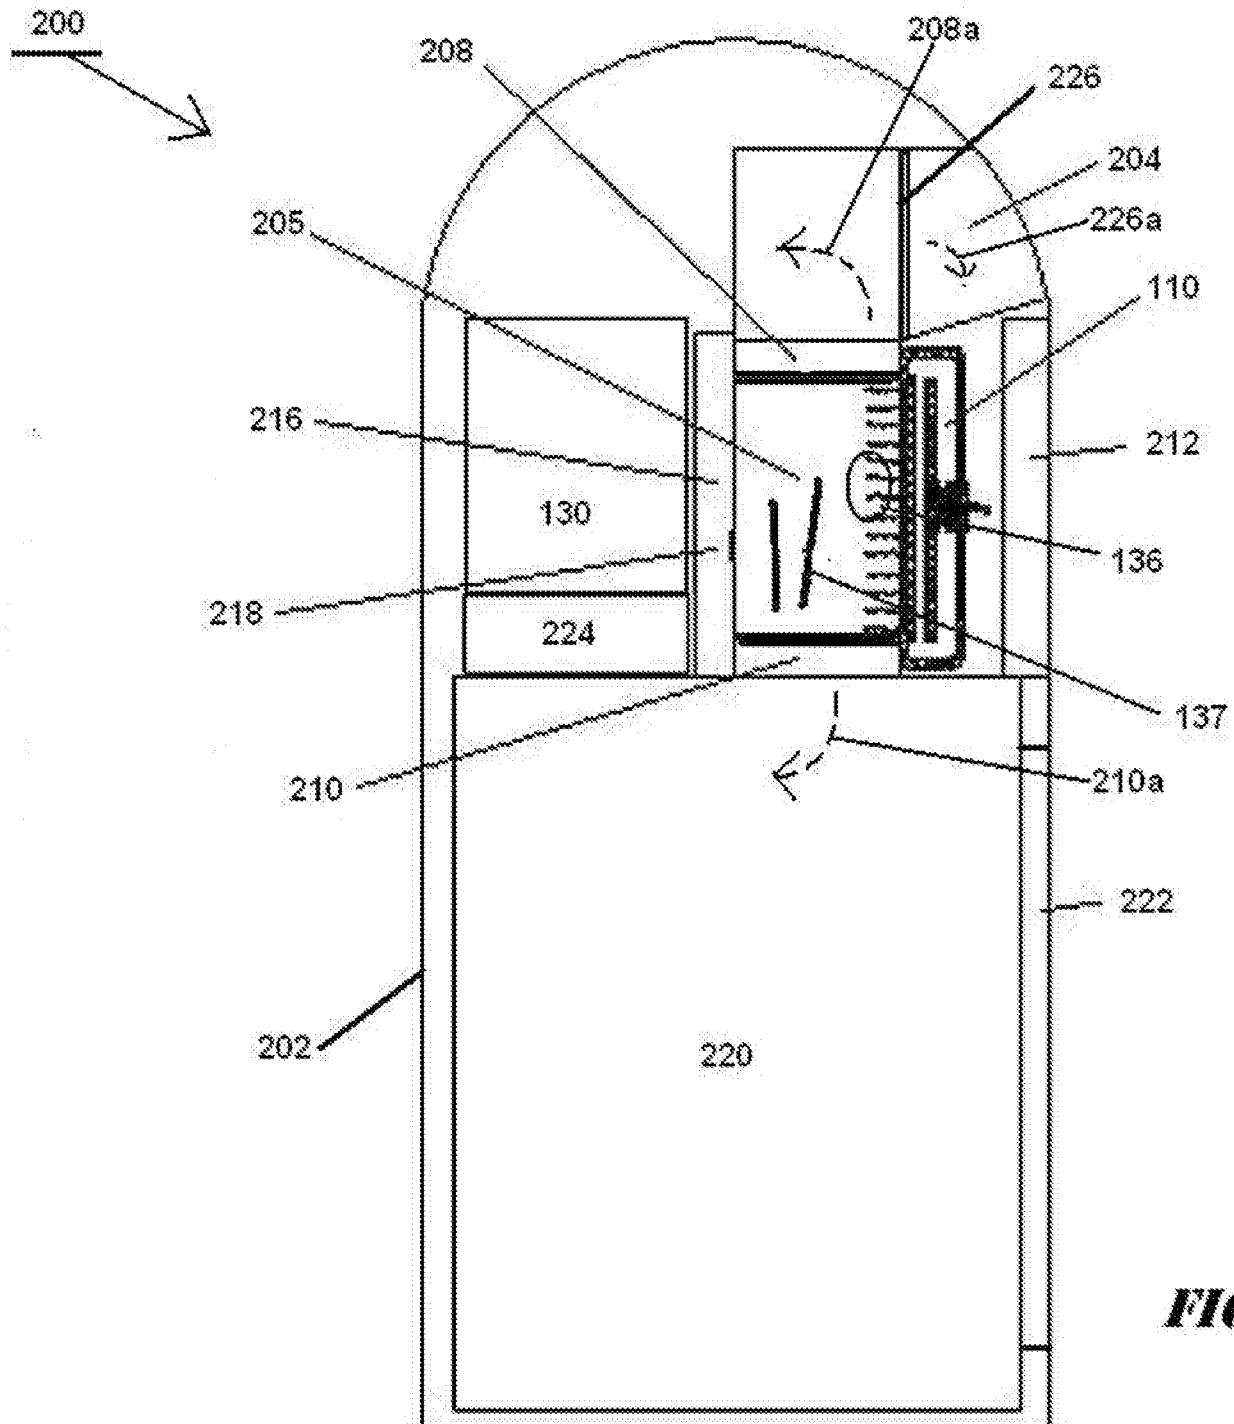
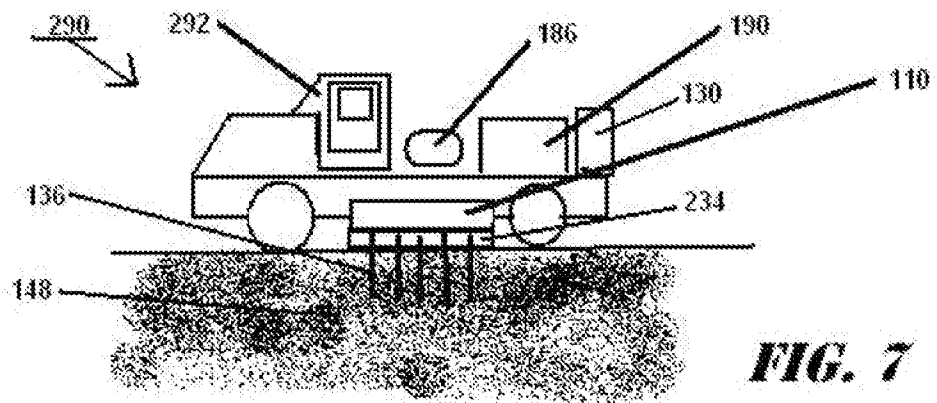


FIG. 4A



**FIG. 5**

**FIG. 6**



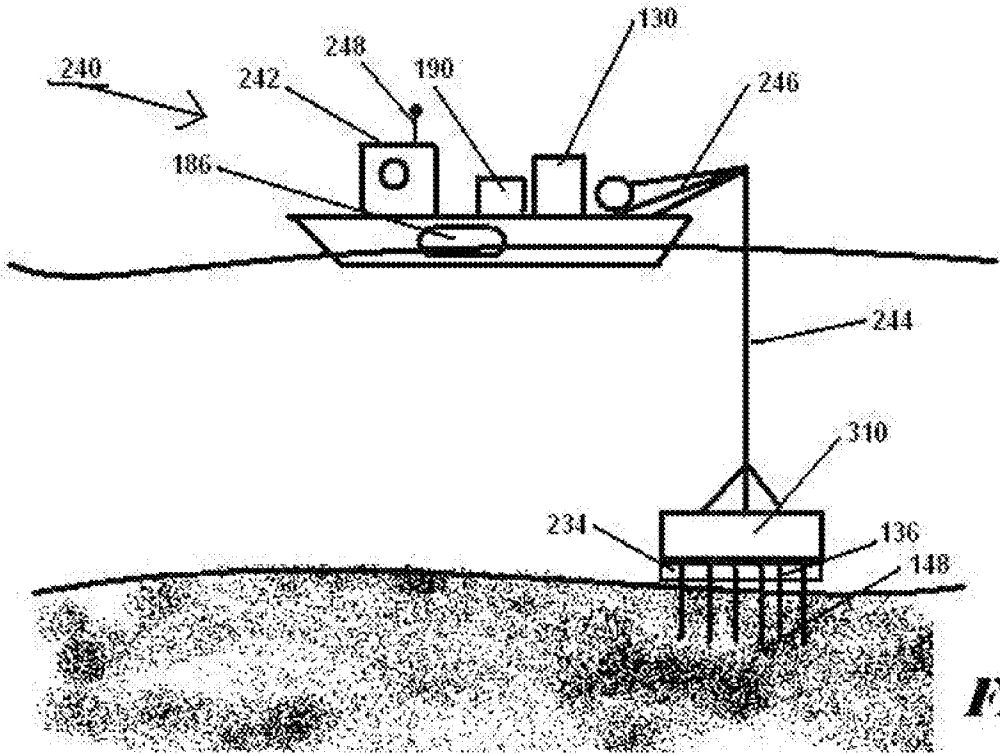


FIG. 8

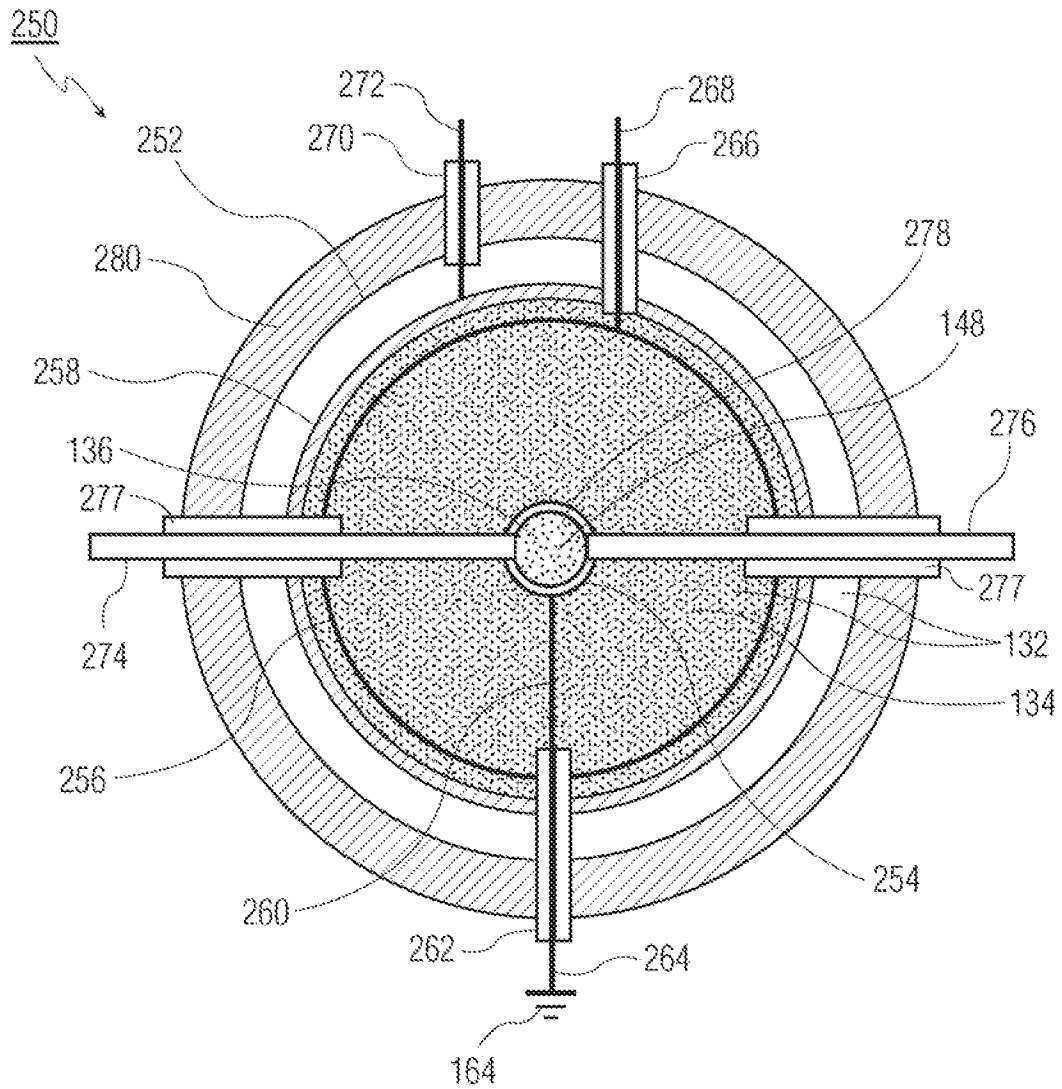


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/44410

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61N 5/10 (2009.01)

USPC - 250/492.3

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): A61N 5/10 (2009.01)

USPC: 250/492.3

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

IPC(8): A61N 5/10 (2009.01) (text search - see terms below)

USPC: 250/370.09, 427, 492.1, 492.3 (text search - see terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST(USPT,PGPB,EPAB,JPAB); Google Patents, Google Scholar Search terms: x-ray, pulse, flash, cathode, anode, grid, cylindrical, spherical, flat, storage capacitor, irradiation, vacuum pump, venturi, generator, high voltage, nanoseconds, vehicle, truck, turbo-jet, vertical, horizontal, downward, access, port, door, chute

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008/0063132 A1 (Birnbach) 13 March 2008 (13.03.2008), Figs 4 A and B, 5, 7, 8; paras [0015]-[0018], [007], [0048], [0051], [0094]-[0097], [0100]	1-15
Y	US 7,274,772 B2 (Lesiak et al.) 25 September 2007 (25.09.2007), Figs 1, 2, 7-9, 13; col 3, ln 12 to col 5, ln 15; col 7, ln 39-65; col 9, ln 20-34; col 10, ln 24-28; col 12, ln 18-38	1-15
Y	US 5,323,442 A (Golovanivsky et al.) 21 June 1994 (21.06.1994), Figs 1, 2; col 3, ln 21-47; col 4, ln 48-56; col 7, ln 10-37; col 9, ln 36-68	5-7, 9-12
Y	US 6,320,935 B1 (Shinar et al.) 20 November 2001 (20.11.2001), Fig 1; col 1, 68 to col 2, ln 32; col 4, ln 9-20	14, 15
Y	US 6,405,701 B1 (Masberg et al.) 18 June 2002 (18.06.2002), col 15, ln 25 to col 16, ln 46	5-7
Y	US 3,527,942 A (Roe et al.) 08 September 1970 (08.09.1970), Fig 2; col 1, ln 68 to col 2, ln 32;	15
Y	US 2,984,751 A (Cliborn) 16 May 1961 (16.05.1961), Figs 1,4; col 3, ln 3-18; col 4, ln 9-20	6, 7
Y	US 7,277,527 B2 (Gallagher) 02 October 2007 (02.10.2007), col 6, ln 37-51	7

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 July 2009 (31.07.2009)

Date of mailing of the international search report

07 AUG 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774