

646175
AUSTRALIA

P/00/001 28/6/91
Section 29

Patents Act 1990

PATENT REQUEST: STANDARD PATENT/PATENT OF ADDITION

We, being the person identified below as the Applicant, request the grant of a patent to the person identified below as the Nominated Person, for an invention described in the accompanying standard complete specification.

Full application details follow.

[71] Applicant: CARRIER CORPORATION
Address: CARRIER PARKWAY, SYRACUSE, NEW YORK 13221, UNITED STATES OF AMERICA

[70] Nominated Person: CARRIER CORPORATION
Address: CARRIER PARKWAY, SYRACUSE, NEW YORK 13221, UNITED STATES OF AMERICA

[54] Invention Title: CENTRIFUGAL COMPRESSOR WITH HIGH EFFICIENCY AND WIDE OPERATING RANGE

[72] Name(s) of actual inventor(s): JOOST J. BRASZ

[74] Address for service in Australia: c/o WATERMARK PATENT & TRADEMARK ATTORNEYS, of The Atrium, 290 Burwood Road, Hawthorn, Victoria 3122, Australia Attorney Code: WM

BASIC CONVENTION APPLICATION(S) DETAILS

[31] Application Number	[33] Country	Country Code	[32] Date of Application
739,006	UNITED STATES OF AMERICA	US	1ST AUGUST 1991

Drawing number recommended to accompany the abstract

By our Patent Attorneys,
WATERMARK PATENT & TRADEMARK ATTORNEYS



.....

DATED this 29th day of July 1992

Stephen K. Plymin.

Encl.

Registered Patent Attorney

F035977 30/07/92

COMMONWEALTH OF AUSTRALIA

Patents Act 1952-1969

DECLARATION IN SUPPORT OF A CONVENTION
APPLICATION FOR A PATENT OR PATENT OF ADDITION(1) Here
insert (in
full) Name of
Company.In support of the Convention Application made by⁽¹⁾.....
CARRIER CORPORATION(2) Here
insert title
of Invention.(hereinafter referred to as the applicant) for a patent for an invention entitled:⁽²⁾.....
CENTRIFUGAL COMPRESSOR WITH HIGH EFFICIENCY AND WIDE OPERATING RANGE(3) Here
insert full Name
and Address
of Company
official
authorized
to make
declaration.I,⁽³⁾.....STEPHEN E. REVIS....., Assistant Secretary
of CARRIER CORPORATION, a Delaware corporation domiciled at
Carrier Parkway, P.O. Box 4800, Syracuse, New York 13221, U.S.A.
do solemnly and sincerely declare as follows:(4) Here
insert basic
Country or
Countries
followed by
date or dates
and basic
Applicant or
Applicants.1. I am authorised by the applicant for the patent to make this declaration on its behalf.
2. The basic application as defined by Section 141 of the Act was.....
made in⁽⁴⁾ the United States of America.....
on the.....1st..... day of.....August.....1991....., by.....
CARRIER CORPORATION.....
on the..... day of.....19....., by.....(5) Here
insert (in
full) Name
and Address
of Actual
Inventor or
Inventors.3.⁽⁵⁾.....JOOST J. BRASZ of 1 Landgrove Drive, Fayetteville, New
York 13066, U.S.A.is the actual inventor of the invention and the facts upon which the applicant is entitled to
make the application are as follows:

The applicant is the assignee of the said actual inventor(s).....

4. The basic application referred to in paragraph 2 of this Declaration was.....
.....the first application made in a Convention country in respect of the invention
the subject of the application.

DECLARED at.....Syracuse, New York, U.S.A.

this.....21st..... day of.....July.....1992.....

(6) Signature.

(6).....
CARRIER CORPORATION
Stephen E. Révis
Assistant Secretary

To: THE COMMISSIONER OF PATENTS.



AU9220674

(12) PATENT ABRIDGMENT (11) Document No. AU-B-20674/92
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 646175

(54) Title
CENTRIFUGAL COMPRESSOR WITH HIGH EFFICIENCY AND WIDE OPERATING RANGE

International Patent Classification(s)
(51)⁵ F04D 029/44 F04D 027/02

(21) Application No. : 20674/92 (22) Application Date : 30.07.92

(30) Priority Data

(31) Number (32) Date (33) Country
739006 01.08.91 US UNITED STATES OF AMERICA

(43) Publication Date : 04.02.93

(44) Publication Date of Accepted Application : 10.02.94

(71) Applicant(s)
CARRIER CORPORATION

(72) Inventor(s)
JOOST J. BRASZ

(74) Attorney or Agent
WATERMARK PATENT & TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122

(56) Prior Art Documents
US 4527949
US 4378194
US 4302150

(57) Claim

1. An improved centrifugal compressor of the type having inlet guide vanes, an impeller and a diffuser and being adapted for operation over a substantial range of operating flow conditions, characterized by:

said diffuser comprising a plurality of fixed wedge-shaped channels disposed circumferentially around and in close proximity to the outer periphery of said impeller, with each of said channels having a longitudinal center line which is aligned tangentially with said impeller outer periphery and which forms an angle with the longitudinal center lines of adjacent channels of at least 15 degrees; and

said impeller comprising a plurality of blades disposed in a backswept orientation such that the fluid leaves the tips thereof at a flow exit angle of not more than 20 degrees.

AUSTRALIA

Patents Act 1990

646175

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Application Number:

Lodged:

Invention Title: CENTRIGUGAL COMPRESSOR WITH HIGH EFFICIENCY AND WIDE OPERATING RANGE

The following statement is a full description of this Invention, Including the best method of performing it known to :US

CENTRIFUGAL COMPRESSOR WITH HIGH
EFFICIENCY AND WIDE OPERATING RANGE

This invention relates generally to compressor apparatus and, more particularly, to a method and apparatus for compressing a fluid in a centrifugal compressor with relatively high efficiencies and over a substantial operating range.

In a centrifugal compressor, it is desirable to convert the gas kinetic energy leaving the impeller to potential energy or static pressure. This is commonly accomplished by way of a diffuser which may be of either fixed or adjustable geometry. The fixed geometry diffuser may be of the vaneless type, or it may be of the fixed vane type. An adjustable geometry diffuser may be either of the vaned or vaneless type and take the form of a throttle ring as shown in U.S. Patent 4,219,305 assigned to the assignee of the present invention, a movable wall as shown in U.S. Patent 4,527,949 assigned to the assignee of the present invention, or include rotatable vanes as shown in U.S. Patent 4,378,194 assigned to the assignee of the present invention. Each of these various types of diffusers have peculiar operating characteristics that tend to favor or discourage their use under particular operating conditions.

Centrifugal chillers used in air conditioning systems are normally required to operate continuously between full load and part load (e.g., 10 percent capacity) conditions. At this 10% flow condition, the air conditioning system still requires a relatively high pressure ratio (i.e., from 50-80% of the full load pressure ratio) from the compressor. This requirement puts an extreme demand on the stable operating range capability of the centrifugal compressor. Therefore, to prevent early compressor surge caused by impeller stall, centrifugal compressors are

typically provided with a variable inlet geometry device (i.e. inlet guide vanes). Rotatable inlet guide vanes are able to reduce the flow incidence angle at the impeller under part load conditions, thus enabling stable compressor operation at much lower capacities.

In addition to the instability which may be introduced by the particular impeller and its inlet design, the diffuser may also be cause for instability under part load conditions. Of all types of diffusers, the vaneless type generally provides the broadest operating range since it can handle a wide variation of flow angles without triggering overall compressor surge. If variable geometry, such as is discussed hereinabove, is added to such a vaneless diffuser, further stability can be obtained, but such features add substantially to the complexity and costs of a system.

Typically associated with the broader operating range of a vaneless diffuser is substantially lower efficiency levels because of the modest pressure recovery in the diffuser. The vaned diffuser, on the other hand, allows higher efficiencies but generally demonstrates a substantially smaller stable operating range. To increase this operating range, some type of variable diffuser geometry may be added to the vaned diffuser to prevent surge when operating under off-design conditions so as to thereby obtain relatively high efficiency over a broad operating range. But again, such a structure is relatively expensive.

One type of fixed geometry diffuser that has demonstrated an exceptionally higher efficiency level is that of the fixed vane or channel diffuser, which may take the form of a vane island or wedge diffuser as shown in U.S. Patent 4,368,005, or a so-called pipe diffuser design as shown in U.S. Patent 3,333,762. The latter was developed for

efficiency improvement under transonic flow conditions occurring in high pressure ratio gas turbine compressors. Like other vaneed diffuser compressors as discussed hereinabove, higher efficiencies are obtained, but they normally introduce an associated narrow stable operating range, which for the gas turbine compressor is not of concern, but when considered for centrifugal chiller application is of significant concern as discussed hereinabove.

In one instance as shown in U.S. Patent 4,302,150, a pipe diffuser was used, supposedly to obtain higher efficiencies, with the associated narrow operating range being broadened by the introduction of a so-called vaneless diffuser space between the impeller outer periphery and the entrance to the diffuser. However, the increased stability of such a design is minimal and only occurs under full load operating conditions (i.e., no inlet guide vanes). Further, the larger vaneless diffuser space reduces the compressor lift capability under part load conditions. Moreover, the introduction of a relatively large vaneless space tends to move the peak efficiency closer to the surge point, an operating condition that cannot be tolerated for safe compressor operation.

In addition to the design considerations for the diffuser as discussed hereinabove, the impeller design features can also be chosen so as to generally optimize efficiency and operating range. While it is generally understood that impeller efficiency peaks when its blade exit angle β_2 approaches 45 degrees (as measured from the tangent direction), there is also a general understanding that, to a point, the operating range of a centrifugal compressor increases as the impeller blade exit angle β_2 decreases. For a given ratio between the impeller inlet relative velocity and the impeller exit relative velocity, reducing

the impeller blade exit angle β_2 (i.e., increasing the backsweep) will reduce the absolute flow exit angle β_2 leaving the impeller. If this angle α_2 decreases too far, however, the radial pressure gradients near the impeller periphery tend to cause flow separation, and the operating range thus becomes narrower. Therefore, in centrifugal refrigeration impeller practice, the impeller absolute flow exit α_2 angle is normally chosen to be within the range of 20 and 40 degrees. Further, heretofore, it was generally understood that to reduce the impeller flow exit angle α_2 below 20 degrees would inherently lead to flow separation and a narrowed operating range. The use of impellers with such flow exit angles have thus been avoided.

It is, therefore, an object of the present invention to provide an improved centrifugal compressor, ~~method and apparatus~~.

~~This object is achieved in an apparatus according to the~~
~~preambles of the claims and by the features of the~~
~~characterizing parts thereof.~~

Briefly, in accordance with one aspect of the invention, a fixed vane or channel type diffuser is provided with a relatively few number of channels so as to thereby maximize the "wedge angle" therebetween. The associated impeller is, in turn, so designed that its flow exit angle is relatively small. The combination of the relatively large wedge angle with the relatively small flow exit angle allows for a relatively large angle of incidence without causing flow separation and degradation of the operating range.

By another aspect of the invention, the diffuser comprises a series of conical channels having center lines which ~~extend substantially tangentially to the outer periphery~~

This object is achieved according to one aspect of the present invention by an improved centrifugal compressor of the type having inlet guide 5 vanes, an impeller and a diffuser and being adapted for operation over a substantial range of operating flow conditions, characterized by:

10 said diffuser comprising a plurality of fixed wedge-shaped channels disposed circumferentially around and in close proximity to the outer periphery of said impeller, with each of said channels having a longitudinal center line which is aligned tangentially with said impeller outer periphery and which forms an angle with the longitudinal center lines of adjacent channels of at least 15 degrees; and

15 said impeller comprising a plurality of blades disposed in a backswept orientation such that the fluid leaves the tips thereof at a flow exit angle of not more than 20 degrees.

Preferably, a fixed vane or channel type diffuser is provided with a relatively few number of channels so as to thereby maximize the "wedge angle" therebetween. The associated impeller is, in turn, so designed that its flow exit angle is relatively small. The combination of the relatively large wedge angle 20 with the relatively small flow exit angle allows for a relatively large angle of incidence without causing flow separation and degradation of the operating range.

Preferably, the diffuser comprises a series of conical channels having center lines which extend substantially tangentially to the outer periphery

of the impeller. The channel structure itself brings about increased efficiencies, and the tangential orientation of the channels to the impeller further enhances the efficiency characteristics of the system.

Preferably,
In accordance with another aspect of the invention, the impeller is so designed that its absolute flow exit angle α_2 is maintained below 20 degrees. This is accomplished in one form by the use of backswept vanes. Flow separation that might otherwise occur is then prevented by maintaining the associated wedge angle α_2 between the adjacent diffuser channels above 15 degrees. In this way, both high efficiency and a broad stable operating range is obtained.

Preferably,
By yet another aspect of the invention, the vaneless space, between the outer periphery of the impeller and the leading edge circle defined by the leading edges of the wedges, is limited in radial depth to thereby reduce the likelihood of flow separation in the vaneless space. In particular, the radial dimension is limited so as not to exceed the throat diameter of the channels.

In the drawings as hereinafter described, a preferred embodiment is depicted; however, various other modifications and alternate constructions can be made thereto without departing from the true spirit and scope of the invention.

Figure 1 is a graphic illustration of a performance map for a fixed speed centrifugal compressor with variable inlet guide vane geometry as compared with that for the fixed diffuser geometry of the present invention.

Figure 2 is a partial, axial cross sectional view of a centrifugal compressor having the present invention incorporated therein.

Figure 3 is a radial view of the diffuser and impeller portions thereof.

Figures 4 and 5 are radial views of the impeller of the present invention showing the effect of backsweep on the absolute flow exit angle α_2 .

Figures 6 and 7 are axial cross sections of the blades showing the effect of impeller back sweep on the height β_2 of the impeller blades at discharge.

Figures 8, and 9 show the flexibility of the present invention in accommodating various flow rates without diffuser leading edge separation.

Referring now to Figure 1, there is shown a plurality of performance map curves representative of various configurations of centrifugal compressors with different inlet guide vane positions as compared with the fixed diffuser geometry of the present invention. In order to understand the significance of the present invention, it is desirable to consider some of the performance characteristics of existing systems.

Centrifugal compressors with vaned diffusers (such as diffusers using airfoil vanes, single thickness vanes, vane islands or conical pipes) have higher efficiencies than compressors with vaneless diffusers and are therefore very attractive, but they also have a smaller stable operating range and therefore need expensive and complicated variable diffuser geometry devices and control schemes to prevent surge under off-design conditions. Considering the definition of the stable operating range as:

$$\text{stable operating range} = \frac{\text{choke mass flow} - \text{surge mass flow}}{\text{choke mass flow}}$$

wherein choke mass flow = the maximum flow when the flow reaches sonic velocity at the throat (represented by curve 1)

surge mass flow = minimum or surge flow representing the lowest stable operating condition in the compressor (represented by the curves C or D)

It can be stated that well designed centrifugal compressors of intermediate pressure ratio (i.e. 2.5 to 1 to 5 to 1) with vaneless diffusers can have a stable operating range of 30%, whereas a centrifugal compressor of similar pressure ratio with some type of vaned diffuser is limited at best to a 20% stable operating range.

Many centrifugal compressor applications require part load characteristics, wherein the head or pressure ratio drops less fast than the flow rate. Curve A in Figure 1, for example, represents a typical load line of a water cooled chiller. In practice, even better part load head capability is required for water cooled chillers since variations from the typical load line A are not uncommon. Curve B in Figure 1, for example, is a typical load line of a water cooled chiller under variable capacity, constant-temperature-lift operating conditions.

Vaned diffuser centrifugal compressors with only variable inlet geometry, part-load control devices are not capable of providing the required head under off-design conditions. The limited range at full load also results in limited range under part load conditions. The end result is a steep surge line on the compressor performance map such as shown at line C in Figure 1.

In contrast the performance map of a centrifugal compressor constructed in accordance with the present invention is shown in the curve D of Figure 1. It will be recognized that, in addition to the high efficiency (i.e. in excess of 85%) a very wide stable operating range (i.e. in excess of 35%) is demonstrated. This surge line which exceeds the most severe load line condition demands (i.e. constant temperature lift water-cooled chiller operation), is obtained with fixed diffuser geometry and with only one variable geometry mechanism, i.e. the variable inlet guide vanes. The specific structure of a centrifugal compressor incorporating the present invention will now be described.

Referring now to Figures 2 and 3, the invention is shown generally at 10 as comprising a particular configuration of a pipe diffuser 11 combined with an impeller 12, as installed in an otherwise conventional centrifugal compressor having a volute structure 13, suction housing 14, blade ring assembly 16, inlet guide vanes 17, and shroud 18. The impeller 12 is mounted on a drive shaft 19, along with a nose piece 21. When the assembly is rotated at high speed, it draws refrigerant into the suction housing 14, past the inlet guide vanes 17, and into the passage 22 where it is compressed by the impeller 12. It then passes through the diffuser 11, which functions to change to kinetic energy to pressure energy. The diffused refrigerant then passes into the cavity 23 of the volute 13, and then on to the cooler (not shown).

Referring now to Figure 3, the impeller wheel 12 is shown in greater detail to include a hub 24, an integrally connected and radially extending disc 26, and a plurality of blades 27. It will be seen that the blades 27 are arranged in a so called backswept configuration which is a significant feature of one aspect of the present invention as will be more fully described hereinafter.

The pipe diffuser 11 is shown in its installed position in Figure 2, and in combination with the impeller 12 only in Figure 3. It comprises a single annular casting which is secured near its radially outer portion to the volute structure 13 by a plurality of bolts 28. A plurality of circumferentially spaced, generally radially extending, tapered channels 31 are formed in the diffuser 11, with their center lines 32 being tangent to a common circle indicated generally at 30 and commonly referred to as the tangency circle, which coincides with the periphery of the impeller 12.

A second circle, located just outside the tangency circle, is referred to as the leading edge circle and is indicated at 33 in Figure 3. The leading edge circle, by definition, passes through the leading edges of each of the wedge shaped islands 34 between the channels 31. The radial space between the periphery of the impeller 12 and the leading edge circle 33 is a vaneless/semi vaneless space 25 whose radial depth is limited in accordance with the present invention in order to broaden the operating range of the system. That is, the applicant has found that, in order to prevent flow separation in the vaneless space 25, this radial dimension should be less than the throat diameter of the tapered channels 31. This vaneless/semi-vaneless space 25, which, for purposes of simplicity will be referred to as a "vaneless" space is more fully described in U. S. Patent Application Serial No. 605,619 filed on October 30, 1990, assigned to the assignee of the present invention, and incorporated herein by reference.

As will be seen in Figure 3, each of the tapered channels 31 has three serially connected sections, all concentric with the axis 32, as indicated at 35, 36 and 37. The first section 35, which includes the "throat" mentioned above, is cylindrical in form, (i.e. with a constant

diameter) and is angled in such a manner that a projection thereof would cross projections of similar sections on either circumferential side thereof. A second section indicated at 36 has a slightly flared axial profile with the walls 38 being angled outwardly at an angle with the axis 32. An angle that has been found to be suitable is 2° . The third section 37 has an axial profile which is flared even more with the walls 39 being angled at an angle which is on the order of 4° . Such a profile of increasing area toward the outer ends of the channel 31 is representative of the degree of diffusion which is caused in the diffuser 11 and is quantified by the equation

$$\text{area ratio} = \frac{\text{area at exit of channel}}{\text{area at inlet of channel}}$$

wherein the area at the exit of the channel is taken normal to the axis at the location identified at A in Figure 3.

It was seen in Figure 3 that the formation of the tapered channels 31 results in the tapered sections or wedges 34 therebetween. It will also be evident that the more tapered channels 31 that are formed in the diffuser, the smaller will be the angle γ of the wedges 34. The particular diffuser 11 shown in Figure 3 has 16 tapered channels formed therein, such that the angle γ is then equal to $22 \frac{1}{2}^\circ$. This relatively large wedge angle tends to prevent flow separation that might otherwise occur because of variations in impeller discharge flow angle β_2 . As will be seen in the subsequent discussion of the impeller design and performance, it is desirable to provide for relatively tangential flow. This, in turn, tends to reduce the change in β_2 with mass flow rate variations. In general, it is therefore desirable to have a relatively large wedge angle γ to accommodate variations in incidence. The number of tapered channels 31, however,

must be sufficiently high so as to accommodate the flow volume from the impeller. The applicant has therefore determined that one can obtain high efficiency performance over a broad operating range, as is desirable for the present invention, by a pipe diffuser having a wedge angle, γ as low as 15° (i.e. 24 tapered channels). We will return to the issue of leading edge separation after a discussion of the impeller design and characteristics.

Referring now to Figures 4 and 5, there are shown impellers 42 and 43 having different degrees of backsweep. The impeller 42 has blades 44 with a 60° backsweep (i.e. an impeller discharge blade angle β_2 of 30°), and the impeller 43 has blades 46 with a 30° backsweep (i.e. an impeller discharge blade angle β_2 of 60°). The absolute tangential component of the flow leaving the impeller, $v_2\theta$ can be obtained by the equation

$$v_2\theta = w_2\theta + u_2$$

where w_2 = the tangential component of the relative velocity and
 u_2 = the propeller tip speed

For impellers with backsweep, the direction of the tangential component of the relative velocity, $w_2\theta$, is opposite to the tip speed direction. For such impellers, $v_2\theta$ becomes less than u_2 and is reduced further by higher impeller backsweep angles. However, since the impeller tip speed u_2 is several times larger than the total relative velocity at the impeller discharge w_2 , the relative change in $v_2\theta$ due to impeller backsweep is much less than the relative change in radial velocity v_{2R} caused by impeller backsweep. Because the increased backsweep reduces the absolute radial velocity v_{2R} to a much larger extent than the absolute tangential velocity $v_2\theta$, another effect of increased impeller discharge blade angle backsweep with constant shroud stream surface

diffusion is a reduction in the absolute flow angle α_2 leaving the impeller. It will therefore be seen in Figure 4 that for a 60° backsweep, the impeller absolute flow exit angle α_2 is 12° , and for a backsweep of 30° as shown in Figure 5, the impeller absolute flow exit angle $\alpha_2 = 20^\circ$.

Normally, neither the impeller 42 shown in Figure 4 or impeller 43 shown in Figure 5 would be acceptable for operation where a broad operating range is desired since the radial pressure gradients at the impeller periphery would tend to cause flow separation. However, when used with the pipe diffuser of the present invention, these lower absolute flow exit angles α_2 are not only possible but, as discovered by the applicant, allow one to obtain higher efficiency over a relatively broad operating range.

It will be recognized that in comparing the impellers of Figure 4 and 5, an increase in the impeller backsweep reduces the blade to blade normal distance n_2 of the discharge normal flow area as shown in Figures 6 and 7. That is, the high backsweep impeller of Figure 4 with its attendant reduced blade to blade normal distance n_2 requires a greater impeller discharge blade height b_2 than the impeller discharge blade height b_2 as shown in Figure 7, which is associated with the lower backsweep impeller 43 of Figure 5. If we assume that we want to maintain the relative velocity ratio W_2/W_1 , where W_2 is the relative impeller discharge velocity and W_1 is the relative impeller inlet shroud velocity, then an increase in impeller backsweep angle will therefore result in an increase in the impeller tip blade height b_2 . This relatively wider tip impeller tends to provide stability at low flow conditions since it results in smaller absolute impeller discharge flow angles α_2 which therefore will show smaller angle variations at reduced flow. Consequently, incidence effects will be less to thereby

promote stability.

In summary, there are three features in the diffuser and impeller structures of the present invention which contribute to the high efficiency, broad operating range characteristics of the present invention. First, the number of tapered channels 31 is limited such that the wedge shaped islands 34 therebetween have a relatively large wedge angle γ such that the occurrence of flow separation at the tips are minimized. Secondly, the vaneless space 25 between the outer periphery 30 of the impeller 31 and the leading edge circle 33 is limited in its radial depth such that the occurrence of flow instabilities are prevented. In this regard, the combination of the small vaneless space 25 together with the solidity of the wedges 34, create pressure fields inside the vaneless space with the gradients being more parallel with the direction of flow rather than creating radial gradients which would tend to cause flow separation. Finally, the use of an impeller with high backsweep, and therefore one with the wide tip impeller, a very shallow discharge flow angle, and relatively small absolute angle variations, reduces the sensitivity of the downstream component (i.e. diffuser) to variations in flow rate and thus increases the stable operating range of the compressor. These results are illustrated in Figures 8 and 9.

In both Figures 8 and 9, the pipe diffuser 11 and the impeller 12 are identical to that in Figure 3, that is with a 60° backsweep in the impeller, with a vaneless space whose radial depth is less than the diameter of the tapered channel throat, and with a wedge angle of 22 1/2°. When the flow is at the full design flow level, the absolute flow exit angle α_2 , the flow direction is parallel to the center line of each of the tapered channels 31 of the diffuser 11. This is shown by the arrows in Figure 8.

It will be seen that the two intermediate arrows represent the direction of refrigerant flow as it engages the wedge 34 on its pressure and suction side. It will thus be understood from this illustration that no flow separation will occur at the tip of the wedge 34. The absolute flow exit angle α_2 is 12° at this flow level.

Referring now to Figure 9, the amount of flow is substantially reduced such that the absolute flow exit angle α_2 is reduced to 2° . Here, the flow direction is parallel to the suction side, and there will of course be no flow separation. The two intermediate arrows again represent the direction of flow that will engage the wedge 34 on its suction side 48. Again, it will be seen that the angles are such that flow separation at the tip of the wedge 34 will not occur.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:
~~What is claimed is:~~

1. An improved centrifugal compressor of the type having inlet guide vanes, an impeller and a diffuser and being adapted for operation over a substantial range of operating flow conditions, characterized by:

 said diffuser comprising a plurality of fixed wedge-shaped channels disposed circumferentially around and in close proximity to the outer periphery of said impeller, with each of said channels having a longitudinal center line which is aligned tangentially with said impeller outer periphery and which forms an angle with the longitudinal center lines of adjacent channels of at least 15 degrees; and

 said impeller comprising a plurality of blades disposed in a backswept orientation such that the fluid leaves the tips thereof at a flow exit angle of not more than 20 degrees.

2. An improved centrifugal compressor as set forth in Claim 1 wherein said diffuser has at its inner periphery a vaneless space with a radial depth which is less than the smallest diameter within its wedge shaped channels.

3. An improved centrifugal compressor as set forth in claim 1 wherein said channels each comprise two serially connected sections, with the first section having diverging walls angled at one angle and the second section having diverging walls angled at a second larger angle.

4. An improved centrifugal compressor as set forth in claim 3 wherein the angle between the walls in the first section is 4 degrees and the angle between the walls in the second section is 8 degrees.

5. An improved centrifugal compressor as set forth in claim 1 wherein said channels are round in transverse cross section.

6. An improved centrifugal compressor as set forth in claim 5 wherein said channels are frustro-conical in longitudinal cross section.

7. An improved centrifugal compressor of the type having in serial flow combination, a variable geometry inlet, an impeller and a fixed geometry diffuser, characterized by:

an impeller having a plurality of circumferentially spaced blades for discharging fluid in a generally radial direction, ^{in a backswept orientation so} said blades being so disposed as to impart motion to said fluid at a flow exit angle of less than 20 degrees; and

a diffuser structure with a plurality of circumferentially spaced channels formed therein, said channels having center lines which extend substantially tangentially through the periphery of said impeller and the number of said channels being limited such that the angle between adjacent channel center lines is greater than 18 degrees.

8. An improved centrifugal compressor as set forth in Claim 7 wherein said diffuser structure has at its inner periphery a vaneless space with a radial depth which is less than the smallest diameter within its circumferentially spaced channels.

9. An improved centrifugal compressor as set forth in claim 7 wherein ^{said} channels are circular in cross-section.



10. An improved centrifugal compressor as set forth in claim 7 wherein ^{said} channels are conical in longitudinal cross-section.

11. An improved centrifugal compressor as set forth in claim 7 wherein said impeller blades are formed in a backswept manner.

DATED this 29th day of July 1992.

CARRIER CORPORATION

WATERMARK PATENT & TRADEMARK ATTORNEYS
"THE ATRIUM"
290 BURWOOD ROAD
HAWTHORN. VIC. 3122.



CENTRIFUGAL COMPRESSOR WITH HIGH
EFFICIENCY AND WIDE OPERATING RANGE

Abstract of the Disclosure

A pipe diffuser is used in a centrifugal compressor in such a way as to obtain high efficiency over a broad operating range. The number of channels in the pipe diffuser is limited such that the wedge angle is relatively large and therefore not susceptible to flow separation at the leading edges thereof. The vaneless space between the impeller and the leading edge circle of the diffuser is limited in its radial depth such that the flow separations are further inhibited. Finally, the impeller has a relatively high backsweep such that the absolute flow exit angle is relatively low, thereby reducing the sensitivity to lower flow conditions.

30 07 92 20074




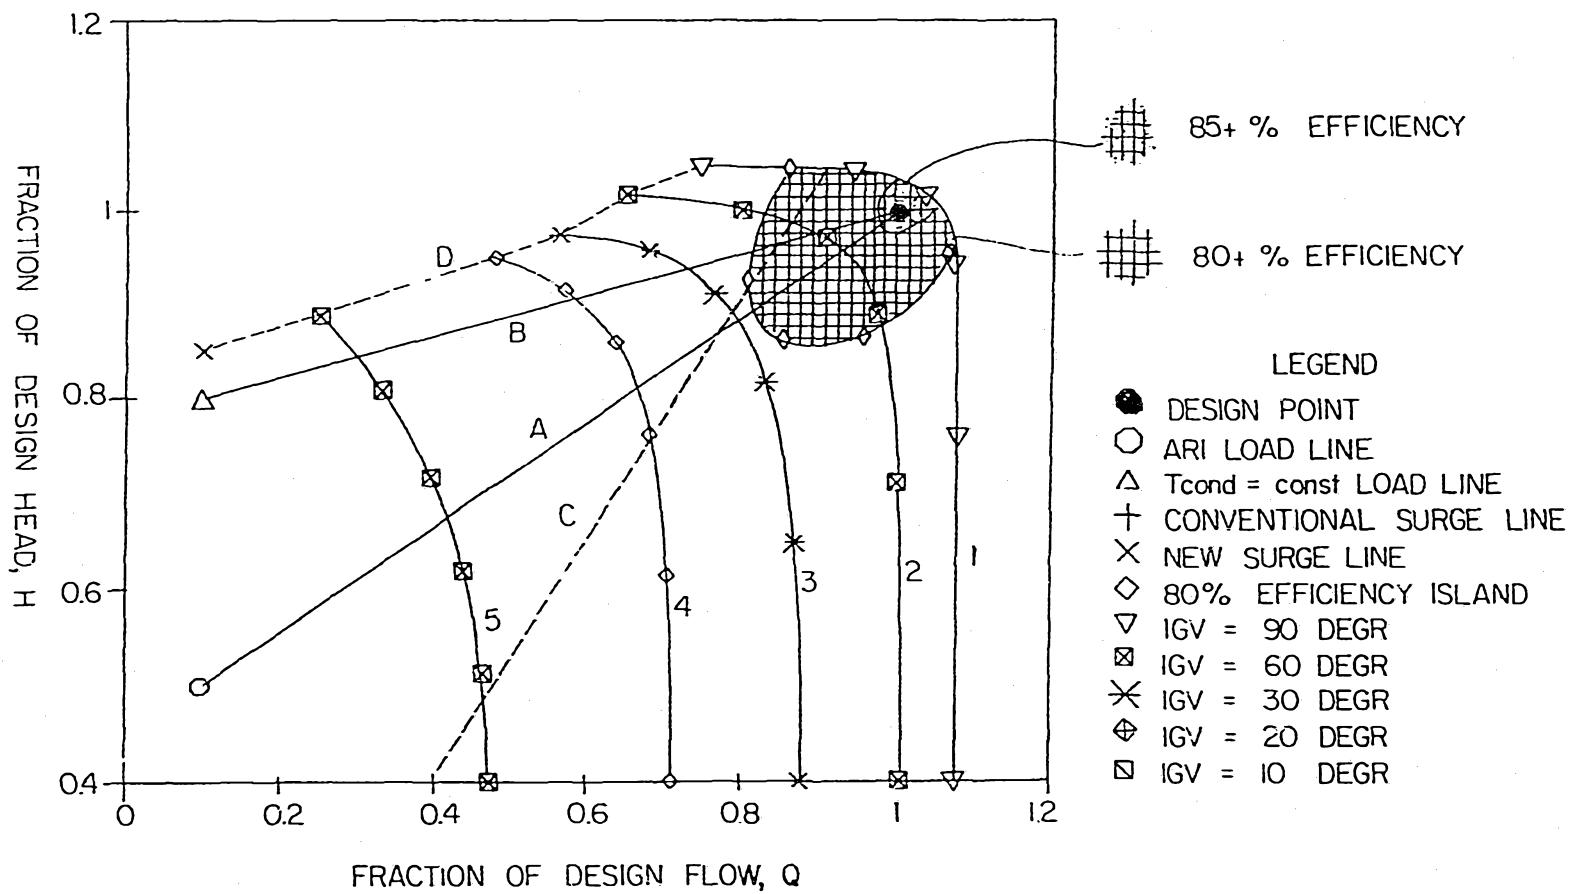


FIG. I

30 07 92 20574

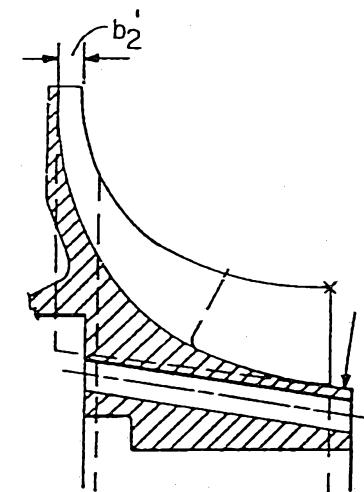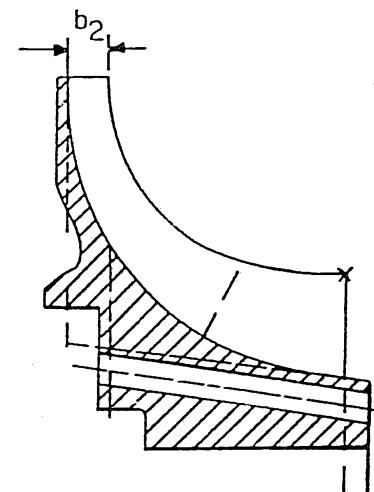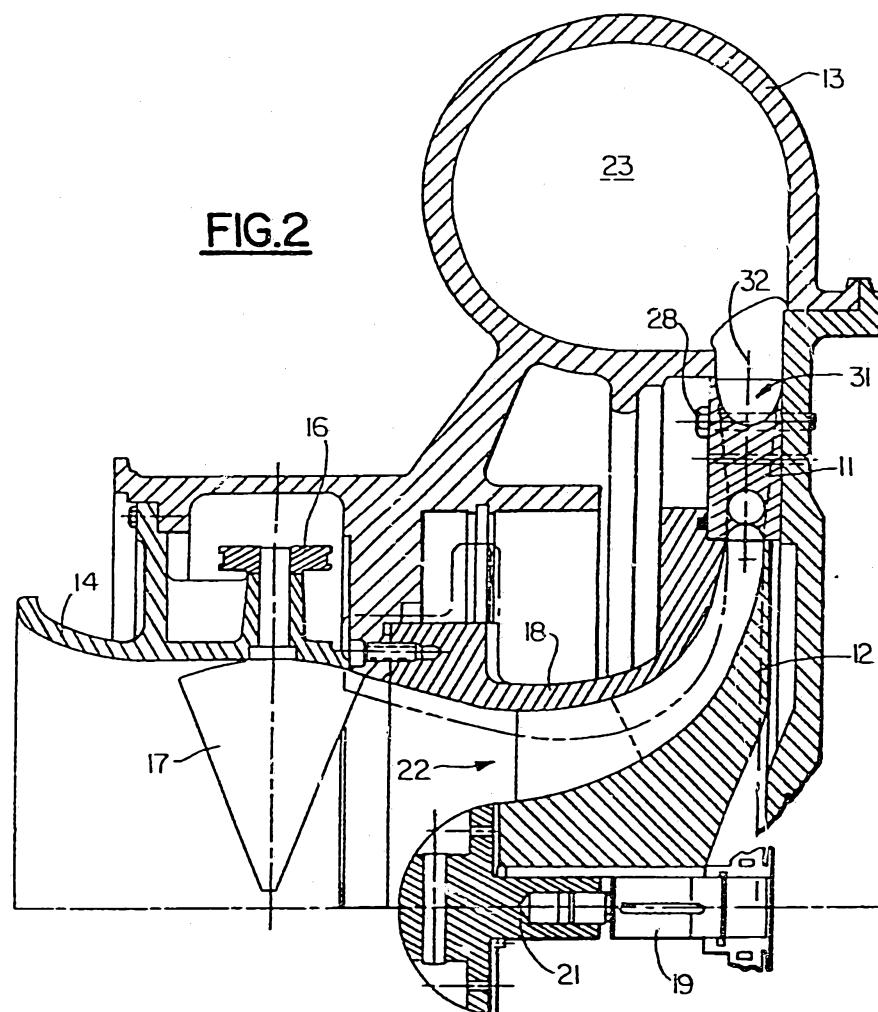


2/5

200674/112

30 07 92 2067%

20674/92

3/5

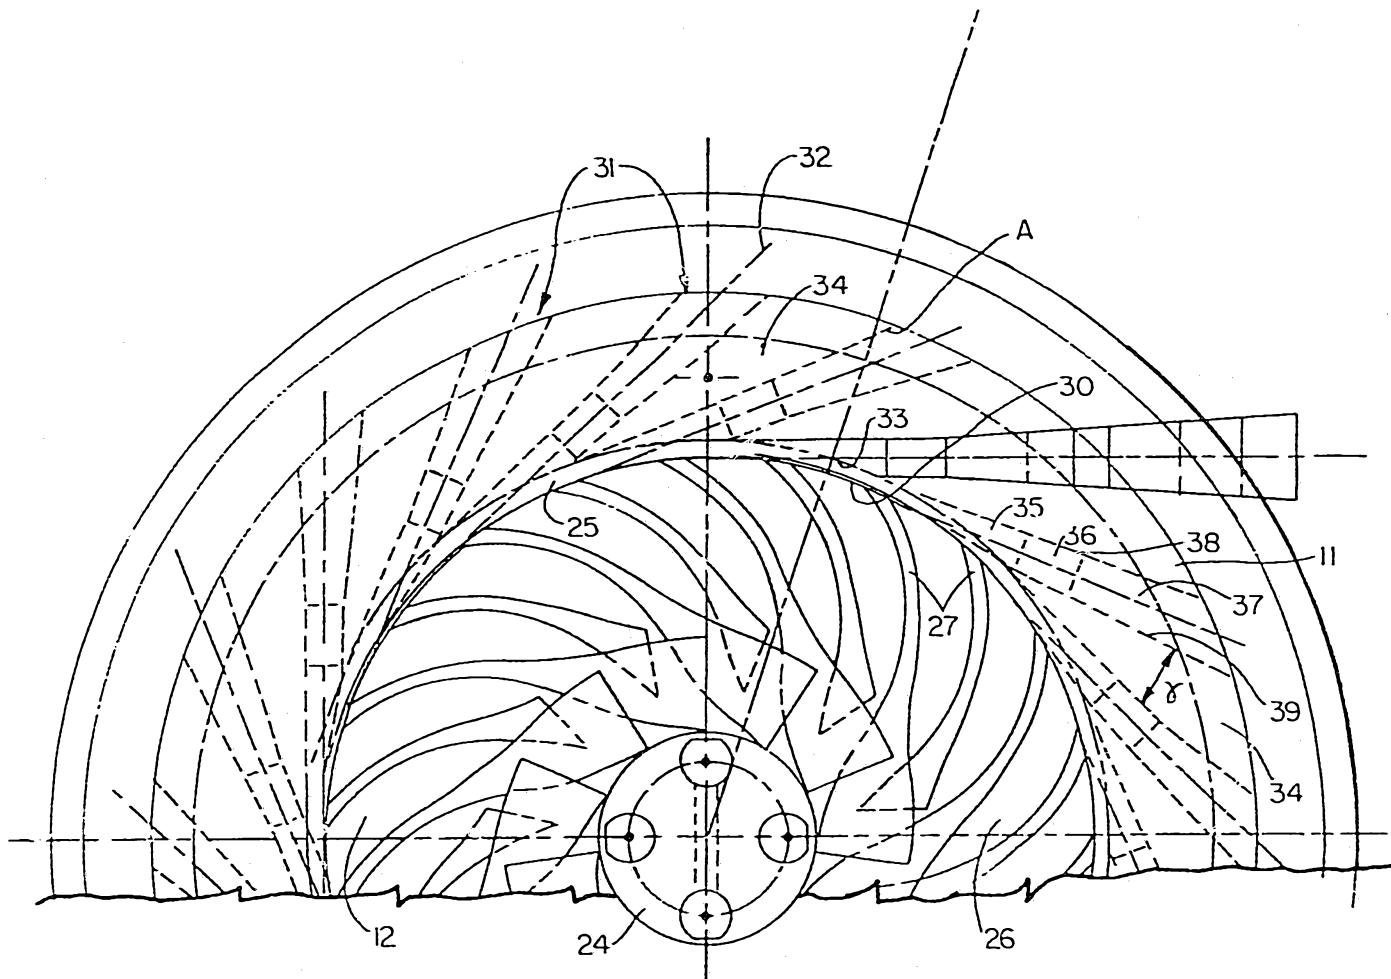

20674 / 92

30 07 92 2007%

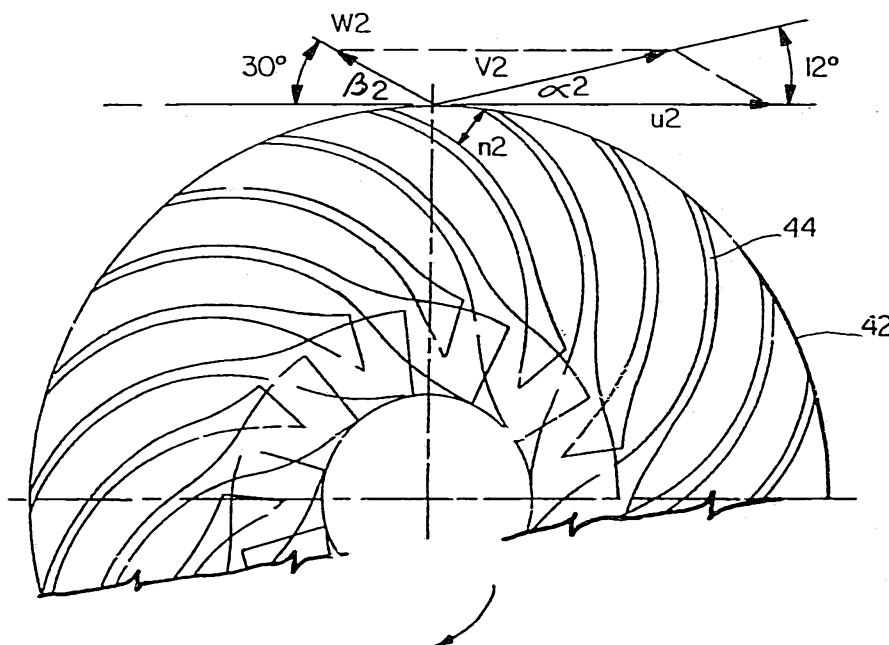


FIG.4

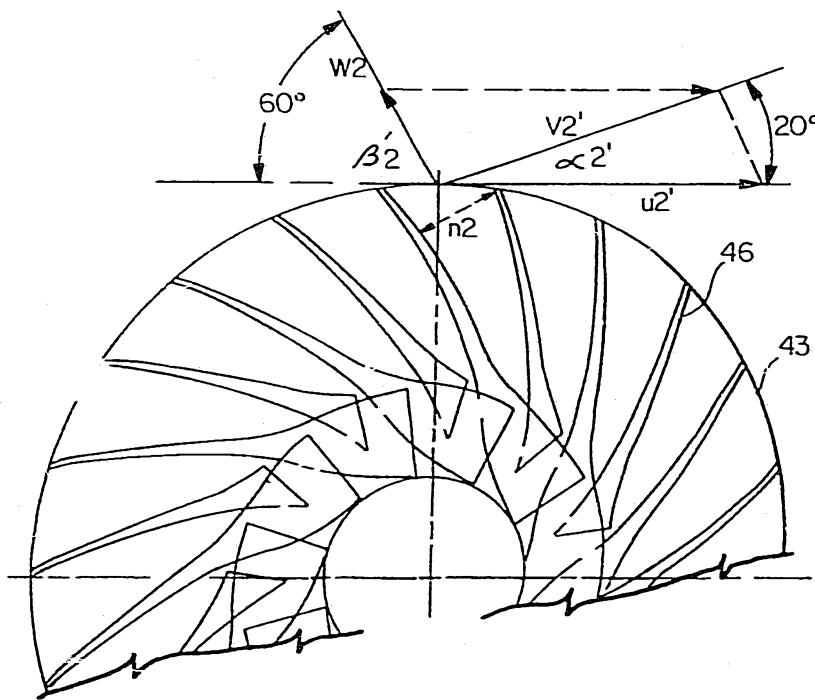


FIG.5

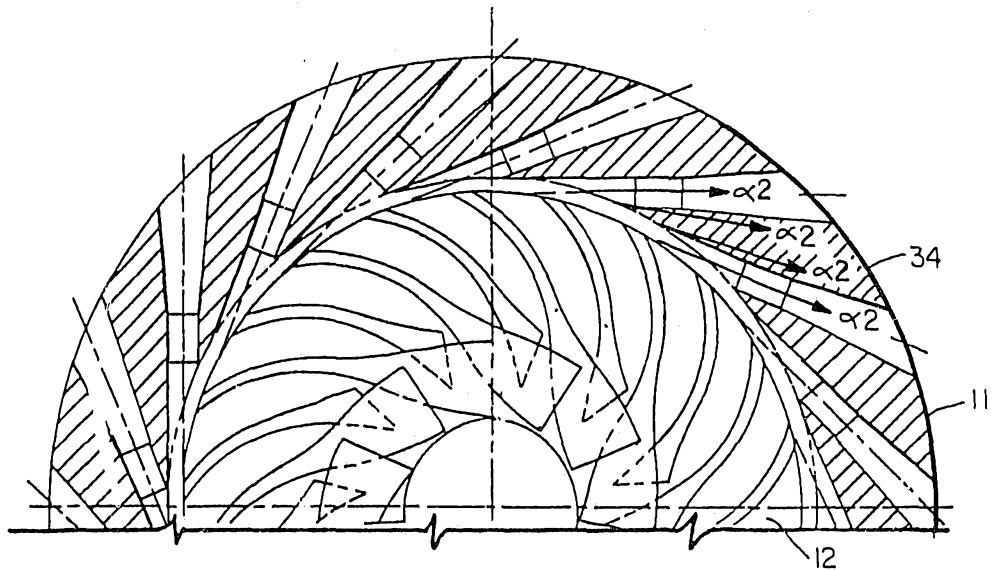


FIG.8

