



- (51) International Patent Classification:
F02M 61/18 (2006.01) *F02M 61/16* (2006.01)
- (21) International Application Number:
PCT/US2018/037311
- (22) International Filing Date:
13 June 2018 (13.06.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
15/622,759 14 June 2017 (14.06.2017) US
- (71) Applicant: **CONTINENTAL AUTOMOTIVE SYSTEMS, INC.** [US/US]; One Continental Drive, Auburn Hills, Michigan 48326 (US).
- (72) Inventors: **SHAW, Keith Aaron**; 117 Amelia Ct, Yorktown, Virginia 23693 (US). **MCFARLAND, Robert Wayne**; 20168 Harbour Ridge, Smithfield, Virginia 23430
- (US). **HATFIELD, Joshua Lee**; 907 Ivystone Way, Newport News, Virginia 23602 (US).
- (74) Agent: **ESSER, William F** et al.; Continental Automotive Systems, Inc., One Continental Drive, Auburn Hills, Michigan 48326 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

(54) Title: FLUID INJECTOR SPRAY DISC HAVING OFFSET CHANNEL ARCHITECTURE

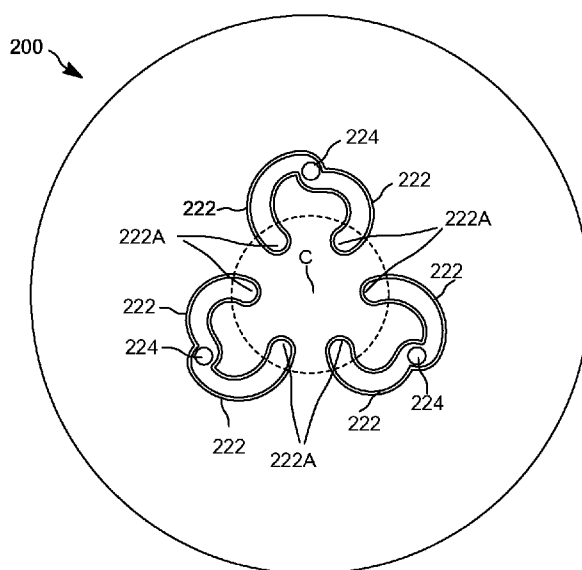


FIG. 5

(57) Abstract: A fluid injector for injecting fluid includes a body with a fluid passageway extending from an inlet to an outlet of the fluid injector; a valve seat; a valve element that is selectively engages with the valve seat; and a disc member disposed in the fluid passageway downstream of the valve seat. The disc member includes a plurality of channels defined along a first surface of the disc member, and a plurality of orifices defined through the disc, with each disc member being fluidly coupled to a plurality of channels. The channels fluidly coupled to each channel are in offset relation to each other at the orifice such that fluid flowing through the orifice forms a swirl pattern when exiting the orifice.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

FLUID INJECTOR SPRAY DISC HAVING OFFSET CHANNEL ARCHITECTURE

Field of Invention

[0001] The present invention generally relates to a spray disc for controlling fluid spray patterns ejected from a fluid injector, and particularly to a spray disc for a fuel or reductant injector which provides improved swirl spray patterns therefrom.

Background

[0002] Strict emission standards for internal combustion engines require the use of advanced fuel and reductant metering techniques that tightly control fluid doses. The fine atomization of fuel or reductant injected into the combustion chamber or exhaust stream, respectively, of the internal combustion engine not only improves emission quality of the engine's exhaust, but also improves fuel consumption, cold start capability, and overall engine performance. One way of injecting a fine spray into the engine's intake manifold, combustion chamber or exhaust stream is for the fluid to have a swirl flow pattern as the fluid exits the fluid injector.

Summary

[0003] Example embodiments provide an improved fluid injector for injecting a spray of fluid, such as fuel or reductant, having one or more swirl spray patterns. According to an example embodiment, a fluid injector for injecting fluid includes a body; a fluid passageway defined through the body and extending from an inlet to an outlet of the fluid injector; a valve seat disposed internally of the body within the fluid passageway; and a valve element that is selectively reciprocated relative to the valve seat to close and open the fluid passageway by seating the valve element on and unseating the valve element from the valve seat, respectively. The fluid injector further includes a disc member disposed in the fluid passageway downstream of the valve seat relative to a direction of the flow of fluid through the fluid injector. The disc member includes a plurality of channels defined along a first surface of the disc member and a

plurality of orifices, with each orifice defined through the disc member and fluidly coupled to at least two of the channels. The channels fluidly coupled to each orifice are in offset relation to each other at the orifice such that fluid flowing through and exiting the orifices from the channels form a swirl pattern.

[0004] In an example embodiment, the channels associated with each orifice are collectively defined at least in part by a first elongated side wall and a second elongated side wall, each of the first elongated side wall and the second elongated side wall includes a dimple at the orifice, the dimples being disposed across the orifice from each other.

[0005] Tangent lines along the first elongated side wall are discontinuous at the orifice and tangent lines along the second side channel wall are discontinuous at the orifice. Each of the first and second elongated side walls includes a dimple defined at or proximal to the orifice.

[0006] In an example embodiment, each orifice is disposed along the disc member radially outwardly from an opening of the fluid passageway at a downstream portion of the valve seat, and each channel includes a first end opposite the orifice. The first end of each channel is disposed along the disc member radially inwardly of the opening of the fluid passageway at the downstream portion of the valve seat.

[0007] The channels fluidly coupled to each orifice may be fluidly coupled together at a location other than at the orifice.

[0008] In an example embodiment, for each channel, a channel width at the orifice is greater than a channel width at other locations of the channel.

[0009] In another example embodiment, each orifice is disposed along the disc member radially outwardly from an opening of the fluid passageway at a downstream portion of the valve seat. Each channel fluidly coupled to an orifice includes a first end opposite the orifice. The first ends of the channels are fluidly coupled to each other and are disposed along the disc member radially inwardly of the opening of the fluid passageway at the downstream portion of the valve seat.

[0010] In yet another example embodiment, a fluid injecting device includes a disc member for passing fluid therethrough, including a plurality of channels defined along a first surface of the disc member, and a plurality of orifices defined through the disc

member. Each orifice is in fluid communication with a plurality of channels, and the channels in fluid communication with each orifice are in offset relation to each other at the orifice such that fluid flowing through the orifice from the channels forms a swirl flow pattern.

[0011] This example embodiment may further include a body; a fluid passageway defined through the body and extending from an inlet to an outlet of the fluid injection device; a valve seat disposed internally of the body within the fluid passageway; and a valve needle that is axially movable within the body between a closed position in which the valve needle sealing engages with the valve seat so as to prevent fluid from flowing through the fluid passageway and exiting the fluid injection device, and an open position in which the valve needle is spaced from the valve seat so as to allow fluid to flow through the fluid passageway and exit the fluid injection device. Each orifice may be disposed along the disc member radially outwardly of an opening of the valve seat at a downstream portion thereof. Each channel may include a first end opposite the orifice with which the channel is in fluid communication, and each first end may be disposed along the disc member radially inwardly to the opening of the valve seat at the downstream portion thereof. The channels associated with each orifice are collectively defined at least in part by a first elongated side wall and a second elongated side wall, each of the first elongated side wall and the second elongated side wall may include a dimple located at the orifice, and the dimple of the first elongated side wall is disposed across the orifice from the dimple of the second elongated side wall.

[0012] In such example embodiment, tangent lines along the first elongated side wall are discontinuous at the orifice and tangent lines along the second elongated side wall are discontinuous at the orifice. Each channel in fluid communication with an orifice may include a first end at the orifice and a second end, and the second ends are in fluid communication with each other.

Brief Description of the Drawings

[0013] Aspects of the invention will be explained in detail below with reference to an exemplary embodiment in conjunction with the drawings, in which:

Fig. 1 is a cross-sectional side view of a fluid injector according to an example embodiment;

Fig. 2 is an enlarged cross-sectional view of an outlet portion of the fluid injector of Fig. 1 when the fluid injector is closed;

Fig. 3 is an enlarged cross-section view of the outlet portion of the fluid injector of Fig. 1 when the fluid injector is open;

Fig. 4 is a perspective view of a disc member of Fig. 1 according to an example embodiment;

Fig. 5 is a top view of the disc member of the fluid injector of Fig. 1;

Fig. 6 is an enlarged view of channels appearing in the disc member of Figs. 4 and 5;

Fig. 7 is a top view of the disc member of the fluid injector of Fig. 1 according to another example embodiment; and

Fig. 8 is a top view of the disc member of the fluid injector of Fig. 1 according to yet another example embodiment.

Detailed Description

[0014] The following description of the preferred embodiment(s) is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

[0015] Example embodiments are generally directed to a disc member disposed at the outlet end of a fluid injector which causes fluid discharged from the fluid injector to follow multiple swirl flow patterns.

[0016] Figs. 1-3 illustrate a solenoid-operated fluid injector 10 according to an example embodiment. The fluid injector 10 has a fluid inlet 112, a fluid outlet 114, and a fluid passageway 116 extending from the fluid inlet 112 to the fluid outlet 114. Fluid injector 10 is of the conventional, solenoid-operated type, having an armature 118 operated by a coil 120. An electromagnetic force is generated by current flow from an electronic control unit (not shown) through the coil 120 in order to move armature 118. Movement of armature 118 also moves an operatively attached valve element and/or valve needle 122. Valve needle 122 includes a ball member 124 integrally formed with

valve needle 122 at a downstream end thereof. Fluid injector 10 further includes a body 126 through which fluid passageway 116 is at least partly defined and in which valve needle 122 is at least partly disposed and movable therein. A valve seat 138 is fixedly disposed within body 126 and includes a bore defined therethrough. Valve needle 122 is axially movable within fluid injector 10 between a closed position in which ball member 124 of valve needle 122 sealingly engages with valve seat 138 so that no fluid flows out of fluid outlet 114, and an open position in which ball member 124 is spaced from valve seat 138 so as to allow fluid to flow through fluid injector 10 and exit the injector at fluid outlet 114. Valve needle 122 and valve seat 138 form a valve assembly of fluid injector 10. Fluid injector 10 further includes spray disc member 200 which is coupled to a downstream side of valve seat 138. Fluid flowing through spray disc member 200 and exiting fluid injector 10 have swirl spray patterns, as discussed in greater detail below.

[0017] Figs. 2 and 3 are simplified images of the downstream end portion of fluid injector 10 according to an example embodiment. The downstream end portion of fluid injector 10 includes a guide member 136 which, together with valve seat 138, are disposed axially interiorly of spray disc member 200. The guide member 136, valve seat 138 and spray disc member 200 are retained within body 126 by a suitable technique such as, for example, welding spray disc member 200 to valve seat 138 and welding seat 138 to body 126.

[0018] Valve seat 138 includes a frusto-conical shaped seating surface 138A that leads from guide member 136 to a central passage 138B of the seat 138 that, in turn, leads in a fluid flow direction to spray disc member 200. Guide member 136 includes a central guide opening for guiding the axial reciprocation of ball member 124 and several through-openings 136A distributed around the central opening to provide for fluid to flow into and through valve seat 138. Fig. 2 shows ball member 124 seated on sealing surface 138A, thus preventing fluid flow from fluid injector 10, and Fig. 3 shows ball member 124 displaced from sealing surface 138A, thereby opening fluid injector 10 and allowing the flow of fluid therefrom.

[0019] Figs. 4 and 5 illustrate spray disc member 200 according to an example embodiment. Spray disc member 200 is constructed from a metal or a metal

composition. As can be seen, spray disc member 200 is flat with opposed planar surfaces. It is understood, however, that spray disc member 200 may have different shapes, such as including a centrally disposed dimple which extends outwardly in a downstream direction, i.e., in a direction of fluid flow through fluid injector 10.

[0020] Disc member 200 includes a plurality of channels 222 defined along the upstream surface of disc member 200 and a plurality of orifices 224 defined through disc member 200. Orifices 224 are disposed within channels 222. In the illustrated example embodiment, disc member 200 includes six channels 222 that are symmetrically spaced about a center C of disc member 200 but it is understood that more or less than six channels 222 may be symmetrically disposed about the center of disc member 200. Each channel 222 is curved and ends at an orifice 224. A plurality of channels 222 are fluidly coupled to, and end at, a single orifice 224. Figs. 4 and 5 illustrate each orifice 224 being in fluid communication with two channels 222, and it is understood that each orifice 224 may be fluidly coupled to more than two channels 222. Channels 222 associated with an orifice 224 somewhat forms a U-shape or horseshoe shape, as explained in greater detail below.

[0021] In the example embodiment illustrated in Figs. 4 and 5, channels 222 have the same length and have ends 222A (Fig. 5) which are at least roughly equally spaced from center C of disc member 220. It is understood that in other example embodiments, however, channels 222 are not the same length and do not have ends 222A which are equally spaced from center C. As shown in Fig. 5, orifices 224 are equally spaced from the center C of disc member 200. Fig. 5 also shows, in dashed lines, the location of the walls of valve seat 138 which define central passageway 138B. Ends 222A of channels 222 are disposed radially inwardly of central passageway 138B and orifices 224 are disposed radially outwardly along the disc member 200 relative to central passageway 138B. In this way, fluid passing through central passageway 138B of valve seat 138 enters channels 222 at or near ends 222A and travels within channels 222 until reaching orifices 224 whereupon the fluid passes through orifices 224 and exits fluid injector 10.

[0022] As explained above, each orifice 224 is in fluid communication with two or more channels 222. In the example embodiment of Figs. 4 and 5, the channels 222

associated with each orifice 224 are offset relative to each other. Channels 222 being offset relative to each other at orifice 224 facilitate fluid passing through orifices 224, and thus exiting fluid injector 10, having a swirl flow pattern. Specifically, instead of channels 222 associated with a single orifice 224 being symmetrical or mirror images of each other at the orifice 224, such as would result if channels 222 form a horseshoe or U-shape with orifice 224 being at the end of channels 222, channels 222 are displaced or offset relative to each other at orifice 224.

[0023] Fig. 6 illustrates channels 222, referenced as 222' and 222", which are in fluid communication with an orifice 224 of disc member 200 of Figs. 4 and 5, and particularly shows fluid flow paths in channels 222' and 222" towards orifice 224. With channels 222' and 222" being offset from each other at orifice 224, fluid flow from one channel 222' enters orifice 224 towards one portion thereof (the upper portion, from the perspective of Fig. 6) while fluid flow from the other channel 222" enters orifice 224 towards the other portion (the lower portion) thereof. Such fluid flow from channels 222' and 222" into orifice 224 results in fluid flow exiting orifice 224 having a swirl pattern in a clockwise direction, as viewed from the perspective of Fig. 6.

[0024] With continued reference to Fig. 6, channels 222' and 222" are collectively defined at least in part by elongated side walls 222B and 222C, each of which extends from end 222A of channel 222' to end 222A of channel 222". The offset positioning of channels 222' and 222" at orifice 224, as described above, results in a dimple formed at point 222E along an outside portion of elongated side wall 222C, and in a dimple formed at point 222D along an outside portion of elongated side wall 222B. Such dimples are disposed across orifice 224 from each other, along a line passing through a center of orifice 224.

[0025] The offset positioning of channels 222' and 222" which are fluidly coupled to the same orifice 224 can be described another way. Referring again to Fig. 6, elongated side walls 222B and 222C are curved such that tangent lines taken along each curved wall 222B, 222C smoothly transition at nearly all locations along side walls 222B and 222C. However, tangent lines along each side wall 222B and 222C undergoes an abrupt or discontinuous change at one location. The abrupt or discontinuous change in the tangent lines occurs at points 222D and 222E along

curved elongated walls 222B and 222C, respectively, where the above-mentioned dimples are located.

[0026] Figs. 7 and 8 depict disc member 200 according to additional example embodiments. In Fig. 7, channels 222 associated with an orifice 224 are offset each other, forming dimples as discussed above with respect to the embodiment of Figs. 4-6, but here the amount of channel offset is not as pronounced. In Fig. 8, offset channels 222 are fluidly coupled to each other at orifice 224 and also at an opposite location therefrom, effectively forming a single channel.

[0027] Fluid injector 10, including disc member 200, may be a fuel injector for injecting fuel into the intake manifold or combustion chamber of an internal combustion engine. Alternatively, fluid injector 10 may be an injector for a reductant delivery unit of a selective catalytic reduction system in which a reductant is injected into the exhaust stream of a vehicle's exhaust line for reducing the vehicle's nitrogen oxide emissions. Further, it is understood that spray disc member 200 may be utilized in fluid and/or fuel injectors having other architectures and component arrangements than the architecture and component arrangement of fluid injector 10 illustrated in Fig. 1 and described hereinabove.

[0028] The example embodiments have been described herein in an illustrative manner, and it is to be understood that the terminology which has been used is intended to be in the nature of words of description rather than of limitation. Obviously, many modifications and variations of the invention are possible in light of the above teachings. The description above is merely exemplary in nature and, thus, variations may be made thereto without departing from the spirit and scope of the invention as defined in the appended claims.

What is claimed is:

1. A fluid injector for injecting fluid, comprising:
 - a body;
 - a fluid passageway defined through the body and extending from an inlet to an outlet of the fluid injector;
 - a valve seat disposed internally of the body within the fluid passageway;
 - a valve element that is selectively reciprocated relative to the valve seat to close and open the fluid passageway by seating the valve element on and unseating the valve element from the valve seat, respectively; and
 - a disc member disposed in the fluid passageway downstream of the valve seat relative to a direction of the flow of fluid through the fluid injector, the disc member comprising a plurality of channels defined along a first surface of the disc member and a plurality of orifices, with each orifice defined through the disc member and fluidly coupled to at least two of the channels,wherein the channels fluidly coupled to each orifice are in offset relation to each other at the orifice such that fluid flowing through and exiting each of the orifices from the channels forms a swirl pattern.
2. The fluid injector of claim 1, wherein the channels associated with each orifice are collectively defined at least in part by a first elongated side wall and a second elongated side wall, each of the first elongated side wall and the second elongated side wall includes a dimple at the orifice, the dimples being disposed across the orifice from each other.
3. The fluid injector of claim 1, wherein the channels associated with each orifice are collectively defined at least in part by a first elongated side wall and a second elongated side wall, and tangent lines along the first elongated side wall are discontinuous at the orifice and tangent lines along the second side channel wall are discontinuous at the orifice.


4. The fluid injector of claim 1, wherein each orifice is disposed along the disc member in the fluid injector radially outwardly from an opening of the fluid passageway at a downstream portion of the valve seat and each channel includes a first end opposite the orifice, the first end of each channel is disposed along the disc member radially inwardly of the opening of the fluid passageway at the downstream portion of the valve seat.
5. The fluid injector of claim 1, wherein the channels fluidly coupled to each orifice are fluidly coupled together at a location other than at the orifice.
6. The fluid injector of claim 5, wherein
each orifice is disposed along the disc member radially outwardly from an opening of the fluid passageway at a downstream portion of the valve seat, and
for each orifice, each channel fluidly coupled thereto includes a first end opposite the orifice, the first ends of the channels are fluidly coupled to each other and are disposed along the disc member radially inwardly of the opening of the fluid passageway at the downstream portion of the valve seat.
7. The fluid injector of claim 1, wherein for each channel, a channel width at the orifice is greater than a channel width at other locations of the channel.
8. The fluid injector of claim 1, wherein the channels fluidly coupled to each orifice are collectively defined at least in part by a first elongated side wall and a second elongated side wall, each of the first and second elongated side walls including a dimple defined at the orifice.

9. A fluid injection device, comprising:
- a disc member for passing fluid therethrough, comprising a plurality of channels defined along a first surface of the disc member, and a plurality of orifices defined through the disc member, with each orifice being in fluid communication with a plurality of channels, the channels in fluid communication with each orifice being in offset relation to each other at the orifice such that fluid flowing through the orifice from the channels forms a swirl pattern.
10. The fluid injection device of claim 9, further comprising:
- a body;
 - a fluid passageway defined through the body and extending from an inlet to an outlet of the fluid injection device;
 - a valve seat disposed internally of the body within the fluid passageway; and
 - a valve needle that is axially movable within the body between a closed position in which the valve needle sealing engages with the valve seat so as to prevent fluid from flowing through fluid passageway and exiting the fluid injection device, and an open position in which the valve needle is spaced from the valve seat so as allow fluid to flow through the fluid passageway and exit the fluid injection device.
11. The fluid injection device of claim 10, wherein each orifice is disposed along the disc member radially outwardly of an opening of the valve seat at a downstream portion thereof, each channel includes a first end opposite the orifice to which the channel is in fluid communication, and each first end is disposed along the disc member radially inwardly to the opening of the valve seat at the downstream portion thereof.
12. The fluid injection device of claim 9, wherein the channels associated with each orifice are collectively defined at least in part by a first elongated side wall and a second elongated side wall, each of the first elongated side wall and the second elongated side wall including a dimple located at the orifice, and the dimple of the first elongated side wall is disposed across the orifice from the dimple of the second elongated side wall.

13. The fluid injection device of claim 9, wherein the channels associated with each orifice are collectively defined at least in part by a first elongated side wall and a second elongated side wall, and tangent lines along the first elongated side wall are discontinuous at the orifice and tangent lines along the second elongated side wall are discontinuous at the orifice.

14. The fluid injection device of claim 9, wherein each channel in fluid communication with an orifice includes a first end at the orifice and a second end, and the second ends are in fluid communication with each other.

15. The fluid injection device of claim 9, wherein for each channel, a channel width at the orifice is greater than a channel width at other locations along the channel.

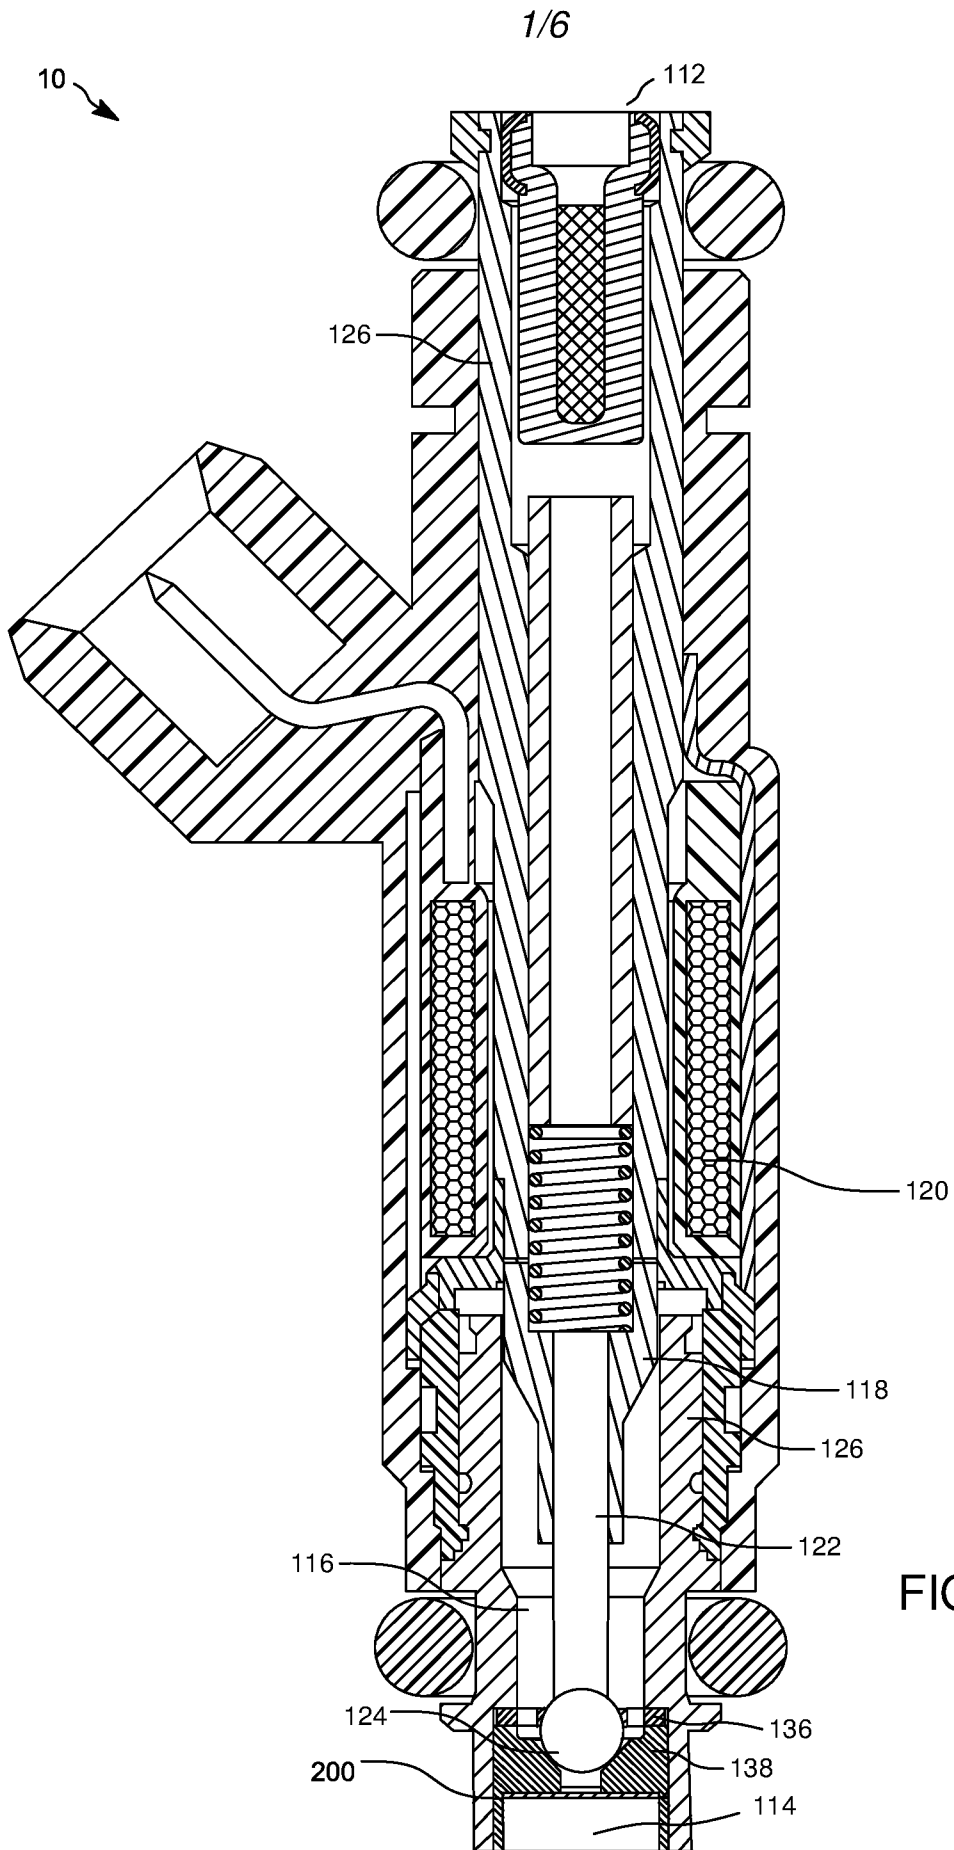

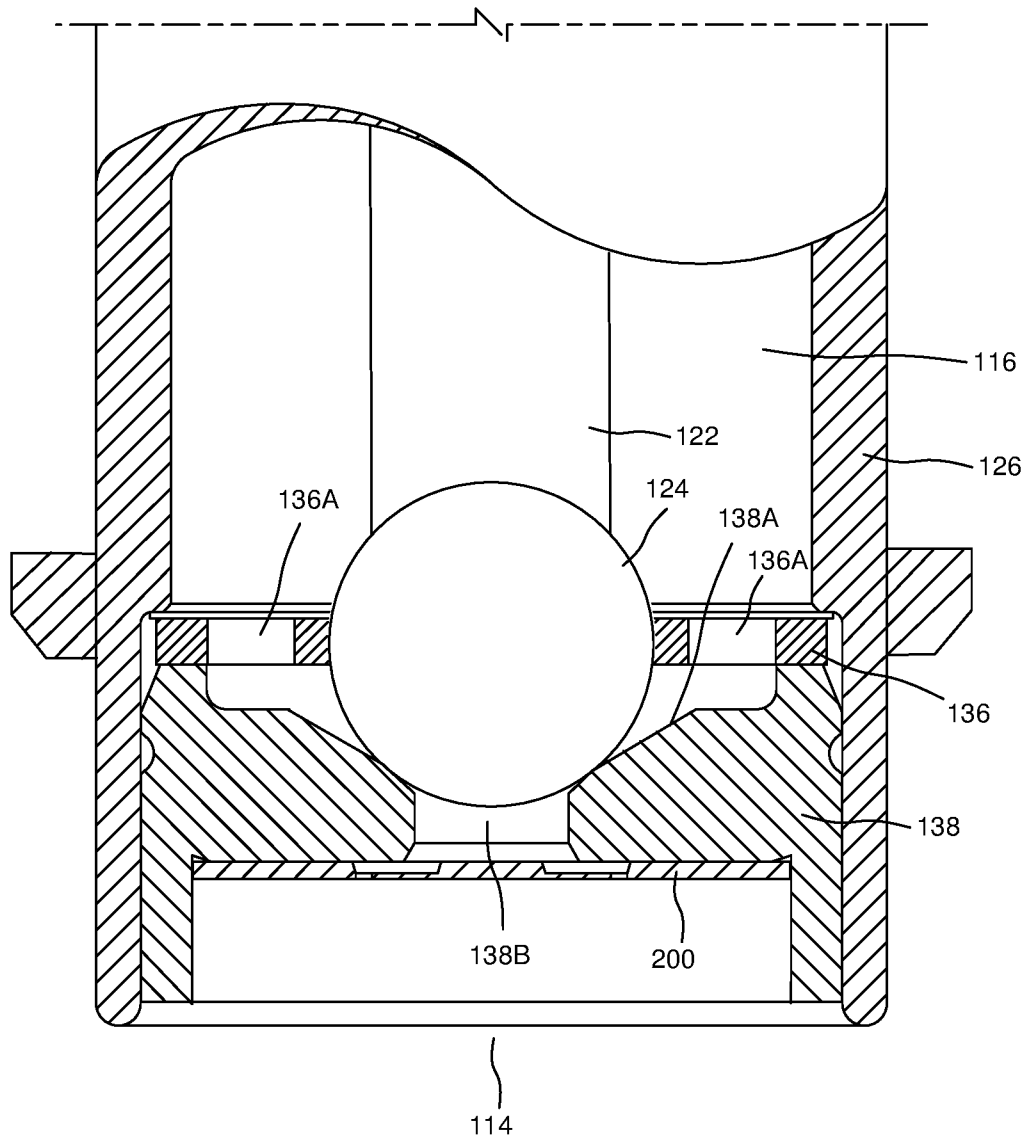


FIG. 2

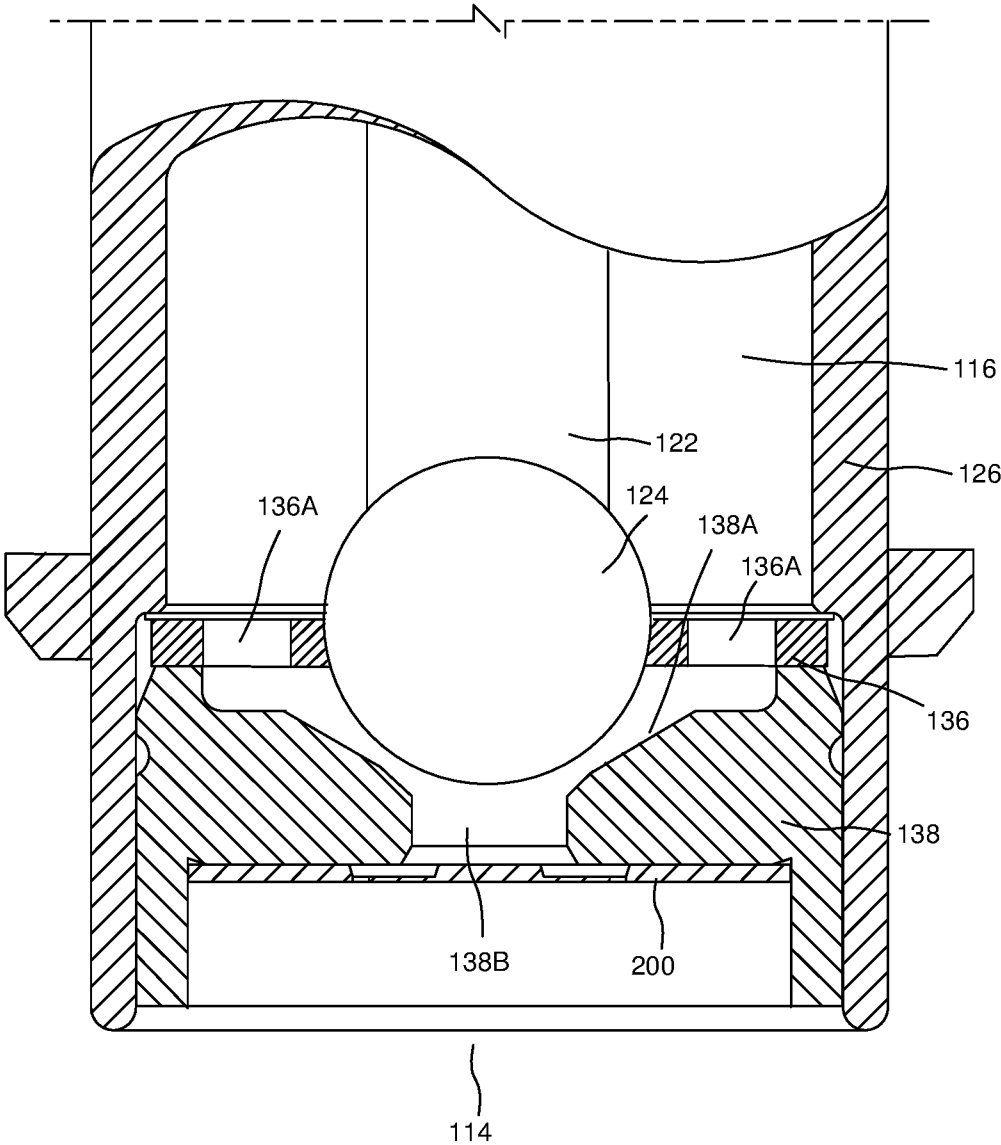


FIG. 3

4/6

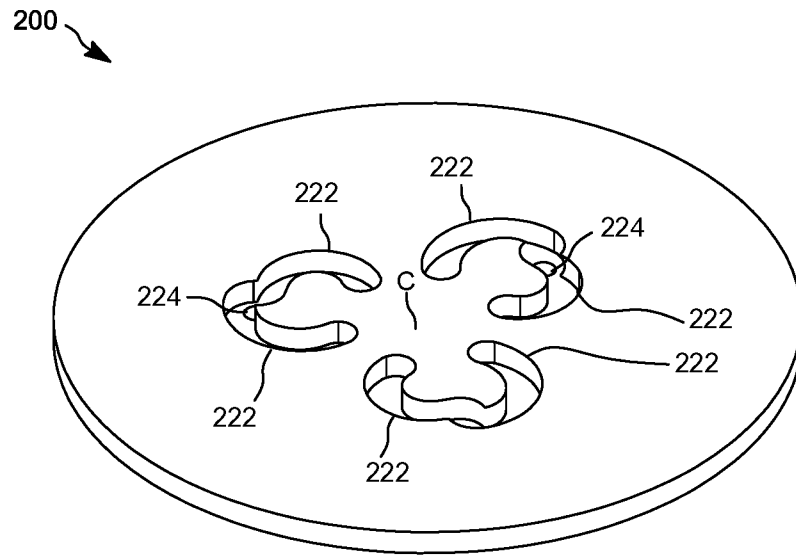


FIG. 4

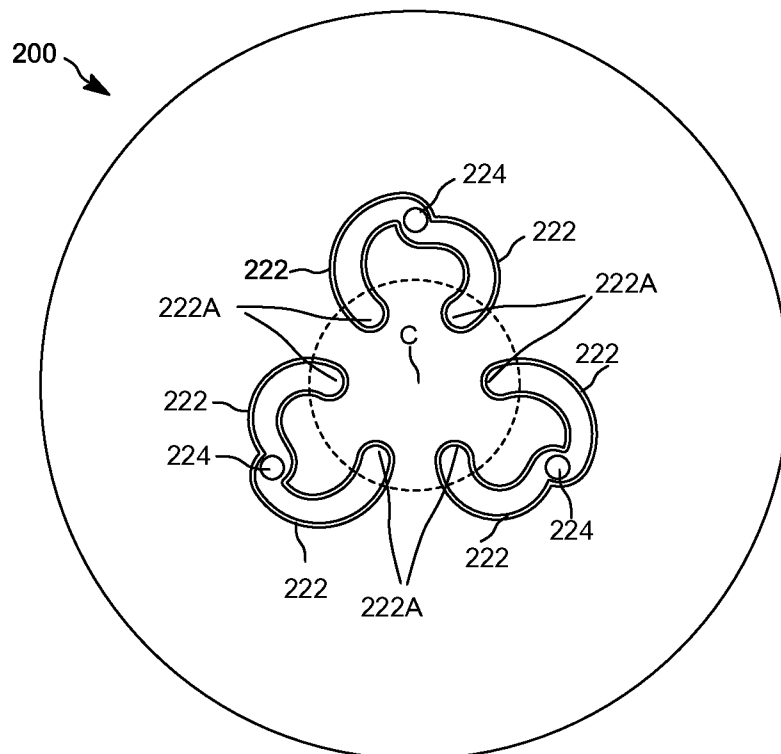


FIG. 5

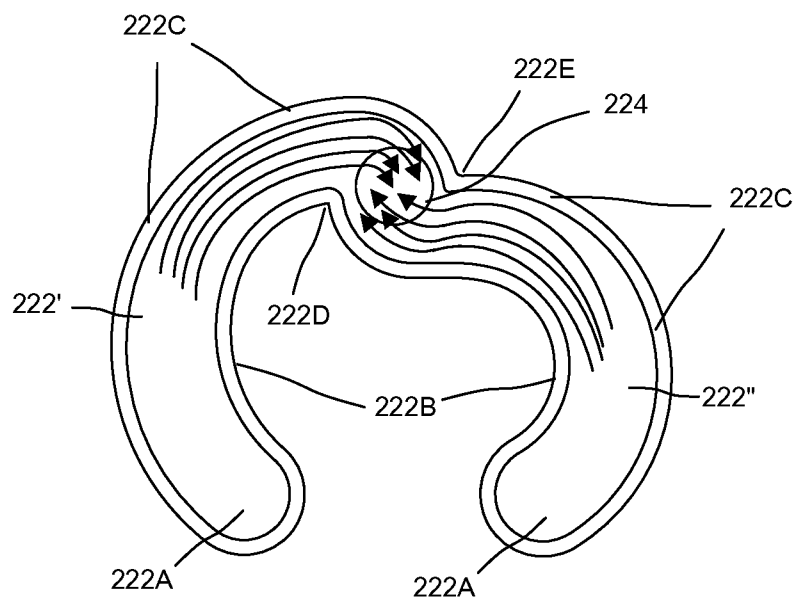


FIG. 6

6/6

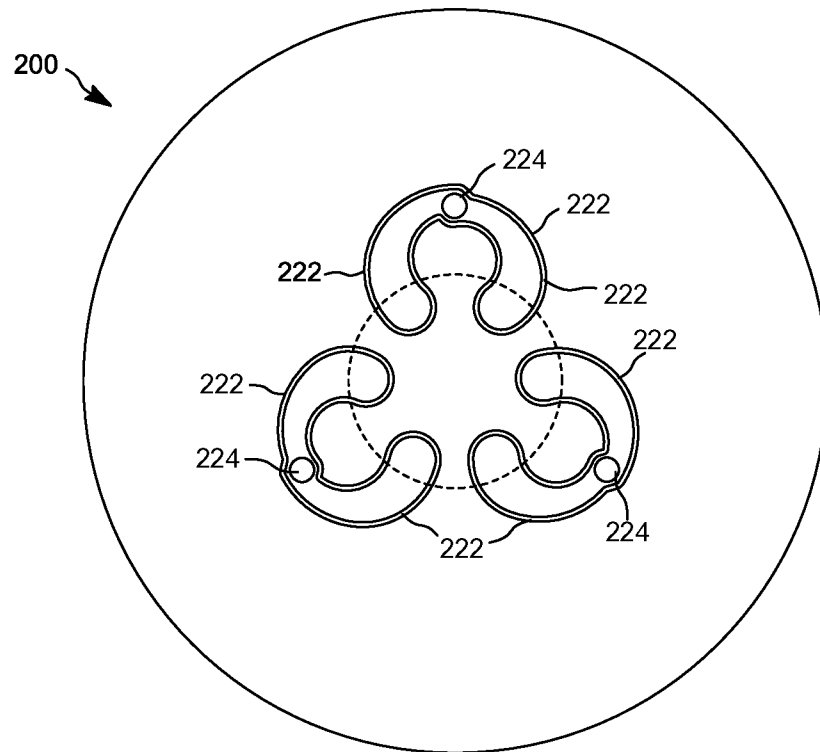


FIG. 7

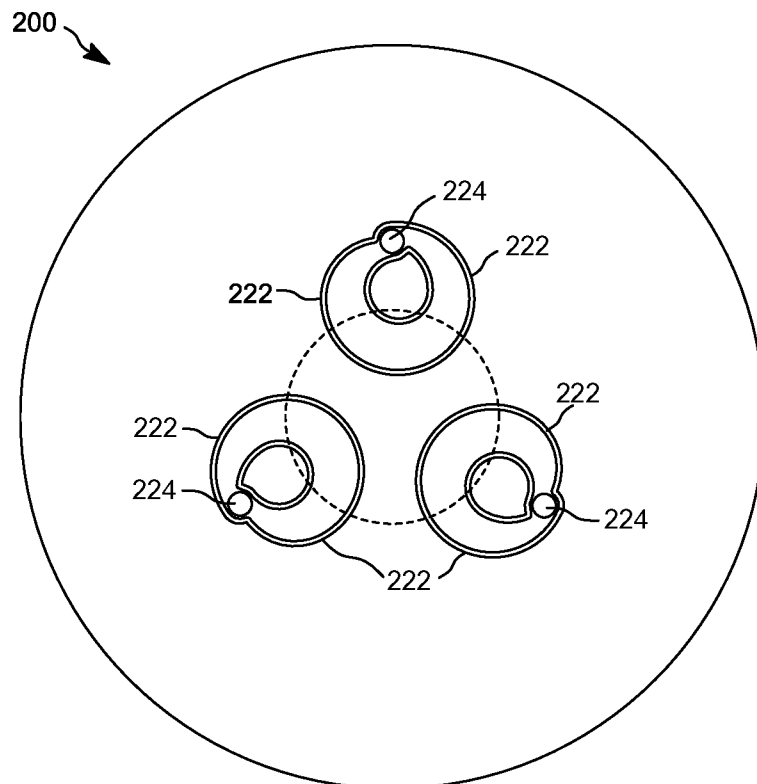


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/037311

A. CLASSIFICATION OF SUBJECT MATTER

INV. F02M61/18 F02M61/16
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F02M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2016 211389 A (MITSUBISHI ELECTRIC CORP) 15 December 2016 (2016-12-15) figures 1-11	1-4, 6-13,15
X,P	----- EP 3 199 796 A1 (ENPLAS CORP [JP]) 2 August 2017 (2017-08-02) paragraphs [0003] - [0005], [0019]; figures 2D, 17A	1-15
X	& WO 2016/047252 A1 (ENPLAS CORP [JP]) 31 March 2016 (2016-03-31) figures 2D, 17A	1-15
X	----- US 2004/217204 A1 (SUGIMOTO TOMOJIRO [JP] ET AL) 4 November 2004 (2004-11-04) figures 7D, 12	1-4, 6-13,15
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 September 2018

Date of mailing of the international search report

18/09/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Tortosa Masiá, A

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/037311

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96/11335 A1 (SIEMENS AUTOMOTIVE CORP LP [US]) 18 April 1996 (1996-04-18) figures 8, 1 -----	1-15
X	EP 2 745 003 A1 (BOSCH GMBH ROBERT [DE]) 25 June 2014 (2014-06-25) claim 1; figures 1, 9 -----	1-4, 6-13,15
X	EP 1 201 917 A2 (HITACHI LTD [JP]) 2 May 2002 (2002-05-02) paragraph [0048]; figures 6B, 4 -----	1-4, 6-13,15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/037311

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2016211389 A	15-12-2016	JP 6141350 B2 JP 2016211389 A	07-06-2017 15-12-2016
EP 3199796 A1	02-08-2017	CN 106715888 A EP 3199796 A1 JP 6351461 B2 JP 2015227656 A US 2017292489 A1 WO 2016047252 A1	24-05-2017 02-08-2017 04-07-2018 17-12-2015 12-10-2017 31-03-2016
US 2004217204 A1	04-11-2004	JP 4154317 B2 JP 2004340121 A US 2004217204 A1	24-09-2008 02-12-2004 04-11-2004
WO 9611335 A1	18-04-1996	DE 69532761 D1 DE 69532761 T2 EP 0784750 A1 JP H10507240 A US 5570841 A WO 9611335 A1	29-04-2004 12-08-2004 23-07-1997 14-07-1998 05-11-1996 18-04-1996
EP 2745003 A1	25-06-2014	BR 112014003635 A2 CN 103732907 A DE 102012211665 A1 EP 2745003 A1 JP 6113163 B2 JP 2014526013 A RU 2014110063 A US 2014252132 A1 WO 2013023838 A1	21-03-2017 16-04-2014 21-02-2013 25-06-2014 12-04-2017 02-10-2014 27-09-2015 11-09-2014 21-02-2013
EP 1201917 A2	02-05-2002	DE 60114344 D1 DE 60114344 T2 EP 1201917 A2 US 2002050266 A1	01-12-2005 27-07-2006 02-05-2002 02-05-2002