



(86) Date de dépôt PCT/PCT Filing Date: 1998/10/21
(87) Date publication PCT/PCT Publication Date: 1999/04/29
(45) Date de délivrance/Issue Date: 2004/06/22
(85) Entrée phase nationale/National Entry: 2000/04/20
(86) N° demande PCT/PCT Application No.: SE 1998/001906
(87) N° publication PCT/PCT Publication No.: 1999/021049
(30) Priorité/Priority: 1997/10/22 (9703851-7) SE


(51) Cl.Int.⁶/Int.Cl.⁶ G02F 1/13, G09F 9/35

(72) Inventeur/Inventor:
ANDERSSON, LARS, SE

(73) Propriétaire/Owner:
ANDERSSON, LARS, SE


(74) Agent: SIM & MCBURNEY

(54) Titre : AFFICHEUR
(54) Title: DISPLAY DEVICE

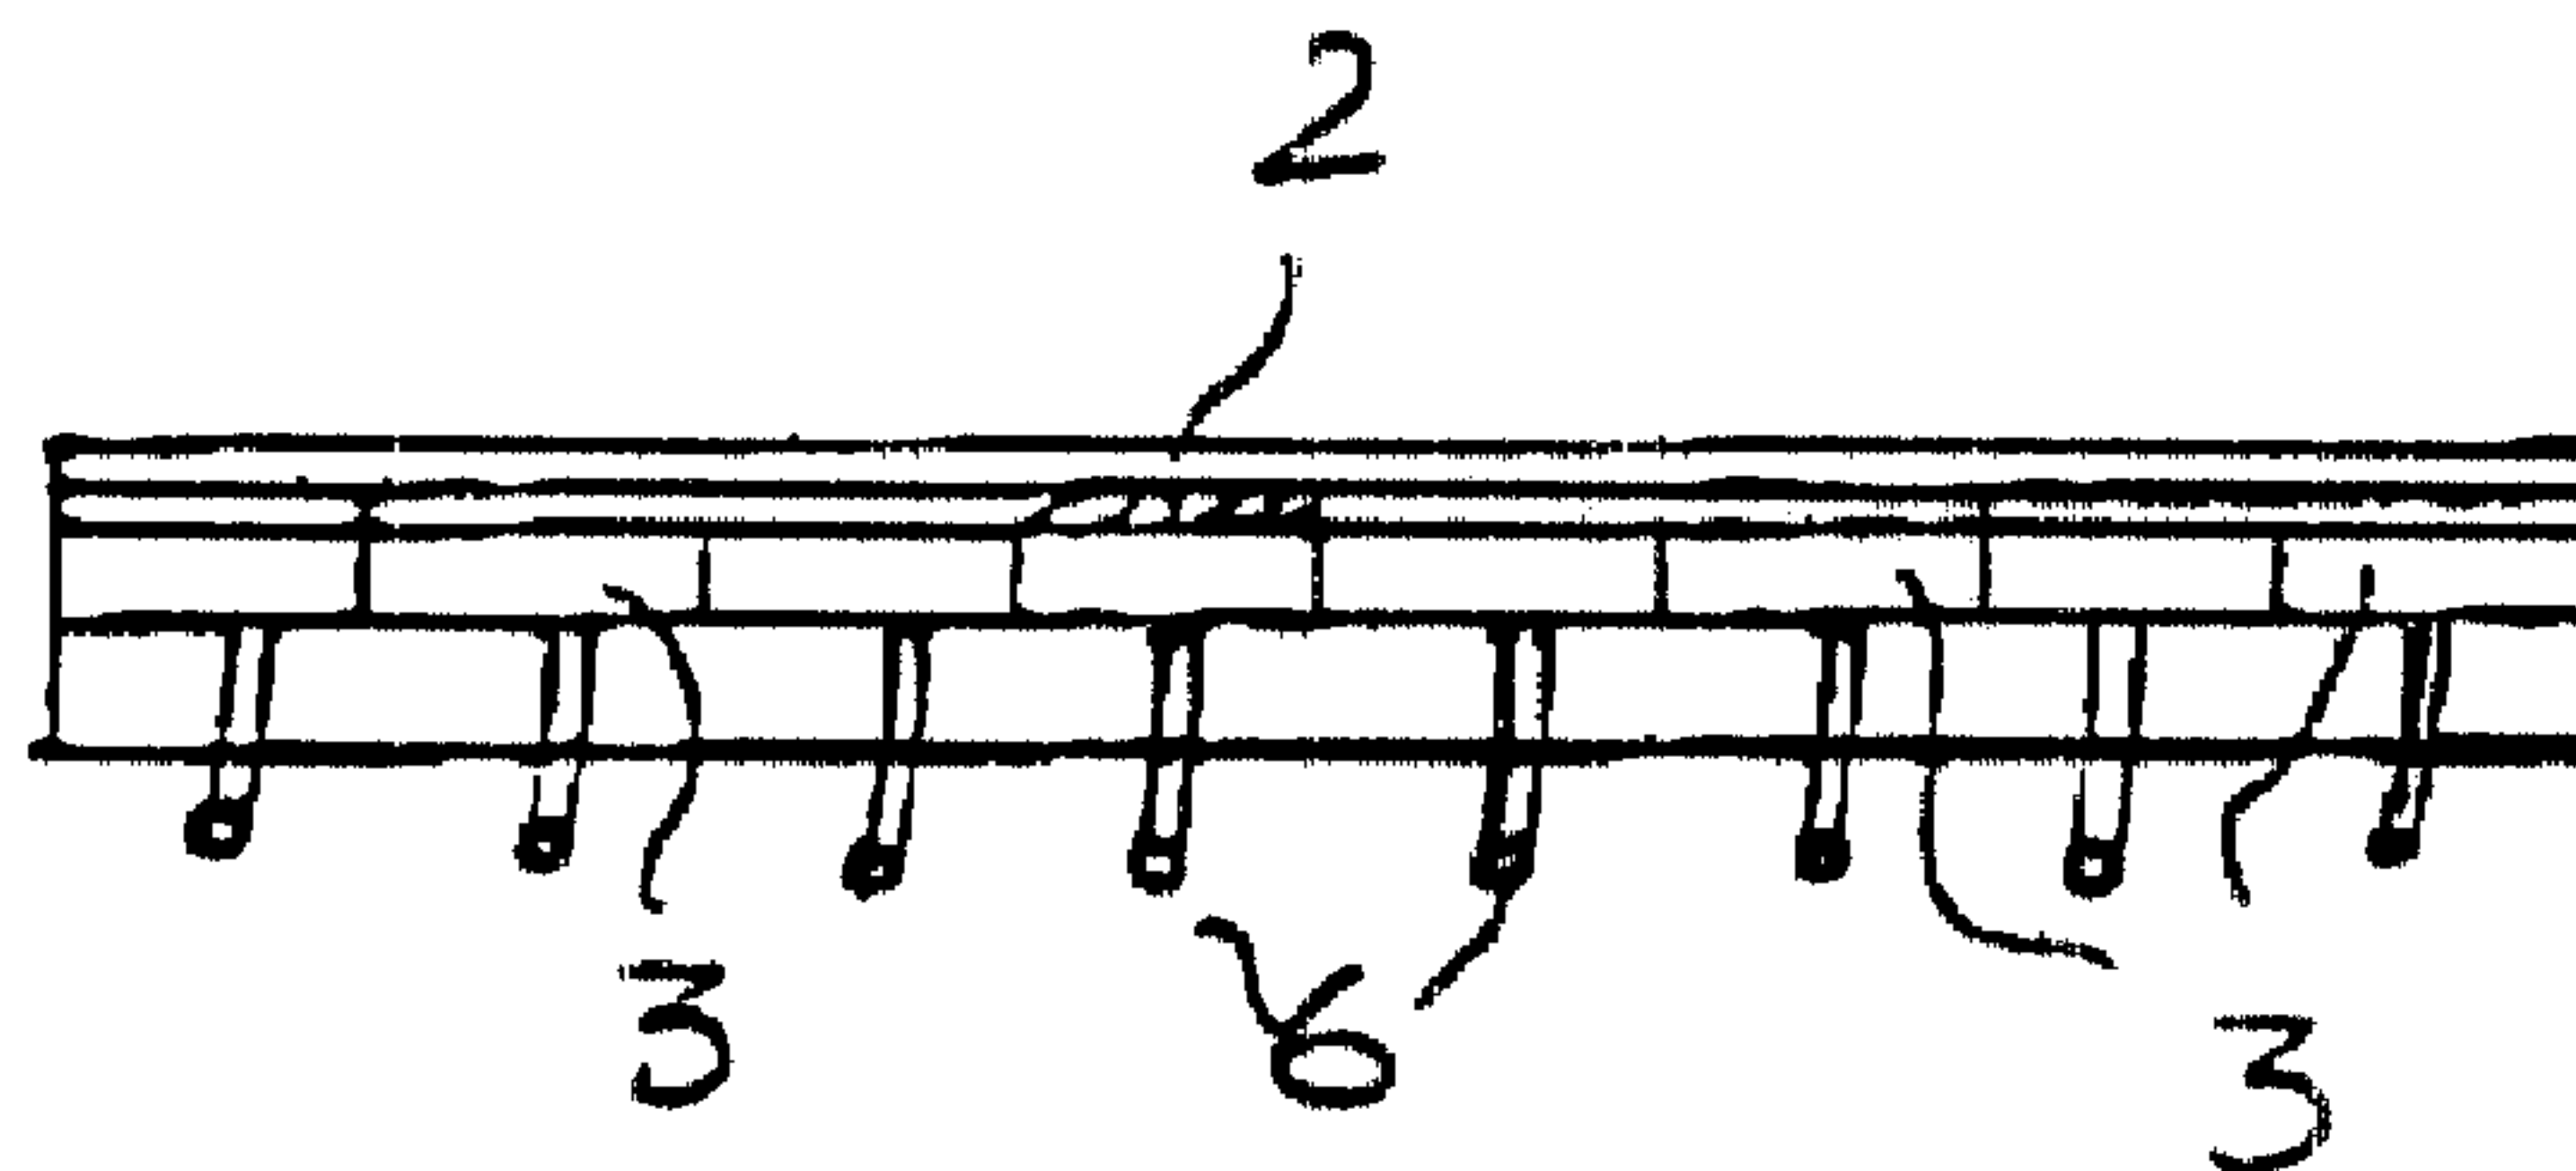


(57) Abrégé/Abstract:

A known display device consists of a sheet-like support (1) which is covered with liquid thermochromic crystals (2). These are tempered by individual power supply to individual healable elements (3), which lie close to the crystals and are placed between the sheet-like support (1) and the crystals (2). The crystals assume different shades of colour dependent on the given temperature so that hereby the colour of the crystals will form a certain pattern. In order to improve the possibilities to control the tempering of the individual crystals and also protect them from being effected by the ambient temperature and from mechanical damage, the crystals have underlying means (4) which are controlled to cool down the crystals (2) and/or keep the sheet-like support (1) of the crystals at a certain temperature. This temperature is lower than the temperature, at which the crystals are coloured. Further the crystals are covered by a coating of lacquer over the complete sheet-like support.

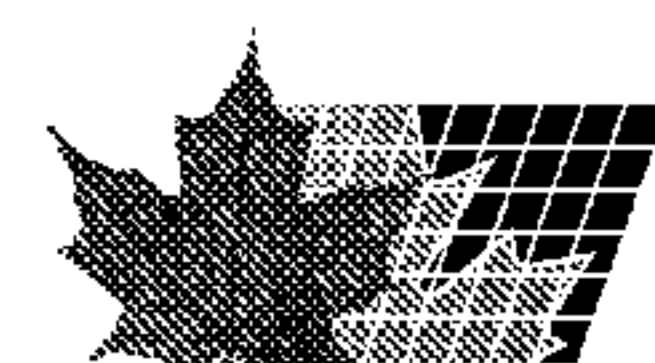

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

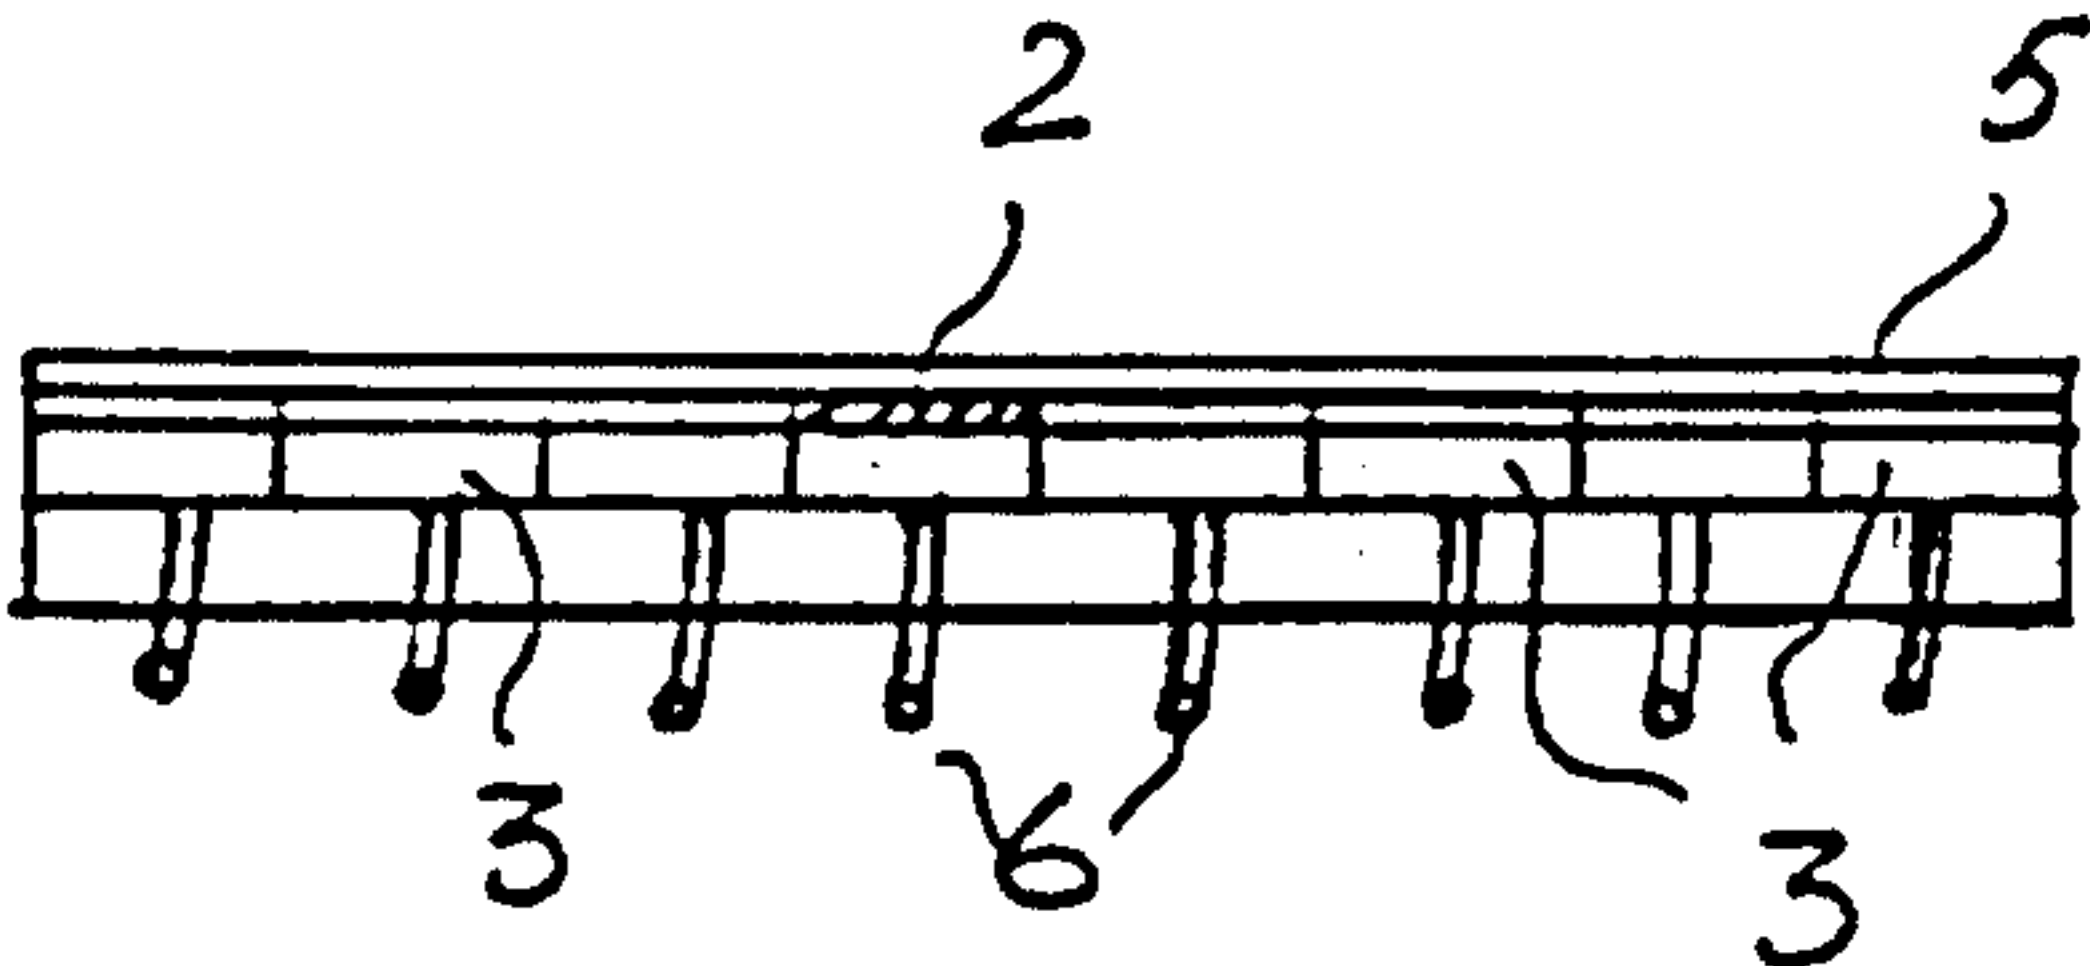(51) International Patent Classification ⁶ : G02F 1/13, G09F 9/35	A1	(11) International Publication Number: WO 99/21049 (43) International Publication Date: 29 April 1999 (29.04.99)
(21) International Application Number: PCT/SE98/01906 (22) International Filing Date: 21 October 1998 (21.10.98) (30) Priority Data: 9703851-7 22 October 1997 (22.10.97) SE (71)(72) Applicant and Inventor: ANDERSSON, Lars [SE/SE]; P.O. Box 14129, S-161 14 Bromma (SE). (74) Agents: MODIN, Jan et al.; Axel Ehmers Patentbyrå AB, P.O. Box 10316, S-100 55 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>
(54) Title: DISPLAY DEVICE  (57) Abstract A known display device consists of a sheet-like support (1) which is covered with liquid thermochromic crystals (2). These are tempered by individual power supply to individual heatable elements (3), which lie close to the crystals and are placed between the sheet-like support (1) and the crystals (2). The crystals assume different shades of colour dependent on the given temperature so that hereby the colour of the crystals will form a certain pattern. In order to improve the possibilities to control the tempering of the individual crystals and also protect them from being effected by the ambient temperature and from mechanical damage, the crystals have underlying means (4) which are controlled to cool down the crystals (2) and/or keep the sheet-like support (1) of the crystals at a certain temperature. This temperature is lower than the temperature, at which the crystals are coloured. Further the crystals are covered by a coating of lacquer over the complete sheet-like support.		

DISPLAY DEVICE

This invention refers to a display device consisting of a sheet-like support, which is covered with liquid thermocromic crystals, which can be tempered by separate power supply to individual heating element, which lie close to the crystals and are placed between the sheet-like support and the crystals, whereby the crystals assume different shades of colour depending on the given temperature so that hereby the colour of the crystals will form a certain pattern.

A display arrangement of now mentioned type is disclosed in e.g. US 4142782. This display includes a sheet-like metallic support, which has a surface, which is covered with a thin layer of a conventional paint. The layer is in turn covered with areas of a certain thermocromic composition and it may also contain areas of different thermocromic composition. It may also contain areas of further different kind of a thermocromic composition and/or mixtures of the earlier mentioned thermocromic compositions. The areas will normally be created by conventional painting techniques using a coating composition containing a thermocromic compound and an appropriate conventional binder and an appropriate solvent. The composition may further include pigments of any colour or the composition can be colourless. The binder is usually colourless in order not to obscure the colour effects to be formed. It is further described in the patent that the heating of the different areas is carried out by plate-like electrical resistance elements, which are placed between the sheet-like support and the areas of the thermocromic positions. These plate-like electrical resistance elements heat the individual crystals in the different areas to a certain temperature so that the crystals in a specific area assume a certain colour depending on the temperature. According to the above described methods certain areas or certain points are given a certain colour by that the thermocromic crystals, above or in the neighbourhood of a certain heating element are heated. Different patterns

will hereby be formed by that the crystals having a certain colour will form a certain pattern. If the display however is subjected to the ambient temperature, one can understand that it may be difficult to control the pattern so it has the wanted design and it can also be difficult to change the pattern from one design to another if the new pattern demands a lower temperature for the individual crystals than the earlier temperature. The temperature of the sheet-like support may assume the ambient temperature, which can be so high that the control of the temperature for the individual electrical element have not effect on the crystals but it is only the ambient temperature which has an effect on the crystals.

It is therefore an object of the invention to increase the possibilities to control the tempering of the individual crystals and also protect them from being effected by the ambient temperature and also from mechanical damage. The produced picture on the display shall also be possible to program.

Accordingly, in one aspect the present invention provides a display device consisting of a sheet-like support covered with a layer of liquid thermocromic crystals, which are separately tempered by individual power supply to individual heatable elements, said heatable elements lying close to the crystals and being placed between the sheet-like support and the crystals, whereby the crystals assume different shades of colour dependent on the given temperature so that hereby the colour of the crystals will form a certain pattern and hereby a figure, said theremocromic crystals being

2a

distributed over the complete layer without a specific pattern so that the design of the figure is determined only by tempering the heatable elements, which are located according to a wanted design, said support including cooling means which is controlled to cool down the crystals and/or keep the support of the crystals at a certain temperature, which is lower than the temperature at which the crystals are coloured, said crystals being covered by a coating.

In one embodiment, the display device includes an underlying layer of peltier elements, which are black and are supplied by electricity in order to set the temperature thereof.

In another embodiment, the heatable elements are constituted by the peltier elements. Preferably, the coating is a plain lacquer consisting of an acryl base and a synthetic agent. Preferably, the acryl base and the synthetic agent are mixed in a 10:1 ratio.

An embodiment of the present invention will now be described more fully with reference to the accompanying drawings in which:

Fig. 1 is thereby a schematic view a display according to the present invention;

Fig. 2 is a schematic section according to the lines II-II of fig. 1; and

Fig. 3 is a section through the underlying sheet-like support.

The invention is thus a display device consisting of a stiff sheet-like support. The sheet-like support could be made for instance of metal. Several small separately heatable elements are arranged on the sheet-like support and the heating is

35

performed by supplying an electrical voltage through cables 6 to the elements 3. A layer of liquid thermocromic crystals 2 cover the layer of the heatable elements. The liquid thermocromic crystals may be applied by painting of a coating composition which contains thermocromic crystals, which are bound by a binder. The characteristic of the thermocromic crystals is that they assume a certain colour in correspondence to their given temperature. If thus a heatable element below a crystal is heated to a certain temperature, said crystal will assume said temperature and is coloured if the temperature is higher than the temperature at rest of the crystal. Fig. 1 shows that the crystals 2 have been given a certain temperature so that a letter L has been formed. The letter L appears by that all the crystals along the shape of L have been given the same certain temperature by the underlying heatable element. The thermocromic crystals outside L remain passive because their underlying heatable element have not been heated by voltage supply. As said earlier the power for heating the elements can take place by supplying a current of a certain voltage.

The thermocromic crystals are covered by a coating of lacquer in order to protect the crystals to the surroundings, the composition of said coating of lacquer being stated later.

25

In order to quickly be able to change the pattern, formed by the crystals, it could be necessary to cool down the crystals, if the crystals must be given a lower temperature than the one they have in order to assume a different colour. This could concern all the crystals or certain crystals. All the crystals shall thus be cooled down and this can be done by that the sheet-like support 1 is cooled down or is kept on a constant temperature which is lower than the temperature which makes the crystals to assume a certain colour. This means that as long as the heatable element are not heated any longer, the whole display device including the thermocromic crystals will be cooled down to the temperature of the sheet-like support.

35

This is illustrated in fig. 3 by that the sheet-like support has one or several continuous channels or is designed like a jacket so that the sheet-like support is hallow whereby a cooling medium can pass through the sheet-like support and keep it at a constant temperature or lower the temperature for the complete display device.

A further way to carry out the refrigerating capacity is to arrange a layer of peltier elements under the heatable elements. The characteristic of a peltier element is that it very quickly is controlled by means of electrical energy and thus can be given an enough low temperature in order to lower the temperature of the thermocromic crystals under the temperature at which they are given a certain colour. The peltier elements can also be used instead of the heatable elements 3, see fig. 2 whereat thus the heatable elements 3 are peltier elements.

The kind of coating of lacquer which is used consists suitably of an acryl base and synthetic agent and it is specifically suitable that the mixing proportion is 10:1. Such a lacquer is very resistant to wearing and also UV-radiation. The described display device is thus suitable as an advertising sign, because the pattern on the display (figures) can be altered rapidly. The display device is not effected by the ambient temperature because the sheet-like support is kept at a constant temperature. If not, the sunshine could effect the display so that it is not possible to control the pattern which the thermocromic crystals should show. Electrical energy is preferably used, e.g. supply of current of a certain voltage, for heating the heatable elements and the supply of current can be program-controlled concerning the voltage and also which of the heatable elements that should be supplied by power. Thus a computer may be programmed by a certain picture and accordingly controls the signals for the power supply to the heatable elements. The signals of a computer can also be used and possibly amplified in order to bring about the change

WO 99/21049

PCT/SE98/01906

5

of temperature of the underlying means. The computer can also control the refrigeration.

What is claimed is:

1. Display device consisting of a sheet-like support covered with a layer of liquid thermocromic crystals, which are separately tempered by individual power supply to individual heatable elements, said heatable elements lying close to the crystals and being placed between the sheet-like support and the crystals, whereby the crystals assume different shades of colour dependent on the given temperature so that hereby the colour of the crystals will form a certain pattern and hereby a figure, said thermocromic crystals being distributed over the complete layer without a specific pattern so that the design of the figure is determined only by tempering the heatable elements, which are located according to a wanted design, said support including cooling means which is controlled to cool down the crystals and/or keep the support of the crystals at a certain temperature, which is lower than the temperature at which the crystals are coloured, said crystals being covered by a coating.

2. Display device according to claim 1, further including an underlying layer of peltier elements beneath said heatable elements, which are black and are supplied by electricity in order to set the temperature thereof.

3. Display device according to claim 1, wherein said heatable elements are constituted by peltier elements.

4. Display device according to claim 3, wherein said liquid thermocromic crystals are painted on the peltier elements.

5. Display device according to any one of claims 1 to 4, wherein said coating is a plain lacquer and consists of an acryl base and a synthetic agent.

6. Display device according to claim 5, wherein the acryl base and the synthetic agent are mixed in 10:1 ratio.

1/1

