

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 November 2006 (02.11.2006)

PCT

(10) International Publication Number
WO 2006/116436 A1

(51) International Patent Classification:
A61C 15/04 (2006.01)

(21) International Application Number:
PCT/US2006/015690

(22) International Filing Date: 25 April 2006 (25.04.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/675,545 28 April 2005 (28.04.2005) US

(71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HAMANT, Deanna, Kimberly** [US/US]; 8174 Morrow Rossburg Road, Morrow, Ohio 45152 (US).

(74) Common Representative: **THE PROCTER & GAMBLE COMPANY**; c/o Eileen L. Hughett, The Procter & Gamble Company, Winton Hill Business Center, 6110 Center Hill Road, Cincinnati, Ohio 45224 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DENTAL FLOSS COMPOSITIONS COMPRISING MENTHOL AND CARBOXAMIDES

(57) Abstract: The present invention relates to a dental floss or dental article comprising: a. a monofilament substrate; b. a coating composition coated on the monofilament substrate comprising a mixture of menthol and a coolant selected from the group consisting of N-substituted-p-menthane-carboxamides, acyclic carboxamides, and mixtures thereof; wherein the ratio of the coolant to menthol is from about 1:1 to about 2.5:1.



WO 2006/116436 A1

DENTAL FLOSS COMPOSITIONS COMPRISING MENTHOL AND CARBOXAMIDES

TECHNICAL FIELD

5

The present invention relates to flavored dental articles having reduced bitterness as well as a unique and long lasting cooling perception which is achieved by using specific amount of coolants in relation to the total menthol levels used herein.

10

BACKGROUND ART

It is known to add mint flavoring to dental articles for desirable taste characteristics and to provide breath freshening properties.

15 A large component of mint flavoring is menthol. Menthol is well known for its physiological cooling effect on the skin and mucous membranes of the mouth and has been extensively used as a flavouring agent (menthol being a major constituent of oil of peppermint) in consumer products such as dentifrices, mouthwashes, etc.

It is well established that the "cooling" effect of menthol is a physiological effect due to the direct action of menthol on the nerve endings of the human body responsive for
20 the detection of hot or cold and is not due to latent heat of evaporation. It is believed that the menthol acts as a direct stimulus on the cold receptors at the nerve endings which in turn stimulate the central nervous system.

Although menthol is well established as a physiological coolant its use, in some compositions, is circumscribed by its strong minty odour and its relative volatility. Mint,
25 too, provides some undesirable properties such as bitterness. Menthol has a tendency to distort flavor notes and render products having a bitter taste perception if not used in proper amounts.

In addition the use of flavored dental articles and dental floss is known in the prior art. Dental flosses are used to remove bacterial debris and plaque from interdental
30 surfaces otherwise unreachable by conventional toothbrushes. Dental flosses are comprised of either several polymeric fibers combined to form a single strand, or alternatively a single polymeric fiber, or monofilament.

Monofilament flosses have become popular among the flossing community due to the reduced amount of fraying and/or shredding associated with them versus multi-

filament flosses. In particular, monofilament flosses have been developed using fluorinated polymers such as polytetrafluoroethylene (PTFE) because of the low coefficient of friction (COF) associated with the compounds. The reduced COF allows for easy sliding between tight dental contacts where ordinary multi-filament flosses would perhaps shred or break upon insertion.

Monofilaments, however, are much harder to supply with substantial flavor due to the decreased surface area upon which coating materials can adhere when compared to their multi-filament counterparts. Also, with some monofilaments, no splaying of the bundle occurs to expose flavor particles trapped on inner fibers. The surface characteristics of PTFE make coating more difficult. In addition although the flavoring of dental articles is not new, the solution to the problem of providing a strong, high impact and long lasting flavor on a monofilament floss or monofilament dental articles, and even more particularly PTFE monofilament floss, has proved to be difficult. Concentrated flavor oils are frequently used in prior art dental flosses for flavor. Such flavor oils are volatile at the high temperatures required to melt common carrier materials (e.g. microcrystalline wax, beeswax and the like) used to coat flosses and thus the impact of the flavor is greatly lost during heating and processing. Also, the large surface area of floss increases the coatings exposure to air and thus greater loss of flavor.

Therefore, prior art monofilament dental articles and floss may use coating compositions having high levels of flavor oils due to their volatility and loss upon heating and storage and due to the low surface area for adherence of the monofilament substrate as compared to a multifilament substrate. This tendency to increase the levels of flavor oils may translate into higher menthol levels and the potential for increase bitterness of the flavor.

While the prior art discloses providing flavored dental articles and flosses, none of the prior art provides guidance as to a coating composition which provides the consumer with a unique and long lasting cooling perception without bitterness from mint flavoring, especially on a monofilament substrate. These advantages are achieved by including a coolant having relatively low volatility in the coating composition.

SUMMARY OF THE INVENTION

The present invention relates to a dental floss or dental article comprising:

- a. a monofilament substrate;
- 5 b. a coating composition coated on the monofilament substrate comprising a mixture of menthol and a coolant selected from the group consisting of N-substituted-p-menthane-carboxamides, acyclic carboxamides, and mixtures thereof;

wherein the ratio of the coolant to menthol is from about 1:1 to about 2.5:1.

10

DESCRIPTION OF THE INVENTION

Definitions

By "dental article" as used herein is meant a product which is a molded device
15 having a dental floss retained therein.

By "oral care composition" or "oral composition" as used herein is meant a product which is not intentionally swallowed for purposes of systemic administration of therapeutic agents, but is retained in the oral cavity for a sufficient time to contact some or substantially all of the dental surfaces and/or oral mucosal tissues for purposes of oral
20 activity. In addition these terms can mean a product which may be intentionally swallowed but not swallowed for the purposes of systemic administration of therapeutic agents.

By "oral condition" as used herein is meant diseases or conditions of the oral cavity including caries, plaque, breath malodor, dental erosion, gingivitis, and periodontal
25 disease. Oral conditions are further described in WO 02/02096A2, published January 10, 2002, P&G.

By "safe and effective amount" as used herein is meant an amount of a component, high enough to significantly (positively) modify the condition to be treated or to effect the desired anticaries result, but low enough to avoid serious side effects (at a
30 reasonable benefit/risk ratio), within the scope of sound medical/dental judgment. The safe and effective amount of a component, will vary with the particular condition (e.g., to effect anticaries activity or remineralization effect) being treated, the age and physical

condition of the patient being treated, the severity of the condition, the duration of treatment, the nature of concurrent therapy, the specific form employed, and the particular vehicle from which the component is applied.

Herein, "comprising" means that other steps and other ingredients which do not
5 affect the end result can be added. This term encompasses the terms "consisting of" and "consisting essentially of".

"Monofilament" floss or dental article as used herein means a single thread-like material suitable for use in cleaning between teeth which may be any shape for example circular, square, rectangular or other desired shape.

10 All percentages and ratios used hereinafter are by weight of total composition, unless otherwise indicated.

All measurements referred to herein are made at 25°C unless otherwise specified.

All percentages, ratios, and levels of ingredients referred to herein are based on the actual amount of the ingredient, and do not include solvents, fillers, or other materials
15 with which the ingredient may be combined as a commercially available product, unless otherwise indicated.

All publications, patent applications, and issued patents mentioned herein are hereby incorporated in their entirety by reference. Citation of any reference is not an admission regarding any determination as to its availability as prior art to the claimed
20 invention. To the extent that any meaning or definition of a term in this written document conflicts with any meaning or definition of the term in a document incorporated by reference, the meaning or definition assigned to the term in this written document shall govern.

25 Monofilament Substrate

The monofilament substrate may be formed from a variety of natural or synthetic materials for example nylon, polyethylene, ultra high molecular weight polyethylene, polyamides; polypropylene, fluorinated polymers such as polytetrafluoroethylene (PTFE); expanded polytetrafluoroethylene (ePTFE); rayon; Dacron, acrylic, polyesters; acetate
30 polymers; polyolefins; block copolymers; cotton; wool; silk; linen, and mixtures thereof. The monofilament substrate may have any desired shaped cross-section. In one embodiment, the monofilament substrate is expanded porous PTFE such as those

described in US 5,518,012, Dolan et al.; a towed PTFE such as those described in US 5,765,576, Dolan et al.; US 5,566,691 Dolan et al.; US 5,718,251 Gray et al.; US 5,878,758 Bacino et al.; low density floss such as those described in US 6,539,951 Baillie et al.

5 US 6,539,951, Baillie et al., teaches a fiber having a thickness of 0.0015" to 0.04", a width of 0.3 to 4 mm (0.01" to 0.16"), and a denier of about 100 to about 3,500. Most importantly, the fiber should have a density of less than about 0.8 g/cc, and in alternative embodiments less than about 0.7 g/cc, less than about 0.6 g/cc, less than about 0.5 g/cc, less than about 0.4 g/cc, less than about 0.3 g/cc, and less than about 0.2 g/cc. Each of
10 these properties is measured in a conventional manner, for example thickness may be determined through any conventional means such as through the use of calipers, a snap gage, optical comparitors, or even a scanning electron microscope. Density may be determined by dividing the measured mass of a sample of fiber (without any coating or additive) by the computed volume of the sample. Volume may be computed by
15 multiplying the measured length, width, and thickness of the sample for substantially rectangular cross-sections, or by other known calculations for other cross-sectional shapes to obtain the most accurate approximation of the volume. Denier is the measured mass of the sample (without any coating or additive) in grams per 9000 meters of length. As disclosed in US 6,539,951, Baillie et al., these advantageous features of the fiber are
20 achieved through non-contact heating of the fiber which is believed to help produce a rougher surface on the fiber than is achieved with plate contact heating. This rougher surface in turn contributes to higher surface friction and better grippability for the this floss.

In another embodiment the floss of the present invention comprises a single
25 relatively thick strand of expanded polytetrafluoroethylene (ePTFE) fiber that is essentially rectangular to oblong in cross-sectional dimensions and is formed substantially without folds or creases, as disclosed in US 5,518,012, Dolan et al. In order to form the floss without folding one or both of its edges over itself, as is required with existing flosses, it is particularly important that this floss is formed to have a significantly greater
30 thickness dimension than other prior art PTFE floss fibers. For example, prior to folding, older conventional expanded PTFE floss fiber sold under the trademark GLIDE® by W. L. Gore & Associates, Inc., has typical dimensions of about 40 µm in thickness and about

2 mm in width. When this material is folded and packaged as dental floss, the material typically has dimensions of about 90 μm in thickness and about 1.2 mm in width. The PTFE floss sold under the name EASY SLIDE by Johnson & Johnson has typical unfolded dimensions of about 23 μm in thickness and about 2.3 mm. When this material
5 is folded and packaged as dental floss, the material typically has dimensions of about 75 μm in thickness and about 1.3 mm in width.

The floss presented in US 5,518,012, Dolan et al., forms essentially a rectangular to oblong cross-sectional dimension. Typical dimensions comprise about 50 to about 250 μm , in another embodiment from about 75 to about 150 μm , in thickness and about 0.5 to
10 about 3 mm, and in another embodiment about 0.7 to about 1.5 mm, in width. The substantial thickness of this material allows the floss to function extremely well without need for folding or otherwise bulking the height of the material. Additionally, the fiber's rectangular to oblong cross-sectional shape is similar to that obtained by the other commercial flosses, but, again, without folding.

15 Also this is highly resistant to fibrillating along its edges during use. The elimination of this fibrillation problem is an important advancement over previous expanded PTFE floss materials, where one of the purposes of folding was to reduce the number of exposed edges on the floss' outer surface subject to fibrillation.

20 Each of these properties is measured in a conventional manner. Width and thickness is determined through any conventional means, such as through the use of calipers or through measurements through a scanning electron microscope. Density is determined by dividing the measured weight of the sample by the computed volume of the sample. The volume is computed by multiplying the measured length, width, and
25 thickness of the sample. Tenacity is calculated by dividing the sample's tensile strength by its normalized weight per unit length (tex [grams/1000 meters] or denier [grams/9000 meters]).

The final dimensions of this fiber should comprise: a width of about 0.5 to about 3.0 mm; a thickness of about 50 to about 250 μm ; a weight/length of about 80 to about
30 450 tex; a density of about 1.0 to about 1.9 g/cc; a tensile strength of about 1.5 to 15 kg; and a tenacity of about 10 to 40 g/tex. These measurements were made in a conventional manner. Bulk tensile strength was measured by a tensile tester, such as an INSTRON Machine of Canton, Mass. In the case of sheet goods, the INSTRON machine was


outfitted with clamping jaws which are suitable for securing the sheet goods during the measurement of tensile loading. The cross-head speed of the tensile tester was 25.4 cm per minute. The gauge length was 10.2 cm. In the case of fibers, the INSTRON machine was outfitted with fiber (horn type) jaws that are suitable for securing fibers and strand goods during the measurement of tensile loading. The cross-head speed of the tensile tester was 25.4 cm per minute. The gauge length was 25.4 cm.

This floss also exhibits increased porosity or "void content." The void content is measured by the ratio of the article's bulk density to its intrinsic density. When processed the floss remains quite porous and compressible in its completed form and has the ability to densify under low stress. This property makes the floss easier to handle and more comfortable when applied between teeth and gums. As a result, the floss will densify when squeezed through a tight area, such as when passed between teeth during flossing, to produce a better cleaning action than that possible with conventional flosses by wiping across a greater portion of the area of the teeth.

Coolant and Menthol

One or more coolants are present in the compositions at a level of from about 0.001% to about 25%, in another embodiment from about 8% to about 20%, in another embodiment from about 15% to about 20%, by weight of the coating composition.

In one embodiment the coolant is a N-substituted-p-menthane-carboxamides that fall within the following formula. These carboxamides have a pronounced physiological cooling activity, which has little or no odour, which are of relatively low volatility and which are substantially non-toxic and are under the following formula:



where R', when taken separately, is hydrogen or an aliphatic radical containing up to 25 carbon atoms;

R'', when taken separately is hydroxy, or an aliphatic radical containing up to 25 carbon atoms, with the proviso that when R' is hydrogen R'' may also be an aryl radical of up to 10 carbon atoms and selected from the group consisting of substituted phenyl, phenalkyl or substituted phenalkyl, naphthyl and substituted naphthyl, pyridyl; and

R' and R'', when taken together with the nitrogen atom to which they are attached, represent a cyclic or heterocyclic group of up to 25 carbon atoms, e.g. piperidino, morpholino etc.

In the above definitions "aliphatic" is intended to include any straight-chained, branched-chained or cyclic radical free or aromatic unsaturation, and thus embraces alkyl, cycloalkyl, alkenyl, cycloalkenyl, alkynyl, hydroxyalkyl, acyloxyalkyl, alkoxy, alkoxyalkyl, aminoalkyl, acylaminoalkyl, carboxyalkyl and similar combinations.


Typical values for R' and R'' when aliphatic are methyl, ethyl, propyl, butyl, isobutyl, n-decyl, cyclopropyl, cyclohexyl, cyclopentyl, cycloheptylmethyl, 2-hydroxyethyl, 3-hydroxy-n-propyl, 6-hydroxy-n-hexyl, 2-aminoethyl, 2-acetoxyethyl, 2-ethylcarboxyethyl, 4-hydroxybut-2-ynyl, carboxymethyl etc.

When R'' is aryl typical values are benzyl, naphthyl, 4-methoxyphenyl, 4-hydroxyphenyl, 4-methylphenyl, 3-hydroxy-4-methylphenyl, 4-fluorophenyl, 4-nitrophenyl, 2-hydroxynaphthyl, pyridyl, etc.

These compounds are recited in U.S. Pat. No. 4,136,163, Watson, et al., issued Jan. 23, 1979. In one embodiment the coolant is N-ethyl-p-menthane-3-carboxamide known as "WS-3" (available from Givaudan) at a level of from about 8% to about 23% by weight of the coating composition. It should be noted that these compounds are quite similar structurally to menthol itself.

In another embodiment the coolant is an acyclic carboxamides selected from those disclosed in US 4,230,688, Rowsell, et al., issued Oct 28, 1980.

The carboxamides of the '688 patent are certain acyclic tertiary and secondary carboxamides. These have the structure

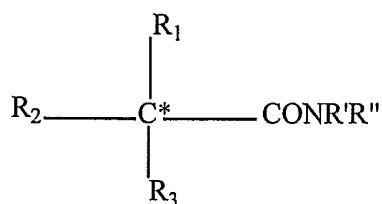

- 5 where R' and R'', when taken separately, are each hydrogen, C₁-C₅ alkyl or C₁-C₈ hydroxyalkyl and provide a total of no more than 8 carbon atoms, with the proviso that when R' is hydrogen R'' may also be alkylcarboxyalkyl of up to 6 carbon atoms;

- 10 R' and R'', when taken together, represent an alkylene group of up to 6 carbon atoms, the opposite ends of which group are attached to the amide nitrogen atom thereby to form a nitrogen heterocycle, the carbon chain of which may optionally be interrupted by oxygen;

- 15 R₁ is hydrogen or C₁-C₅ alkyl; and R₂ and R₃ are each C₁-C₅ alkyl; with the provisos that (i), R₂ and R₃ together provide a total of at least 5 carbon atoms, preferably from 5-10 carbon atoms; and (ii) when R₁ is hydrogen, R₂ is C₂-C₅ alkyl and R₃ is C₃-C₅ alkyl and at least one of R₂ and R₃ is branched, preferably in an alpha or beta position relative to the carbon atom marked (*) in the formula.

- 20 While the carboxamide compounds are generally insoluble in water, they may be employed in the coating composition of the dental article as particulate solids and added directly to the coating composition or blended with other solid ingredients used to make the coating composition. The coolant may be added in several forms, such as in the form of an encapsulate, or previously dissolved in a polar solvent and/or mixed with a flavor
25 oil and then used in the composition. Encapsulation may be achieved using conventional procedures for example, the encapsulation may be performed using water-insoluble as well as water-soluble agents. The use of encapsulation may be beneficial when a delay in cooling perception is desired. When the carboxamides are dissolved in a polar solvent such solvents may be selected from a wide variety of materials. In one embodiment

solvents are selected from the group consisting of ethyl alcohol, ethylacetate, diethyl ether, isopropyl alcohol and glycerin.

In another embodiment coolants in the present compositions are the paramenthan carboxamide agents such as N-ethyl-p-menthan-3-carboxamide, known commercially as "WS-3", N,2,3-trimethyl-2-(1-methylethyl)butanamide, known as "WS-23," and mixtures thereof. Additional coolants may be selected from the group consisting of menthol, 3-1-menthoxypropane-1,2-diol known as TK-10 manufactured by Takasago, menthone glycerol acetal known as MGA manufactured by Haarmann and Reimer, menthyl lactate known as Frescolat[®] manufactured by Haarmann and Reimer and monomenthyl succinate known as Physcool[®] from Mane, further disclosed in US 5,725,865, V. Mane Fils. The terms menthol and menthyl as used herein include dextro- and levorotatory isomers of these compounds and racemic mixtures thereof. TK-10 is described in U.S. Pat. No. 4,459,425, Amano et al., issued 7/10/84.

The present invention further comprises a safe and effective amount of menthol. Generally, the coating composition of the present invention comprises from about 0.01% to about 20%, in another embodiment from about 1% to about 15%, in another embodiment from about 3% to about 10%, by weight of the coating composition, of menthol. In calculating the levels of menthol in the coating composition, the levels of menthol include those amounts of menthol from peppermint oil or other flavor oil containing menthol, as well as menthol that may be added directly to the coating composition.

In one embodiment the ratio of the coolant to menthol is from about 1:1 to about 2.5:1, in another embodiment is from about 1.3:1 to about 2:1, and in yet another embodiment is from about 1.5:1 to about 1.9:1. The ratios of coolant to menthol in the coating composition of the present invention are measured for the coating composition for fresh product and are measured within 3 days of manufacturing the dental floss or dental article.

OPTIONAL INGREDIENTS

Waxes

The present coating composition may optionally comprise a safe and effective amount of a natural or synthetic wax which may be water soluble or water insoluble waxes. These waxes include animal, vegetable, mineral, petroleum, and microcrystalline, waxes. Generally, the waxes that may be used in the coating composition herein include beeswax, candelilla, candela, carnauba, paraffin, microcrystalline wax, Fischer-Tropsch waxes, polyethylene waxes, fatty acid waxes, amide waxes, and mixtures thereof. In one embodiment the paraffin waxes useful herein generally have a melting point range of from about 68° C to about 70° C; the microcrystalline wax useful herein has a melting point of from about 65° C to about 80° C; the beeswax useful herein has a melting point of from about 62° to about 65° C. with a flash point of 242° C; the candelilla wax useful herein has melting point of from about 68° to about 72° C; the carnauba wax useful herein has a melting point of from about 83° to about 86° C; the Fischer-Tropsch wax useful herein has a melting point of about 95° to about 120° C; and the polyethylene waxes useful herein have melting point of from about 90° to about 120° C. Synthetic grades of beeswax, candelilla, and carnauba waxes are also available with similar properties as the natural grades.

Water-soluble waxes include polymers of ethylene oxide, in the form of relatively low molecular weight liquids and waxes, referred to as poly (ethylene glycol) or PEG, available in molecular weights ranging from 1,000 to 20,000. Typically, polymers with molecular weight below 20,000 are defined as PEG and those above 20,000 are poly (ethylene oxide)--(PEO). In one embodiment, the melting point of PEG is from about 45° to about 60° C.

Flavoring Agents

The present invention can optionally further comprise a safe and effective amount of a flavoring agent. Suitable flavoring agents include oil of wintergreen, oil of peppermint, oil of spearmint, clove bud oil, menthol, anethole, methyl salicylate, eucalyptol, 1-menthyl acetate, and mixtures thereof. Flavoring agents are generally used in the coating compositions at levels of from about 0.001% to about 5%, in another embodiment from about 0.1 to about 2%, by weight of the coating composition.

As mentioned above in order to improve their stability, flavor oils can be dispersed in a suitable matrix by a microencapsulation process. These flavor particles can be made by conventional procedures including spray-drying emulsions of flavor oils dispersed in a malto-dextrin solution optionally containing a non-toxic gum such as gum Arabic; extruding, tray-drying or drum-drying the emulsions to form solids which are then ground to the desired particle size; by coacervation or aqueous phase separation procedures which yield flavor droplets coated in a non-toxic coating such as gelatin. The amount of flavor in the particle can vary from 1 to 30%. Encapsulated flavor particles are described in the art for example U.S. Pat. Nos. 3,943,949; 3,957,964; 4,033,365; 4,071,614; 4,386,106; 4,515,769; 4,568,560 and 5,004,595.

Sweetening Agents

The present invention can optionally further comprise a safe and effective amount of a sweetening agent.

Sweetening agents which can be optionally used include sucralose, sucrose, glucose, saccharin, dextrose, levulose, lactose, mannitol, sorbitol, fructose, maltose, xylitol, saccharin salts, thaumatin, aspartame, D-tryptophan, dihydrochalcones, acesulfame and cyclamate salts, neotame, tagatose, especially acesulfame, sodium cyclamate and sodium saccharin, and mixtures thereof. In one embodiment the coating composition comprises from about 0.001% to about 10% of these agents, in another embodiment from about 0.01% to about 2%, by weight of the coating composition.

II. Application of the Coating Composition to the Monofilament Substrate

The coating composition is made by conventional processing. The coating composition of the present invention is applied to the monofilament substrate at a level of from about 2% to about 30%, in another embodiment from about 5% to about 20% and in yet another embodiment from about 10% to about 15% by weight (w/w) of coating composition (i.e. weight of coating/weight of monofilament substrate plus coating).

Further, in one embodiment the coating composition has a substantially uniform outer surface. In another embodiment the coating composition outer surface is not uniform.

The process of applying a coating to a fiber is well known in the art and is described in US Pat. No. 5,220,932, Blass. The coating may be applied to the filament by other conventional techniques including, spraying or padding, etc.

Finally, after coating and drying if necessary, the fibers may be wound onto a spool with care taken to avoid rolling or folding of the fibers during the spooling process.

EXAMPLES

The following non-limiting examples further describe preferred embodiments within the scope of the present invention. Many variations of these examples are possible without departing from the scope of the invention.

10

EXAMPLE I

	1 (% by wt of coating)	2 (% by wt of coating)	3 (% by wt of coating)
Beeswax	80		69
Microcrystalline wax		78	
Sodium Saccharin			2
Acesulfame K	2	2	
Peppermint Oil	10	10	17
WS-3 ¹	8		6
WS-23 ²		10	6
Total	100	100	100

¹ N-ethyl-p-menthan-3-carboxamide

² N, 2, 3 – trimethyl – 2 – (1-methyl ethyl) butanamide

15

What is claimed is:

1. A dental floss or dental article comprising:
 - a. a monofilament substrate;
 - b. a coating composition coated on the monofilament substrate comprising a mixture of menthol and a coolant selected from the group consisting of N-substituted-p-menthane-carboxamides, acyclic carboxamides, and mixtures thereof;wherein the ratio of the coolant to menthol is from about 1:1 to about 2.5:1.
2. The floss or article according to claim 1 wherein the coolant is N-ethyl-p-menthane-3-carboxamide.
3. The floss or article according to claim 1 wherein the coolant is N,2,3-trimethyl-2-(1-methylethyl)butanamide.
4. The floss or article according to claim 1 wherein the coolant is a mixture of N-ethyl-p-menthane-3-carboxamide and N,2,3-trimethyl-2-(1-methylethyl)butanamide.
5. The floss or article according to any of the preceding claims, wherein the ratio is from about 1.3:1 to about 2:1.
6. The floss or article of according to any of the preceding claims wherein the ratio is from about 1.5:1 to about 1.9:1.
7. The floss or article of according to any of the preceding claims wherein the coating composition further comprises a natural or synthetic wax compound.
8. The floss or article according to claim 7 wherein the wax is an insoluble wax selected from the group consisting of beeswax, candelilla, candela, carnauba,

paraffin, microcrystalline wax, Fischer-Tropsch wax, polyethylene wax, fatty acid wax, amide wax, and mixtures thereof.

9. The floss or article according to any of the preceding claims wherein the monofilament substrate is a strand of expanded polytetrafluoroethylene (PTFE) fiber.
10. The floss or article according to claim 9 wherein the monofilament substrate has a density of 1.0 to 1.9 g/cc and uniform dimensions of width and thickness along its length and having an outer surface of essentially rectangular to oblong cross-sectional dimension, the single fiber being without folds so that its outer surface is fully exposed.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/015690

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61C15/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61C A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 209 251 A (CURTIS ET AL) 11 May 1993 (1993-05-11) column 2, lines 29-68 column 3, lines 54-58 column 6, lines 25-28 column 9, lines 45-49 column 10, line 61 - column 11, line 1; table 1 column 11, lines 27-30	1-4, 7-10
Y	US 5 009 893 A (CHERUKURI ET AL) 23 April 1991 (1991-04-23) column 1, lines 7-43 column 3, line 63 - column 4, line 33; table I	1, 2
	----- -/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

17 August 2006

Date of mailing of the international search report

25/08/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pypen, C

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/015690

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 230 688 A (ROWSELL ET AL) 28 October 1980 (1980-10-28) the whole document -----	3,4
X,P	WO 2005/117811 A (MILLENNIUM SPECIALTY CHEMICALS) 15 December 2005 (2005-12-15) page 1, lines 27-31 page 2, line 3 - page 5, line 12 page 7, line 19 - page 8, line 14 page 11, lines 24-31 page 15, lines 19-32 page 16, lines 1-8 page 17, lines 3-15 page 19, lines 14-18 page 21, lines 21-34 page 20, lines 24-31; examples 19-22 -----	1-4
Y	US 5 518 012 A (DOLAN ET AL) 21 May 1996 (1996-05-21) column 3, line 24 - column 4, line 10; claim 1; figure 2 -----	9,10
Y	US 6 080 481 A (OCHS ET AL) 27 June 2000 (2000-06-27) column 1, lines 16-20 column 2, lines 43-67 column 4, line 24 - column 5, line 40 column 7, line 49 - column 8, line 10 -----	7,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/015690

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5209251	A	11-05-1993	US 6270890 B1	07-08-2001
US 5009893	A	23-04-1991	CA 2021222 A1	18-01-1991
			GB 2233873 A	23-01-1991
			JP 2923336 B2	26-07-1999
			JP 3053849 A	07-03-1991
US 4230688	A	28-10-1980	AU 468442 B2	15-01-1976
			AU 5442973 A	17-10-1974
			BE 798312 A1	17-10-1973
			CA 984745 A1	02-03-1976
			DE 2317538 A1	31-10-1973
			DE 2366423 A1	23-09-1982
			FR 2180942 A1	30-11-1973
			GB 1421743 A	21-01-1976
			HK 43179 A	06-07-1979
			JP 1259130 C	12-04-1985
			JP 49019043 A	20-02-1974
			JP 59035940 B	31-08-1984
			NL 7305509 A	22-10-1973
			US 4296255 A	20-10-1981
			ZA 7302515 A	27-02-1974
WO 2005117811	A	15-12-2005	US 2005265930 A1	01-12-2005
US 5518012	A	21-05-1996	AU 676774 B2	20-03-1997
			AU 7722394 A	05-01-1996
			BR 9407323 A	18-06-1996
			CA 2163437 A1	16-12-1995
			DE 69421405 D1	02-12-1999
			DE 69421405 T2	25-05-2000
			EP 0721318 A1	17-07-1996
			JP 3609419 B2	12-01-2005
			JP 9501861 T	25-02-1997
			WO 9534252 A1	21-12-1995
US 6080481	A	27-06-2000	AU 753587 B2	24-10-2002
			AU 9140698 A	03-06-1999
			BR 9804740 A	28-03-2000
			CA 2253905 A1	14-05-1999
			EP 0919208 A2	02-06-1999
			JP 11221239 A	17-08-1999