



(51) International Patent Classification:
F25D 23/02 (2006.01)

(21) International Application Number:
PCT/IB2015/055372

(22) International Filing Date:
16 July 2015 (16.07.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
201420404180.5 18 July 2014 (18.07.2014) CN

(71) Applicant: BSH HAUSGERÄTE GMBH [DE/DE]; Carl-Wery-Str. 34, 81739 München (DE).

(72) Inventors: DING, Yuan; Room 401, No. 40 Rongxiang Xincun, Wuxi, Jiangsu 214063 (CN). SONG, Jicong; c/o BSH Electrical Appliances (Jiangsu) Co. Ltd., No.208 Yaoxin Road, Nanjing Economy and Technology Development Zone, Nanjing, Jiangsu 210046 (CN). ZHAO, Changliang; No.16, Team 4, small pu village, Yancheng, Jiangsu 224600 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: REFRIGERATOR

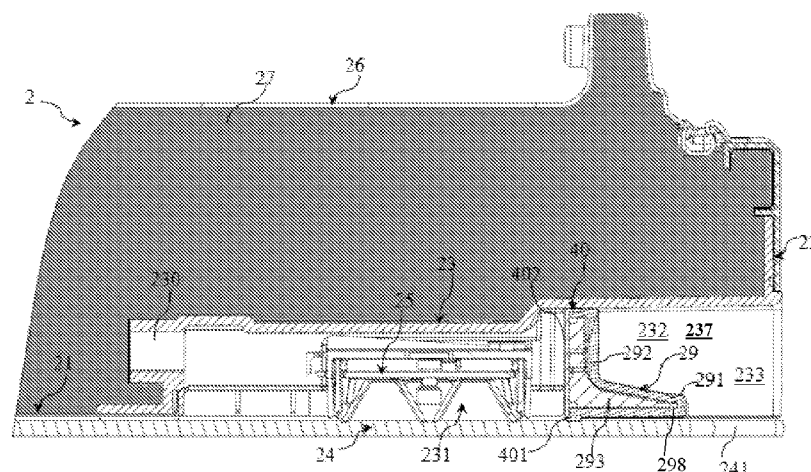


FIG. 4

(57) Abstract: Disclosed is a refrigerator. The refrigerator includes a door (2), and the door (2) includes a user interface electrical module (25), a first receiving space (231) that receives the user interface electrical module (25), a second receiving space (237) open towards a side of the door (2), and a handle member (29) detachably received in the second receiving space (237). The handle member (29) closes the first receiving space (231), and when the handle member (29) is detached, and the user interface electrical module (25) is accessible via the second receiving space (237); wherein the door (2) further includes a sealing member (40), and the sealing member (40) includes a sealing portion (401) located between the handle member (29) and at least one boundary wall of the second receiving space (237).



REFRIGERATOR

BACKGROUND

Technical Field

The present invention relates to a refrigerator, and more particularly to a household refrigerator with a door.

Related Art

JP 2013-178054 A discloses a refrigerator door, including a door body having a heat insulating material. A user interface apparatus is disposed in an intermediate region, viewed from a longitudinal direction, of the door body, and located behind a glass plate of the door body. A step member making a front surface concaved is formed on a side cover of a right end portion of the door body. The step member closes and receives a receiving compartment of the user interface apparatus. A handle member protruding towards the right side is installed on an installation surface of a side facing the step member by using a screw. A handle groove extending along the entire height of the door is formed between the handle member and the step member. A front surface of the handle portion is covered by a protective cover clamped between a front end of the handle portion and the step member. The protective cover is formed by a transparent resin formed part.

SUMMARY

An object of the present invention is to overcome at least one technical problem in the prior art, so as to provide an improved refrigerator.

The object can be achieved through features in the independent claim. Preferable embodiments of the present invention are subject matters of the accompanying drawings, the specification and the dependent claims.

An aspect of the present invention relates to a refrigerator. The refrigerator includes a door, characterized in that, the door includes a user interface electrical module; a first receiving space that receives the user interface electrical module; a second receiving space open towards a side of the door; and a handle member detachably received in the

second receiving space, wherein the handle member closes the first receiving space, and when the handle member is detached, the user interface electrical module is accessible via the second receiving space; wherein the door further includes a seal, and the seal includes a sealing portion located between the handle member and at least one boundary wall of the second receiving space.

So, possibility can be reduced that water vapor, dust and the like enter into the first receiving space through the second receiving space to reduce the service life of electric parts.

The present invention is applicable to refrigerators with various different structures, for example, the present invention is applicable to a side-by-side combination refrigerator having a first storage compartment and a second storage compartment disposed side by side, is applicable to a refrigerator having a first storage compartment and a second storage compartment disposed up and down, and may have a refrigerator where a pair of doors close the same storage compartment.

A storage compartment of a refrigerator may be used for storing food and/or wine, for example, the refrigerator may have at least one storage compartment purely for storing wine.

The door may be a rotatable door pivotally connected to the main body of the refrigerator, and may also be a drawer-type door drawably connected to the main body.

The door may close one or more storage compartments of the refrigerator, and may also close a part of one or more storage compartments.

In one possible embodiment, the second receiving space may be open towards a longitudinal side (e.g., left side or right side) of the door. In one alternative embodiment, the second receiving space may be open towards a horizontal side (e.g., top side or bottom side) of the door.

The user interface electrical module may include an input unit for receiving a user input instruction and/or an output unit displaying information for a user.

The user interface electrical module may be completely located in a first receiving space, or one part is located in the first receiving space, and the other part is located

outside the first receiving space.

The expression "the handle member is detachable" means detaching the handle member from the door by using a tool or not using a tool without damaging the door, where the handle member can be installed to the door once again.

When the handle member is detached, the user interface module may be taken out of the first receiving space or placed into the first receiving space.

In one embodiment, the seal may be only formed by sealing portions. In another embodiment, the seal further includes, for example, other parts for installation.

Boundary walls of the second receiving space are walls defining and directly facing the second receiving space. The sealing portion may be located at the handle member and one or more boundary walls of the second receiving space. The sealing portion may further extend only along part of the length/height/thickness of one or more boundary walls.

Other individual features or those combined with other features to be regarded as characteristics of the present invention are set forth in the following appended claims.

In one possible embodiment, the handle member includes a first end close to the first receiving space and a second end away from the first receiving space, and the seal is disposed between the first end and the at least one boundary wall. Thus, the second end of the handle member may not be pressed towards the boundary wall of the second receiving space due to the seal. For example, it is possible that a gap is formed between the second end of the handle member and a front boundary wall of the second receiving space. This helps to reduce the probability that the front panel and the user interface electrical module are in poor contact possibly caused by a force applied to the front panel by the grip portion when the grip portion is gripped to pull the door forward. Preferably, the gap is not less than 0.2 mm and not greater than 1 mm, especially between 0.2 mm and 0.6 mm. Therefore, a front surface of the grip portion is disposed adjacent to the front panel. In this way, not only can the possibility that foreign matters enter into the gap be reduced, but also the possibility that a force is applied to the front panel due to deformation of the handle member is reduced.

In one possible embodiment, the door includes a front panel covering the user interface electrical module and the handle member, the front panel forms front boundaries of the first receiving space and the second receiving space, and the sealing portion is disposed between a front surface of the handle member and the front panel.

In one possible embodiment, the sealing portion extends on the entire height of the handle member.

In one possible embodiment, the sealing portion is annular, and disposed all around the handle member.

In one possible embodiment, the seal and the handle member are assembled to the door by forming a pre-assembled unit. In other words the seal and the handle member form a pre-assembled unit. This particularly helps to assemble the seal to the door. For example, before the handle member is fixed to the door, the seal may be positioned/fixed to the handle member through mechanical structural/chemical connection.

In one possible embodiment, the seal is sheathed on the handle member.

In one possible embodiment, the handle member includes a covering portion for closing the first receiving space, and the sealing portion is located between the covering portion and the at least one boundary wall.

In one possible embodiment, the seal includes a base portion attached to the covering portion and disposed facing one side of the first receiving space, and the sealing portion extends outwards from an edge of the base portion. Preferably, the base portion has a shape adapted to the covering portion.

In one possible embodiment, the second receiving space further includes a concave portion forward and open towards a side of the door, a handle groove located within the second receiving space is accessible to a user through the concave portion, and the first receiving space and the second receiving space are located in the same housing member. By integrating the first receiving space, the handle groove and the concave portion in the user interface housing, the handle groove and the concave portion are formed without an additional member, which not only helps to simplify construction of the door,

but also helps to form an integrated user operation center.

The structure and other invention objectives as well as beneficial effects of the present invention will be more comprehensible with reference to the accompanying drawings and the description about the preferable embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

As a part of the specification and for facilitating further comprehension of the present invention, the following accompanying drawings illustrate specific implementation manners of the present invention, and describe the principle of the present invention together with the specification.

FIG. 1 is a schematic partial perspective view of a refrigerator according to a preferable embodiment of the present invention;

FIG. 2 is a schematic partial perspective view of a door according to a preferable embodiment of the present invention;

FIG. 3 is a partial exploded view of a door according to a preferable embodiment of the present invention;

FIG. 4 is a partial sectional view along the A-A line in FIG. 2; and

FIG. 5 is a schematic exploded view of a handle member and a seal according to a preferable embodiment of the present invention.

DETAILED DESCRIPTION

FIG. 1 is a schematic perspective view of a refrigerator 100 according to a preferable embodiment of the present invention. As shown in FIG. 1, the refrigerator 100 includes a main body 5 having a first storage compartment (not shown) and a second storage compartment (not shown) disposed side by side. The refrigerator 100 further includes a pair of French doors 2, 2' connected to the main body 5 to close a corresponding storage compartments, respectively.

Referring to FIG. 2 to FIG. 4 in combination with FIG. 1, the door 2 has an integrated operation center 6. The operation center 6 includes a user interface 61 and a handle groove 232 integrated in the operation center 6. When opening or closing the

door 2, the user's fingers can stretch into the handle groove 232. The operation center 6 further includes a concave portion 233 concaved backwards, and the user's fingers enter into the handle groove 232 through the concave portion 233.

The user interface 61 is configured to receive inputs from users and to output information to the users, and such information may include, for example, setting information about the refrigerator 100 and/or information of food stored in the refrigerator 100, etc. The user interface 61 includes a plurality of touch areas 24a and a display area 24b on a front panel 24. The touch areas 24a may, as shown in FIG. 2, be separated from the display area 24b, and may also be located in the display area 24b.

The user interface 61 includes a user interface electrical module 25 located behind the touch regions 24a and the display region 24b. The user interface electrical module 25 may include a light source, and when the light source is turned on, light can transmit through the display area 24b.

As shown in FIG. 7, the concave portion 233 is open towards a front surface 201 and a side surface 202 of the door 2. The concave portion 233, the handle groove 232 and the user interface electrical module 25 are arranged side by side in a depth direction of the handle groove 232 (which is also a transverse direction of the door 2 in this embodiment). Viewed from the front, visual elements of the user interface 61, such as the touch areas 24a and the display area 24b through which light may transmit, the handle groove 232 and the concave portion 233 are disposed side by side in sequence in a transverse direction of the door 2.

The door 2 includes a door body 20 having a heat insulating material 27, and the front panel 24 covers the front of the door body 20. The front panel 24 has an edge notch 241 located in front of the concave portion 233, so as to expose the concave portion 233 to the user.

The front panel 24 may be made from glass or resins like glass. The front panel 24 may be adhered to the door body 20 through an adhering apparatus 242 disposed at least around a front edge of the door body 20.

The door body 20 includes a user interface housing 23. The user interface housing

23 is constructed independently from a front wall 21 and a side wall 22 of the door body and then connected to them. The user interface housing 23, the front wall 21, the side wall 22 and a door liner 26 are connected fixedly to a heat insulating material 27 located between the front wall 21 and the door liner 26.

Referring to FIG. 4, the user interface housing 23 has a recess portion concaved backwards, to form, on the door 2, a first receiving space 231 for receiving the user interface electrical module 25 and a second receiving space 237 disposed side by side with the first receiving space 231. The second receiving space 237 is open towards a side of the door 2.

The user interface housing 23 has a through-line hole 230, and a cable can enter into the first receiving space 231 via the through-line hole 230 to be connected with the user interface electrical module 25.

In this embodiment, the first receiving space 231 and the second receiving space 237 are located between the front panel 24 and the user interface housing 23. Boundary walls of the first receiving space 231 and the second receiving space 237 are formed by the user interface housing 23 and the front panel 24, wherein the front panel 24 forms front boundary walls of the first receiving space 231 and the second receiving space 237. The user interface housing 23 forms rear boundary walls, upper boundary walls and lower boundary walls of the first receiving space 231 and the second receiving space 237.

The user interface electrical module 25 is attached to the front panel 24, to receive an instruction input by the user by touching the front panel 24.

The door 2 includes a handle member 29 detachably received in the second receiving space 237. The door 2 may include a user interface electrical module 25 for detachably fixing the handle member 29 to the user interface housing 23 by a screw (not shown), such that it is possible to check the user interface electrical module 25 when necessary.

The handle member 29 closes an inlet of the first receiving space 231 which inlet is open towards the second receiving space 237. When the handle member 29 is fixed to

the door 2, the inlet of the first receiving space 231 is closed, and the user is not able to get access to the first receiving space 231. When the handle member 29 is removed from the door 2, the user interface electrical module 25 is accessible via the second receiving space 237. For example, the user interface electrical module 25 can be removed from the first receiving space 231, or the user interface electrical module 25 may be placed into the first receiving space 231 via the second receiving space 237.

The handle member 29 includes a grip portion 291 in the second receiving space 237. The handle groove 232 is located behind the grip portion 291.

After the user's fingers stretch into the handle groove 232, the fingers in the handle groove 232 can hold the grip portion 291, to open the door 2. For example, some fingers of the user press on a rear surface of the grip portion 291, and another finger (e.g., thumb) presses on the front panel 24 in front of the grip portion 291, so as to apply a force to open the door 2.

The handle member 29 includes a covering portion 292 for closing the open side of the first receiving space 231. The grip portion 291 is connected to a front side of the covering portion 292.

The handle groove 232 and the first receiving space 231 are divided by the covering portion 292. In the second receiving space 237, the handle groove 232 is located behind the grip portion 291 and the latter defines a side boundary of the covering portion 292, and the concave portion 233 in communication with the handle groove 232 is located behind the edge cutout 241 and thus it is exposed to the front of the door 2.

A side of the covering portion 292, which side is faced towards the handle groove 232, may be at least substantially perpendicular to a front panel 24 located in front of the user interface electrical module 25 and the handle member 29 and accordingly at least substantially perpendicular to the front surface 201 of the door 2. In this embodiment, the covering portion 292 is shape substantially like a board.

The grip portion 291 has a front surface which is at least substantially parallel to the front panel 24. Thus, the handle member 29 has a substantially L-shaped cross section.

As shown in FIG. 4 and FIG. 5, the door 2 includes a sealing member 40, and the

sealing member 40 includes a sealing portion 401 located between the handle member 29 and at least one boundary wall of the second receiving space 237. In this way, a possibility that water vapor, dust and the like enter into the first receiving space 231 may be reduced.

In this embodiment, the sealing portion 401 forms a close loop, and disposed all around the handle member 29, and thus the sealing portion 401 is extending along the entire length and width of the handle member 29.

Specifically, the sealing portion 401 is disposed between front, rear, upper and lower boundary walls of the second receiving space 237 and the handle member 29. For example, between a front surface of the handle member 29 facing the front panel 24 and the front panel 24, it is provided with the sealing portion 401.

The handle member 29 includes a first end 297 close to the first receiving space 231 and a second end 298 away from the first receiving space 231, and the sealing portion 401 is disposed along the first end 297. The second end 298 of the handle member 29 is adjacent to the concave portion 233. In this embodiment, the first end 297 of the handle member 29 is formed by the covering portion 292, that is, the sealing portion 401 is located between the covering portion 292 and the boundary wall of the second receiving space 237.

The handle member 29 has a portion which is located between the sealing portion 401 and the second end 298 in a transverse direction, and a gap is formed between this portion of the handle member 29 and the front panel 24 in a fore-and-aft direction. The gap is preferably not less than 0.2 mm and not greater than 1 mm, especially between 0.2 mm and 0.6 mm.

Specifically, the front surface of the grip portion 291 is adjacent to the front panel 24 but is spaced apart from the rear surface of the front panel 24 by a tiny gap. For example, the grip portion 291 is adjacent to the front panel 24 with a gap between the grip portion 291 and the front panel 24 in the fore-and-aft direction not less than 0.2 mm but not greater than 1 mm. Preferably, the gap between the front surface of the grip portion 291 and the front panel 24 is between 0.2 mm and 0.6 mm, for example, the gap

is 0.6 mm.

The handle member 29 may further include a metal reinforcement member 293, especially for strengthening of the grip portion 291. The reinforcement member 293 may be extending along almost an entire length of the grip portion 291, which is advantageous to prevent a technical problem that the user interface electrical module 25 and the front panel 24 are in poor contact caused by a force applied to the front panel 24 by transverse deformation of the grip portion 291 in a process of opening the door.

In this embodiment, the sealing member 40 includes a base portion 402 attached to one side of the covering portion 292 which side is faced to the first receiving space 231. The base portion 402 has a shape adapted to the covering portion 292, and thus is substantially sheet-like in this embodiment. The sealing portion 401 is extending outwards from an edge of the base portion 402, and the sealing member 40 can be sheathed on the handle member 29. In this way, the sealing member 40 and the handle member 29 may form a pre-assembled unit and then be assembled to the door 2.

In this embodiment, the user interface electrical module 25 is provided with a light source (not shown) for illuminating the handle groove 232 and the concave portion 233. Therefore, the handle member 29 and the seal 40 are provided thereon with corresponding holes/openings (not labeled) to allow light to enter into the handle groove 232 and the concave portion 233.

Various embodiments of single parts described in combination with FIG. 1 to FIG. 5 can be combined in any given manner, to implement advantages of the present invention. In addition, the present invention is not limited to the illustrated embodiments, and generally, other means other than the illustrated means may also be used, as long as the means may also achieve the same effect.

CLAIMS

What is claimed is:

1. A refrigerator (100), comprising a door (2), characterized in that, the door (2) comprises:

a user interface electrical module (25);

a first receiving space (231) that receives the user interface electrical module (25);

a second receiving space (237) open towards a side of the door (2); and

a handle member (29) detachably received in the second receiving space (237), wherein the handle member (29) closes the first receiving space (231), and when the handle member (29) is removed, the user interface electrical module (25) is accessible via the second receiving space (237);

wherein the door (2) further comprises a sealing member (40), and the sealing member (40) comprises a sealing portion (401) located between the handle member (29) and at least one boundary wall of the second receiving space (237).

2. The refrigerator according to claim 1, characterized in that, the handle member (29) comprises a first end (297) close to the first receiving space (231) and a second end (298) away from the first receiving space (231), and the sealing member (40) is disposed between the first end (297) and the at least one boundary wall.

3. The refrigerator according to claim 1 or 2, characterized in that, the door (2) comprises a front panel (24) covering the user interface electrical module (25) and the handle member (29), and a gap is formed between a portion of the handle member (29), which portion is located between the sealing member (40) and the second end (298) in a transverse direction, and the front panel (24).

4. The refrigerator according to claim 3, characterized in that, the gap is not less than 0.2 mm and not greater than 1 mm, especially between 0.2 mm and 0.6 mm.

5. The refrigerator according to at least one of the preceding claims, characterized in that the door (2) comprises a front panel (24) covering the user interface electrical module (25) and the handle member (29), the front panel (24) defining front boundaries

of the first receiving space (231) and the second receiving space (237), and the sealing portion (401) is disposed between a front surface of the handle member (29) and the front panel (24).

6. The refrigerator according to at least one of the preceding claims, characterized in that, the sealing portion (401) is extending over the entire height of the handle member (29).

7. The refrigerator according to at least one of the preceding claims, characterized in that, the sealing portion (401) forms a close loop and is disposed surrounding the handle member (29).

8. The refrigerator according to at least one of the preceding claims, characterized in that, the sealing member (40) and the handle member (29) are assembled to the door (2) as a pre-assembled unit.

9. The refrigerator according to at least one of the preceding claims, characterized in that, the sealing member (40) is sheathed on the handle member (29).

10. The refrigerator according to at least one of the preceding claims, characterized in that, the handle member (29) comprises a covering portion (292) for closing the first receiving space (231), and the sealing portion (401) is located between the covering portion (292) and the at least one boundary wall.

11. The refrigerator according to claim 10, characterized in that, the sealing member (40) comprises a base portion (402) attached to a side of the covering portion (292), which side is faced to the first receiving space (231), the sealing portion (401) extending outwards from an edge of the base portion (402).

12. The refrigerator according to claim 11, characterized in that, the base portion (402) has a shape adapted to the covering portion (292).

13. The refrigerator according to at least one of the preceding claims, characterized in that, the second receiving space (237) further comprises a concave portion (233) which is open forward and open towards the side of the door (2), a handle groove (232) within the second receiving space (237) being accessible to a user through the concave portion (233), and the first receiving space (231) and the second receiving space (237)

are located in a common housing member (23).

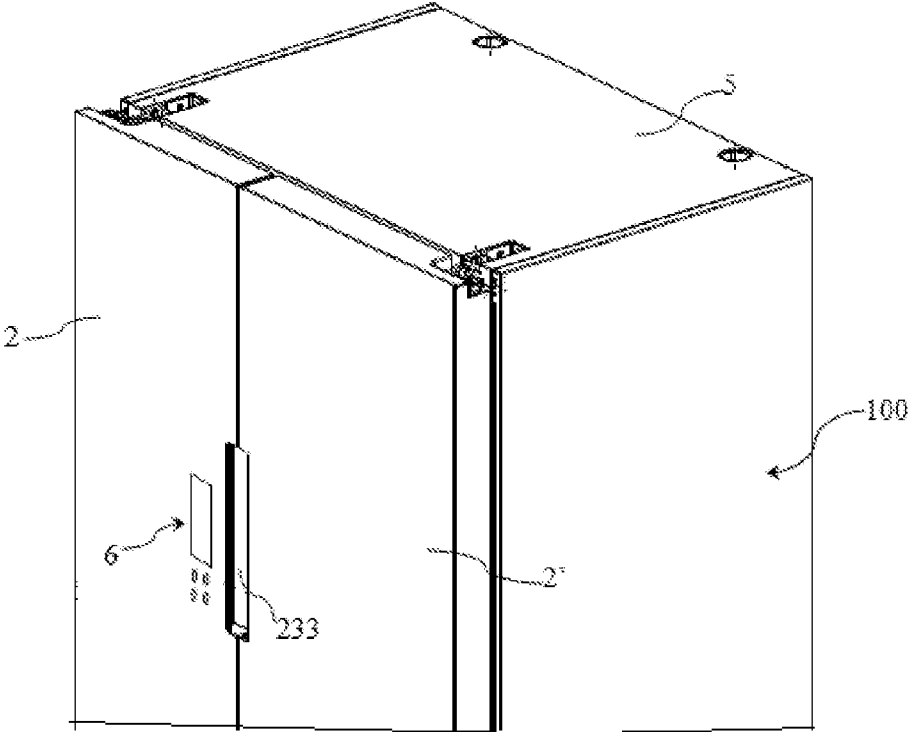


FIG. 1

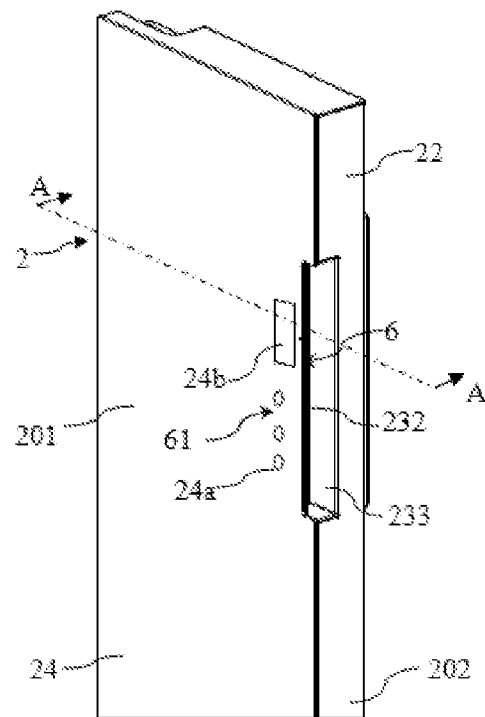


FIG. 2

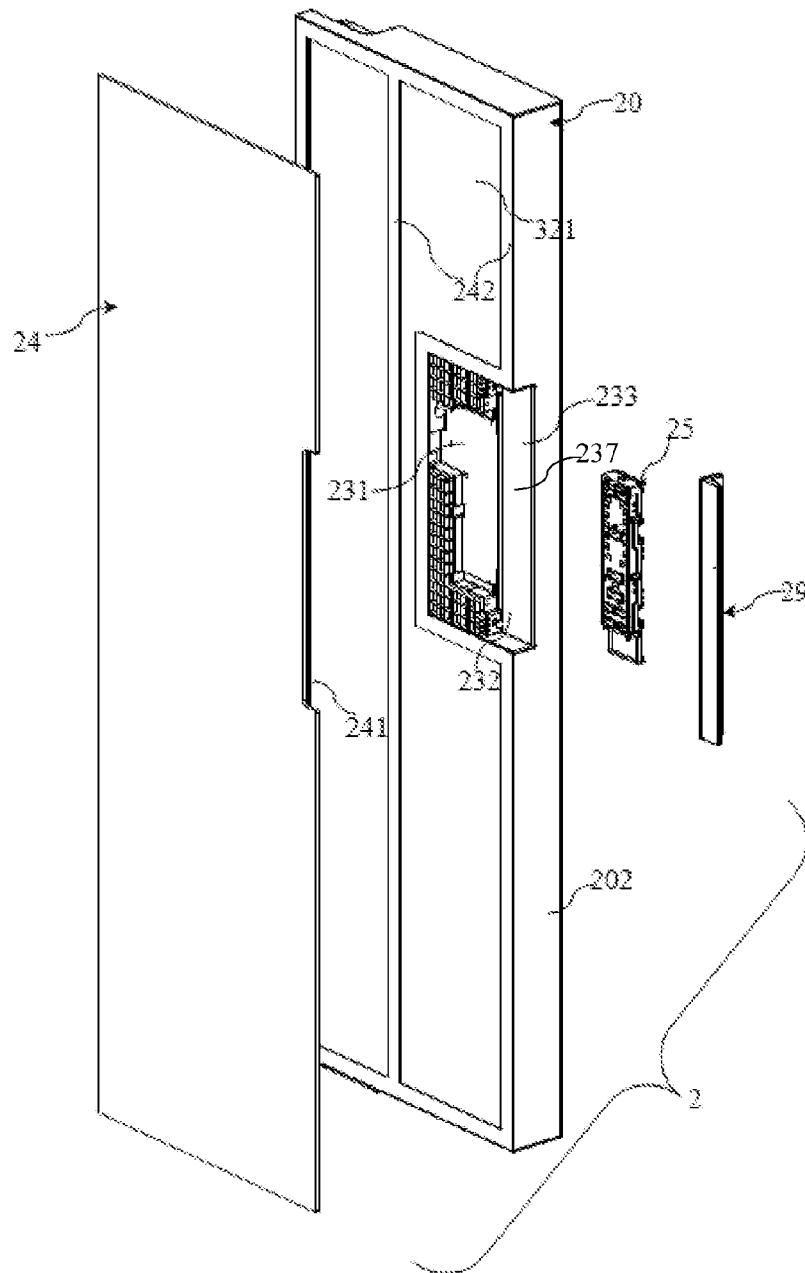


FIG. 3

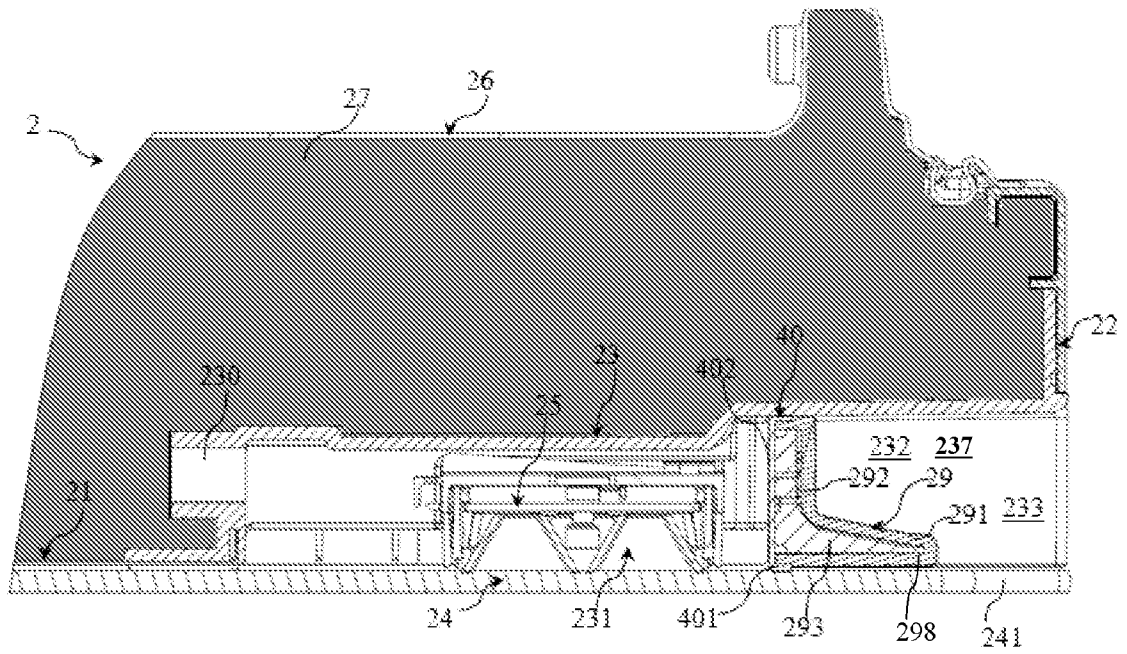


FIG. 4

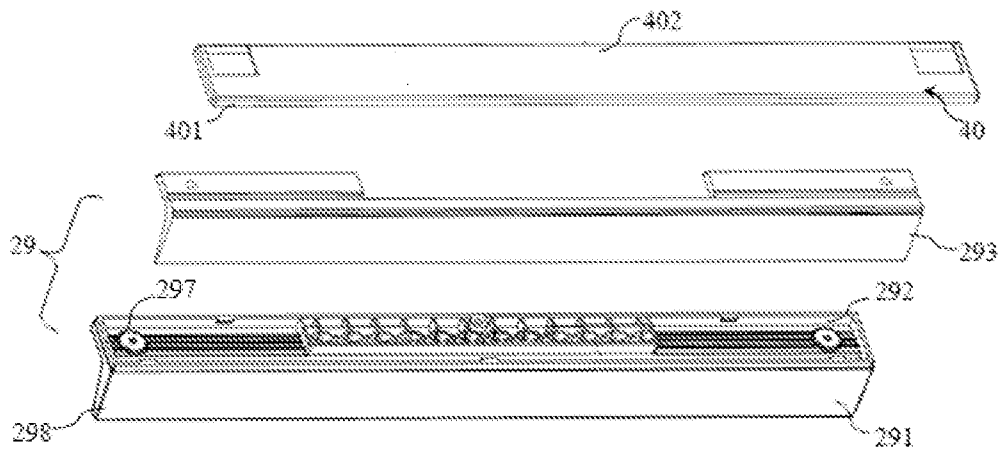


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2015/055372

A. CLASSIFICATION OF SUBJECT MATTER
INV. F25D23/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F25D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2013 178054 A (SHARP KK) 9 September 2013 (2013-09-09) cited in the application paragraphs [0007] - [0070]; figures 1-10 -----	1-6,8-13
X	JP 2004 044980 A (TOSHIBA CORP) 12 February 2004 (2004-02-12) paragraphs [0004] - [0035]; figures 1-10 -----	1,3,6,7, 13
X	DE 10 2012 200812 A1 (BSH BOSCH SIEMENS HAUSGERAETE [DE]) 25 July 2013 (2013-07-25) paragraphs [0004] - [0049]; figures 1-6 -----	1,6,13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 October 2015

Date of mailing of the international search report

03/11/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kolev, Ivelin

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2015/055372

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2013178054 A	09-09-2013	NONE	
JP 2004044980 A	12-02-2004	CN 2699206 Y JP 2004044980 A	11-05-2005 12-02-2004
DE 102012200812 A1	25-07-2013	DE 102012200812 A1 WO 2013107663 A1	25-07-2013 25-07-2013