



(22) **Date de dépôt/Filing Date:** 2016/04/25

(41) **Mise à la disp. pub./Open to Public Insp.:** 2017/01/31

(45) **Date de délivrance/Issue Date:** 2019/04/09

(30) **Priorité/Priority:** 2015/07/31 (US14/814,647)

(51) **Cl.Int./Int.Cl.** *H04W 76/14* (2018.01),
G06K 7/10 (2006.01), *H04B 1/59* (2006.01)


(72) **Inventeurs/Inventors:**
TROY, JAMES J., US;
ESPOSITO, CHRISTOPHER, US;
KARAKUSEVIC, VLADIMIR, US

(73) **Propriétaire/Owner:**
THE BOEING COMPANY, US

(74) **Agent:** SMART & BIGGAR

(54) **Titre : SYSTEMES ET METHODES DE JUMELAGE AUTOMATISE DE DISPOSITIF**

(54) **Title: SYSTEMS AND METHODS FOR AUTOMATED DEVICE PAIRING**

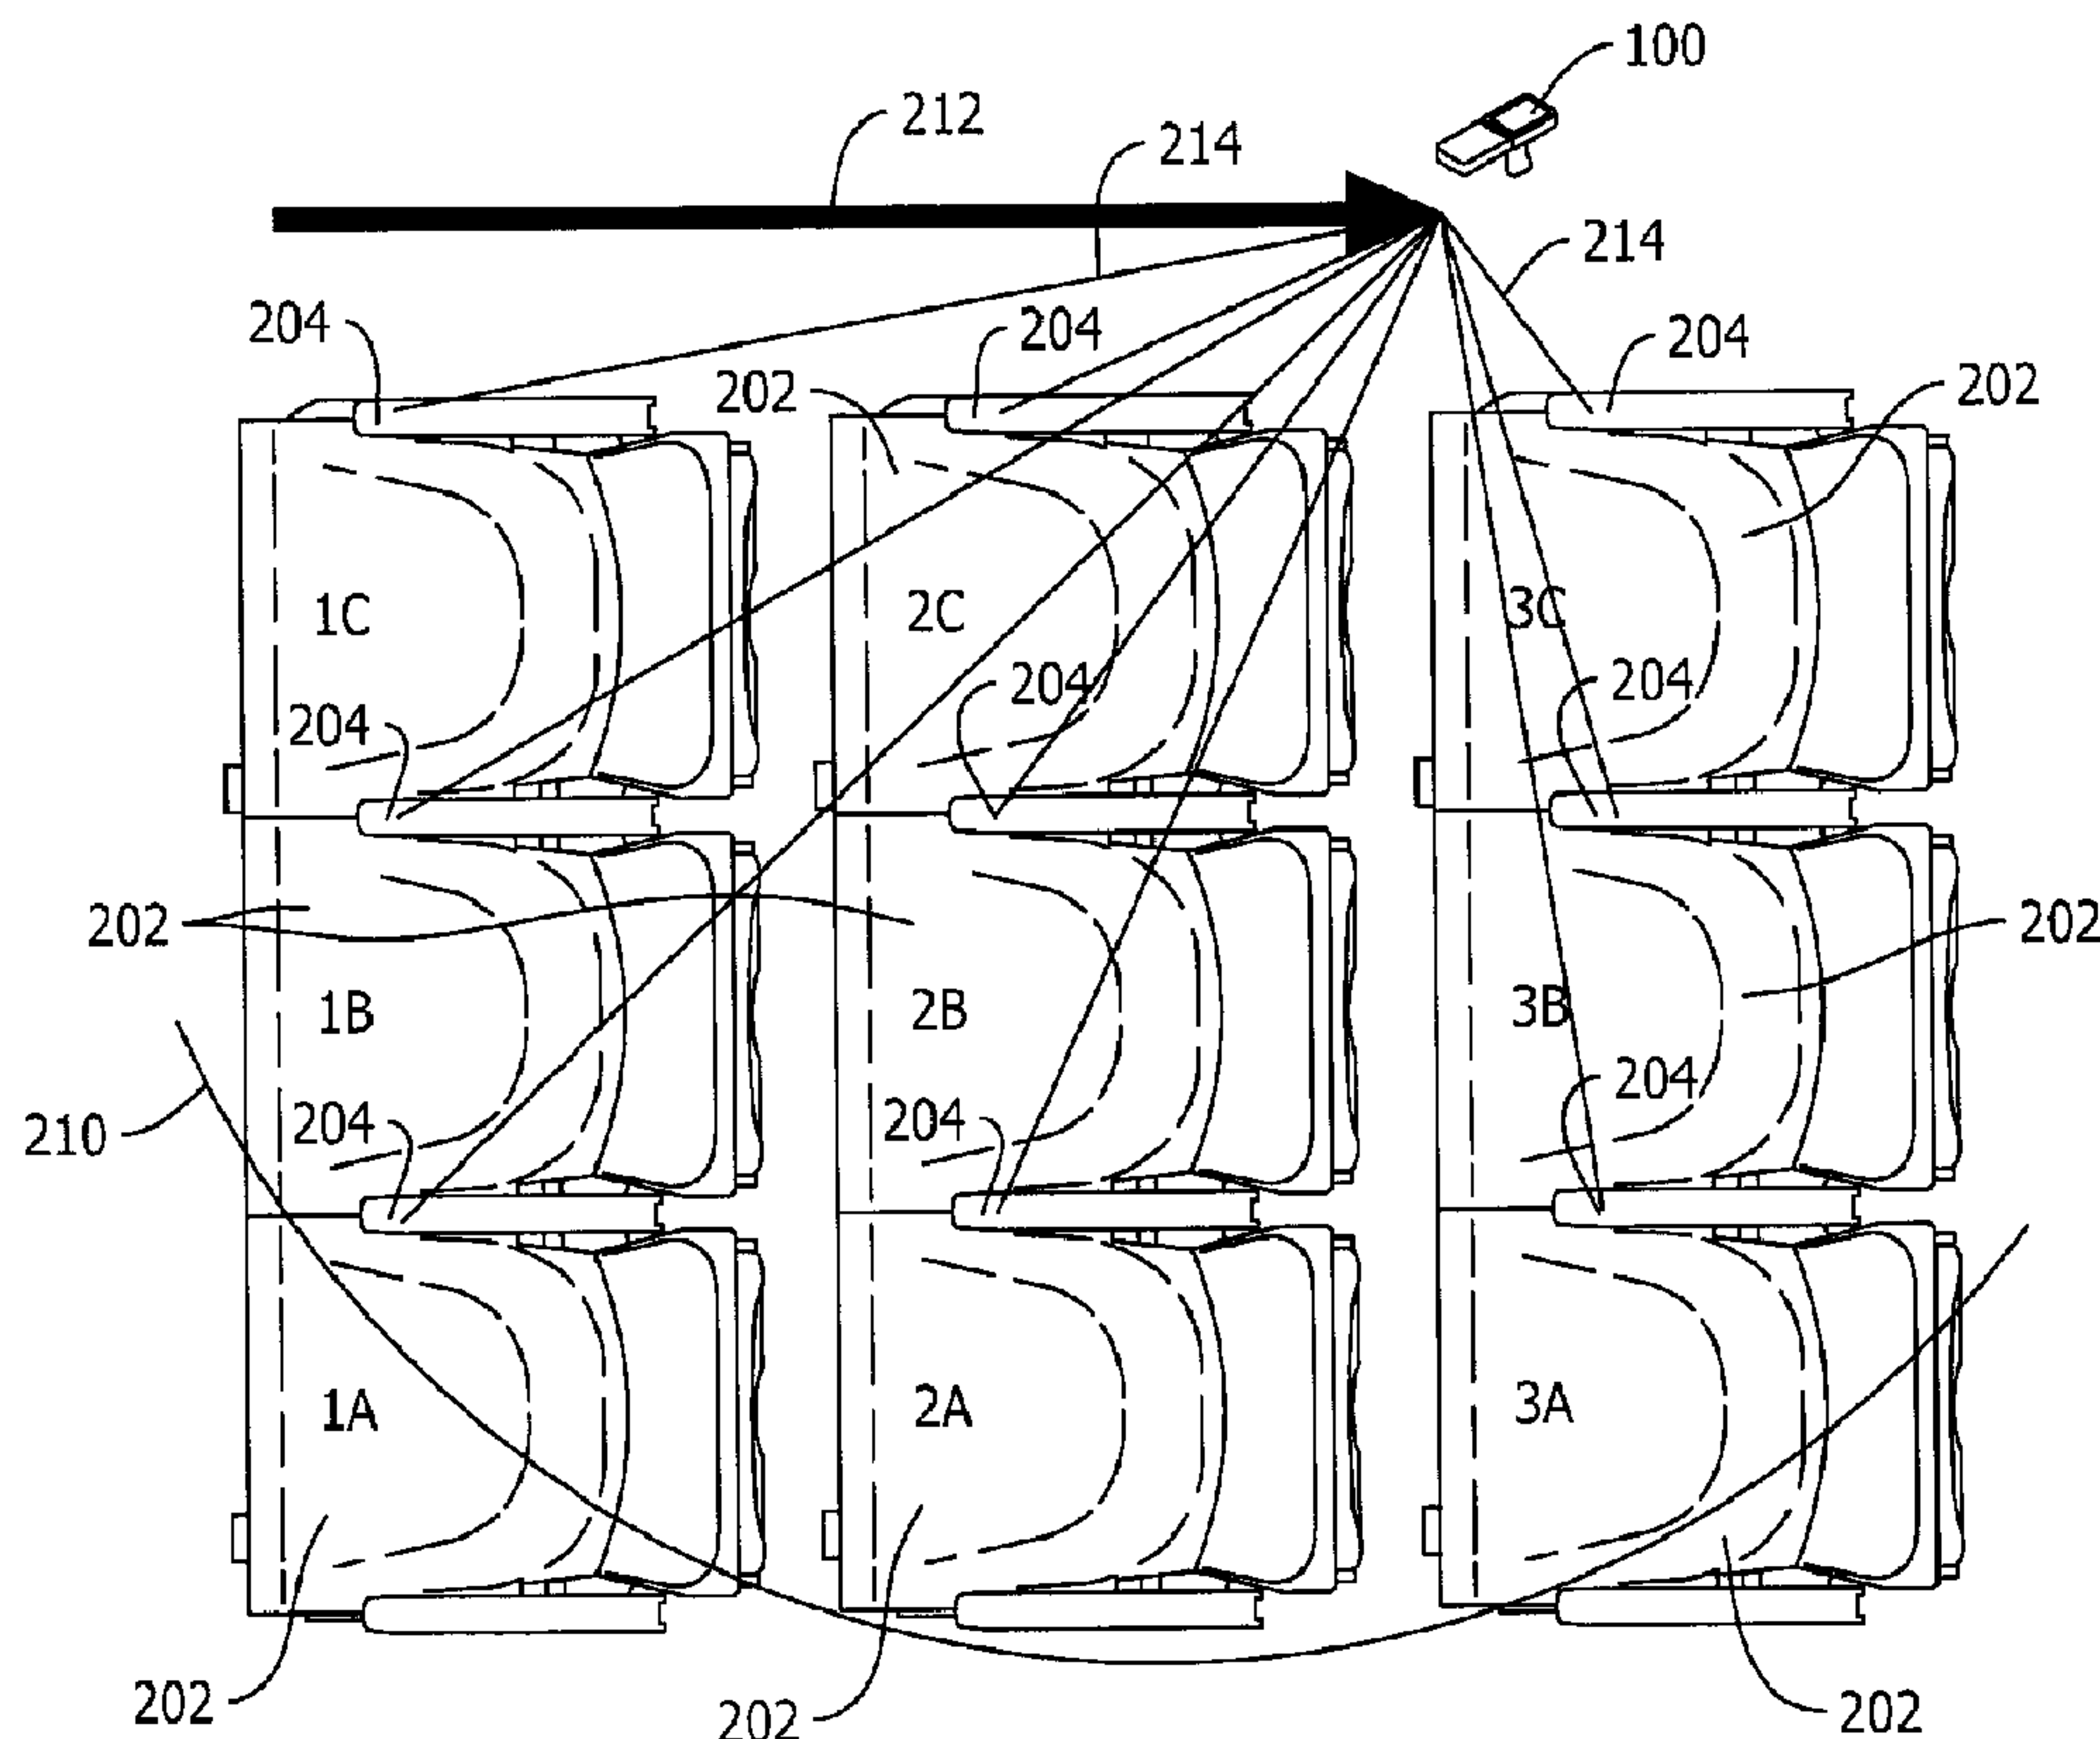

(57) **Abrégé/Abstract:**

A system is provided that includes a scanner movable relative to seat units and controllable devices each having RFID tags, the scanner configured to obtain a continuum of received signals, a distance sensor configured to determine a relative position of the

(57) Abrégé(suite)/Abstract(continued):

scanner, a filter configured to disregard outliers and smooth the continuum into respective sets of received signal data, wherein each set of received signal data includes data points having a unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point, and a processor configured to determine a relative location of each RFID tag, based on the relative position associated with maximum received signal strength within the set of received signal data, and generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags.

ABSTRACT OF THE DISCLOSURE

A system is provided that includes a scanner movable relative to seat units and controllable devices each having RFID tags, the scanner configured to obtain a continuum of received signals, a distance sensor configured to determine a relative position of the scanner, a filter configured to disregard outliers and smooth the continuum into respective sets of received signal data, wherein each set of received signal data includes data points having a unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point, and a processor configured to determine a relative location of each RFID tag, based on the relative position associated with maximum received signal strength within the set of received signal data, and generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags.

SYSTEMS AND METHODS FOR AUTOMATED DEVICE PAIRING

BACKGROUND

The field of the disclosure relates generally to electronically pairing devices or objects, and, more particularly, relates to a scanning system for quickly and efficiently pairing multiple devices.

Aircraft cabins may include a number of output devices (e.g., lights, vents, entertainment systems, etc.) that are remotely controllable by a control panel, or controller, located, for example, on or near a user's seat. In at least some known systems, custom wire harnesses directly connect a controller to an output device. However, the custom wire harnesses are typically heavy and inflexible. Accordingly, in at least some other known systems, controller and output devices are in wired or wireless communication with one another, and each output device has a unique network address. The output device responds only to commands directed to the unique network address. This reduces the amount of wiring and allows output devices to be moved relative to controller, but requires the controller to be associated with the unique network address of the device being controlled.

Current systems and methods for pairing controllers and output devices are somewhat inefficient and error prone. For example, at least one method for pairing devices over a network requires the devices to first be connected to the on-board network, and requires detailed location information as well as a learning mode for entering unique IDs for each output device to be controlled. The location information and unique IDs are manually entered for storage in a table. This method has multiple possible points of failure, include the initial acquisition of location information and unique IDs, and manual entry of data into the table (which is time consuming, tedious, and often involves transcription errors). Further, in at least some known systems, a user operates a hand-held device to pair each controller and output device. However, such methods are not automated (relying on the user to identify which controller should be paired with which output device), and do not have the capability to

continuously receive and update position information for detectable controllers and output devices.

BRIEF DESCRIPTION

In one aspect, a system for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft is provided. The system includes a scanner movable relative to a plurality of seat units and a plurality of controllable devices each having RFID tags, the scanner configured to continuously scan and obtain a continuum of received signals from the RFID tags, a distance sensor configured to determine a relative position of the scanner over time as the scanner is moved, a filter configured to disregard outliers and smooth the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point, and a processor configured to determine a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag, and generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

In another aspect, a method for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft is provided. The method includes moving a scanner relative to a plurality of seat units and a plurality of controllable devices each having RFID tags to continuously scan and obtain a continuum of received signals from the RFID tags, determining a relative position of the scanner over time as the scanner is moved, filtering the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point, determining a relative location of each RFID tag, based on the relative position

associated with a maximum received signal strength within the set of received signal data for each RFID tag, and generating a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

In yet another aspect, a scanner for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft is provided. The scanner is configured to continuously scan and obtain a continuum of received signals from RFID tags associated with a plurality of seat units and a plurality of controllable devices as the scanner is moved through the aircraft, determine a relative position of the scanner over time as the scanner is moved, filter the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point, determine a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag, and generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

In another embodiment, there is provided a system for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft. The system includes a scanner movable relative to a plurality of seat units and a plurality of controllable devices each having RFID tags. The scanner is configured to continuously scan and obtain a continuum of received signals from the RFID tags. The system further includes a distance sensor configured to determine a relative position of the scanner over time as the scanner is moved, a filter configured to disregard outliers and smooth the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data

includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point. The system further includes a processor configured to determine a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag, and generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

The distance sensor may be implemented within the scanner.

The processor may be configured to generate entries for the data file for each of the plurality of seat units and controllable devices regardless of the status of an on-board communications network for the aircraft.

The processor may be further configured to upload the data file to a network control system configured to control communications between the plurality of seat units and controllable devices.

The processor may be configured to generate a map of RFID tag locations within the aircraft based on the filtered continuum of received signals.

The processor may be configured to determine a position of the scanner based on the filtered continuum of received signals.

The system may include a cart supporting the scanner.

The scanner may be configured to be worn by a user.

In another embodiment, there is provided a method for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft. The method involves moving a scanner relative to a plurality of seat units and a plurality of controllable devices each having RFID tags to continuously scan and obtain a continuum of received signals from the RFID tags, and determining a relative position of the scanner over time as the

scanner is moved. The method further involves filtering the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point. The method further involves determining a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag, and generating a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

Generating a data file may involve generating a data file including a set of paired unique IDs for each of the plurality of seat units and controllable devices.

Generating a data file may involve generating entries for the data file for each of the plurality of seat units and controllable devices regardless of the status of an on-board communications network for the aircraft.

The method may involve uploading the data file to a network control system configured to control communications between the plurality of seat units and controllable devices.

The method may involve generating a map of RFID tag locations within the aircraft based on the filtered continuum of received signals.

The method may involve determining a position of the scanner based on the filtered continuum of received signals.

In another embodiment, there is provided a scanner for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft. The scanner is configured to continuously scan and obtain a continuum of received signals from RFID tags associated with a plurality of seat units and a plurality of controllable devices as the scanner is

moved through the aircraft, and determine a relative position of the scanner over time as the scanner is moved. The scanner is further configured to filter the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point. The scanner is further configured to determine a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag. The scanner is further configured to generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

To generate a data file, the scanner may be configured to generate a data file including a set of paired unique IDs for each of the plurality of seat units and controllable devices.

To generate a data file, the scanner may be configured to generate a data file prior to connection of each of the plurality of seat units and controllable devices to a communications network of the aircraft.

The scanner may be further configured to upload the data file to a network control system configured to control communications between the plurality of seat units and controllable devices.

The scanner may be further configured to generate a map of RFID tag locations within the aircraft based on the filtered continuum of received signals.

The scanner may be further configured to determine a position of the scanner based on the filtered continuum of received signals.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic view of an example scanner.

Fig. 2 is a schematic diagram illustrating operation of an omnidirectional scanner.

Fig. 3 is a graph showing simulated recorded signal strength for an omnidirectional signal scanner over time.

Fig. 4 is a graph showing simulated recorded signal strength for an omnidirectional signal scanner over time with signal noise taken into account.

Fig. 5 is a portion of the graph shown in Fig. 4.

Fig. 6 is a graph showing recorded signal strength after filtering.

Fig. 7 is a schematic diagram illustrating operation of a unidirectional scanner.

Fig. 8 is a graph showing simulated recorded signal strength for a unidirectional scanner over time with signal noise taken into account.

Fig. 9 is a graph showing recorded signal strength after filtering.

Fig. 10 is a block diagram of an example computing device that may be used with the scanner shown in Fig. 1.

DETAILED DESCRIPTION

The systems and methods described herein facilitate using long range and/or directional RFID equipment to read unique IDs of RFID-tagged control units and objects (also referred to as controllable devices or associated devices) as a scanning system is moved through an environment (e.g., an airplane cabin) without having to stop at each control unit or object location to acquire unique ID data from that control unit/object. Spatial information and temporal information associated with signal strengths of the control units and objects are acquired as the scanning system is moved through the environment. The scanning system

may be a wearable system that a user carries or straps on (like a backpack), or may be moved around on a cart. In some implementations, robotic platforms may also be used to carry the scanning system on a planned route through the environment. Once complete, a pairing list of control units and associated objects is downloaded to a system processor, as described herein.

The data acquired during the pairing process (or in a separate scanning process) may also be used to provide a location of the control units and objects in a map for 3D localization. This may be a continuously updated process that gives a position (e.g., of the scanning system) relative to the RFID-tagged control units and objects, which may facilitate 3D visualization methods and/or robotic navigation.

The implementations described herein may also be part of a larger overall process that also uses a hand-held approach, such as that disclosed is U.S. Patent Application No. **14/699,713**, filed April 29, 2015. The hand-held approach may be more reliable, but the automated approach described herein will likely be faster. Accordingly, the two approaches may be used together in a comprehensive application where the automated approach is performed first, and any missed and/or incorrect data is resolved using the hand-held approach.

Fig. 1 is a schematic view of an example scanner **100**. Scanner **100** is radio-frequency identification (RFID) scanner in the example implementation. Alternatively, scanner **100** may be any other type of scanning device that enables scanner **100** to function as described herein. Scanner **100** includes a display **102** for displaying information to a user, and at least one input interface **104** (e.g., a button, a touch-screen interface, voice recognition, etc.) for receiving input from the user. Although scanner **100** is shown as a portable, hand held scanner, alternatively, scanner may be any type of scanning device. For example, scanner **100** may be included in a wearable system that a user carries or straps on (like a backpack), or scanner **100** may be moved around on a cart.

Scanner **100** is used to implement a pairing process that takes advantage of relative spatial associations and device information contained in (or derived from) machine readable tags on devices in order to differentiate devices. That is, in the example implementation,

devices to be paired each include a passive RFID tag that is readable by scanner **100**. For example, on an aircraft, scanner **100** may be used to pair a control unit on a seat with an associated device. Associated devices may include, for example, an overhead light, an entertainment system (e.g., a television), a vent, an electronic window shade, and an attendant notification system (e.g., a stewardess call button).

As described below, scanner **100** is used in a spatial/temporal process to identify passive RFID tags and determine the relative locations of the tags. This process enables pairing tags for control applications, as well as position tracking and localization for navigation applications, such as 3D visualization applications. For example, scanner **100** may be used to automatically create a map of RFID tag locations within the aircraft that specifies relative positions of detected RFID tags.

Efficient device pairing as well as continuous position tracking in real-world conditions is made possible using the systems and methods described herein. In general, the process involves moving scanner **100** through an environment to gather signal strengths of ID data from multiple RFID tags corresponding to control units associated with seats in different rows of an aircraft. Once sufficient data has been acquired, a differentiation process can determine the position of scanner **100** relative to the seats. Further, if the location of at least one seat is known (i.e., in airplane coordinates), then the position of scanner **100** may be converted into airplane coordinates, which may be useful in other applications.

Although knowledge of a seating pattern may be used with RFID signal strength data to determine which signal belongs with which seat in ideal conditions, unfortunately, in real-world situations, disturbances such as signal noise and multi-path reflections may make it difficult to reliably determine which seat is associated with which signal. The implementations described herein address this problem by collecting a series of data points while scanner **100** is moving through the environment. Further, a filtering process also facilitates identifying which signal belongs with which seat. Recording both spatial data (i.e., a one-dimensional distance) and temporal data (i.e., a time stamp) for each measured signal strength data point, as well as the identification data (e.g., the RFID tag's unique identifier) allows for tag location identification, even under noisy conditions, as described herein. Based

on the recorded distance and other acquired data, a three-dimensional position of the RFID tag and/or scanner **100** may be determined. Once identified, the association between the seat and signal may be maintained, and location estimates may be generated, even when multiple signals overlap.

Fig. **2** is a schematic diagram illustrating operation of scanner **100**. As shown in Fig. **2**, an environment, such as an aircraft cabin, includes a plurality of seats **202**. In Fig. **2**, the environment includes nine seats **202** arranged in three rows of three seats **202** each. Alternatively, the environment may include any number of seats **202** arranged in any suitable configuration. Each seat **202** includes a control unit **204** (e.g., positioned in an arm rest). Further, each control unit **204** includes a passive RFID tag detectable by scanner **100**. In this implementation, control unit **204** is located in the arm rest of seat **202**. Alternatively, control unit **204** may be located somewhere else than on seat **202**.

In the implementation shown in Fig. **2**, scanner **100** is an omnidirectional scanner. Alternatively, scanner **100** may be a unidirectional scanner, as described in more detail below. Scanner **100** has an operating radius **210** within which scanner **100** can activate and detect passive RFID tags, such as those in control units **204**. As scanner **100** is moved through the environment along a scanning path **212**, using RFID detection, scanner **100** detects control units **204** and distances **214** between scanner **100** and control units **204**. In general, the closer the control unit **204** is to scanner **100**, the higher the detected signal strength. This data is collected over time, such that for a given control unit **204**, the signal strength corresponding to distance **214** is recorded at multiple times (e.g., by time-stamping the measured signal strength). This recorded data for each data sample includes the signal strength associated with the RFID unique identifier, a time-stamp value, and the measured distance along the scanning path.

Fig. **3** is a graph **300** showing simulated recorded signal strength over time in an ideal scenario (i.e., without any signal noise). As shown in Fig. **3**, signals associated with each seat **202** are clearly discernable. However, such a scenario is unlikely to occur in real-world conditions. That is, in real-world applications, the recorded signal strength will have significant signal noise, as well as multi-path reflections problems, making it difficult to

determine which RFID tag (and associated control unit **204** and seat **202**) corresponds to which signal.

In contrast, Fig. **4** is a graph **400** showing simulated recorded signal strength over time with typical signal noise taken into account. Fig. **5** is a portion **500** of graph **400**. As shown in Figs. **4** and **5**, the signals overlap with one another repeatedly, making it difficult to differentiate the signals from one another at a given point in time.

Accordingly, in the implementations described herein, signal strength data is collected and analyzed over time to identify periods of time where specific individuals signals may be extracted from the overlapping data from other signals. That is, by analyzing signal strength data over a larger time window, it is possible to filter the data to recover where peaks occur. As the individual peaks for each seat **202** are clearly distinguishable, even in Fig. **4**, this allows the unique IDs associated with each RFID tag to be differentiated from one another.

In the example implementation, the signal strength data is filtered using a complementary (i.e., fading memory) filter. Alternatively, the signal strength data may be filtered using any type of filter than enables scanner **100** to function as described herein. Fig. **6** is a graph **600** showing recorded signal strength after filtering. As shown in Fig. **6**, the peaks of each signal may automatically be identified after filtering. Each seat **202** may then be associated with signal data in the region where the associated signal stands out from the others. As scanner **100** is moved along scanning path **212**, signals for all RFID tags will be located and differentiated, but not all at the same time. It is important to recognize that this process does not require any prior knowledge of seat row location within the aircraft.

The identification method described above enables both a device automated pairing process and a real-time localization process. For example, for automated device pairing, a second set of signal strength curves may be similarly acquired for RFID-tagged objects (i.e., associated devices) that are to be paired with respective control units **204**. Using a one-to-one pairing process, the objects are automatically paired with associated control units **204**, and a data file including the list of pairings is automatically generated. For example, at a given

location, the strongest control unit signal is paired with the strongest object signal, the second strongest control unit signal is paired with the second strongest object signal, etc.

The pairing of control units **204** and associated devices is recorded (e.g., in a memory device on scanner **100**, or in a memory device of a remote computing device in communication with scanner **100**). In the example implementation, each associated device may be paired with only one control unit **204**. However, a single control unit **204** may be paired with multiple associated devices. After the pairing of control unit **204** with associated device is recorded, a data file may be generated that includes a set of paired unique IDs for each of control units **204** and associated devices, wherein the data file may be generated prior to connection of each of the plurality of control units **204** and associated devices to a communications network of the aircraft. Accordingly, an operational on-board network is not required for the pairing process. Of course, the pairing process may be performed after an on-board network is operational, but the network is not required.

The format of the data file may be an ASCII text file, a binary file, and/or any other type of data file format. In some implementations, the data file may be uploaded to a network control system that controls communications between the first and second pair members. The pairing data collected may be integrated with a graphical representation of the environment within which the scanning is being performed. This enables automatic generation of a pairing map. A successful pairing can then be shown on a graphics display (e.g., displayed on scanner **100**). For example, pairing information may be displayed on a two-dimensional or three-dimensional graphical representation of an aircraft seat layout.

In some implementations, a portable computing device (e.g., a tablet or wearable computer device) is equipped with scanner **100**, which may be detachable from the portable computing device (not shown). Information associated with the devices, such as successful pairings, may be displayed on the portable computing device. This pairing status information may also be displayed on the portable computing device in a proper registered 3D coordinate system of the aircraft. Further, portable computing device may include software that allows a user to modify the way successful (or unsuccessful) pairings are displayed (e.g., whether they

are displayed in a textual or graphical form, the order in which the pairings are displayed, etc.).

The pairing data may be displayed to a user in multiple different formats, and may be displayed on scanner **100**, a computing device communicatively coupled to scanner **100**, and/or any other suitable display device. In one implementation, a three-dimensional model (e.g., of an aircraft interior) is displayed, with the pairing data overlaid on the three-dimensional model. This may assist the user in confirming locations of the paired objects in terms of a coordinate system (e.g., a coordinate system tied to seat numbers in the aircraft interior). Upon confirming the locations of the paired objects, and prior to connection of each of the paired objects to a communications network of the aircraft, a data file may be generated from the multiple sets of acquired pairing data (where pairings may include unique IDs for each control unit **204** and object). The data file of paired unique IDs is then uploaded (e.g., during the manufacture of the aircraft) to a network control system configured to control communications between the plurality of control units **204** and objects, where the data file is uploaded such that a communication from the selected control units **204** will control the selected object. Accordingly, the data file of paired unique IDs may, for example, improve the process of manufacturing the aircraft by quickly and automatically generating a data file including pairing information prior to connection of each of the plurality of paired control units **204** and objects to a network.

The methods implemented using scanner **100** may also detect errors in the pairing process and generate corresponding alerts. For example, it may be determined whether, after the pairing process, one or more control units **204** with a detected RFID tag remain unpaired with an associated device. In another example, it may be determined whether more than one RFID tag is detected at the same location. By generating an appropriate visual, audible, and/or tactile alert, scanner **100** notifies a user, and the user can address the issue.

For real-time localization, a user may move scanner **100** through the environment until a set of peaks is detected. By comparing the detected peaks with the previously acquired data for all seats **202**, the location of scanner **100** may be determined. When not at a signal peak, a location estimate may be computed by comparing the measured signal strength data to a

mathematical model of the expected signal strength data. Moving scanner **100** away from those “peak” locations causes location determination to be less accurate, but the location can be updated when another set of peaks is detected. This localization application addresses translational motion of scanner **100** down the aisle of the airplane, but may also be used as part of a six degrees-of-freedom localization application that determines both position and orientation. These localization techniques enable a user to quickly determine their location for applications related to inspection, quality control, and tours of the aircraft.

To address orientation, scanner **100** may be communicatively coupled to or include an inertial measurement unit (IMU). The IMU may be used to provide rotational data as well as an additional source of position data (by double integrating acceleration data). This additional data may be passed through a Kalman filter to improve determination of a location of scanner **100**.

As discussed above, scanner **100** may be an omnidirectional scanner or a unidirectional scanner. As used herein, an omnidirectional scanner transmits and receives substantially equally in all angular directions, whereas a unidirectional scanner transmits and receives within a limited angular view. A unidirectional scanner may be used, for example, when transmission power is limited (e.g., due to environmental restriction or FCC regulations).

When scanner **100** is omnidirectional, RF energy is transmitted in all direction to energize the passive RFID tags in control units **204**. Accordingly, the gain pattern is substantially spherical, extending in **360°** in both vertical and horizontal planes. However, in order to energize RFID tags that are relatively far away, significantly more RF energy is needed than with a unidirectional scanner. Accordingly, some omnidirectional scanners may only have a range of a few inches, or less.

In contrast, unidirectional scanners may be capable of energizing and detecting passive RFID tags within a range of approximately fifteen feet. Accordingly, unidirectional scanners may be used to implement the methods described herein. For a unidirectional scanner, the gain pattern will have a substantially elliptical shape that extends from the

scanner over a relatively limited angle. The width of the elliptical shape, or beam width, may differ between the horizontal and vertical profiles of the gain pattern. Accordingly, a unidirectional scanner transmits RF energy over a relatively narrow field-of-view, as compared to an omnidirectional scanner.

To use a unidirectional scanner in the methods described herein, in some implementations, scanner **100** may be placed on a motorized gimbal that oscillates through an elevation angle in a direction perpendicular to the direction of travel as scanner **100** moves down the aisle. Alternatively, in other implementations, an array of unidirectional multiple scanners configured in a fan-like arrangement could be used.

When using a unidirectional scanner, there may be gaps in the signal strength data when no RFID tags are detected in the narrower beam coverage region. However, gimbal rotation along a pan axis, along with IMU orientation, may be used to acquire data in this region, if desired. To allow for gimbal rotation and adequate data acquisition, a gimbaled unidirectional scanner may also need to be moved slower along scanning path **212** than an omnidirectional antenna. For an array of multiple unidirectional scanners, transmit/receive patterns may need to be adjusted (e.g., sequenced) for scanners adjacent to each other, in order to avoid return signal crosstalk.

Fig. 7 is a schematic diagram illustrating operation of scanner **100** when scanner **100** is a unidirectional scanner. Scanner **100** has an operating range **1010** within which scanner **100** can activate and detect passive RFID tags, such as those in control units **204**. As scanner **100** is moved through the environment along a scanning path **212**, using RFID detection, scanner **100** detects control units **204** and distances **1014** between scanner **100** and control units **204**. The closer the control unit **204** is to scanner **100**, the higher the detected signal strength. As shown in Fig. 7, the beam shape of a unidirectional scanner is much narrower than an omnidirectional scanner.

Fig. 8 is a graph **1100** showing simulated recorded signal strength over time using a unidirectional scanner and including signal noise. As shown in Fig. 8, because of the limited beam width, there are gaps in the data where no signal data was received. However, signal

strength peaks can still be identified and discriminated using the methods described above in conjunction with an omnidirectional scanner, as shown in graph **1200** of Fig. **9**. If multiple unidirectional scanners are used (e.g., in sequence), the orientation of the scanners may be determined, and seats on the left and right sides of the aisle may be differentiated from each other in a single pass.

Fig. **10** is a block diagram of a computing device **1300** that may be used to implement the methods described herein. For example, scanner **100** and/or a computing device in communication with scanner **100** may be implemented using computing device **1300**. Computing device **1300** includes at least one memory device **1310** and a processor **1315** that is coupled to memory device **1310** for executing instructions. In some implementations, executable instructions are stored in memory device **1310**. In the example implementation, computing device **1300** performs one or more operations described herein by programming processor **1315**. For example, processor **1315** may be programmed by encoding an operation as one or more executable instructions and by providing the executable instructions in memory device **1310**. In other implementations, scanner **100** may use a wireless network connection that allows the application software to be run remotely (i.e., performing processing at a location other than on scanner **100**).

Processor **1315** may include one or more processing units (e.g., in a multi-core configuration). Further, processor **1315** may be implemented using one or more heterogeneous processor systems in which a main processor is present with secondary processors on a single chip. In another illustrative example, processor **1315** may be a symmetric multi-processor system containing multiple processors of the same type. Further, processor **1315** may be implemented using any suitable programmable circuit including one or more systems and microcontrollers, microprocessors, reduced instruction set circuits (RISC), application specific integrated circuits (ASIC), programmable logic circuits, field programmable gate arrays (FPGA), and any other circuit capable of executing the functions described herein.

In the example implementation, memory device **1310** is one or more devices that enable information such as executable instructions and/or other data to be stored and

retrieved. Memory device **1310** may include one or more computer readable media, such as, without limitation, dynamic random access memory (DRAM), static random access memory (SRAM), a solid state disk, and/or a hard disk. Memory device **1310** may be configured to store, without limitation, application source code, application object code, source code portions of interest, object code portions of interest, configuration data, execution events and/or any other type of data.

In the example implementation, computing device **1300** includes a presentation interface **1320** that is coupled to processor **1315**. Presentation interface **1320** presents information to a user **1325**. For example, presentation interface **1320** may include a display adapter (not shown) that may be coupled to a display device, such as a cathode ray tube (CRT), a liquid crystal display (LCD), an organic LED (OLED) display, and/or an “electronic ink” display. In some implementations, presentation interface **1320** includes one or more display devices.

In the example implementation, computing device **1300** includes a user input interface **1335**. User input interface **1335** is coupled to processor **1315** and receives input from user **1325**. User input interface **1335** may include, for example, a keyboard, a pointing device, a mouse, a stylus, a touch sensitive panel (e.g., a touch pad or a touch screen), a gyroscope, an accelerometer, a position detector, and/or an audio user input interface. For example, user input interface may be implemented as input interface **104** of scanner **100**. A single component, such as a touch screen, may function as both a display device of presentation interface **1320** and user input interface **1335**.

Computing device **1300**, in the example implementation, includes a communication interface **1340** coupled to processor **1315**. Communication interface **1340** communicates with one or more remote devices. To communicate with remote devices, communication interface **1340** may include, for example, a wired network adapter, a wireless network adapter, and/or a mobile telecommunications adapter.

As compared to at least some known pairing systems, the implementations described are significantly faster and easier for a human operator, and eliminate transcription errors.

Further, the systems and methods described herein enable real-time, continuous positioning for interactive visualization or robotics applications. Eliminating of multiple steps of known processes, simplifying the pairing process, and removing potential sources of error will result in less time needed to collect pairing information, reducing costs. Further, relatively little training will be required for a user to operate the systems described herein. The user need only walk down the aisle of the airplane while carrying or pushing the scanning device. No manual entry is required. Moreover, additional automation is possible by using robotic vehicles to move the scanning device through the environment.

This written description uses examples to disclose various implementations, which include the best mode, to enable any person skilled in the art to practice those implementations, including making and using any devices or systems and performing any incorporated methods. The patentable scope is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

THE EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A system for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft, said system comprising:
 - a scanner movable relative to a plurality of seat units and a plurality of controllable devices each having RFID tags, said scanner configured to continuously scan and obtain a continuum of received signals from the RFID tags;
 - a distance sensor configured to determine a relative position of said scanner over time as said scanner is moved;
 - a filter configured to disregard outliers and smooth the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point;
 - a processor configured to:
 - determine a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag; and
 - generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

2. The system in accordance with Claim 1, wherein said distance sensor is implemented within said scanner.
3. The system in accordance with Claim 1, wherein said processor is configured to generate entries for the data file for each of the plurality of seat units and controllable devices regardless of the status of an on-board communications network for the aircraft.
4. The system in accordance with Claim 1, wherein said processor is further configured to upload the data file to a network control system configured to control communications between the plurality of seat units and controllable devices.
5. The system in accordance with Claim 1, wherein said processor is configured to generate a map of RFID tag locations within the aircraft based on the filtered continuum of received signals.
6. The system in accordance with Claim 1, wherein said processor is configured to determine a position of said scanner based on the filtered continuum of received signals.
7. The system in accordance with Claim 1, further comprising a cart supporting said scanner.
8. The system in accordance with Claim 1, wherein said scanner is configured to be worn by a user.
9. A method for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft, said method comprising:
 - moving a scanner relative to a plurality of seat units and a plurality of controllable devices each having RFID tags to continuously scan and obtain a continuum of received signals from the RFID tags;
 - determining a relative position of the scanner over time as the scanner is moved;
 - filtering the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated

with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point;

determining a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag; and

generating a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

10. The method in accordance with Claim 9, wherein generating a data file comprises generating a data file including a set of paired unique IDs for each of the plurality of seat units and controllable devices.
11. The method in accordance with Claim 9, wherein generating a data file comprises generating entries for the data file for each of the plurality of seat units and controllable devices regardless of the status of an on-board communications network for the aircraft.
12. The method in accordance with Claim 9, further comprising uploading the data file to a network control system configured to control communications between the plurality of seat units and controllable devices.
13. The method in accordance with Claim 9, further comprising generating a map of RFID tag locations within the aircraft based on the filtered continuum of received signals.
14. The method in accordance with Claim 9, further comprising determining a position of the scanner based on the filtered continuum of received signals.
15. A scanner for electronically pairing a plurality of seat units with a plurality of controllable devices in an aircraft, said scanner configured to:

continuously scan and obtain a continuum of received signals from RFID tags associated with a plurality of seat units and a plurality of controllable devices as said scanner is moved through the aircraft;

determine a relative position of said scanner over time as said scanner is moved;

filter the continuum of received signals into respective sets of received signal data for each RFID tag, based on a unique ID in each received signal associated with each RFID tag, wherein each set of received signal data includes data points having the unique ID and a received signal strength, and wherein a relative time and a relative position are determined for each data point;

determine a relative location of each RFID tag, based on the relative position associated with a maximum received signal strength within the set of received signal data for each RFID tag; and

generate a data file including pairings of seat units and associated controllable devices based on similar relative positions of RFID tags associated with each seat unit and each controllable device, the data file generated to enable respective seat units to operate associated controllable devices.

16. The scanner in accordance with Claim 15, wherein to generate a data file, said scanner is configured to generate a data file including a set of paired unique IDs for each of the plurality of seat units and controllable devices.
17. The scanner in accordance with Claim 15, wherein to generate a data file, said scanner is configured to generate a data file prior to connection of each of the plurality of seat units and controllable devices to a communications network of the aircraft.
18. The scanner in accordance with Claim 15, wherein said scanner is further configured to upload the data file to a network control system configured to control communications between the plurality of seat units and controllable devices.

19. The scanner in accordance with Claim **15**, wherein said scanner is further configured to generate a map of RFID tag locations within the aircraft based on the filtered continuum of received signals.
20. The scanner in accordance with Claim **15**, wherein said scanner is further configured to determine a position of said scanner based on the filtered continuum of received signals.

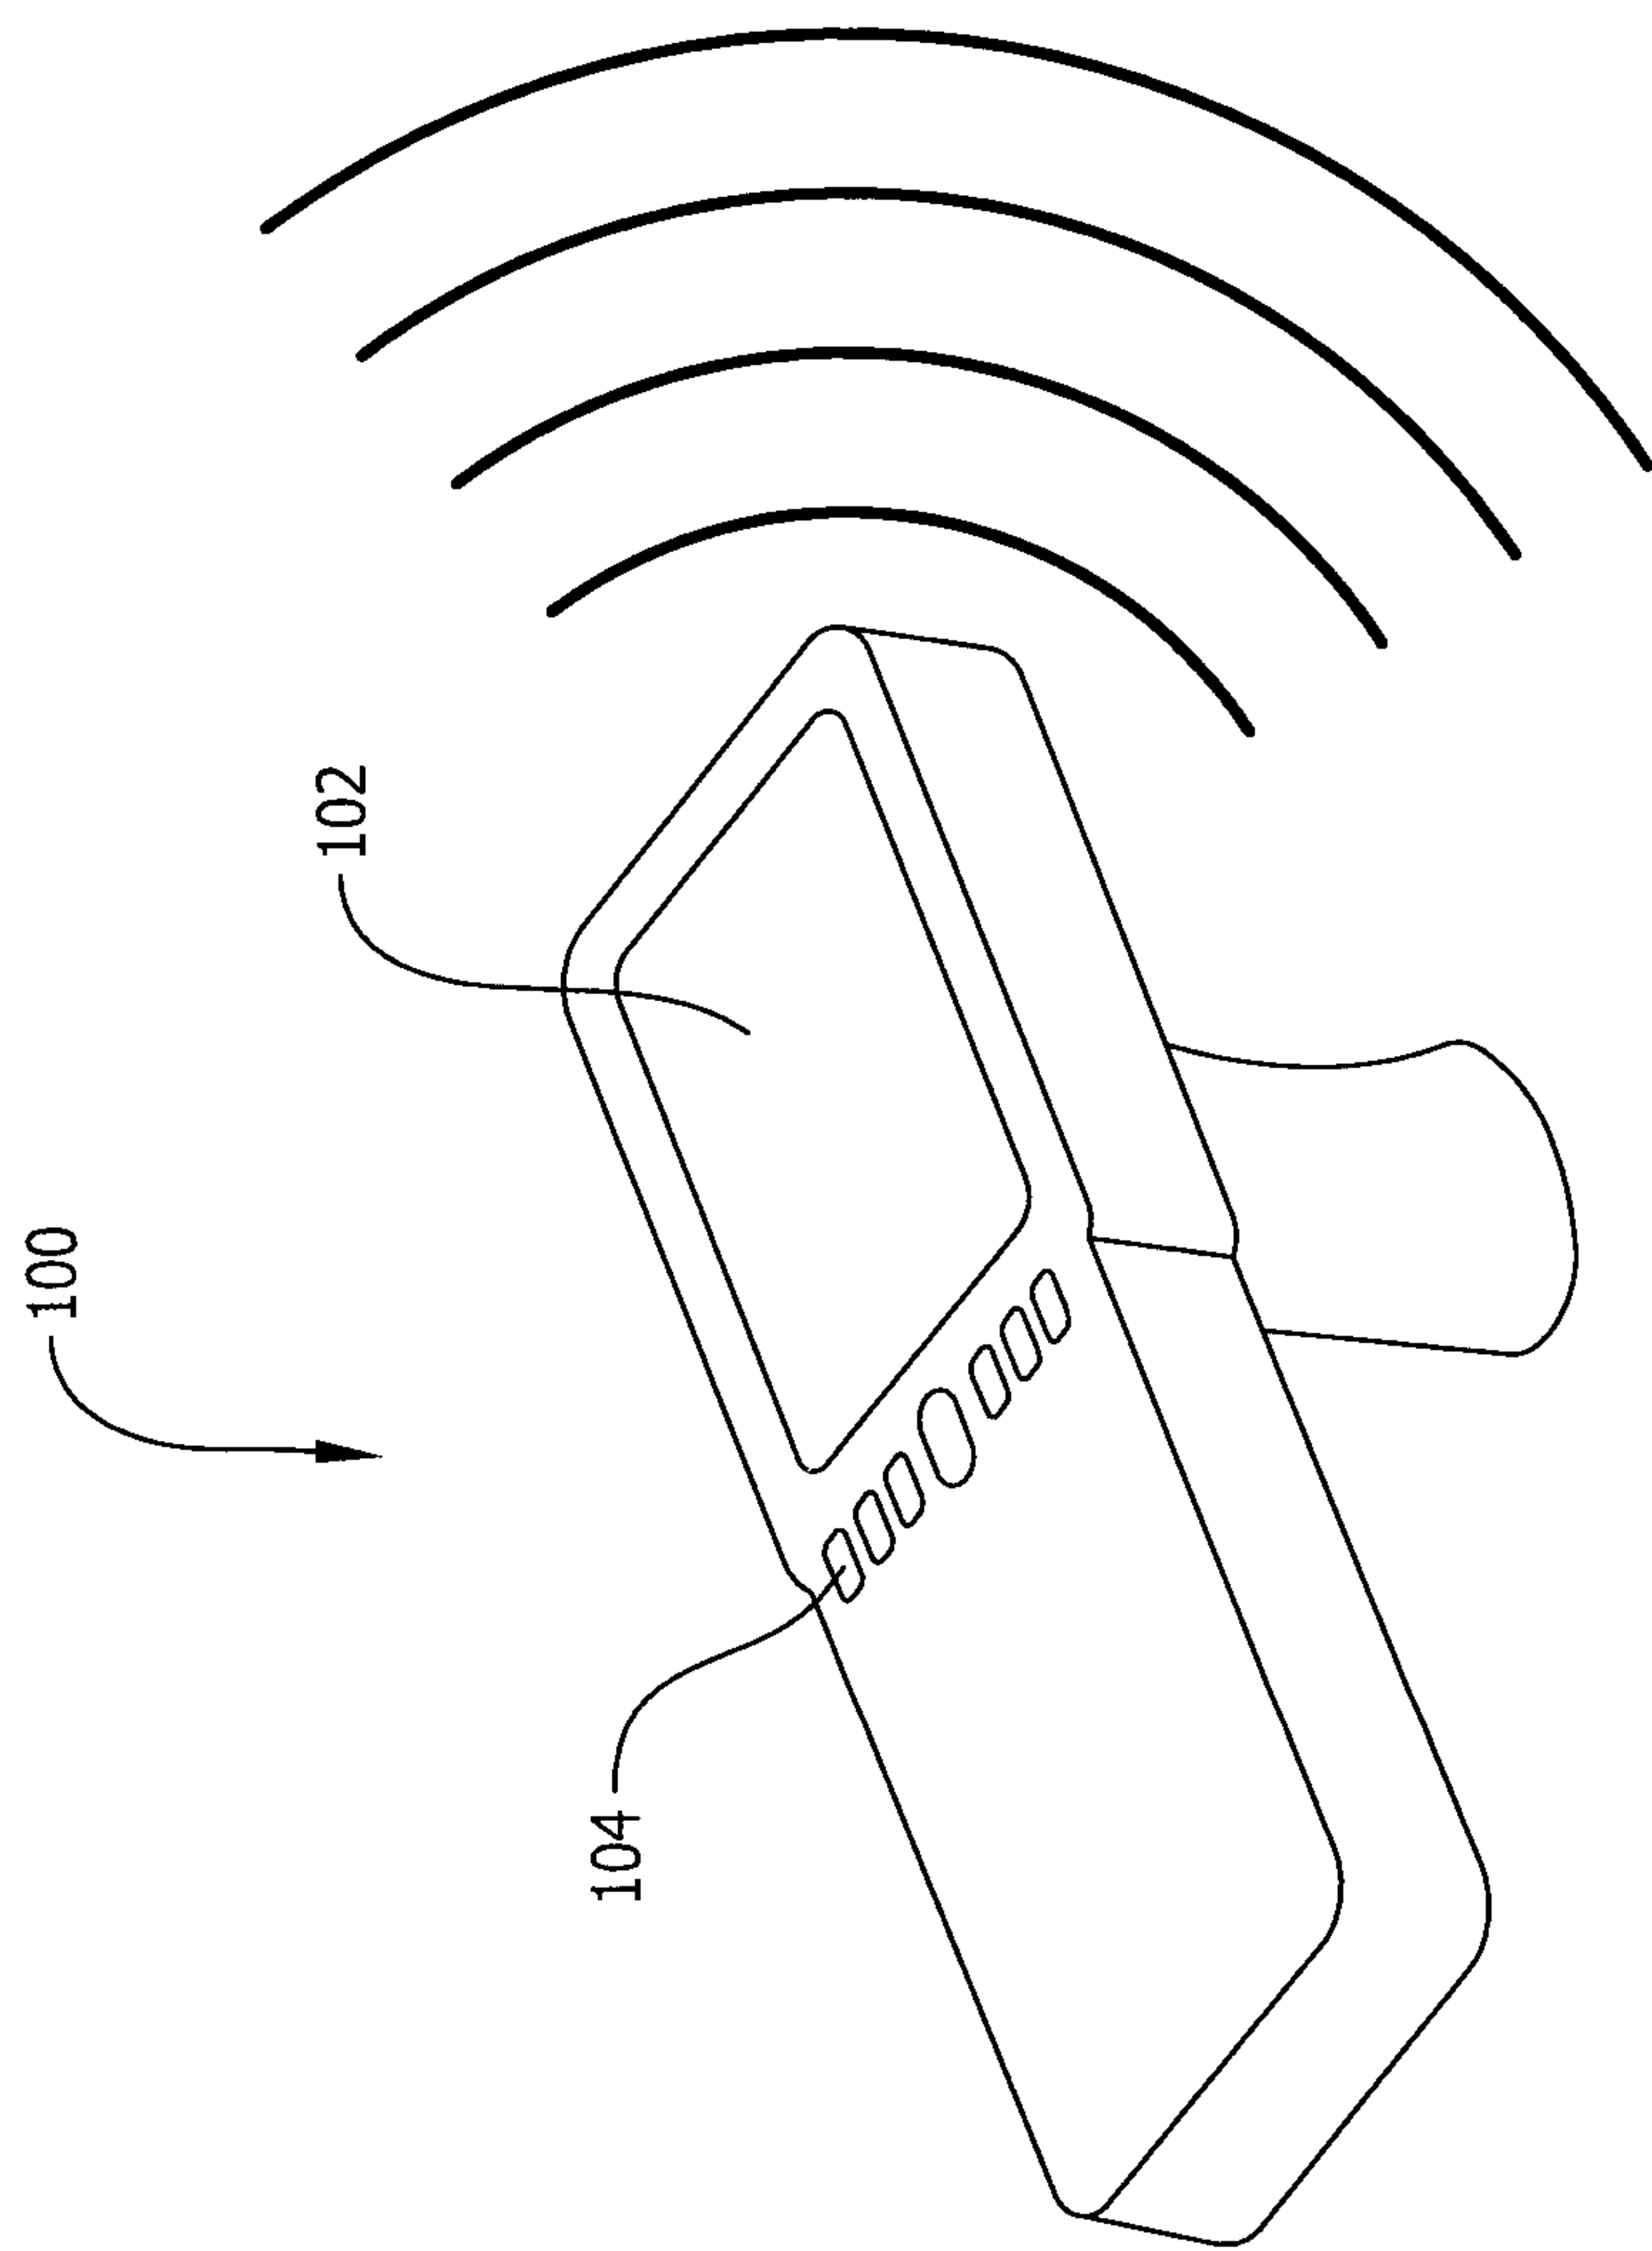


FIG. 1

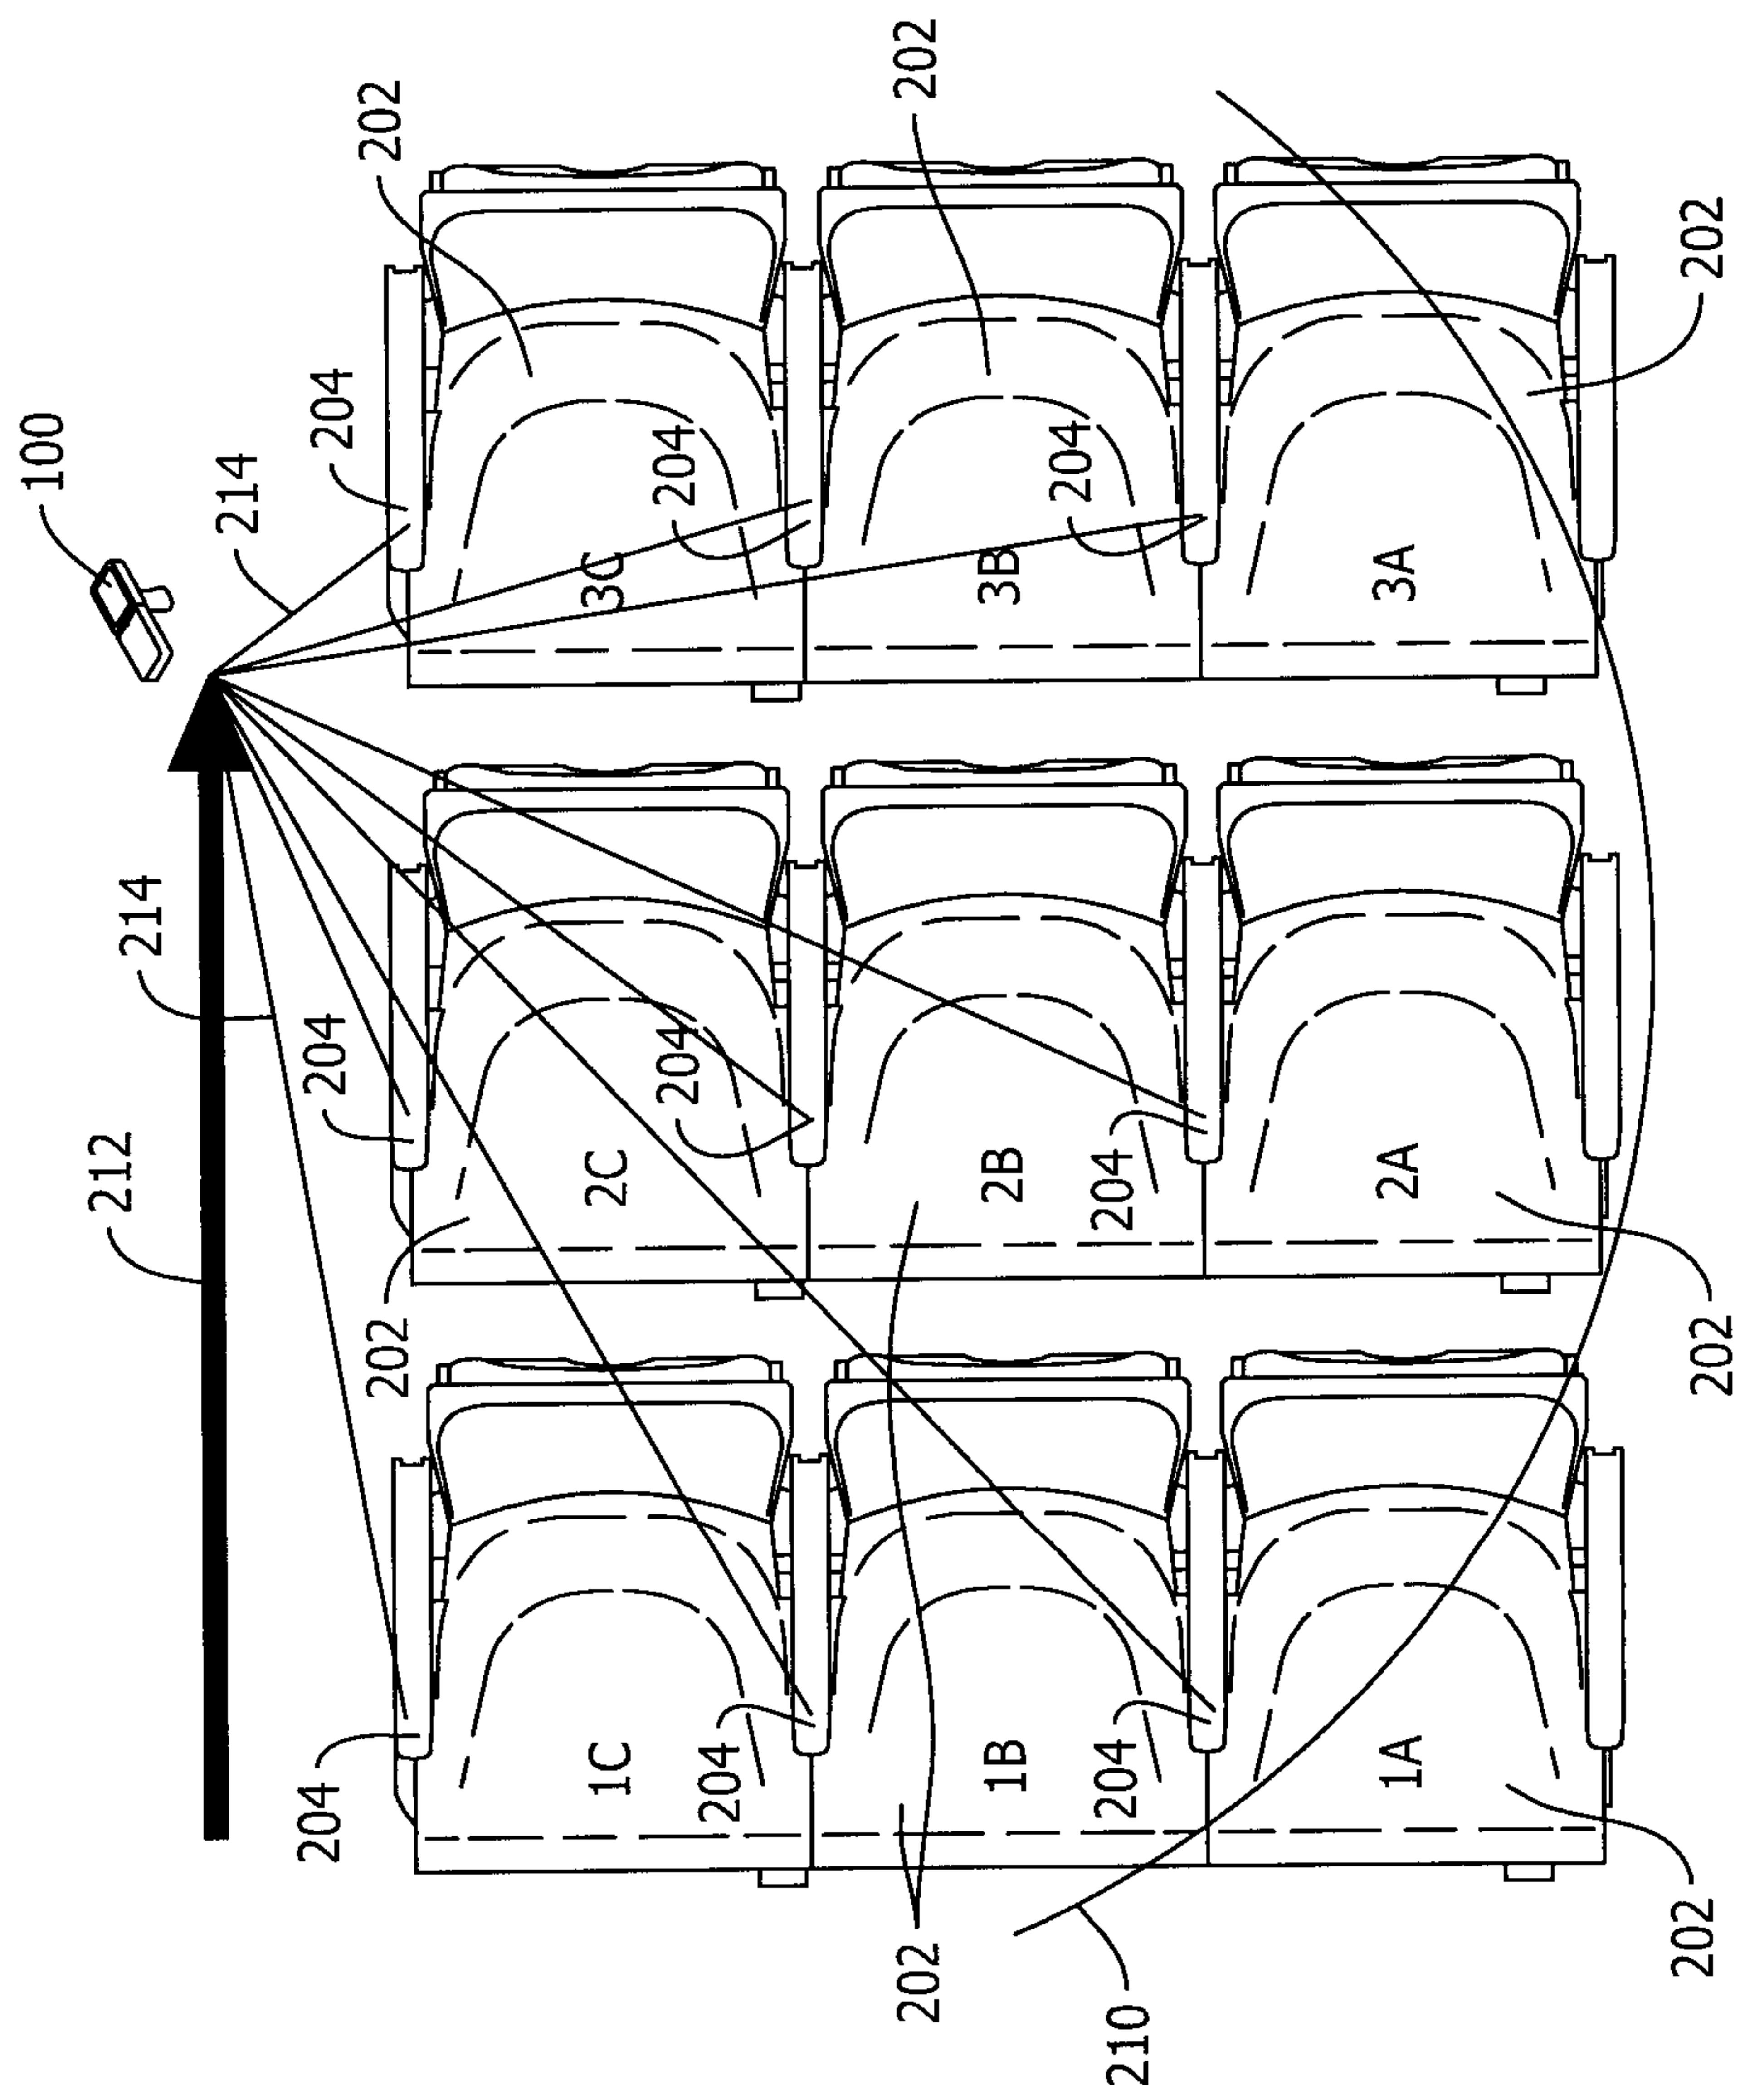


FIG. 2

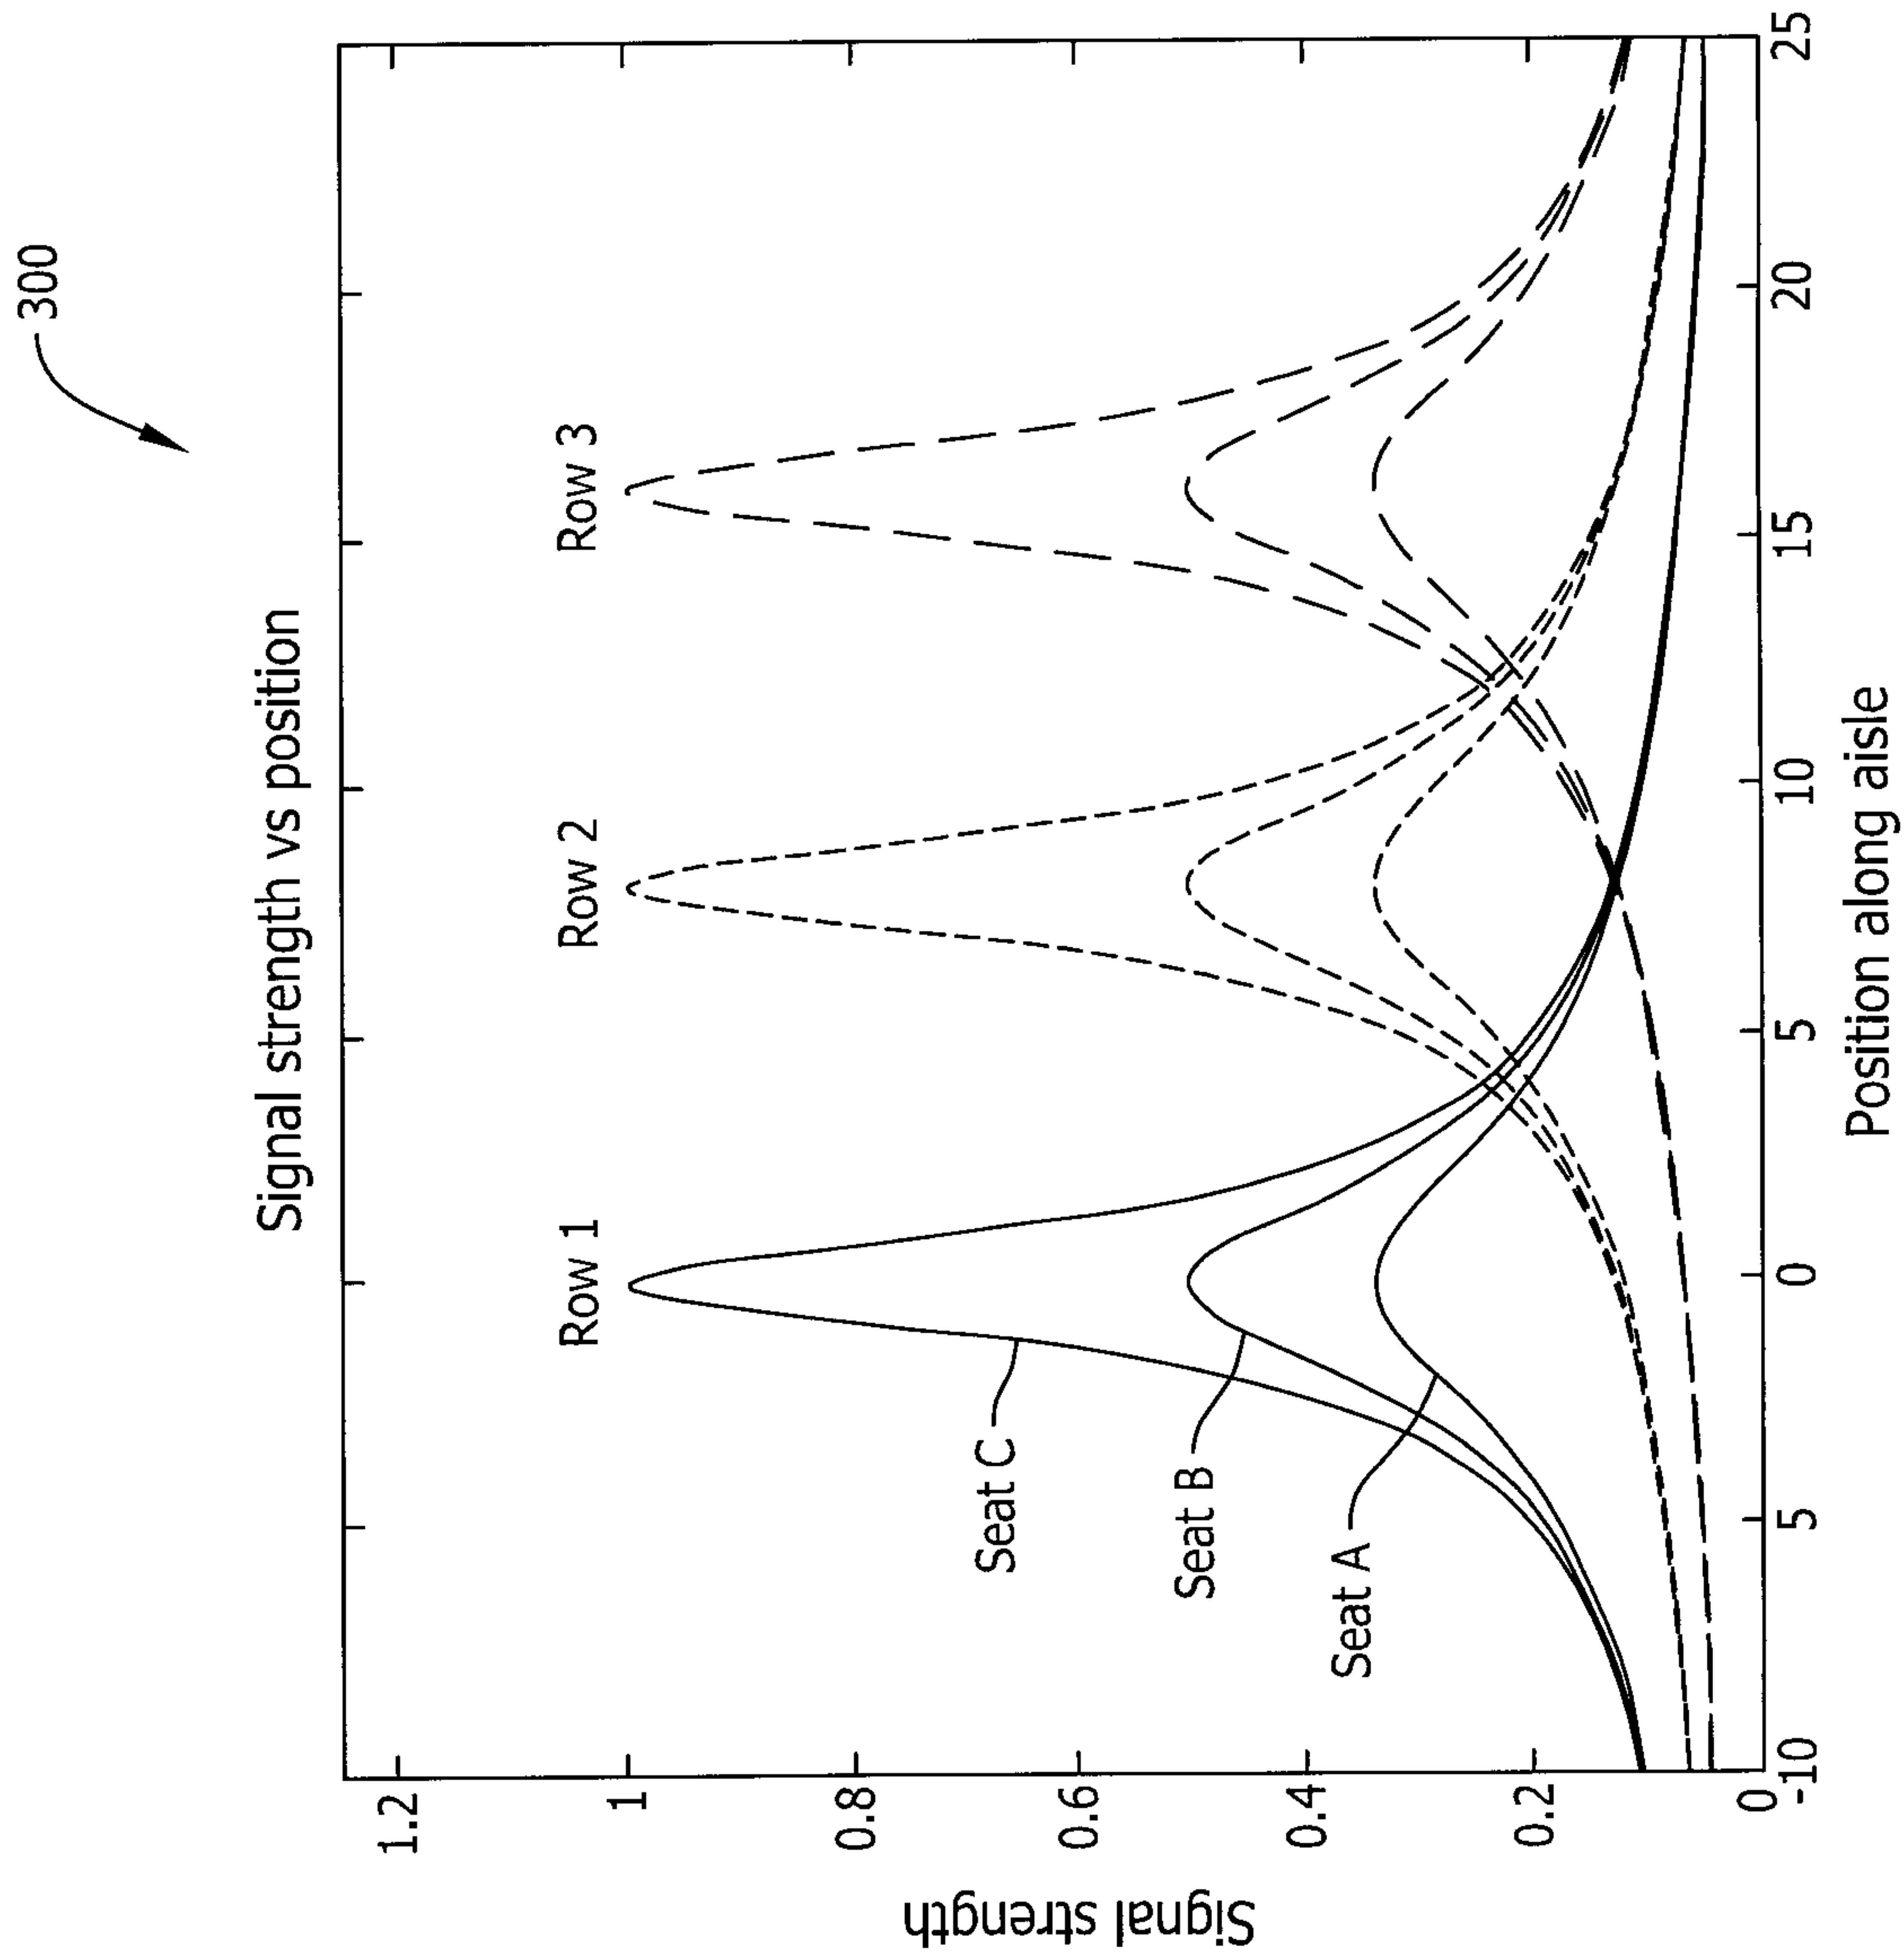


FIG. 3

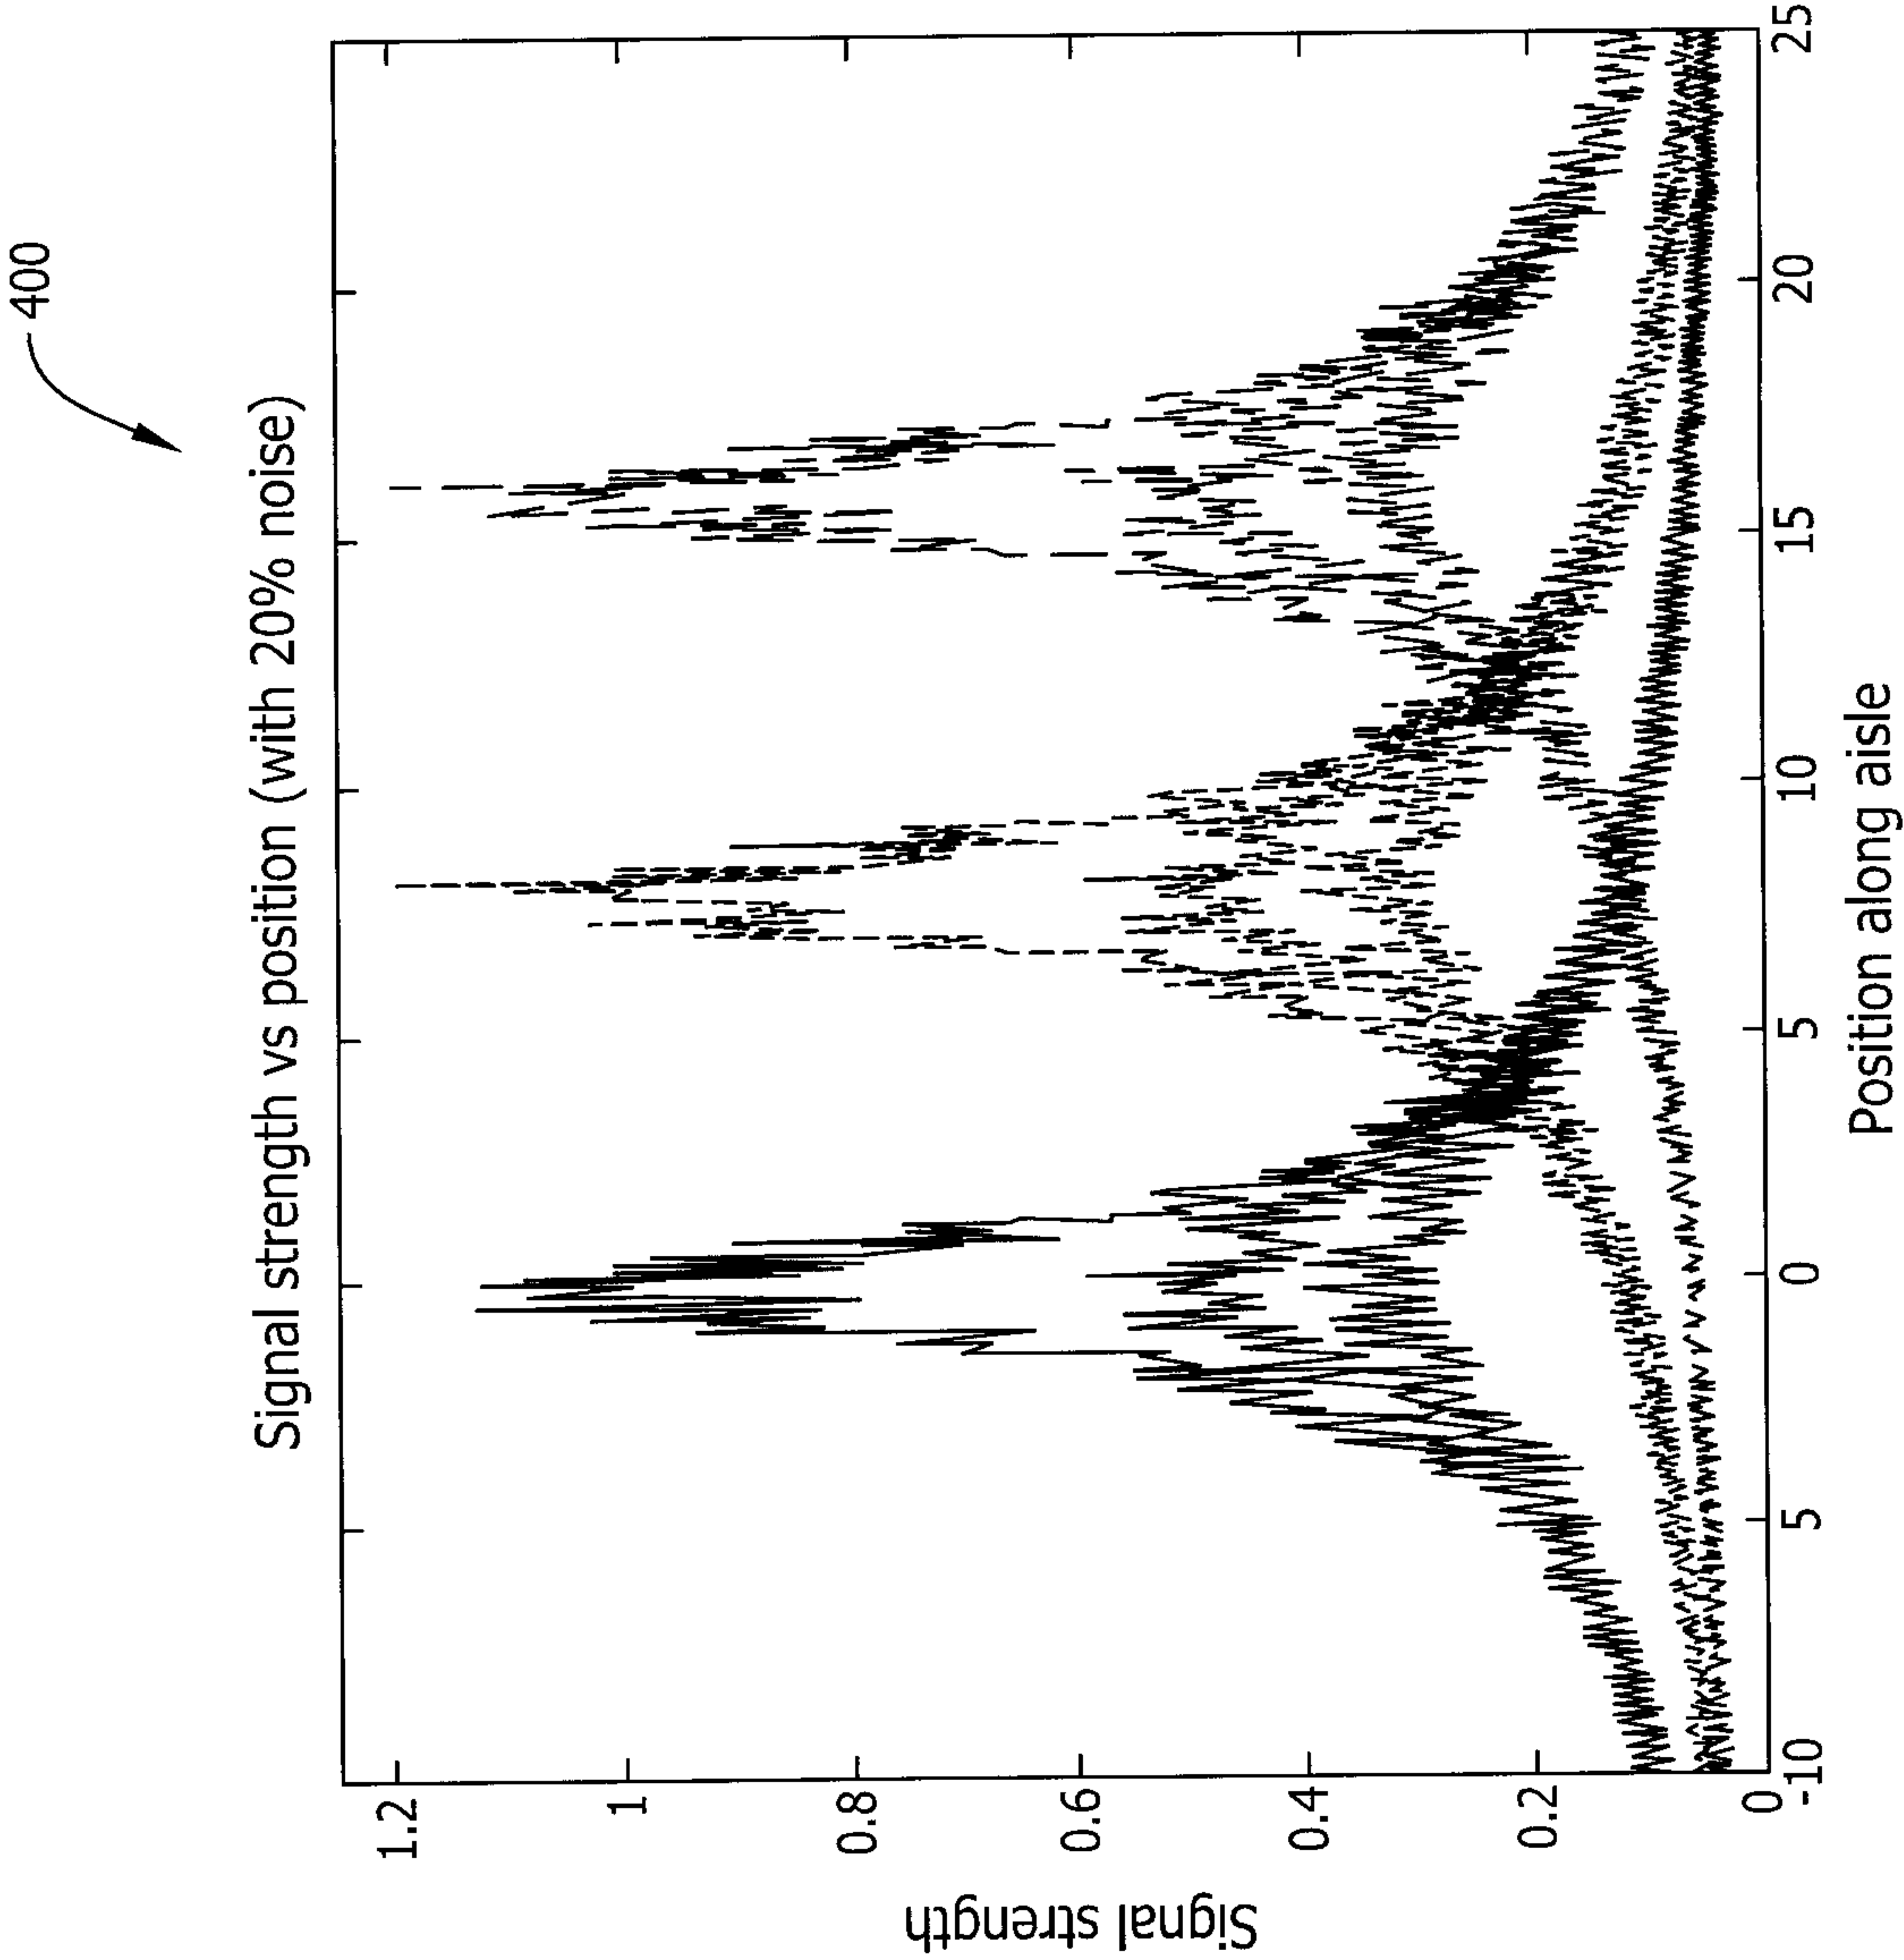


FIG. 4

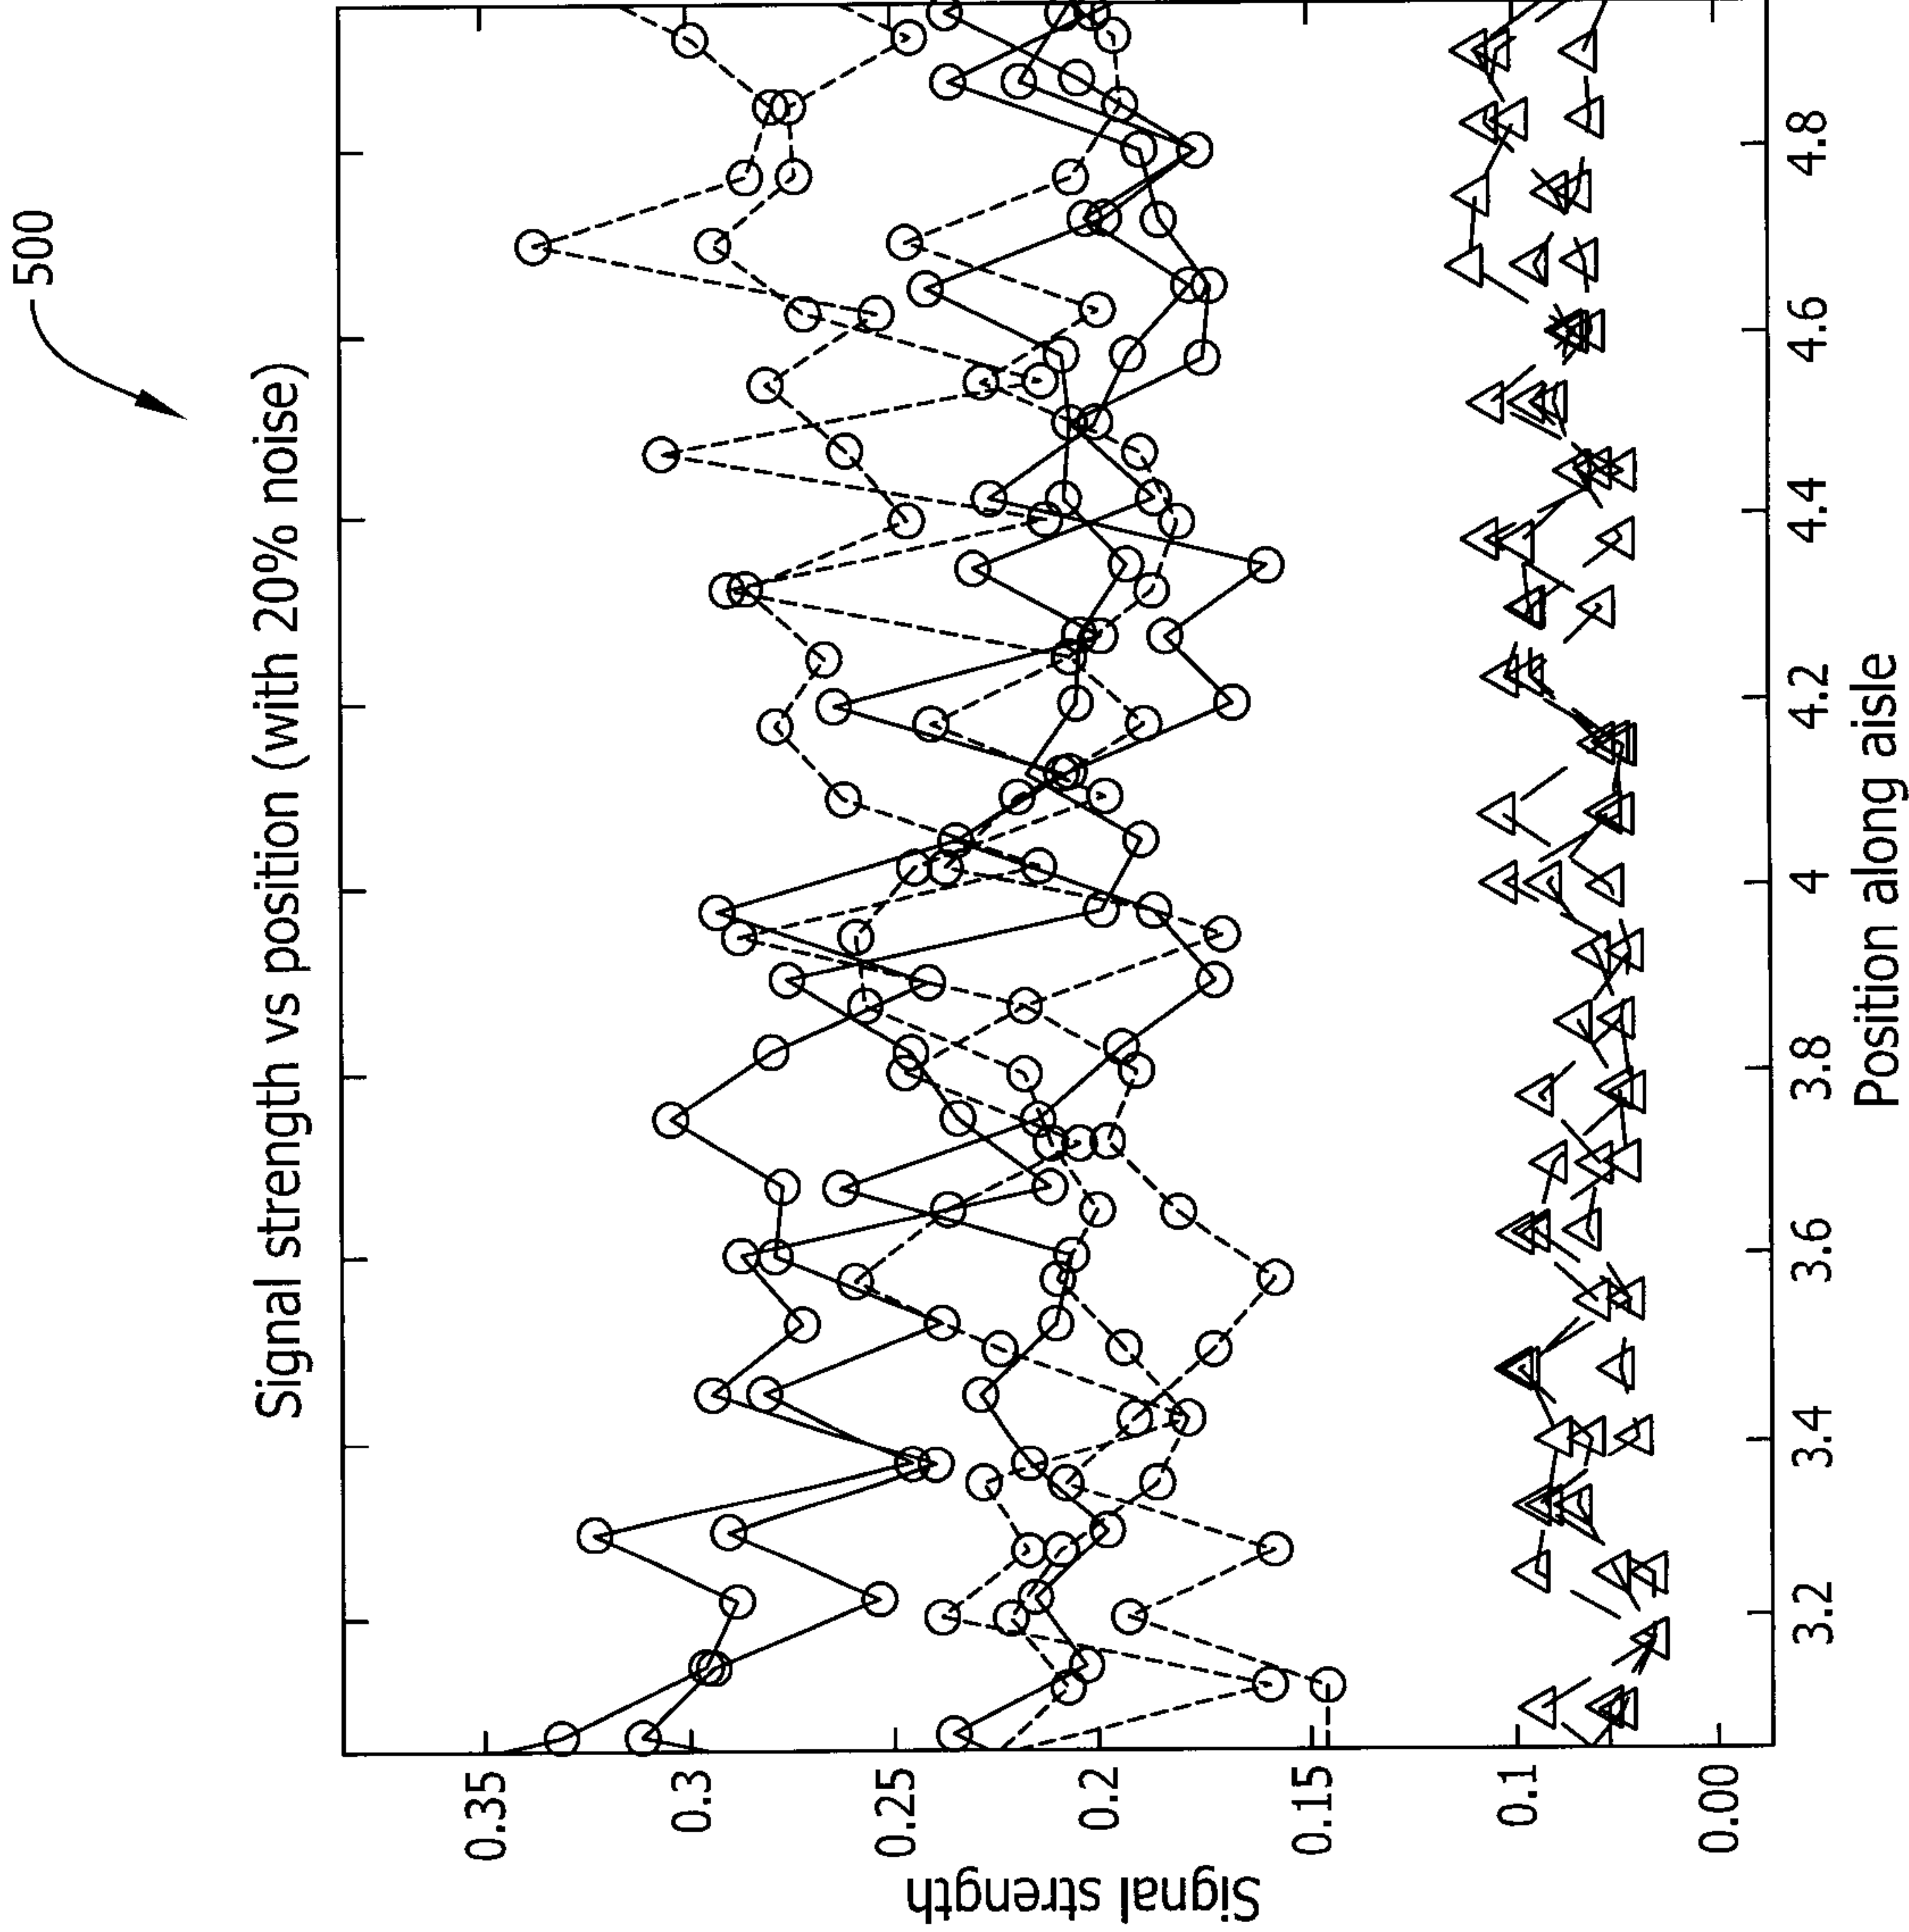


FIG. 5

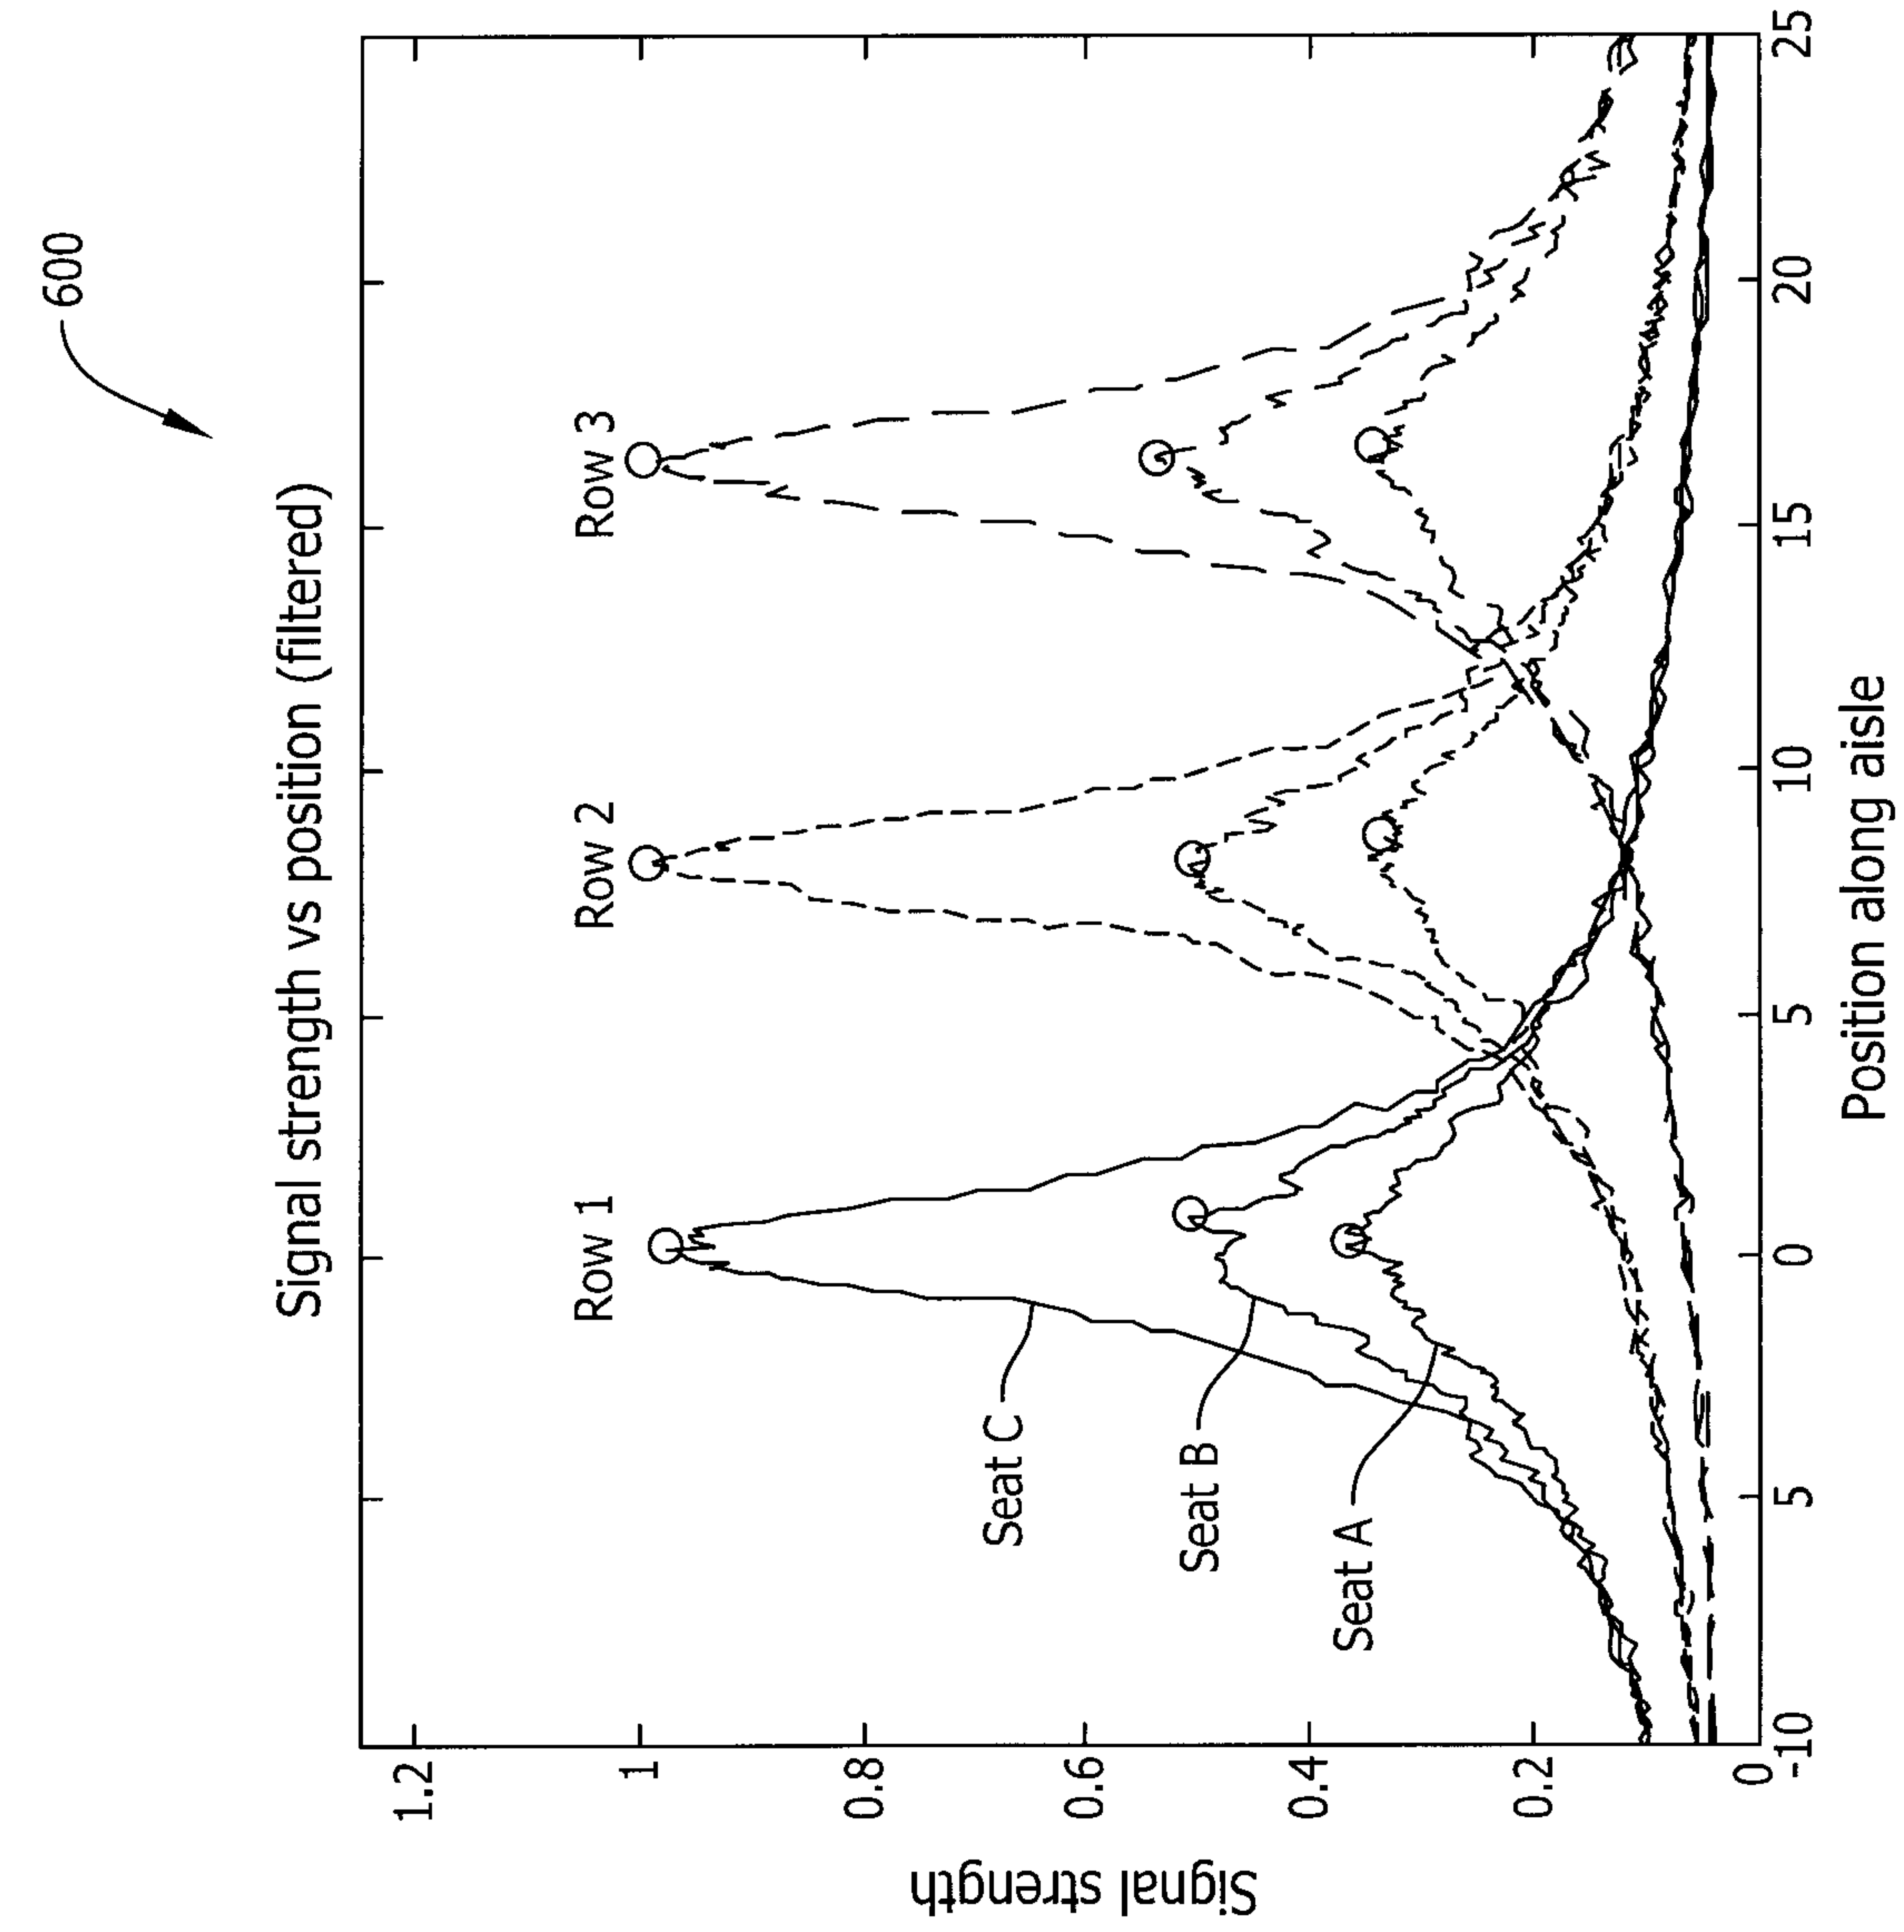


FIG. 6

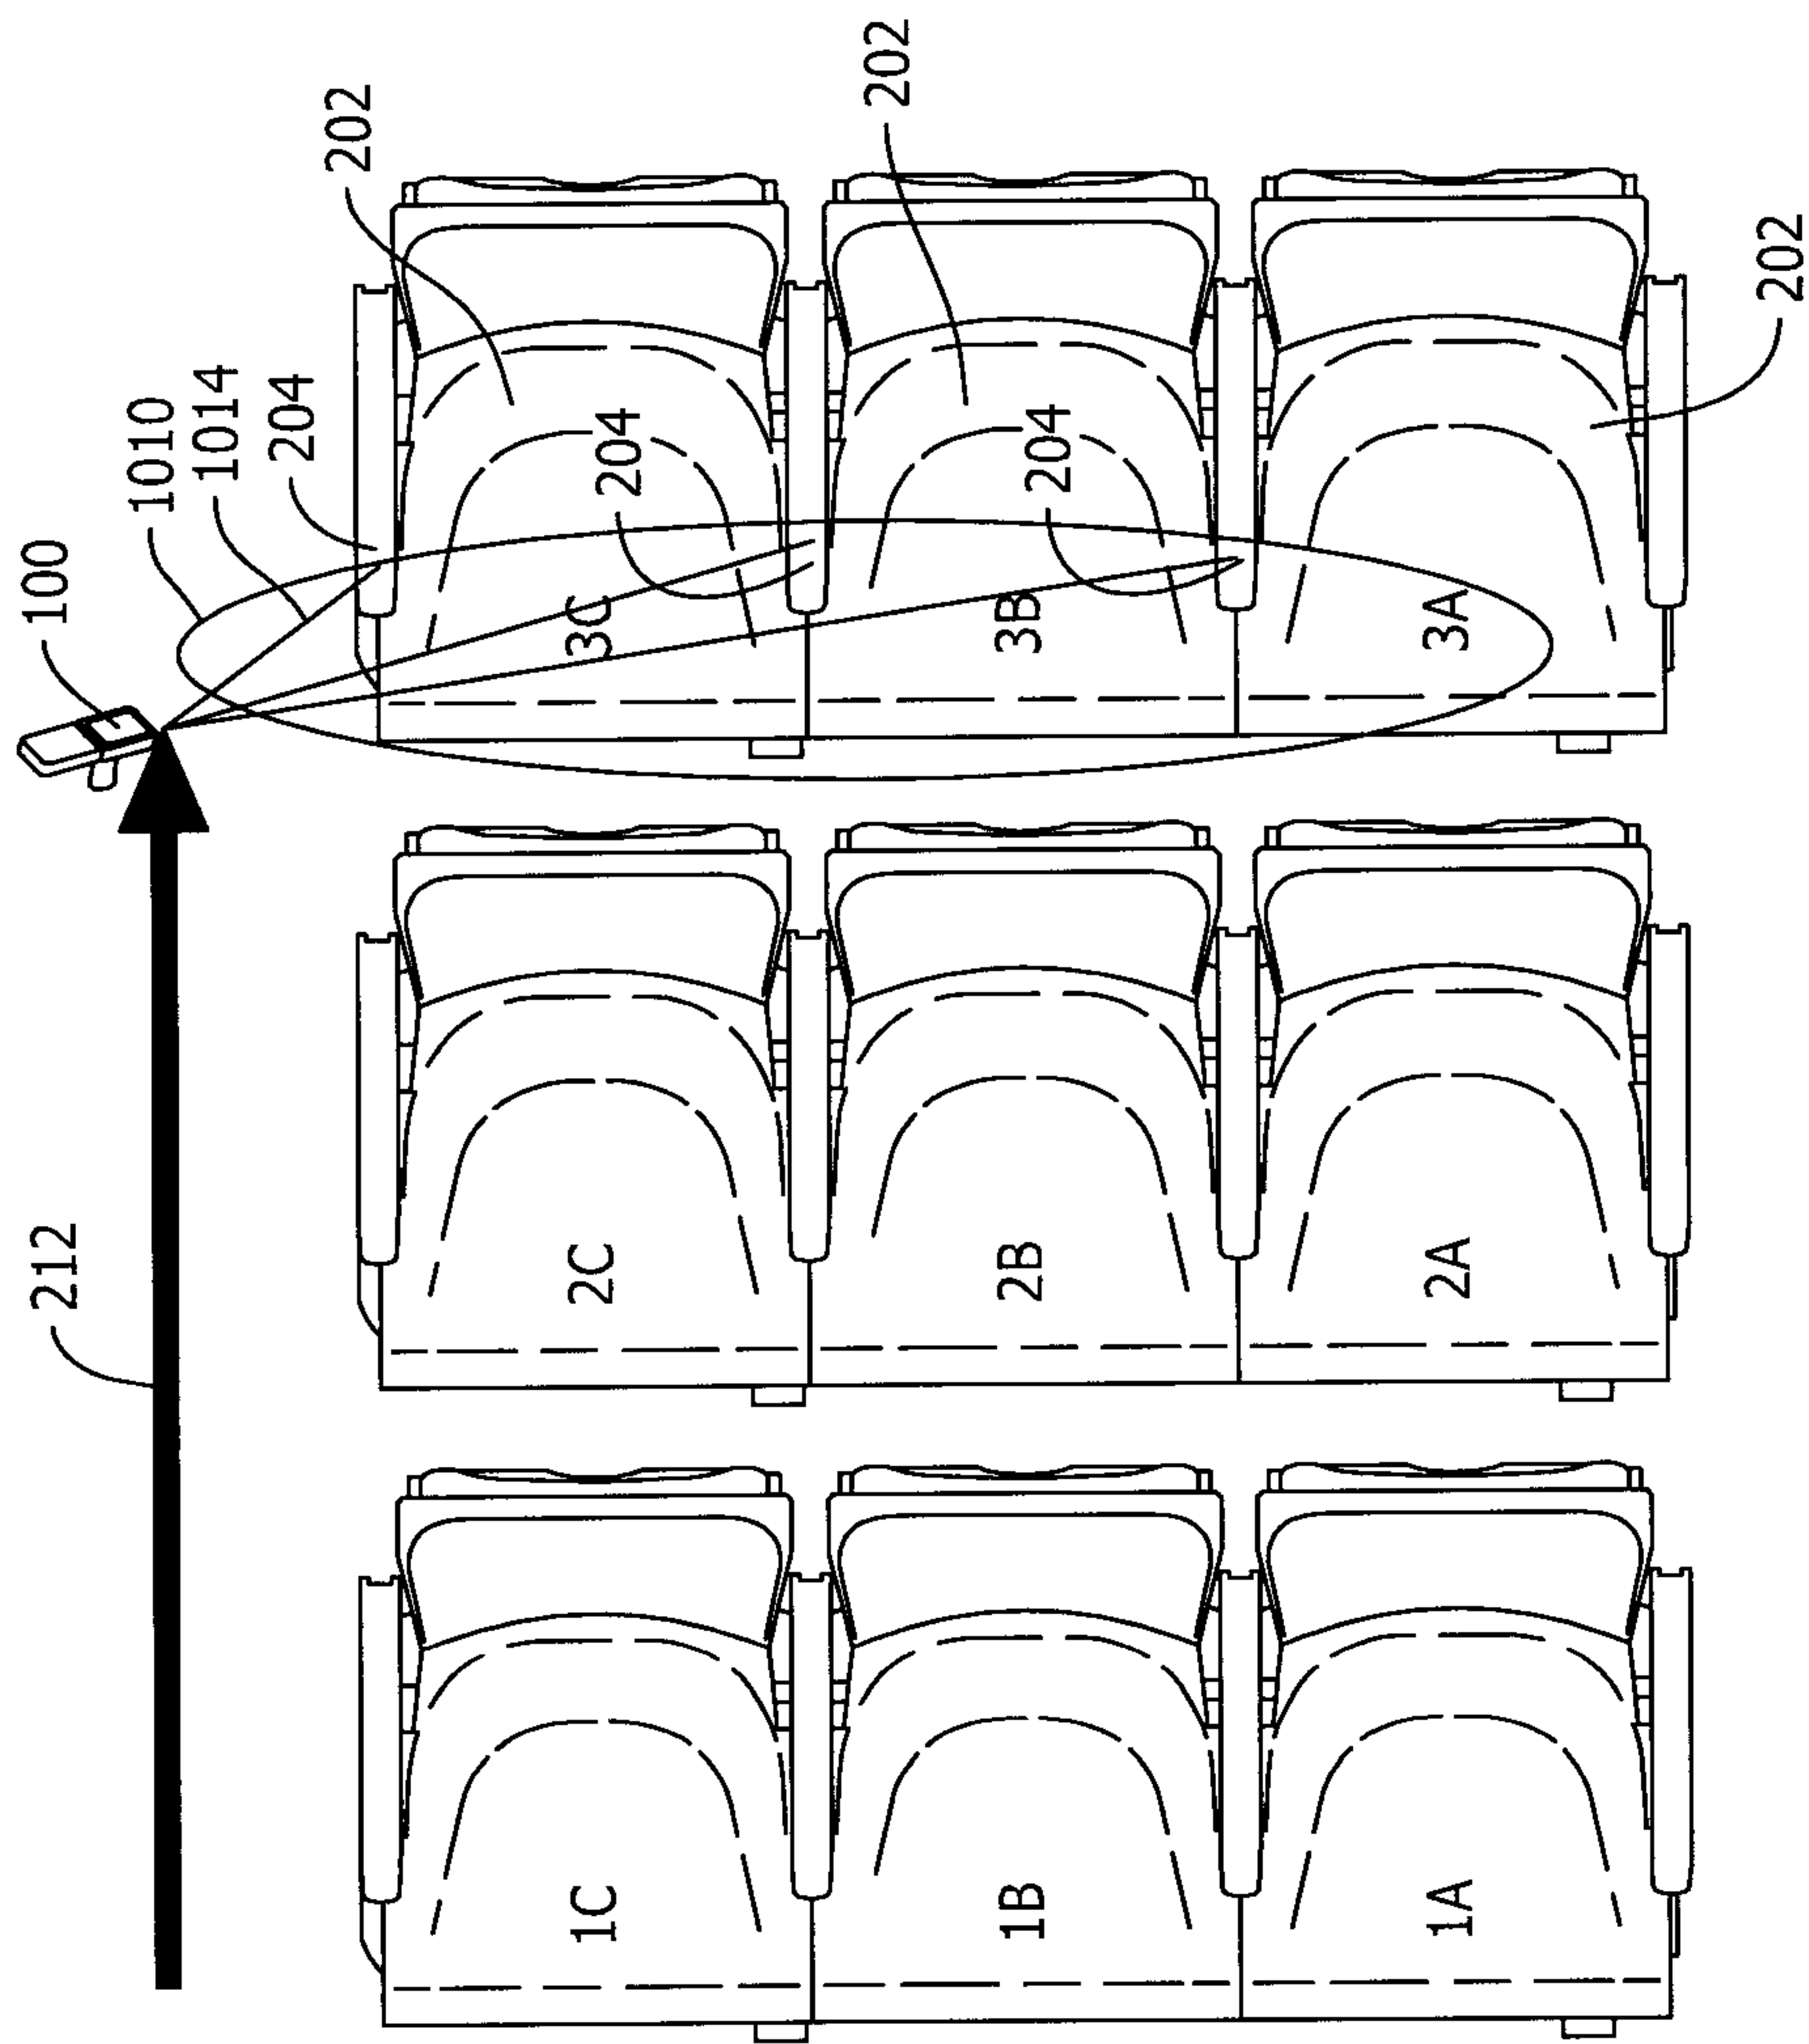


FIG. 7

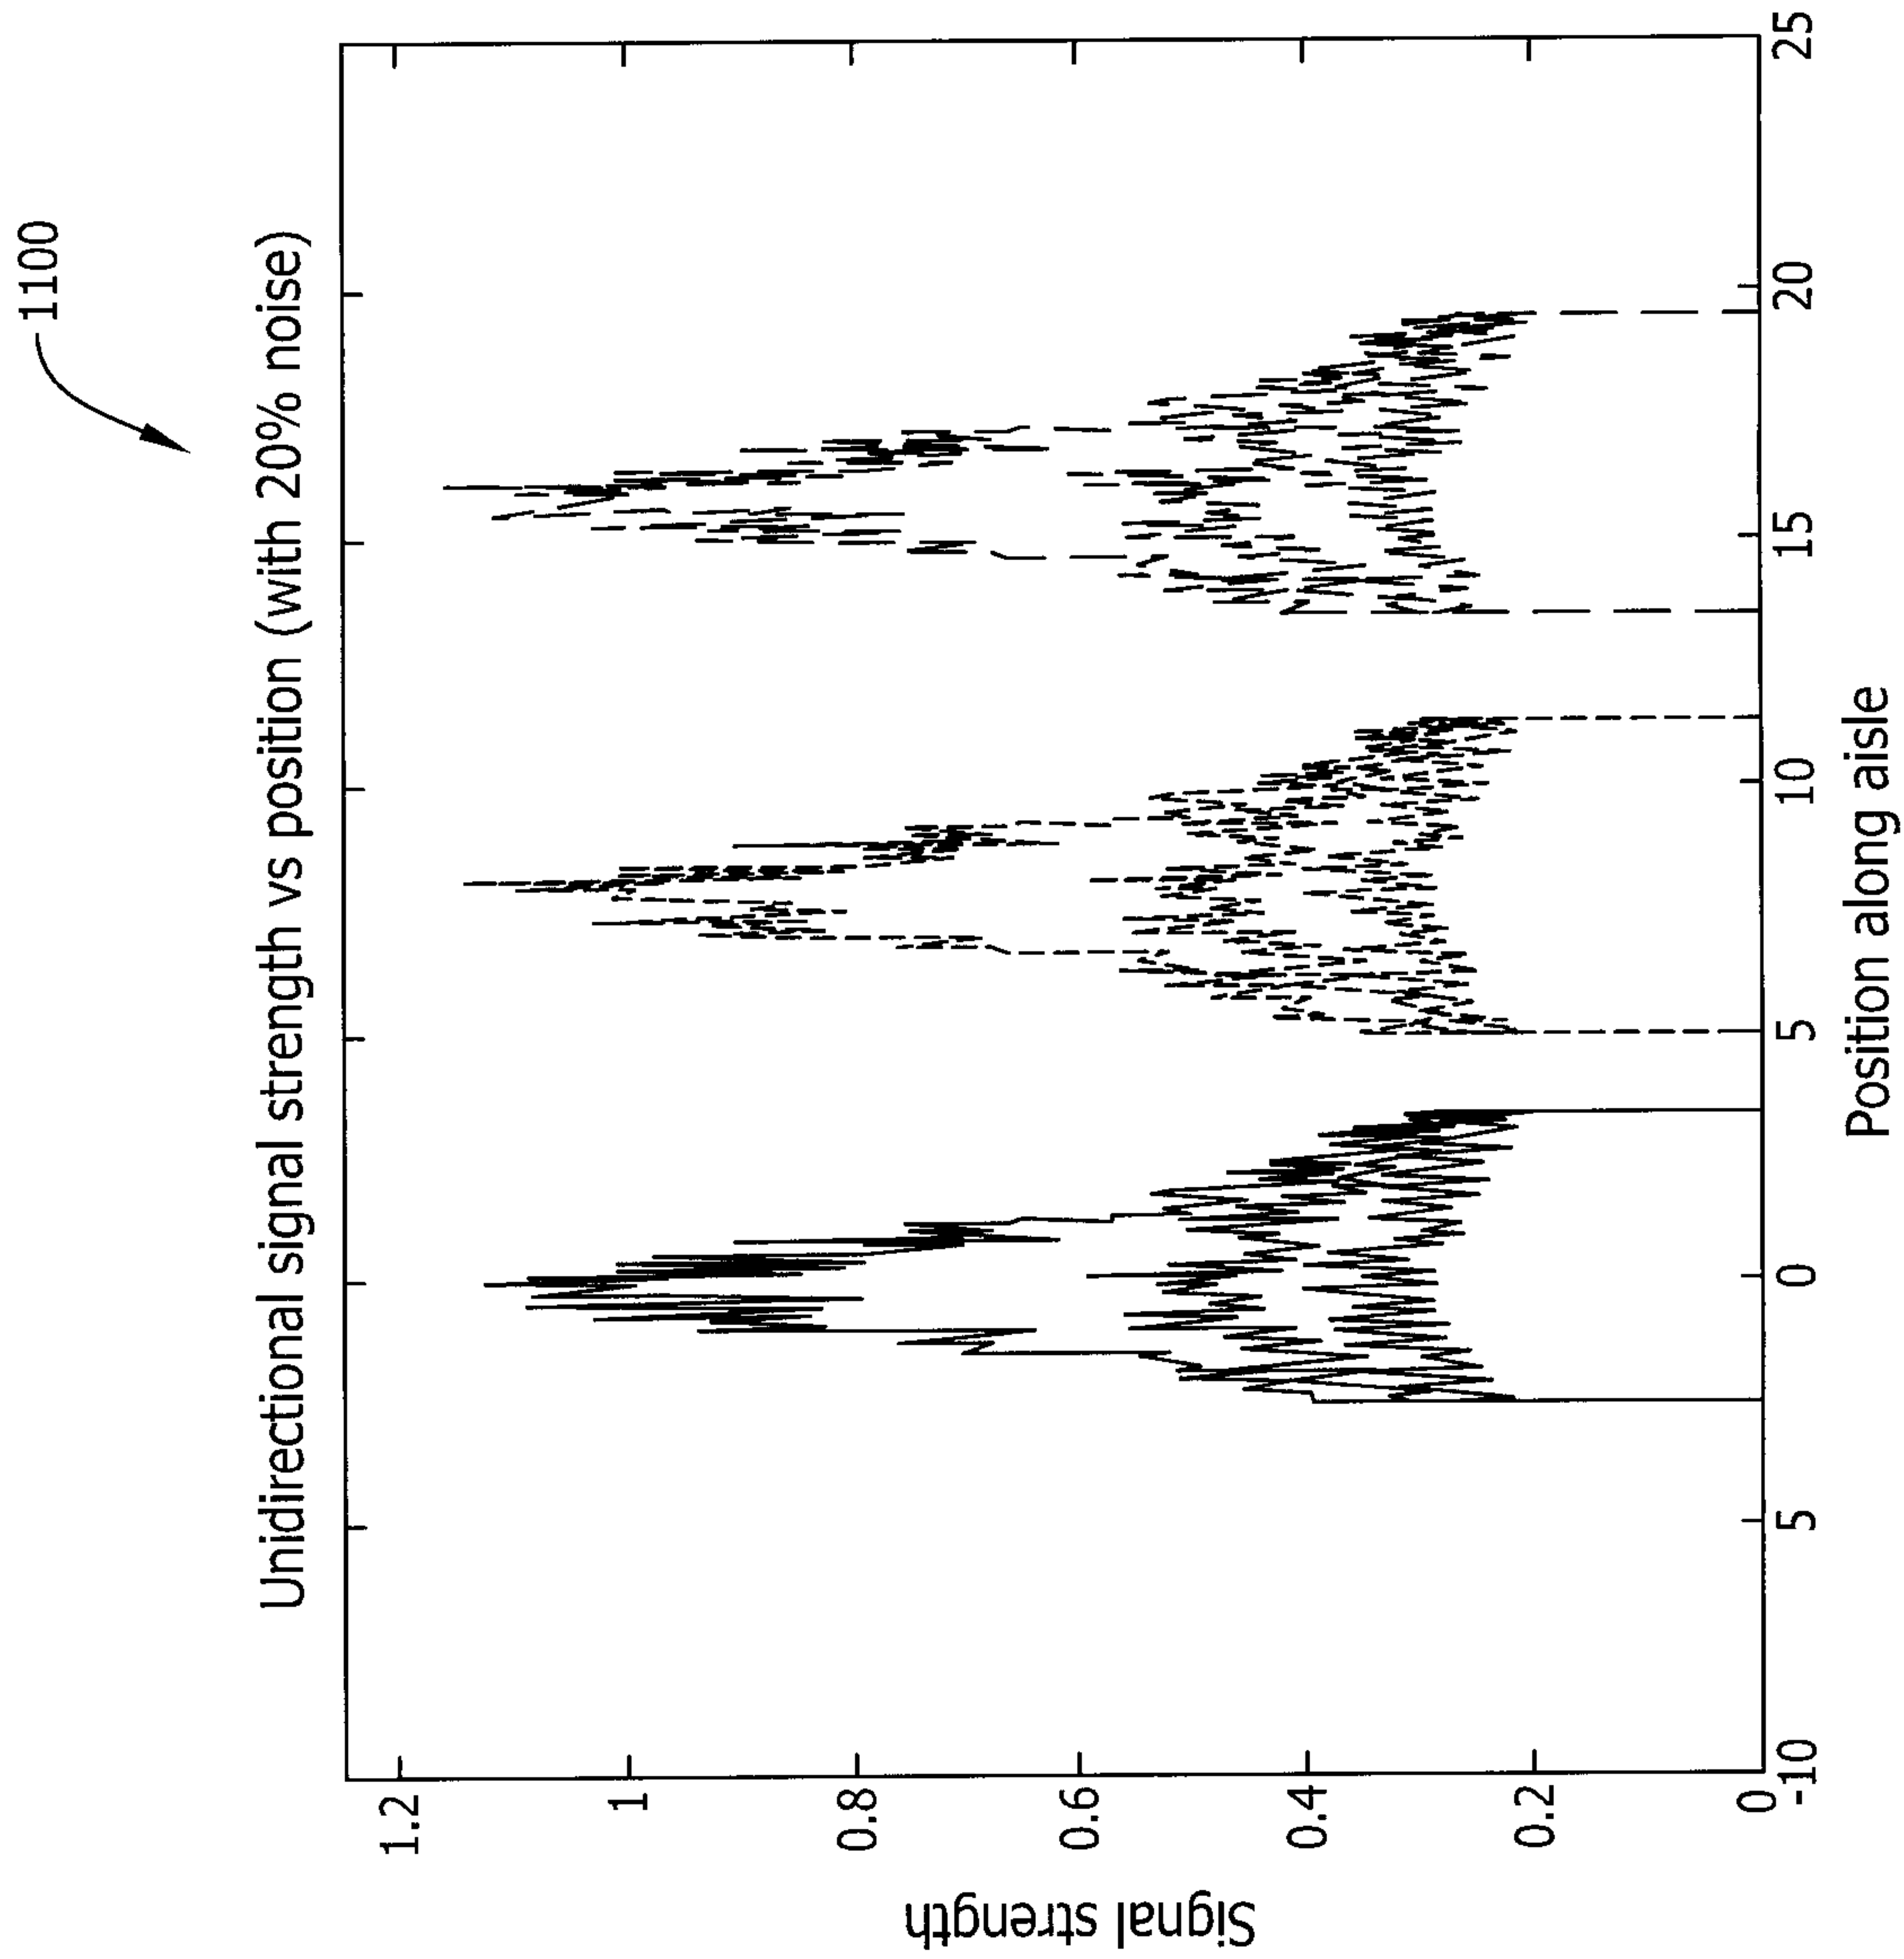


FIG. 8

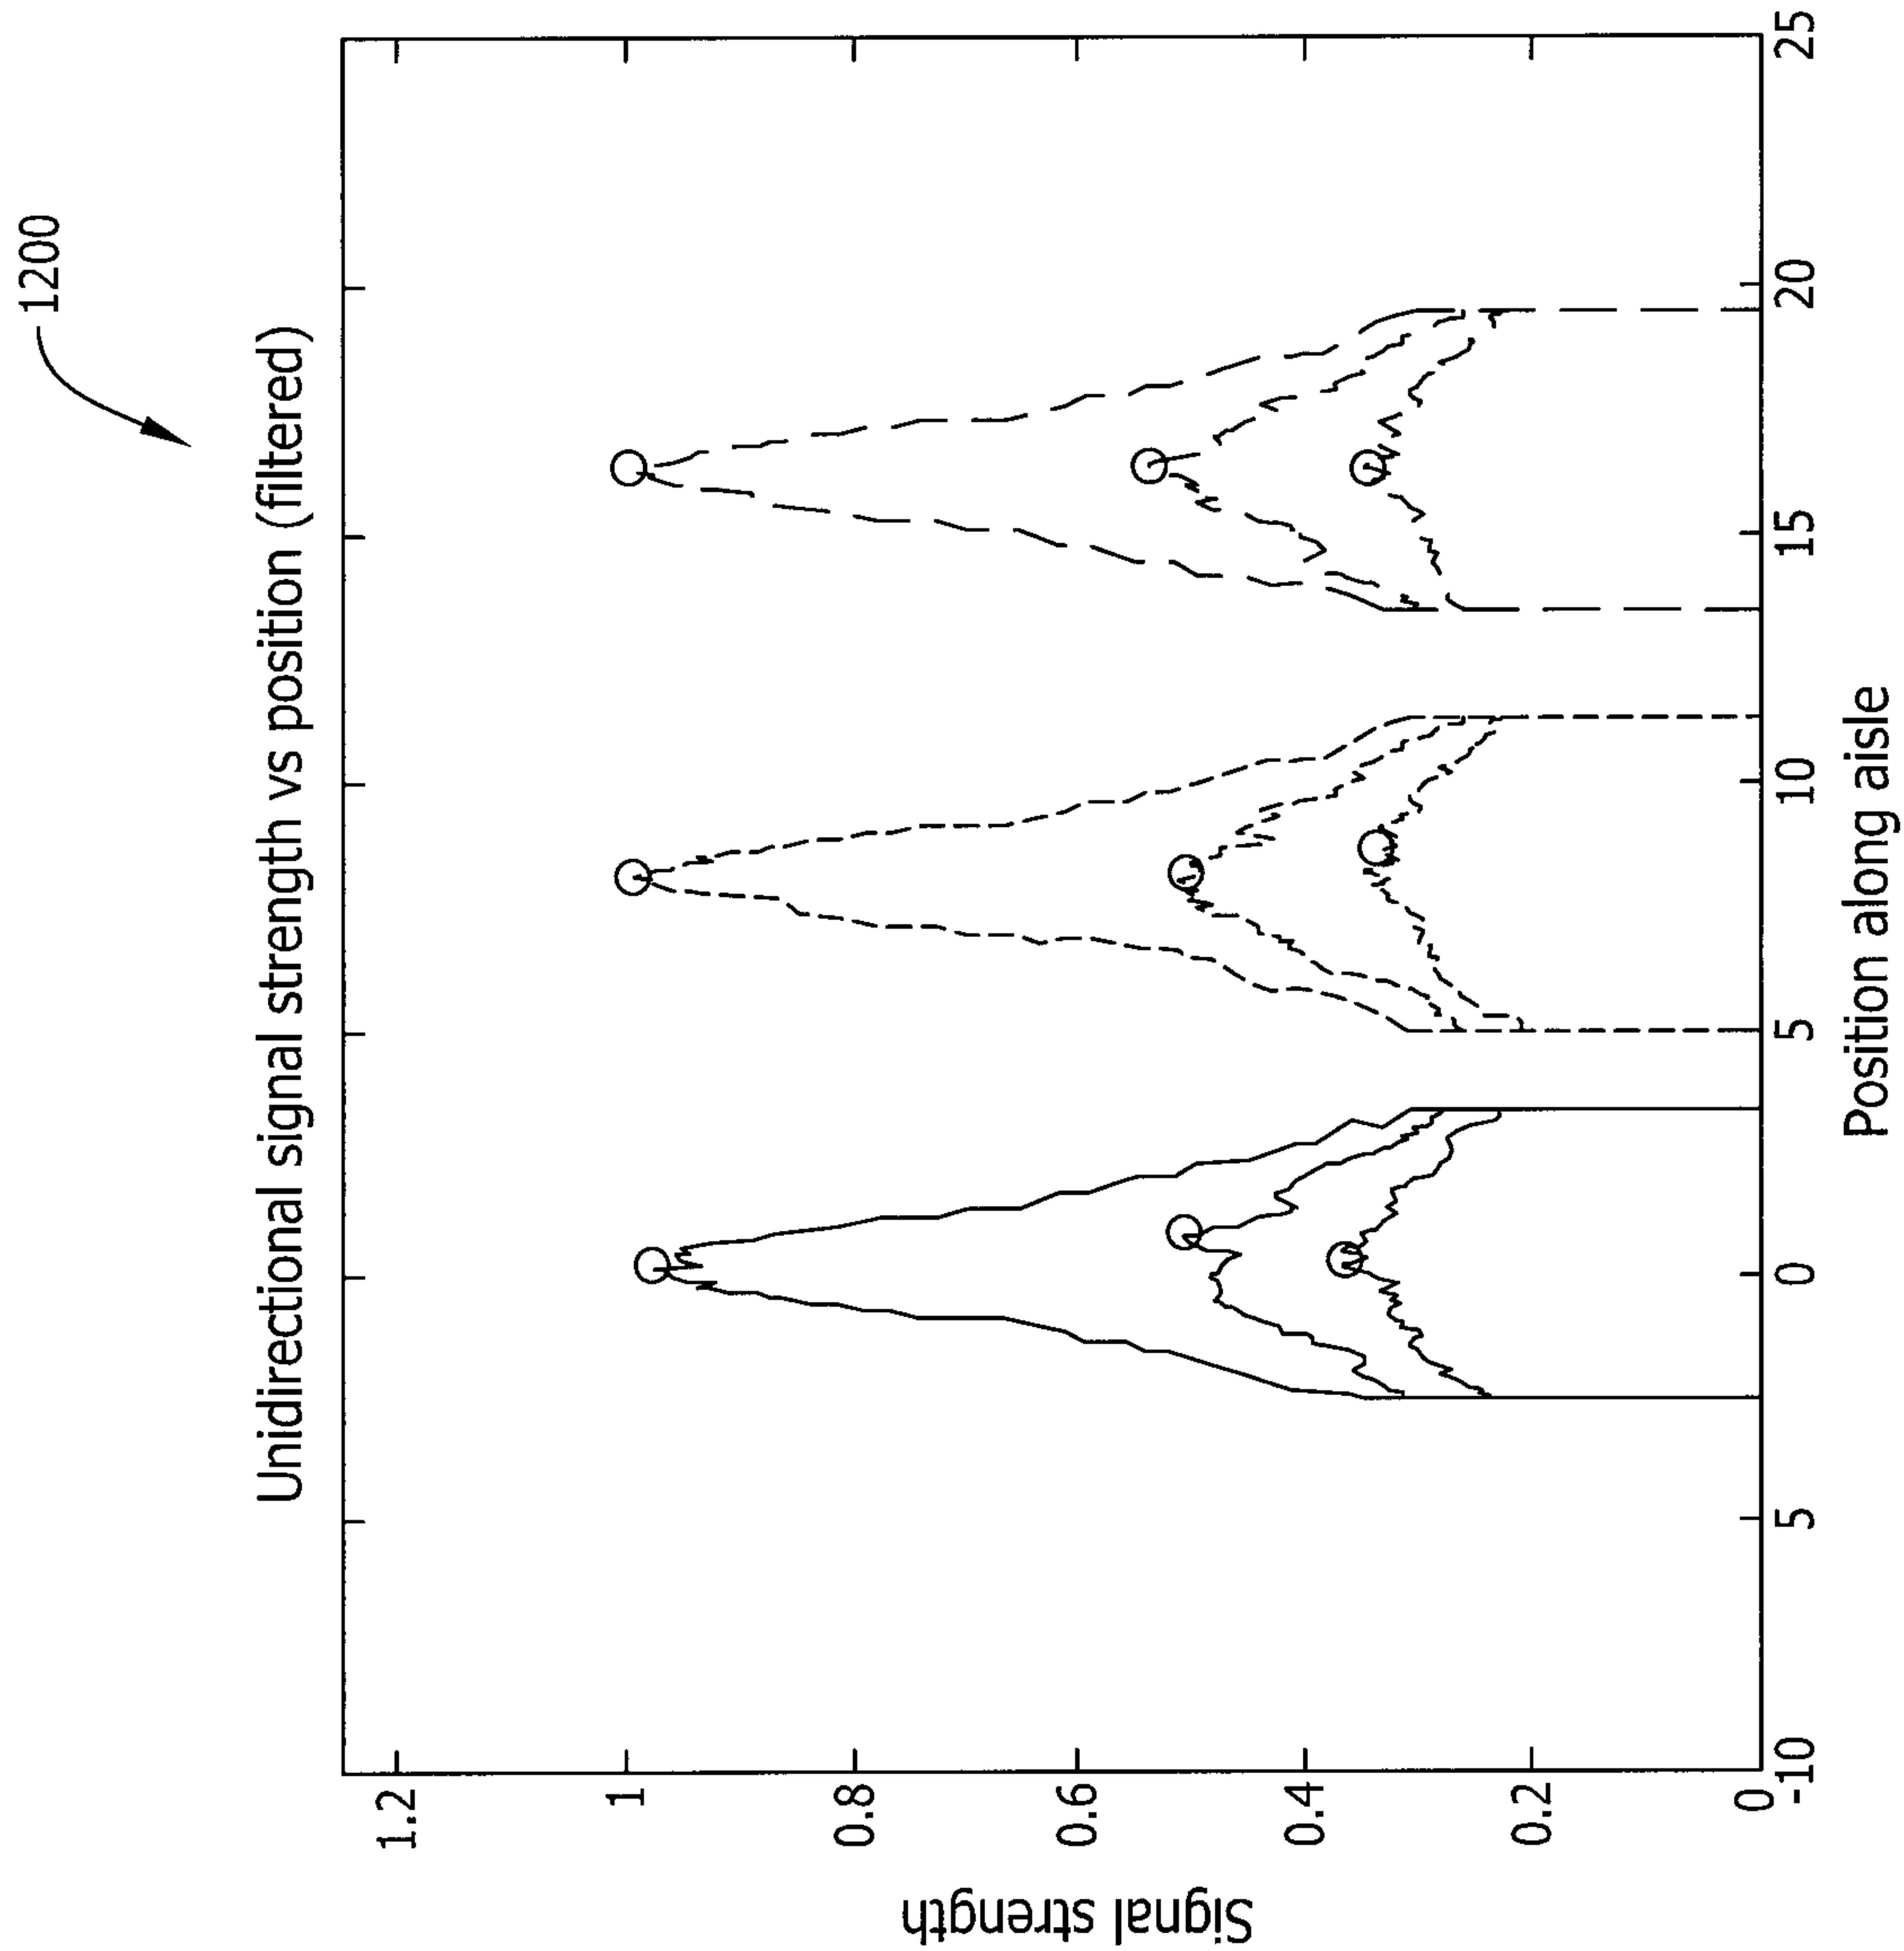


FIG. 9

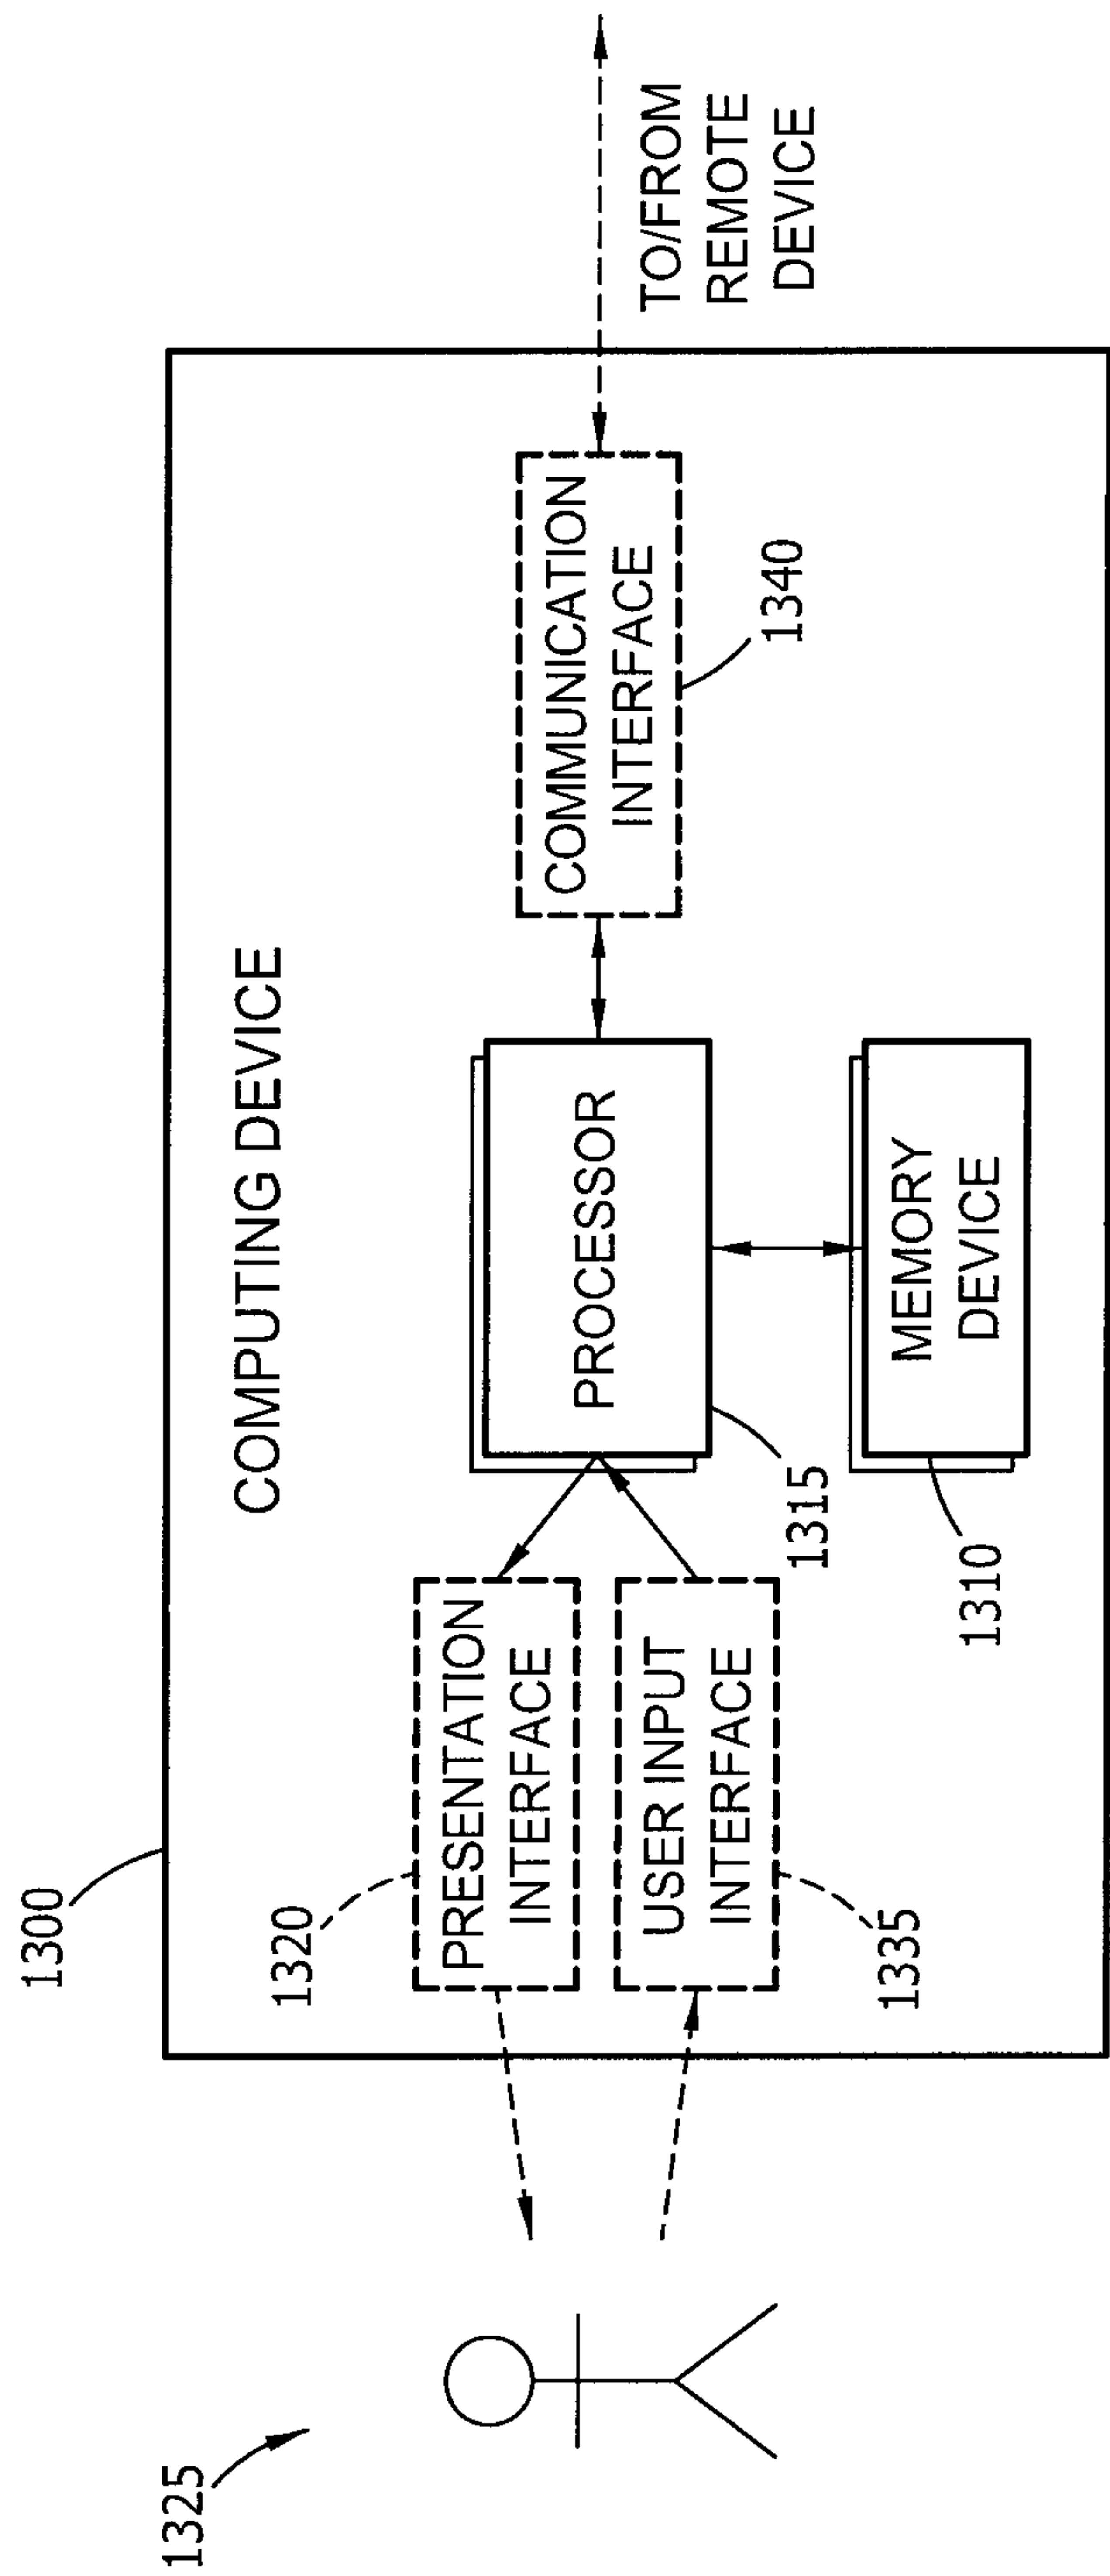


FIG. 10

