(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 October 2012 (18.10.2012)

WIPO | PCT

(10) International Publication Number
WO 2012/139626 A1

(51) International Patent Classification:
H04W 36/00 (2009.01)

(21) International Application Number:
PCT/EP2011/055611

(22) International Filing Date:
11 April 2011 (11.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant *(for all designated States except US)*: **NOKIA SIEMENS NETWORKS OY** [FI/FI]; Karaportti 3, FI-02610 Espoo (FI).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **HOLMA, Harri Kalevi** [FI/FI]; Ripusuontie 3 A, FI-00660 Helsinki (FI). **VAITOVIRTA, Hannu Pekka Matias** [FI/FI]; Pohjantie 4B, FI-02100 Espoo (FI). **TOSKALA, Antti Anton** [FI/FI]; Mankkaanrinne 2 C, FI-02180 Espoo (FI).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

WO 2012/139626 A1

(54) Title: A METHOD AND APPARATUS

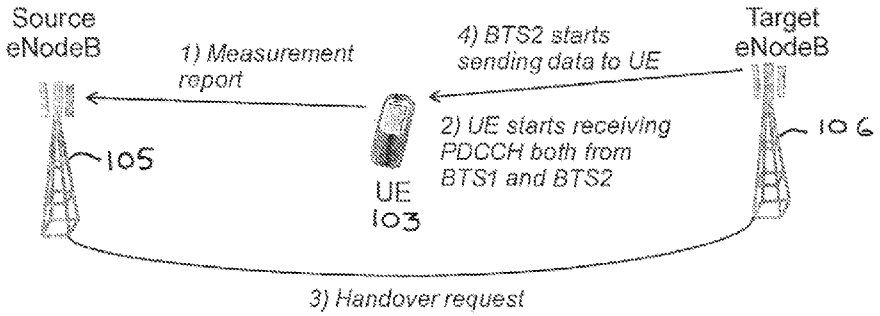


Figure 4

(57) Abstract: A method comprises receiving information indicating a user equipment is to be handed over from a source base station and scheduling transmission of a control channel for said user equipment in dependence on identity information associated with said user equipment.

Description

Title

A method and Apparatus

The invention relates a method and apparatus and in particular but not exclusively to a method and apparatus and in particular but not exclusively to a method and apparatus for use in handover.

A communication system can be seen as a facility that enables communication sessions between two or more entities such as fixed or mobile communication devices, base stations, servers and/or other communication nodes. A communication system and compatible communicating entities typically operate in accordance with a given standard or specification which sets out what the various entities associated with the system are permitted to do and how that should be achieved. For example, the standards, specifications and related protocols can define the manner how communication devices can access the communication system and how various aspects of communication shall be implemented between communicating devices. A communication can be carried on wired or wireless carriers. In a wireless communication system at least a part of the communication between at least two stations occurs over a wireless link.

Examples of wireless systems include public land mobile networks (PLMN) such as cellular networks, satellite based communication systems and different wireless local networks, for example wireless local area networks (WLAN). A wireless system can be divided into cells, and hence these are often referred to as cellular systems. A cell is provided by a base station. Cells can have different shapes and sizes. A cell can also be divided into sectors. Regardless of the shape and size of the cell providing access for a user equipment, and whether the access is provided via a sector of a cell or a

cell, such area can be called radio service area or access area. Neighbouring radio service areas typically overlap, and thus a communication in an area can listen to more than one base station.

A user can access the communication system by means of an appropriate communication device. A communication device of a user is often referred to as user equipment (UE) or terminal. A communication device is provided with an appropriate signal receiving and transmitting arrangement for enabling communications with other parties. Typically a communication device is used for enabling receiving and transmission of communications such as speech and data. In wireless systems a communication device provides a transceiver station that can communicate with another communication device such as e.g. a base station of an access network and/or another user equipment. The communication device may access a carrier provided by a station, for example a base station, and transmit and/or receive communications on the carrier.

An example of communication systems attempting to satisfy the increased demands for capacity is an architecture that is being standardized by the 3rd Generation Partnership Project (3GPP). This system is often referred to as the long-term evolution (LTE) of the Universal Mobile Telecommunications System (UMTS) radio-access technology. The LTE aims to achieve various improvements, for example reduced latency, higher user data rates, improved system capacity and coverage, reduced cost for the operator and so on. A further development of the LTE is often referred to as LTE-Advanced. The various development stages of the 3GPP LTE specifications are referred to as releases.

In LTE-Advanced the network nodes can be wide area network nodes such as a macro eNodeB B (eNB) which may, for example, provide coverage for an entire cell. A user equipment which is associated with a source cell may be handed over to a target cell.

According to an aspect, there is method comprising: receiving information indicating a user equipment is to be handed over from a source base station; and scheduling transmission of a control channel for said user equipment in dependence on identity information associated with said user equipment.

The identity information may comprises at least one of user equipment identity and cell identity

The control channel may comprise a control channel to be transmitted by a target base station.

The control channel may comprise a physical downlink control channel.

The scheduling may further comprise scheduling said control channel from the target base station for said user equipment at a time when a corresponding control channel from a source base station is not transmitted.

The source base station and target base station may comprise synchronised based stations.

The information indicating a user equipment is to be handed over from a source base station may comprise a handover message.

The method may comprise receiving said handover message from at least one of the source base station and said user equipment.

The handover message may comprise a handover command.

The method may comprise transmitting said control channel to said user equipment prior to said receiving of said handover message.

The information indicating a user equipment is to be handed over may be provided by signals received by said target base station from said user equipment.

The method may comprise determining strength of said received signals, said received signal strength indicating that the user equipment is to be handed over.

The method may be performed in said target base station.

According to another aspect, there is provided a method comprising; providing information indicating a user equipment is to be handed over to a target base station; and monitoring a control channel at time periods in dependence on identity information associated with said user equipment.

The identity information may comprise at least one of user equipment identity and cell identity

The control channel may comprise a control channel transmitted by said target base station.

The control channel may comprise a physical downlink control channel.

The information may be provided to at least one of a source base station and a target base station.

The information may comprise measurement information.

The method may comprise monitoring said control channel prior to providing said information.

The method may comprise additionally monitoring a control channel of a source base station.

The method may be performed by a user equipment.

According to another aspect, there is provided apparatus comprising; means for receiving information indicating a user equipment is to be handed over from a source base station; and means for scheduling transmission of a control channel for said user equipment in dependence on identity information associated with said user equipment.

The identity information may comprise at least one of user equipment identity and cell identity

The control channel may comprise a control channel to be transmitted by a target base station.

The control channel may comprise a physical downlink control channel.

The means for scheduling may be configured to schedule said control channel from the target base station for said user equipment at a time when a corresponding control channel from a source base station is not transmitted.

The source base station and target base station may comprise synchronised based stations.

The information indicating user equipment is to be handed over from a source base station may comprise a handover message.

The receiving means may be configured to receive said handover message from at least one of the source base station and said user equipment.

The handover message may comprise a handover command.

The apparatus may comprise means for transmitting said control channel to said user equipment prior to receiving of said handover message.

The information indicating a user equipment is to be handed over may be provided by signals received by said receiving means from said user equipment.

The apparatus may comprise means for determining strength of said received signals, said received signal strength indicating that the user equipment is to be handed over.

A base station may comprise the apparatus.

According to an aspect, there is provided an apparatus comprising: means for providing information indicating a user equipment is to be handed over to a target base station; and means for monitoring a control channel at time periods in dependence on identity information associated with said user equipment.

The identity information may comprise at least one of user equipment identity and cell identity

The control channel may comprise a control channel transmitted by said target base station.

The control channel may comprise a physical downlink control channel.

The information may be provided to at least one of a source base station and a target base station.

The information may comprise measurement information.

The monitoring means may be configured to monitor said control channel prior to providing said information.

The monitoring means may be configured to additionally monitor a control channel of a source base station.

A user equipment may comprise the apparatus.

According to another aspect, there is provided an apparatus comprising at least one processor and at least one memory including computer program code, the at least one memory and computer program code configured, with the at least one processor, to cause the apparatus to: provide information indicating a user equipment is to be handed over to a target base station; and monitor a control channel at time periods in dependence on identity information associated with said user equipment.

According to another aspect, there is provided an apparatus comprising at least one processor and at least one memory including computer program code, the at least one memory and computer program code configured, with the at least one processor, to cause the apparatus to: receive information indicating a user equipment is to be handed over from a source base station; and schedule transmission of a control channel for said user equipment in dependence on identity information associated with said user equipment.

According to another aspect, there is provided a method comprising: receiving at a user equipment a control channel from a source base station; and causing said user equipment to change to receiving a corresponding control channel from a targeted base station.

According to another aspect, there is provided apparatus comprising: means for receiving at a user equipment a control channel from a source base station; and means for causing said user equipment to change to receiving a corresponding control channel from a targeted base station

According to another aspect, there is provided a method comprising: receiving a handover request for a user equipment, and scheduling a control channel from a target base station for said use equipment at a time when said

corresponding control channel from said source base station is not transmitted.

According to another aspect, there is provided apparatus comprising: means for receiving a handover request for a user equipment, and means for scheduling a control channel from a target base station for said use equipment at a time when said corresponding control channel from said source base station is not transmitted.

According to another aspect, there is provided a method comprising: receiving a handover request for a user equipment; and scheduling transmission of a control channel for said user equipment using a limited set of control channel configurations at defined times.

According to another aspect, there is provided apparatus comprising: means for receiving a handover request for a user equipment; and means for scheduling transmission of a control channel for said user equipment using a limited set of control channel configurations at defined times

It should be appreciated that any feature of any aspect may be combined with any other feature of any other aspect.

Embodiments will now be described in further detail, by way of example only, with reference to the following examples and accompanying drawings, in which:

Figure 1 shows a schematic diagram of a network according to some embodiments;
Figure 2 shows a schematic diagram of a mobile communication device according to some embodiments;
Figure 3 shows a schematic diagram of a control apparatus according to some embodiments;
Figure 4 shows schematically a source eNB, a target eNB and a UE;

Figure 5 shows channels of the source and target eNBs in a synchronised scenario and a non synchronised scenario; and Figure 6 shows a method of an embodiment.

In the following certain exemplifying embodiments are explained with reference to a wireless or mobile communication system serving mobile communication devices. Before explaining in detail the exemplifying embodiments, certain general principles of a wireless communication system, access systems thereof, and mobile communication devices are briefly explained with reference to Figures 1 to 3 to assist in understanding the technology underlying the described examples.

A communication device or user equipment 101, 102, 103, is typically provided wireless access via at least one base station or similar wireless transmitter and/or receiver node of an access system. In figure 1 two neighbouring and overlapping access systems or radio service areas 100, 110 are shown being provided by base stations 105, 106.

However, it is noted that instead of two access systems, any number of access systems can be provided in a communication system. An access system can be provided by a cell of a cellular system or another system enabling a communication device to access a communication system. A base station site 105, 106 can provide one or more cells. A base station can also provide a plurality of sectors, for example three radio sectors, each sector providing a cell or a subarea of a cell. All sectors within a cell can be served by the same base station. A radio link within a sector can be identified by a single logical identification belonging to that sector. Thus a base station can provide one or more radio service areas. Each communication device 101, 102, 103, and base station 105, 106 may have one or more radio channels open at the same time and may send signals to and/or receive signals from more than one source.

Base stations 105, 106, are typically controlled by at least one appropriate controller apparatus 109, 107 so as to enable operation thereof and management of mobile communication devices 101, 102, 103, in communication with the base stations 105, 106, 108. The control apparatus 107, 109 can be interconnected with other control entities. The control apparatus 107, 109 can typically be provided with memory capacity 301 and at least one data processor 302. The control apparatus 107, 109 and functions may be distributed between a plurality of control units. In some embodiments, each base station 105, 106 can comprise a control apparatus 109, 107. In alternative embodiments, two or more base stations may share a control apparatus. Currently LTE does not have a separate radio network controller. In some embodiments the control apparatus may be respectively provided in each base station.

The cell borders or edges are schematically shown for illustration purposes only in Figure 1. It shall be understood that the sizes and shapes of the cells or other radio service areas may vary considerably from the similarly sized omni-directional shapes of Figure 1.

In particular, Figure 1 depicts two wide area base stations 105, 106, which can be macro-eNBs 105, 106. The macro-eNBs 105, 106 transmit and receive data over the entire coverage of the cells 100 and 110 respectively. Alternatively, in LTE-Advanced, network nodes can be small area network nodes such as Home eNBs (HeNB) (femto cells) or pico eNodeBs (pico-eNB). HeNBs may be configured to support local offload and may support any UE or UEs belonging to a closed subscriber group (CSG) or an open subscriber group (OSG). In some instances a combination of wide area network nodes and small area network nodes can be deployed using the same frequency carriers (e.g. co-channel deployment). The coverage of the smaller area base station is generally smaller than the coverage of the wide area base stations 105, 106. The coverage provided by smaller area nodes (pico or femto nodes) may overlap with the

coverage provided by the macro-eNBs. Pico eNBs can be used to extend coverage of the macro-eNBs outside the original cell coverage of the macro-eNBs. The pico eNB can also be used to provide cell coverage in "gaps" or "shadows" where there is no coverage within the existing cells and/or may serve "hot spots". In some embodiments, the smaller area node can be a femto or Home eNB which can provide coverage for a relatively small area such as the home. Some environments may have both pico and femto cells.

As shown, the radio service areas can overlap. Thus signals transmitted in an area can interfere with communications in another area.

The communication devices 101, 102, 103, can access the communication system based on various access techniques, such as code division multiple access (CDMA), or wideband CDMA (WCDMA). Other examples include time division multiple access (TDMA), frequency division multiple access (FDMA) and various schemes thereof such as the interleaved frequency division multiple access (IFDMA), single carrier frequency division multiple access (SC-FDMA) and orthogonal frequency division multiple access (OFDMA), space division multiple access (SDMA) and so on.

Some non-limiting examples of the recent developments in communication systems are the long-term evolution (LTE) of the Universal Mobile Telecommunications System (UMTS) that is being standardized by the 3rd Generation Partnership Project (3GPP). As explained above, further development of the LTE is referred to as LTE-Advanced. Non-limiting examples of appropriate access nodes are a base station of a cellular system, for example what is known as NodeB (NB) in the vocabulary of the 3GPP specifications. The LTE employs a mobile architecture known as the Evolved Universal Terrestrial Radio Access Network (E-UTRAN). Base stations of such systems are known as evolved Node Bs (eNBs) and may provide E-UTRAN features such as user plane Radio Link

Control/Medium Access Control/Physical layer protocol (RLC/MAC/PHY) and control plane Radio Resource Control (RRC) protocol terminations towards the user devices. Other examples of radio access system include those provided by base stations of systems that are based on technologies such as wireless local area network (WLAN) and/or WiMax (Worldwide Interoperability for Microwave Access).

In Figure 1 the base stations 105, 106, of the access systems can be connected to a wider communications network 113. The controller apparatus 107, 109 may be provided for coordinating the operation of the access systems. A gateway function 112 may also be provided to connect to another network via the network 113. The smaller base station 108 can also be connected to the other network by a separate gateway function 111. The base stations 105, 106, can be connected to each other by a communication link for sending and receiving data. The communication link can be any suitable means for sending and receiving data between the base stations 105, 106 and in some embodiments the communication link is an X2 link.

The other network may be any appropriate network. A wider communication system may thus be provided by one or more interconnect networks and the elements thereof, and one or more gateways may be provided for interconnecting various networks.

The communication devices will now be described in more detail with reference to Figure 2. Figure 2 shows a schematic, partially sectioned view of a communication device 101 that a user can use for communication. Such a communication device is often referred to as user equipment (UE) or terminal. An appropriate communication device may be provided by any device capable of sending and receiving radio signals. The communication device may be mobile. Non-limiting examples of a communication device include a mobile station (MS) such as a mobile phone or what is known as a 'smart

phone', a portable computer provided with a wireless interface card or other wireless interface facility, personal data assistant (PDA) provided with wireless communication capabilities, or any combinations of these or the like. A communication device may provide, for example, communication of data for carrying communications such as voice, electronic mail (email), text message, multimedia and so on. Users may thus be offered and provided numerous services via their communication devices. Non-limiting examples of these services include two-way or multi-way calls, data communication or multimedia services or simply an access to a data communications network system, such as the Internet. Users may also be provided broadcast or multicast data. Non-limiting examples of the content include downloads, television and radio programs, videos, advertisements, various alerts and other information.

The communication device 101 may receive signals over an air interface 207 via appropriate apparatus for receiving and may transmit signals via appropriate apparatus for transmitting radio signals. In Figure 2 transceiver apparatus is designated schematically by block 206. The transceiver apparatus 206 may be provided for example by means of a radio part and associated antenna arrangement. The antenna arrangement may be arranged internally or externally to the mobile device.

A mobile device is also typically provided with at least one data processing entity 201, at least one memory 202 and other possible components 203 for use in software and hardware aided execution of tasks it is designed to perform, including control of access to and communications with access systems and other communication devices. The data processing, storage and other relevant control apparatus can be provided on an appropriate circuit board and/or in chipsets. This feature is denoted by reference 204.

The user may control the operation of the mobile device by means of a suitable user interface such as key pad 205, voice commands, touch sensitive screen or pad, combinations thereof or the like. A display 208, a speaker and a microphone can be also provided. Furthermore, a mobile communication device may comprise appropriate connectors (either wired or wireless) to other devices and/or for connecting external accessories, for example hands-free equipment, thereto.

Figure 3 shows an example of a control apparatus 109 (or 107) for a communication system, for example to be coupled to, included in and/or for controlling a station of an access system. In some embodiments the base stations 105, 106, each comprise a separate control apparatus, such as shown in Figure 3. The control apparatus 109 can be arranged to provide control of communications by communication devices that are in the service area of the system. The control apparatus 109 can be configured to provide control functions in association with generation and communication of transmission patterns and other related information and for muting signals by means of the data processing facility in accordance with certain embodiments described below. For this purpose the control apparatus 109 comprises at least one memory 301, at least one data processing unit 302, 303 and an input/output interface 304. Via the interface the control apparatus can be coupled to a receiver and a transmitter of the base station. The control apparatus 109 can be configured to execute an appropriate software code to provide the control functions.

The LTE system currently has frequency reuse where neighbouring cells use the same frequency. Therefore, the inter-cell interference may be high at the cell edge and this may limit the available data rates. Currently LTE radio uses transmission and reception from one cell at a time. Currently no soft handover has been defined for LTE. Another issue for cell edge performance is handover delay and/or hysteresis. Typical handover latency may be more than 1 second due to

measurement averaging. The handover hysteresis maybe typically 4 dB, which means that the target cell must be 4 dB better than the current cell before handover is executed. Therefore, UE may not always be connected to the best cell at the cell edge conditions. Cell edge performance may be affected by one or more of the following:
frequency reuse may make inter-cell interference high;
handover delay may cause the UE to be connected to the non-optimal cell; and
handover hysteresis may cause the UE to be connected to a non-optimal cell.

The issues may, if combined with high speed mobility, cause call drops. The connection may get dropped after UE has sent a measurement report but before UE has received the reconfiguration command from old eNodeB.

Soft handover is used in WCDMA and HSUPA, but is not currently proposed with LTE. Site selection transmit diversity was defined in 3GPP Release 99 but not implemented and removed in Release 5. Coordinated multipoint transmission (CoMP) has been studied in Release 10 and 11. This assumed very high capacity and low delay transport connection. Enhanced serving cell change has been proposed in HSDPA. These methods in WCDMA may be built under the assumption that the connection exists for a cell (part of the active set) and the data path is directed from one of the existing base stations in the active set which has become the best. In current LTE proposals however a UE is only receiving data and connected to a single base station and the handover is hard handover. It should be noted that CoMP is where a UE is preconfigured from which eNodeBs the UE is expected to receive data, similar to soft handover.

Reference is now made to Figures 4 and 5 which show some embodiments of the invention. In Figure 4, the two base stations 105 and 106 are shown with the user equipment 103. In the example shown, the user equipment 103 is associated

with the source eNB 105. The target eNB 106 is the base station to which the user equipment is to be handed over. Referring back to Figure 1, it can be seen that the user equipment 103 is in an area of overlap of the two cells of the source eNB 105 and the target eNB 106.

It should be appreciated that handover may be between two macro cells, a macro cell and a pico cell, a macro cell and a femto cell, two pico cells, a pico cell and a femto cell or two femto cells. In some embodiments, handover may occur more frequently with smaller cells. Corner effects, particularly with smaller cells may change the path loss rapidly when a UE for example drives behind a building.

As referenced 1) in Figure 4, the user equipment 103 sends a measurement report to the source eNB 105. The measurement report will contain information about measurements made by the user equipment. In particular, the measurement report may include information about the strength of signals received at the user equipment from either the source eNB or the target eNodeB or both. A user equipment will typically make one or more measurements of one or more parameters. One or more of those measurements of one or more parameters may be used in embodiments.

Additionally or alternatively, the UE equipment may send information indicating that the UE should be handed over to the target eNB or information from which the source eNB is able to determine that handover is required.

After the measurement report has been sent to the source eNB, the user equipment may start to receive the PDCCH (physical downlink control channel) from the target eNB. In one embodiment, the user equipment will start monitoring for the PDCCH from the target eNB if the user equipment determines that the user equipment should be handed over to the target eNB. This may, for example, be based on an analysis by the user equipment of the measurement information and/or may be

dependent on information received from the source eNB. In one alternative, the user equipment may monitor for the PDCCH from the target eNB periodically.

In another embodiment the UE has a separate threshold level from the one used for sending measurement reports, to be used for considering another cell as a target cell and initiating decoding of the PDCCH of the source cell. The PDCCH in such a case may occur at predefined time instants and/or with limited configurations in order to limit the needed blind decodes and other processing needed for extra decoding.

It should be appreciated that the user equipment may receive the PDCCH from both the source eNB and the target eNB, referenced 2). This will be explained in more detail below with reference to Figure 5. The eNodeB sends via the PDCCH (physical downlink control channel) information about the resource allocation to the UE. The eNodeB will then send the PDSCH (physical downlink shared channel) to the corresponding UE.

In some embodiments, the user equipment does not need to listen to the target eNB 106 continuously. Rather, the user equipment monitors the PDCCH periodically.

In one embodiment, once the source eNB 105 has received the measurement report from the user equipment and the source eNB determines that the user equipment is to be handed over to the target eNB, the source eNB will send the handover request referenced 3), in Figure 4 to the target eNB 106. In one embodiment, the source eNB decides that the user equipment is to be handed over based on the information in the measurement report. In an alternative embodiment, the measurement report includes information indicating that the user equipment is to be handed over from the source eNB. Thus, in this latter embodiment, the user equipment makes an initial handover decision. In one further alternative, the decision as to

whether to handover the user equipment is made in combination by the user equipment and the source eNB.

It should be appreciated that the source eNB and target eNB can communicate in any suitable manner. For example, the source eNB and target eNB may have a connection there between, the so-called X2 connection.

In one embodiment, the user equipment may start monitoring the target eNB as soon as the measurement report has been sent to the source eNB. The UE may start monitoring the PDCCH from the target cell immediately after having detected that the UE needs to send the measurement report or indication that the new cell has become stronger than the current cell. The UE may be listening to the target cell PDCCH even before the UE sends the measurement report or information. From UE point of view, the target cell may be considered to be the cell that is strongest and may monitor the PDCCH of the target cell.

In one embodiment, the user equipment may delay listening to the target eNB. This, for example, may be to allow sufficient time for the source eNB to send the handover request to the target eNB. For example the delay between the UE providing the measurement report and the target eNB 106 transmitting the PDDCH to the UE may be around 50ms. The UE may delay monitoring the PDDCH of the target eNB to take into account this delay.

In one embodiment, the source eNB delivers the handover request to the target eNB and the target eNB starts transmitting the PDCCH to the user equipment. The handover request may include identity information relating the UE and/or the cell ID. In one alternative embodiment, there may be an exchange of two or more messages between the source eNB 105 and the target eNB 106 before the target eNB starts transmitting the PDCCH to the user equipment.

In one embodiment, the possible transmission times on the PDCCH from the target eNB to the user equipment are predefined. For example, in one embodiment, the transmission times are predefined based on at least one of the user equipment identity and cell identity. This means that the UE will know when to monitor the PDDCH of the target eNB. The cell identity may be the cell ID of the source cell or the target cell. The UE ID and/or the cell ID may be provided in the handover request from the source eNB. In other embodiments, other methods may be used to ensure that the UE monitors the PDCCH of the target eNB at the time when that PDCCH contains information for that eNB. For example, the source eNB may select a time and provide that information to both the target eNB and the UE.

However, it should be appreciated that in other embodiments, other methods may be used to ensure that the user equipment knows when it needs to check the PDCCH from the target eNB. The PDCCH may provide channel allocation information for the UE.

If the source eNB and target eNB are synchronised, the source eNB will not transmit on the PDCCH to the user equipment that the target eNB transmits to the UE on the PDCCH. If the eNBs are not synchronised, the user equipment will skip reception of the overlapping PDCCH channel from the source eNB, when the UE receives the PDDCH from the target eNB. This will be discussed in more detail with reference to Figure 5.

In one embodiment, the user equipment receives a reconfiguration message from the source eNB and the user equipment proceeds with handover. When the handover has been completed, the user equipment will send a reconfiguration complete message to the target eNB. In alternative embodiment, the user equipment may receive information from the target eNB on the PDCCH and will send a reconfiguration complete message to the target eNB.

Once the handover has been completed, the target eNB will send data to the user equipment, as referenced 4) in Figure 4.

In one embodiment the UE may be advised in a message if the target and/or source base station support embodiments. This message can be any suitable message and may for example be a measurement configuration message. This may allow backwards compatibility of the some embodiments with existing systems.

Reference is now made to Figure 5. Figure 5 shows the case where the eNBs are synchronised and the case where the eNBs are not synchronised. As shown, firstly for the case of the synchronised eNBs, the source eNB alternatively transmits the PDCCH and the PDSCH (physical downlink shared channel). In Figure 5, the PDCCH is shown with the hatching whilst the PDSCH is shown in grey. The source eNB alternatively transmits the PDCCH and the PDSCH. However, gaps 400 are provided in the transmission. A gap is where the source eNB does not transmit the PDCCH and/or the PDSCH for the UE. For synchronised eNBs, the target eNB will transmit its PDCCH during these gaps. Thus, the user equipment will be able to monitor the PDCCH channel of the target eNB in these gaps. Further, the user equipment will know the possible transmission times of the PDCCH targeted for that user equipment and will monitor those possible transmission times.

Figure 5 also shows a scenario where the eNBs are not synchronised eNBs. As can be seen, the source eNB alternatively transmits the PDCCH and the PDSCH without any gaps. The target eNB will transmit the PDCCH for the user equipment. Again, the user equipment will know the possible transmission times of the PDCCH targeted for that user equipment. The user equipment will stop monitoring the source eNB PDCCH and/or PDSCH when it expects the PDCCH from the target eNB. Thus, the user equipment will skip reception of some sub-frames when receiving the PDCCH from the target

eNB. In some embodiments, this may mean that the user equipment does not need to have a dual receiver.

It should be appreciated that in some embodiments, the user equipment may have a dual receiver and be able to monitor both the source eNB PDCCH and the target eNB PDSCH.

It should be appreciated that the channels shown in Figure 5 are from the perspective of the user equipment.

In some embodiments, the user equipment will know when to expect the PDCCH from the target eNB. In one embodiment, the timing of the PDCCH is based on the user equipment ID and/or cell ID. Thus, both the target eNB and the user equipment will be able to determine the timing of the relevant PDCCH.

In the case of synchronised eNBs, the source eNB will have interruptions in the transmission of the PDCCH and PDSCH to allow the user equipment to measure the target eNBs. In the case of non-synchronised eNBs, the user equipment will skip reception of the PDCCH from the source eNB to allow the user equipment to receive the PDCCH.

Reference is now made to Figure 6 which shows a method. In step S1, the UE makes measurements, as discussed above.

In step S2, the UE sends the measurement reports to the source eNB. As mentioned previously, one or other or both of the UE and source eNB will decide that handover to the target eNB is required. The UE may start monitoring the PDDCH even before the measurement report is sent, as the measurement report is sent or after the measurement report is sent. Of course instead of the measurement report, information indicative of a need for handover may be sent. However, until the target eNB has received the handover request for the PDDCH or made a determination that handover of the UE to that target eNB is possible or likely, the PDDCH will not have any information for the UE.

In step S3, the source eNB send a handover request to the target eNB via the X2 connection or the like.

In step S4, the target eNB starts to send the PDDCH to the UE, as discussed previously.

In step S5, the UE is handed over the target eNB.

Some embodiments may have an advantage in that the PDCCH decoding efforts are reduced because the user equipment will know when to expect the PDCCH from the target eNB.

In some embodiments, the eNodeBs are synchronised in TD (time division)-LTE. In FDD (frequency division duplex)-LTE, the eNBs may not be synchronised. The synchronised embodiment of Figure 4 may be appropriate in the case of TD-LTE and the non synchronised embodiment of Figure 5 may be appropriated in the case of FDD-LTE.

Thus in some embodiments, the UE should find out the timing of the target cell as part of the neighbour cell measurements. In some embodiments, the cell ID + UE ID combination then defines the timing of PDCCH relative to the common channel timing of the target cell. In some embodiments, there may be a pre-defined mapping from Cell IE and/or UE ID to the transmission timing.

In some embodiments, the target cell may start providing the PDDCH for the
UE, even where the UE has not sent a measurement report to the source
eNB.

In some embodiments the target eNB is configured to provide the PDCCH at a time expected by the UE. There may be some limitations for the configurations for the control channel to

be used and/or on the limitation of the time(s) when such a control channel may occur.

Reference has been made to the PDDCH and PDSCH channels. It should be appreciated that other embodiments may use only one of these channels. Other embodiments may use one or more different channels.

It is noted that whilst embodiments have been described in relation to LTE-Advanced, similar principles can be applied to any other communication system or indeed to further developments with LTE. Also, instead of carriers provided by a base station a carrier comprising may be provided by a communication device such as a mobile user equipment. For example, this may be the case in application where no fixed equipment provided but a communication system is provided by means of a plurality of user equipment, for example in adhoc networks. Therefore, although certain embodiments were described above by way of example with reference to certain exemplifying architectures for wireless networks, technologies and standards, embodiments may be applied to any other suitable forms of communication systems than those illustrated and described herein. In some other embodiments the aforementioned embodiments can be adopted to orthogonal frequency division multiple access (OFDMA) frequency division duplex (FDD) based mobile communication system other than LTE.

The required data processing apparatus and functions of a base station apparatus, a communication device and any other appropriate apparatus may be provided by means of one or more data processors. The described functions at each end may be provided by separate processors or by an integrated processor. The data processors may be of any type suitable to the local technical environment, and may include one or more of general purpose computers, special purpose computers, microprocessors, digital signal processors (DSPs), application specific integrated circuits (ASIC), gate level

circuits and processors based on multi core processor architecture, as non limiting examples. The data processing may be distributed across several data processing modules. A data processor may be provided by means of, for example, at least one chip. Appropriate memory capacity can also be provided in the relevant devices. The memory or memories may be of any type suitable to the local technical environment and may be implemented using any suitable data storage technology, such as semiconductor based memory devices, magnetic memory devices and systems, optical memory devices and systems, fixed memory and removable memory.

In general, the various embodiments may be implemented in hardware or special purpose circuits, software, logic or any combination thereof. Some aspects of the invention may be implemented in hardware, while other aspects may be implemented in firmware or software which may be executed by a controller, microprocessor or other computing device, although the invention is not limited thereto. While various aspects of the invention may be illustrated and described as block diagrams, flow charts, or using some other pictorial representation, it is well understood that these blocks, apparatus, systems, techniques or methods described herein may be implemented in, as non-limiting examples, hardware, software, firmware, special purpose circuits or logic, general purpose hardware or controller or other computing devices, or some combination thereof.

The embodiments of this invention may be implemented by computer software executable by a data processor of the communication device, base station and/or control apparatus such as in the processor entity, or by hardware, or by a combination of software and hardware.

Further in this regard it should be noted that any blocks of the logic flow as in the Figures may represent program steps, or interconnected logic circuits, blocks and functions, or a combination of program steps and logic circuits, blocks and

functions. The software may be stored on such physical media as memory chips, or memory blocks implemented within the processor, magnetic media such as hard disk or floppy disks, and optical media such as for example DVD and the data variants thereof, CD.

The foregoing description has provided by way of exemplary and non-limiting examples a full and informative description of the exemplary embodiment of this invention. However, various modifications and adaptations may become apparent to those skilled in the relevant arts in view of the foregoing description, when read in conjunction with the accompanying drawings and the appended claims. However, all such and similar modifications of the teachings of this invention will still fall within the scope of this invention as defined in the appended claims. Indeed there is a further embodiment comprising a combination of one or more of any of the other embodiments previously discussed.

Claims

1. A method comprising:

receiving information indicating a user equipment is to be handed over from a source base station; and

scheduling transmission of a control channel for said user equipment in dependence on identity information associated with said user equipment.

2. A method as claimed in claim 1, wherein said identity information comprises at least one of user equipment identity and cell identity

3. A method as claimed in claim 1 or 2, wherein said control channel comprises a control channel to be transmitted by a target base station.

4. A method as claimed in claim 3, wherein said control channel comprises a physical downlink control channel.

5. A method as claimed in claim 3 or 4, wherein said scheduling further comprises scheduling said control channel from the target base station for said user equipment at a time when a corresponding control channel from a source base station is not transmitted.

6. A method as claimed in claim 5, wherein said source base station and target base station comprise synchronised based stations.

7. A method as claimed in any preceding claim, wherein said information indicating a user equipment is to be handed over from a source base station comprises a handover message.

8. A method as claimed in claim 7, comprising receiving said handover message from at least one of the source base station and said user equipment.

9. A method as claimed in claim 7 or 8, wherein said handover message comprises a handover command.

10. A method as claimed in any of claims 7 to 9, comprising transmitting said control channel to said user equipment prior to said receiving of said handover message.

11. A method as claimed in any of claims 1 to 6, wherein said information indicating a user equipment is to be handed over is provided by signals received by said target base station from said user equipment.

12. A method as claimed in claim 11, said method comprises determining a strength of said received signals, said received signal strength indicating that the user equipment is to be handed over.

13. A method as claimed in any preceding claim, performed in said target base station.

14. A method comprising:

providing information indicating a user equipment is to be handed over to a target base station; and

monitoring a control channel at time periods in dependence on identity information associated with said user equipment.

15. A method as claimed in claim 14, wherein said identity information comprises at least one of user equipment identity and cell identity

16. A method as claimed in claim 14 or 15, wherein said control channel comprises a control channel transmitted by said target base station.

17. A method as claimed in claim 16, wherein said control channel comprises a physical downlink control channel.

18. A method as claimed in any of claims 14 to 17, wherein said information is provided to at least one of a source base station and a target base station.

19. A method as claimed in any of claims 14 to 18 wherein said information comprises measurement information.

20. A method as claimed in any of claims 14 to 19, comprising monitoring said control channel prior to providing said information.

21. A method as claimed in any of claims 14 to 20 comprising additionally monitoring a control channel of a source base station.

22. A method as claimed in any one of claims 14 to 21, performed by a user equipment.

23. Apparatus comprising:

means for receiving information indicating a user equipment is to be handed over from a source base station; and

means for scheduling transmission of a control channel for said user equipment in dependence on identity information associated with said user equipment.

24. Apparatus as claimed in claim 23, wherein said identity information comprises at least one of user equipment identity and cell identity

25. Apparatus as claimed in claim 23 or 24, wherein said control channel comprises a control channel to be transmitted by a target base station.

26. Apparatus as claimed in claim 25, wherein said control channel comprises a physical downlink control channel.

27. Apparatus as claimed in claim 25 or 26, wherein means for scheduling is configured to schedule said control channel from the target base station for said user equipment at a time when a corresponding control channel from a source base station is not transmitted.

28. Apparatus as claimed in claim 27, wherein said source base station and target base station comprise synchronised based stations.

29. Apparatus as claimed in any of claims 23 to 28, wherein said information indicating user equipment is to be handed over from a source base station comprises a handover message.

30. Apparatus as claimed in claim 29, wherein said receiving means is configured to receive said handover message from at least one of the source base station and said user equipment.

31. Apparatus as claimed in claim 29 or 30, wherein said handover message comprises a handover command.

32. Apparatus as claimed in claim 29 to 31, comprising means for transmitting said control channel to said user equipment prior to receiving of said handover message.

33. Apparatus as claimed in any of claims 23 to 28, wherein said information indicating a user equipment is to be handed over is provided by signals received by said receiving means from said user equipment.

34. Apparatus as claimed in claim 33, comprising means for determining strength of said received signals, said received signal strength indicating that the user equipment is to be handed over.

35. A base station comprising an apparatus as claimed in any of claims 23 to 34.

36. Apparatus comprising:
means for providing information indicating a user equipment is to be handed over to a target base station; and
means for monitoring a control channel at time periods in dependence on identity information associated with said user equipment.

37. Apparatus as claimed in claim 36, wherein said identity information comprises at least one of user equipment identity and cell identity

38. Apparatus as claimed in claim 36 or 37, wherein said control channel comprises a control channel transmitted by said target base station.

39. Apparatus as claimed in claim 38, wherein said control channel comprises a physical downlink control channel.

40. Apparatus as claimed in any of claims 36 to 39, wherein said information is provided to at least one of a source base station and a target base station.

41. Apparatus as claimed in any of claims 36 to 40 wherein said information comprises measurement information.

42. Apparatus as claimed in any of claims 36 to 41, wherein said monitoring means is configured to monitor said control channel prior to providing said information.

43. Apparatus as claimed in any of claims 36 to 42 wherein said monitoring means is configured to additionally monitor a control channel of a source base station.

44. A user equipment comprising apparatus as claimed in any of claims 36 to 43.

45. An apparatus comprising at least one processor and at least one memory including computer program code, the at

least one memory and computer program code configured, with the at least one processor, to cause the apparatus to:

provide information indicating a user equipment is to be handed over to a target base station; and

monitor a control channel at time periods in dependence on identity information associated with said user equipment.

46. An apparatus comprising at least one processor and at least one memory including computer program code, the at least one memory and computer program code configured, with the at least one processor, to cause the apparatus to:

receive information indicating a user equipment is to be handed over from a source base station; and

schedule transmission of a control channel for said user equipment in dependence on identity information associated with said user equipment.

47. A computer program comprising computer executable instructions which when run on one or more processors perform the method of any of claims 1 to 22.

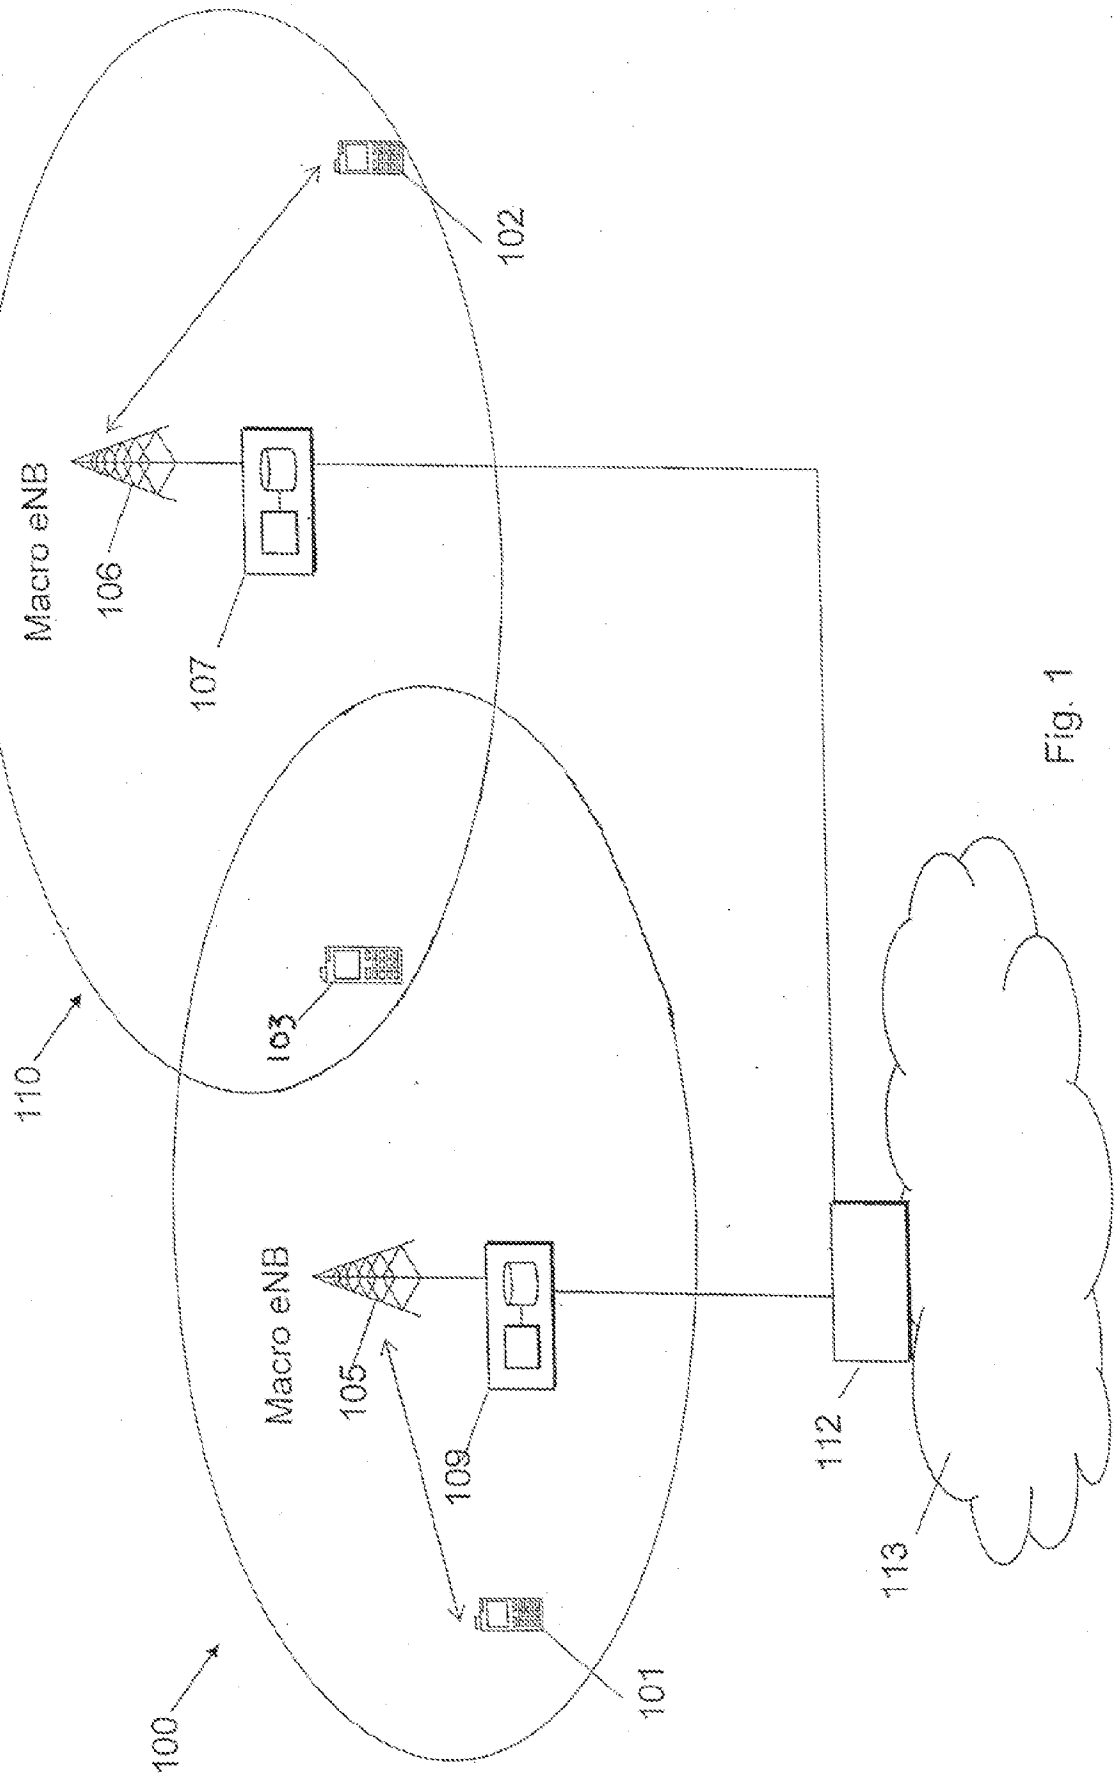


Fig. 1

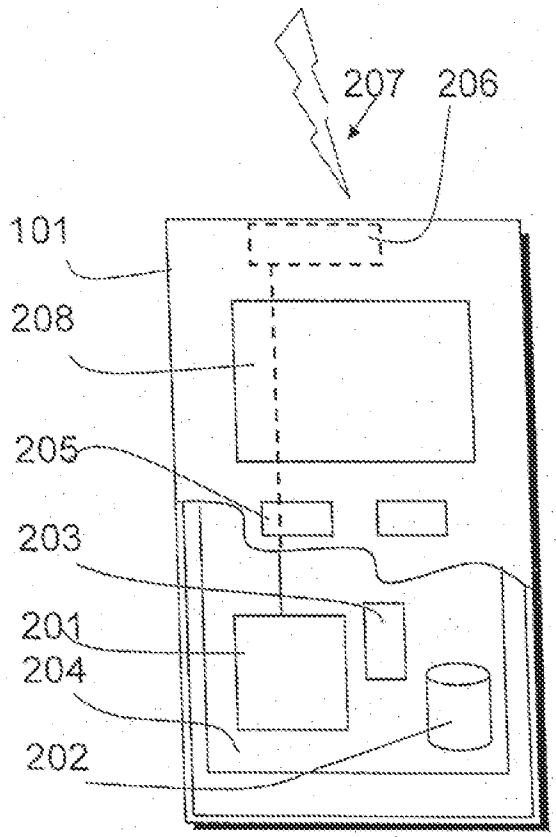


Fig. 2

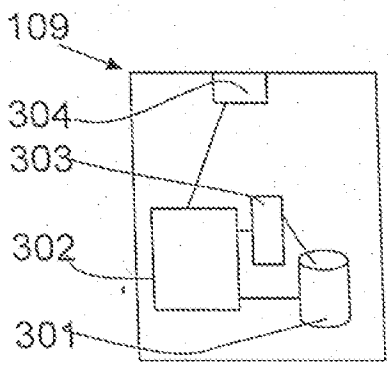


Fig. 3

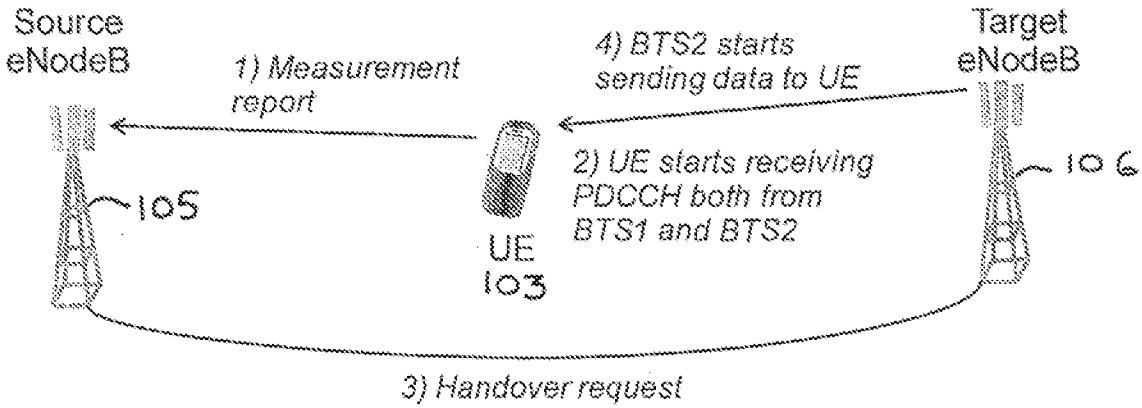


Figure 4

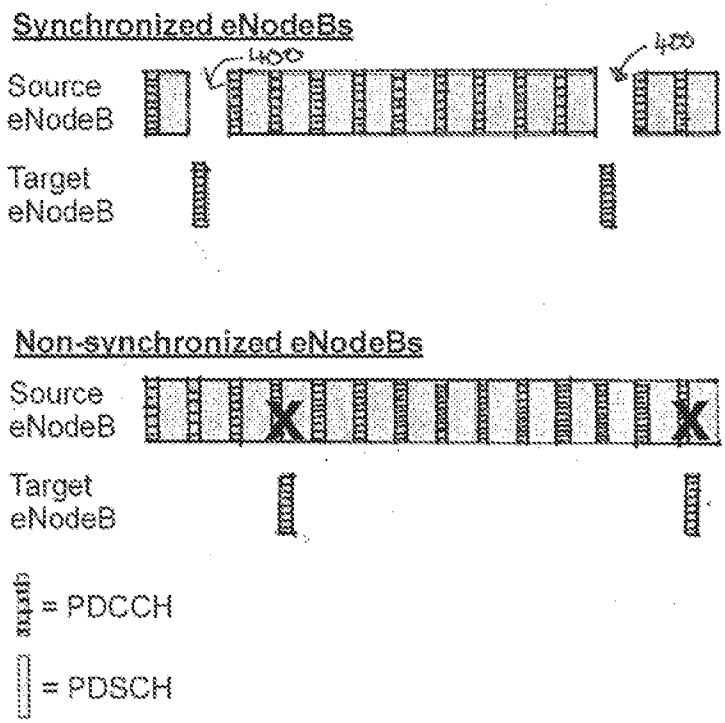
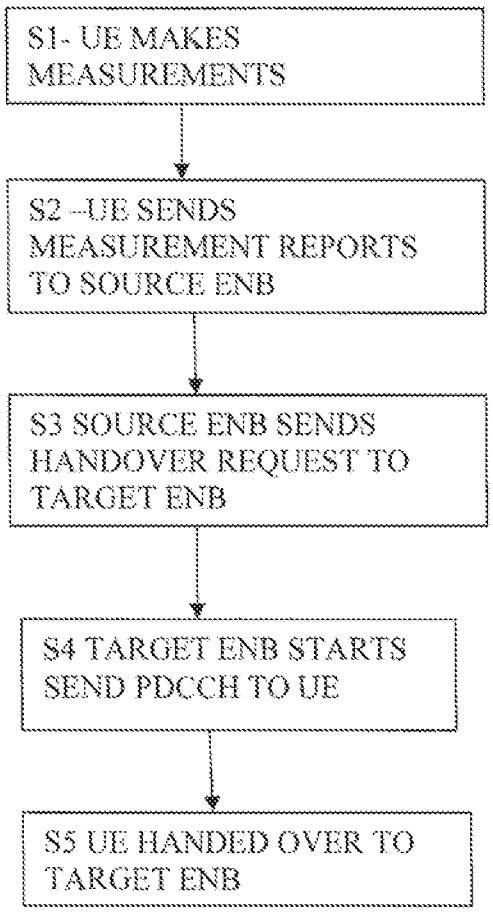


Figure 5

FIGURE 6


S1- UE MAKES MEASUREMENTS
S2 –UE SENDS MEASUREMENT REPORTS TO SOURCE ENB
S3 SOURCE ENB SENDS HANDOVER REQUEST TO TARGET ENB
S4 TARGET ENB STARTS SEND PDCCH TO UE
S5 UE HANDED OVER TO TARGET ENB

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/055611

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W36/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, COMPENDEX, INSPEC, IBM-TDB, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	"3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2 (Release 10)", 3GPP STANDARD; 3GPP TS 36.300, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. V10.3.0, 5 April 2011 (2011-04-05), pages 1-197, XP050477175, [retrieved on 2011-04-05] * chapters 10.1.2.1.1, 10, 10.1.2, 10.1.2.1, 20.2.2.1* * chapter 5, 5.1.3, 5.1.8, 8.1, 11.1, 11.1.1, 11.2, 12, 20.3.2a - 22.3.4 * -/--	1-47

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
19 January 2012	26/01/2012

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Rosken, Wilfried

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	* chapters 16.1.5, 16.1.5.1-16.1.5.2.1 * * annex K * -----	
Y	WO 2010/129606 A1 (QUALCOMM INC [US]; CHEN WANSHI [US]; DAMNJANOVIC JELENA M [US]; MONTOJ) 11 November 2010 (2010-11-11) abstract paragraphs [0008] - [0015], [0030] - [0032], [0035], [0057] - [0065] claims 1-44 figure 1 -----	1-47
Y	SAMSUNG: "Configuration of PDCCH Monitoring Set", 3GPP DRAFT; R1-080028 PDCCH RESTRICTION, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Sevilla, Spain; 20080108, 8 January 2008 (2008-01-08), XP050108571, [retrieved on 2008-01-08] * chapters 2, 3 * -----	1-47
Y	MOTOROLA: "PDCCH Search Space Assignment Hashing Function", 3GPP DRAFT; R1-081672 (R1-081289) - PDCCH SEARCH SPACE ASSIGNMENT HASHING FUNCTION_F, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Shenzhen, China; 20080409, 9 April 2008 (2008-04-09), XP050110062, [retrieved on 2008-04-09] * chapter 1, last paragraph - chapter 3, fist paragraph * -----	1-47
A	TEXAS INSTRUMENTS: "Rel-8/9 compatible PDCCH interference mitigation schemes for Het-Nets", 3GPP DRAFT; R1-102831 TI REL-8 COMPATIBLE PDCCH INTERFERENCE MITIGATION TECHNIQUES, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Montreal, Canada; 20100510, 4 May 2010 (2010-05-04), XP050419991, [retrieved on 2010-05-04] * chapter 2.2, 2.3.1* -----	1-47
	-/--	

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/055611

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	TEXAS INSTRUMENTS: "Views on PDCCH Interference Mitigation for Het-Nets", 3GPP DRAFT; R1-103713 TI HETNETS PDCCH INTERFERENCE MITIGATION, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Dresden, Germany; 20100628, 22 June 2010 (2010-06-22), XP050449145, [retrieved on 2010-06-22] * chapters 3.1, 3.2*	1-47
A	HUAWEI: "LTE non-CA based HetNet support", 3GPP DRAFT; R1-101982, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Beijing, china; 20100412, 6 April 2010 (2010-04-06), XP050419319, [retrieved on 2010-04-06] page 3 - page 4	1-47
A	US 2010/304748 A1 (HENTTONEN TERO [FI] ET AL) 2 December 2010 (2010-12-02) abstract paragraphs [0050], [0053], [0063], [0072], [0074], [0079], [0081], [0082] claims 5,10,15,20 figures 10, 11, 12	1-47
A	WO 2010/150662 A1 (NTT DOCOMO INC [JP]; IWAMURA MIKIO [JP]; ISHII MINAMI [JP]; UMESH ANIL) 29 December 2010 (2010-12-29) abstract figures 6,8-10	1-47
A	LUCENT TECHNOLOGIES: "Discussion on Intra-access mobility in LTE_Active", 3GPP DRAFT; R3-051130-INTRA-ACCESS-MOBILTY-LTE-ACTIVE, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG3, no. Cannes, France; 20051006, 6 October 2005 (2005-10-06), XP050158628, [retrieved on 2005-10-06] * chapter 2 *	1-47

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2011/055611

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010129606 A1	11-11-2010	TW 201127155 A	01-08-2011
		US 2011103509 A1	05-05-2011
		WO 2010129606 A1	11-11-2010
US 2010304748 A1	02-12-2010	NONE	
WO 2010150662 A1	29-12-2010	JP 2011004377 A	06-01-2011
		WO 2010150662 A1	29-12-2010