

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 March 2006 (16.03.2006)

PCT

(10) International Publication Number  
**WO 2006/028678 A1**

(51) International Patent Classification:  
**G01V 3/28** (2006.01)

(21) International Application Number:  
PCT/US2005/029404

(22) International Filing Date: 18 August 2005 (18.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/934,596 3 September 2004 (03.09.2004) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED?** [US/US]; 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).

(72) Inventors: **TABAROVSKY, Leonty, A.**; 12126 Via Porta Rosa, Cypress, TX 77429 (US). **BESPALOV, Alexandre, N.**; 739 Cypresswood Cove, Apt. #409, Spring, TX 77373 (US). **FORGANG, Stanislav, W.**; 18055 Somerset Knolls, Houston, TX 77094-1429 (US). **RABINOVICH, Michael**; 206 Heathbrook Lane, Houston, TX 77094 (US).


(74) Agent: **RIDDLE, Albert, J.**; Baker Hughes Incorporated, 3900 Essex Lane, Suite 1200, Houston TX 77027 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MULTI FREQUENCY FOCUSING FOR MWD RESISTIVITY TOOLS

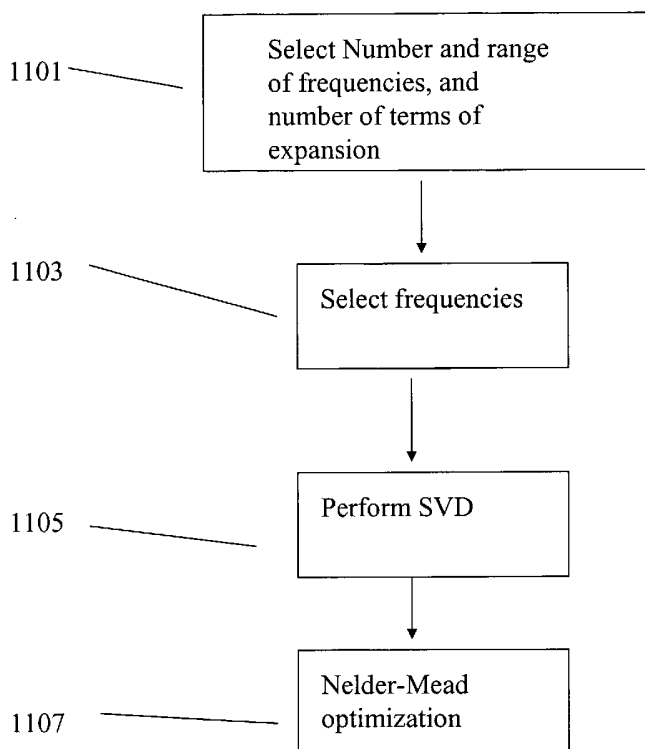

(57) Abstract: An induction logging tool is used on a MWD bottom hole assembly. Due to the finite, nonzero, conductivity of the mandrel, conventional multi frequency focusing (MFF) does not work. A correction is made to the induction logging data to give measurements simulating a perfectly conducting mandrel. MFF can then be applied to the corrected data to give formation resistivities.

WO 2006/028678 A1



**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**MULTI-FREQUENCY FOCUSING FOR MWD RESISTIVITY TOOLS**

**Leonty A. Tabarovsky, Alexandre N. Besspalov, Stanislav W. Forgang & Michael B. Rabinovich**

5

**1. Field of the Invention**

[0001] The invention is related to the field of electromagnetic induction well logging for determining the resistivity of earth formations penetrated by wellbores. More specifically, the invention addresses the problem of selecting frequencies of operation  
10 of a multifrequency induction logging tool.

**2. Description of the Related Art**

[0002] Electromagnetic induction resistivity instruments can be used to determine the electrical conductivity of earth formations surrounding a wellbore. An  
15 electromagnetic induction well logging instrument is described, for example, in U.S. Pat. No. 5,452,761 issued to Beard et al. The instrument described in the Beard et al '761 patent includes a transmitter coil and a plurality of receiver coils positioned at axially spaced apart locations along the instrument housing. An alternating current is passed through the transmitter coil. Voltages which are induced in the receiver coils  
20 as a result of alternating magnetic fields induced in the earth formations are then measured. The magnitude of certain phase components of the induced receiver voltages are related to the conductivity of the media surrounding the instrument.

[0003] As is well known in the art, the magnitude of the signals induced in the  
25 receiver coils is related not only to the conductivity of the surrounding media (earth formations) but also to the frequency of the alternating current. An advantageous feature of the instrument described in *Beard '761* is that the alternating current flowing through the transmitter coil includes a plurality of different component frequencies. Having a plurality of different component frequencies in the alternating  
30 current makes possible more accurate determination of the apparent conductivity of the medium surrounding the instrument.

[0004] One method for estimating the magnitude of signals that would be obtained at zero frequency is described, for example, in U.S. Patent No. 5,666,057, issued to

Beard et al., entitled, "Method for Skin Effect Correction and Data Quality Verification for a Multi-Frequency Induction Well Logging Instrument". The method of *Beard* '057 in particular, and other methods for skin effect correction in general, are designed only to determine skin effect corrected signal magnitudes, where the induction logging instrument is fixed at a single position within the earth formations. A resulting drawback to the known methods for skin effect correction of induction logs is that they do not fully account for the skin effect on the induction receiver response within earth formations including layers having high contrast in the electrical conductivity from one layer to the next. If the skin effect is not accurately determined, then the induction receiver responses cannot be properly adjusted for skin effect, and as a result, the conductivity (resistivity) of the earth formations will not be precisely determined.

[0005] U.S. Patent No. 5,884,227, issued to Rabinovich et al., having the same assignee as the present invention, is a method of adjusting induction receiver signals for skin effect in an induction logging instrument including a plurality of spaced apart receivers and a transmitter generating alternating magnetic fields at a plurality of frequencies. The method includes the steps of extrapolating measured magnitudes of the receiver signals at the plurality of frequencies, detected in response to alternating magnetic fields induced in media surrounding the instrument, to zero frequency. A model of conductivity distribution of the media surrounding the instrument is generated by inversion processing the extrapolated magnitudes. *Rabinovich* '227 works equally well under the assumption that the induction tool device has perfect conductivity or zero conductivity. In a measurement-while-drilling device, this assumption does not hold.

[0006] Multi-frequency focusing (MFF) is an efficient way of increasing depth of investigation for electromagnetic logging tools. It is being successfully used in wireline applications, for example, in processing and interpretation of induction data. MFF is based on specific assumptions regarding behavior of electromagnetic field in frequency domain. For MWD tools mounted on metal mandrels, those assumptions are not valid. Particularly, the composition of a mathematical series describing EM field at low frequencies changes when a very conductive body is placed in the vicinity of sensors. Only if the mandrel material were perfectly conducting, would MFF be

applicable. There is a need for a method of processing multi-frequency data acquired with real MWD tools having finite non-zero conductivity. The present invention satisfies this need.

5

### **SUMMARY OF THE INVENTION**

[0007] The present invention is a method and apparatus for determining a resistivity of an earth formation. Induction measurements are made downhole at a plurality of frequencies using a tool. A multifrequency focusing (MFF) is applied to the data to give an estimate of the formation resistivity. The frequencies at which the  
10 measurements are made are selected based on one or more criteria, such as reducing an error amplification resulting from the MFF, increasing an MFF signal voltage, or increasing an MFF focusing factor. In one embodiment of the invention, the tool has a portion with finite non-zero conductivity.

15 [0008] The method and apparatus may be used in reservoir navigation. For such an application, the frequency selection may be based on a desired distance between a bottomhole assembly carrying the resistivity measuring instrument and an interface in the earth formation.

20

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0009] The present invention is best understood with reference to the accompanying figures in which like numerals refer to like elements and in which:  
FIG. 1 (Prior Art) shows an induction logging instrument as it is typically used to make measurements for use with the method of the invention;  
25 FIG. 1A (prior art) shows an induction tools conveyed within a formation layer;  
FIG. 2 (prior art) shows a typical induction tool of the present invention.;  
FIG. 3 (prior art) shows responses of a induction tool with a perfectly conducting mandrel;  
FIG. 4 (prior art) shows the effect of finite mandrel conductivity;  
30 FIG. 5 (prior art) shows the difference between finite conducting mandrel and perfect conducting mandrel at several frequencies;  
FIG. 6 (prior art) shows the effect of wireline multi-frequency focusing processing of data acquired with perfectly conducting mandrel and finite conducting mandrel;  
FIG. 7 (prior art) shows the convergence of the method of the present invention with

the increased number of expansion terms;

FIG. 8 shows multi-frequency focusing of the finite conducting mandrel response;

FIG. 9 shows MFF noise amplification for a 3-coil MWD tool on a steel pipe;

FIG. 10 shows the MFF voltage for a 3-coil MWD tool on a steel pipe;

5 FIG. 11 shows the MFF Focusing factor for a 3-coil MWD tool on a steel pipe;

FIG. 12 is a flow chart illustrating a method of the present invention; and

FIG. 13 shows an MWD tool in the context of reservoir navigation.

### **DETAILED DESCRIPTION OF THE INVENTION**

10 [0010] Figure 1 shows a schematic diagram of a drilling system 10 with a drillstring 20 carrying a drilling assembly 90 (also referred to as the bottom hole assembly, or "BHA") conveyed in a "wellbore" or "borehole" 26 for drilling the wellbore. The drilling system 10 includes a conventional derrick 11 erected on a floor 12 which supports a rotary table 14 that is rotated by a prime mover such as an electric motor  
15 (not shown) at a desired rotational speed. The drillstring 20 includes a tubing such as a drill pipe 22 or a coiled-tubing extending downward from the surface into the borehole 26. The drillstring 20 is pushed into the wellbore 26 when a drill pipe 22 is used as the tubing. For coiled-tubing applications, a tubing injector, such as an injector (not shown), however, is used to move the tubing from a source thereof, such as a reel (not shown), to the wellbore 26. The drill bit 50 attached to the end of the drillstring breaks up the geological formations when it is rotated to drill the borehole 26. If a drill pipe 22 is used, the drillstring 20 is coupled to a drawworks 30 via a Kelly joint 21, swivel 28, and line 29 through a pulley 23. During drilling operations, the drawworks 30 is operated to control the weight on bit, which is an important  
20 parameter that affects the rate of penetration. The operation of the drawworks is well known in the art and is thus not described in detail herein.

[0011] During drilling operations, a suitable drilling fluid 31 from a mud pit (source) 32 is circulated under pressure through a channel in the drillstring 20 by a mud pump  
30 34. The drilling fluid passes from the mud pump 34 into the drillstring 20 via a desurger (not shown), fluid line 28 and Kelly joint 21. The drilling fluid 31 is discharged at the borehole bottom 51 through an opening in the drill bit 50. The drilling fluid 31 circulates uphole through the annular space 27 between the drillstring 20 and the borehole 26 and returns to the mud pit 32 via a return line 35. The drilling

fluid acts to lubricate the drill bit **50** and to carry borehole cutting or chips away from the drill bit **50**. A sensor  $S_1$  preferably placed in the line **38** provides information about the fluid flow rate. A surface torque sensor  $S_2$  and a sensor  $S_3$  associated with the drillstring **20** respectively provide information about the torque and rotational  
5 speed of the drillstring. Additionally, a sensor (not shown) associated with line **29** is used to provide the hook load of the drillstring **20**.

[0012] In one embodiment of the invention, the drill bit **50** is rotated by only rotating the drill pipe **22**. In another embodiment of the invention, a downhole motor **55** (mud  
10 motor) is disposed in the drilling assembly **90** to rotate the drill bit **50** and the drill pipe **22** is rotated usually to supplement the rotational power, if required, and to effect changes in the drilling direction.

[0013] In the embodiment of Figure 1, the mud motor **55** is coupled to the drill bit **50**  
15 via a drive shaft (not shown) disposed in a bearing assembly **57**. The mud motor rotates the drill bit **50** when the drilling fluid **31** passes through the mud motor **55** under pressure. The bearing assembly **57** supports the radial and axial forces of the drill bit. A stabilizer **58** coupled to the bearing assembly **57** acts as a centralizer for the lowermost portion of the mud motor assembly.

20  
[0014] In one embodiment of the invention, a drilling sensor module **59** is placed near the drill bit **50**. The drilling sensor module contains sensors, circuitry and processing software and algorithms relating to the dynamic drilling parameters. Such parameters preferably include bit bounce, stick-slip of the drilling assembly, backward rotation,  
25 torque, shocks, borehole and annulus pressure, acceleration measurements and other measurements of the drill bit condition. A suitable telemetry or communication sub **72** using, for example, two-way telemetry, is also provided as illustrated in the drilling assembly **90**. The drilling sensor module processes the sensor information and transmits it to the surface control unit **40** via the telemetry system **72**.

30  
[0015] The communication sub **72**, a power unit **78** and an MWD tool **79** are all connected in tandem with the drillstring **20**. Flex subs, for example, are used in connecting the MWD tool **79** in the drilling assembly **90**. Such subs and tools form the bottom hole drilling assembly **90** between the drillstring **20** and the drill bit **50**.

The drilling assembly 90 makes various measurements including the pulsed nuclear magnetic resonance measurements while the borehole 26 is being drilled. The communication sub 72 obtains the signals and measurements and transfers the signals, using two-way telemetry, for example, to be processed on the surface. Alternatively,  
5 the signals can be processed using a downhole processor in the drilling assembly 90.

[0016] The surface control unit or processor 40 also receives signals from other downhole sensors and devices and signals from sensors  $S_1$ - $S_3$  and other sensors used in the system 10 and processes such signals according to programmed instructions  
10 provided to the surface control unit 40. The surface control unit 40 displays desired drilling parameters and other information on a display/monitor 42 utilized by an operator to control the drilling operations. The surface control unit 40 preferably includes a computer or a microprocessor-based processing system, memory for storing programs or models and data, a recorder for recording data, and other  
15 peripherals. The control unit 40 is preferably adapted to activate alarms 44 when certain unsafe or undesirable operating conditions occur.

[0017] Figure 1A shows a typical configuration of a metal mandrel 101 within a borehole 105. Two formation layers, an upper formation layer 100 and a lower  
20 formation layer 110, are shown adjacent to the borehole 105. A prominent invasion zone 103 is shown in the upper formation layer.

[0018] Figure 2 shows a generic tool for evaluation of MFF in MWD applications (MFFM) using the present invention. A transmitter, T, 201 is excited at a plurality of  
25 RF frequencies  $f_1, \dots, f_n$ . For illustrative purposes, eight frequencies are considered: 100, 140, 200, 280, 400, 560, 800, and 1600 kHz. A plurality of axially-separated receivers,  $R_1, \dots, R_m$ , 205 are positioned at distances,  $L_1, \dots, L_m$ , from transmitter. For illustrative purposes, distances of the seven receivers are chosen as  $L = 0.3, 0.5, 0.7, 0.9, 1.1, 1.3$ , and 1.5 m. Transmitter 201 and receivers 205 enclose a metal mandrel  
30 210. In all examples, the mandrel radius is 8 cm, the transmitter radius is 9 cm, and the radius of the plurality of receivers is 9 cm. Data is obtained by measuring the responses of the plurality of receivers 205 to an induced current in the transmitter 201. Such measured responses can be, for example, a magnetic field response. The mandrel conductivity may be assumed perfect (perfectly conducting mandrel, PCM)



or finite (finite conductivity mandrel, FCM). In the method of the present invention, obtained data is corrected for the effects of the finite conductivity mandrel, such as skin effect, for example, in order to obtain data representative of an induction tool operated in the same manner, having an infinite conductivity. Corrected data can then  
 5 be processed using multi-frequency focusing. Typical results of multi-frequency focusing can be, for instance, apparent conductivity. A calculated relationship can obtain value of conductivity, for example, when frequency is equal to zero. Any physical quantity oscillating in phase with the transmitter current is called *real* and any measurement shifted 90 degrees with respect to the transmitter current is called  
 10 *imaginary, or quadrature.*

[0019] Obtaining data using a nonconducting mandrel is discussed in Rabinovich et al., U.S. Patent No. 5,884,227, having the same assignee as the present invention, the contents of which are fully incorporated herein by reference. When using a  
 15 nonconducting induction measurement device, multi-frequency focusing (MFF) can be described using a Taylor series expansion of EM field frequency. A detailed consideration for MFFW (wireline MFF applications) can be used. Transmitter **201**, having a distributed current  $J(x,y,z)$  excites an EM field with an electric component  $E(x,y,z)$  and a magnetic component  $H(x,y,z)$ . Induced current is measured by a  
 20 collection of coils, such as coils **205**.

[0020] An infinite conductive space has conductivity distribution  $\sigma(x,y,z)$ , and an auxiliary conductive space ('background conductivity') has conductivity  $\sigma_0(x,y,z)$ . Auxiliary electric dipoles located in the auxiliary space can be introduced. For the  
 25 field components of these dipoles, the notation  $e''(\mathbf{P}_0, \mathbf{P})$ ,  $h''(\mathbf{P}_0, \mathbf{P})$ , where  $\mathbf{n}$  stands for the dipole orientation,  $\mathbf{P}$  and  $\mathbf{P}_0$ , indicate the dipole location and the field measuring point, respectively. The electric field  $E(x,y,z)$  satisfies the following integral equation (see L. Tabarovsky, M. Rabinovich, 1998, Real time 2-D inversion of induction logging data. Journal of Applied Geophysics, 38, 251-275.):

$$30 \quad E(\mathbf{P}_0) = E^0(\mathbf{P}_0) + \int_{-\infty}^{+\infty} \int_{-\infty}^{+\infty} \int_{-\infty}^{+\infty} (\sigma - \sigma_0) \hat{e}(\mathbf{P}_0 | \mathbf{P}) E(\mathbf{P}) dx dy dz. \quad (1)$$

where  $E^0(\mathbf{P}_0)$  is the field of the primary source  $\mathbf{J}$  in the background medium  $\sigma_0$ . The

3x3 matrix  $e(\mathbf{P}_0|\mathbf{P})$  represents the electric field components of three auxiliary dipoles located in the integration point  $\mathbf{P}$ .

- [0021] The electric field,  $\mathbf{E}$ , may be expanded in the following Taylor series with respect to the frequency:.

$$\mathbf{E} = \sum_{k=2}^{k=\infty} \mathbf{u}_{k/2} (-i\omega)^{k/2} \quad (2)$$

$$\mathbf{u}_{3/2} = 0$$

- The coefficient  $\mathbf{u}_{5/2}$  corresponding to the term  $\omega^{5/2}$  is independent of the properties of a near borehole zone, thus  $\mathbf{u}_{5/2} = \mathbf{u}_{5/2}^0$ . This term is sensitive only to the conductivity distribution in the undisturbed formation (100) shown in Figure 1A.

- [0022] The magnetic field can be expanded in a Taylor series similar to Equation (2):

$$\mathbf{H} = \sum_{k=0}^{k=\infty} \mathbf{s}_{k/2} (-i\omega)^{k/2} \quad (3)$$

$$\mathbf{s}_{1/2} = 0$$

- In the term containing  $\omega^{3/2}$ , the coefficient  $\mathbf{s}_{3/2}$  depends only on the properties of the background formation, in other words  $\mathbf{s}_{3/2} = \mathbf{s}_{3/2}^0$ . This fact is used in multi-frequency processing. The purpose of the multi-frequency processing is to derive the coefficient  $\mathbf{u}_{5/2}$  if the electric field is measured, and coefficient  $\mathbf{s}_{3/2}$  if the magnetic field is measured. Both coefficients reflect properties of the deep formation areas.

- [0023] If an induction tool consisting of dipole transmitters and dipole receivers generates the magnetic field at  $m$  angular frequencies,  $\omega_1, \omega_2, \dots, \omega_m$ , the frequency Taylor series for the imaginary part of magnetic field has the following form:

$$\text{Im}(\mathbf{H}) = \sum_{k=1}^{k=\infty} \mathbf{s}_{k/2} \omega^{k/2} \quad (4)$$

$$s_{2j} = 0; \quad j = 1, 2, \dots, .$$

- where  $s_{k/2}$  are coefficients depending on the conductivity distribution and the tool's geometric configuration, not on the frequency. Rewriting the Taylor series for each measured frequency obtains:

$$\begin{pmatrix} H(\omega_1) \\ H(\omega_2) \\ \vdots \\ H(\omega_{m-1}) \\ H(\omega_m) \end{pmatrix} = \begin{pmatrix} \omega & \omega_1^{3/2} & \omega_1^{5/2} & \cdot & \cdot & \cdot & \omega_1^{n/2} \\ \omega & \omega_2^{3/2} & \omega_2^{5/2} & \cdot & \cdot & \cdot & \omega_2^{n/2} \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \omega & \omega_{m-1}^{3/2} & \omega_{m-1}^{5/2} & \cdot & \cdot & \cdot & \omega_{m-1}^{n/2} \\ \omega & \omega_m^{3/2} & \omega_m^{5/2} & \cdot & \cdot & \cdot & \omega_m^{n/2} \end{pmatrix} \begin{pmatrix} S_1 \\ S_{3/2} \\ S_{5/2} \\ \cdot \\ \cdot \\ S_{n/2} \end{pmatrix} \quad (5)$$

Solving the system of Equations (5), it is possible to obtain the coefficient  $s_{3/2}$ . It turns out that the expansion is the same for a perfectly conducting mandrel and a non-conducting mandrel

5

[0024] Figure 3 shows the results of MFF for a perfectly conducting mandrel. In Figure 3, borehole radius is 11 cm. MFF, as performed based on Eq.(5) and Eq.(3) (MFFW) produces the expected results. Data sets 301 and 305 are shown for a formation having 0.4 S/m and 0.1 S/m respectively, with no borehole effects. Data set 303 is shown for a formation having 0.4 S/m and a borehole having mud conductivity 10 S/m and 0.1 S/m. Apparent conductivity data, processed using MFFW, do not depend on borehole parameters or tool length. Specifically, apparent conductivity equals to the true formation conductivity. The present invention can be used to correct from an FCM tool to a PCM with the same sensor arrangements.

15

[0025] Fundamental assumptions enabling implementing MFFW are based on the structure of the Taylor series, Eq. (2) and Eq. (3). These assumptions are not valid if a highly conductive body is present in the vicinity of sensors (e.g., mandrel of MWD tools). The present invention uses an asymptotic theory that enables building MFF for MWD applications (MFFM).

20

[0026] The measurements from a finite conductivity mandrel can be corrected to a mandrel having perfect conductivity. Deriving a special type of integral equations for MWD tools enables this correction. The magnetic field measured in a typical MWD electromagnetic tool may be described by

25

$$H_a(P) = H_a^0(P) + \beta \int_S \{ \vec{H}^{M\alpha} \vec{h} \} dS \quad (6)$$

where  $H_\alpha(P)$  is the magnetic field measure along the direction  $\alpha$  ( $\alpha$ -component),  $P$  is the point of measurement,  $H_\alpha^0(P)$  is the  $\alpha$ -component of the measured magnetic field given a perfectly conducting mandrel,  $S$  is the surface of the tool mandrel,  $\beta =$

$1/\sqrt{-i\omega\mu\sigma_c}$ , where  $\omega$  and  $\mu$  are frequency and magnetic permeability, and  $^{ma}h$  is the

5 magnetic field of an auxiliary magnetic dipole in a formation where the mandrel of a finite conductivity is replaced by an identical body with a perfect conductivity. The dipole is oriented along  $\alpha$ -direction. At high conductivity,  $\beta$  is small.

[0027] Equation (6) is evaluated using a perturbation method, leading to the following  
10 results:

$$H_\alpha = \sum_{i=0}^{i=\infty} {}^{(i)}H_\alpha \quad (7)$$

$${}^{(0)}H_\alpha = H_\alpha^0 \quad (8)$$

$${}^{(i)}H_\alpha = \beta \int_S \left\{ {}^{(i-1)}\vec{H}^{M\alpha} \vec{h} \right\} dS \quad (9)$$

$i = 1, \dots, \infty$

In a first order approximation that is proportional to the parameter  $\beta$ :

$$15 \quad {}^{(1)}H_\alpha = \beta \int_S \left\{ {}^{(0)}\vec{H}^{M\alpha} \vec{h} \right\} dS = \beta \int_S \left\{ \vec{H}_0^{M\alpha} \vec{h} \right\} dS \quad (10)$$

The integrand in Eq. (10) is independent of mandrel conductivity. Therefore, the integral on the right-hand side of Eq. (10) can be expanded in wireline-like Taylor series with respect to the frequency, as:

$$\int_S \left\{ \vec{H}_0^{M\alpha} \vec{h} \right\} dS \approx b_0 + (-i\omega\mu)b_1 + (-i\omega\mu)^{3/2}b_{3/2} + (-i\omega\mu)^2b_2 + \dots \quad (11)$$

20

Substituting Eq. (11) into Eq. (10) yields:

$${}^{(1)}H_\alpha = \frac{1}{\sqrt{\sigma_c}} \left( \frac{b_0}{(-i\omega\mu)^{1/2}} + (-i\omega\mu)^{1/2}b_1 + (-i\omega\mu)b_{3/2} + (-i\omega\mu)^{3/2}b_2 + \dots \right) \quad (12)$$

Further substitution in Eqs. (7), (8), and (9) yield:

$$25 \quad H_\alpha \approx H_\alpha^0 + \frac{1}{\sqrt{\sigma_c}} \left( \frac{b_0}{(-i\omega\mu)^{1/2}} + (-i\omega\mu)^{1/2}b_1 + (-i\omega\mu)b_{3/2} + (-i\omega\mu)^{3/2}b_2 + \dots \right) \quad (13)$$

Considering measurement of imaginary component of the magnetic field, Equation (5), modified for MWD applications has the following form:

$$\begin{pmatrix} H(\omega_1) \\ H(\omega_2) \\ \vdots \\ H(\omega_{m-1}) \\ H(\omega_m) \end{pmatrix} = \begin{pmatrix} \omega_1^{1/2} & \omega_1^1 & \omega_1^{3/2} & \omega_1^{5/2} & \cdot & \cdot & \cdot & \omega_1^{n/2} \\ \omega_2^{1/2} & \omega_2^1 & \omega_2^{3/2} & \omega_2^{5/2} & \cdot & \cdot & \cdot & \omega_2^{n/2} \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \omega_{m-1}^{1/2} & \omega_{m-1}^1 & \omega_{m-1}^{3/2} & \omega_{m-1}^{5/2} & \cdot & \cdot & \cdot & \omega_{m-1}^{n/2} \\ \omega_m^{1/2} & \omega_m^1 & \omega_m^{3/2} & \omega_m^{5/2} & \cdot & \cdot & \cdot & \omega_m^{n/2} \end{pmatrix} \begin{pmatrix} S_{1/2} \\ S_1 \\ S_{3/2} \\ S_{5/2} \\ \cdot \\ \cdot \\ \cdot \\ S_{n/2} \end{pmatrix}. \quad (14)$$

Details are given in the Appendix. The residual signal (third term) depends on the mandrel conductivity, but this dependence is negligible due to very large conductivity of the mandrel. Similar approaches may be considered for the voltage measurements.

[0028] In Eq. (13), the term  $H_\alpha^0$  describes effect of PCM, and the second term containing parentheses describes the effect of finite conductivity. At relatively low frequencies, the main effect of finite conductivity is inversely proportional to  $\omega^{1/2}$  and  $\sigma^{1/2}$ :

$$H_\alpha \approx H_\alpha^0 + \frac{1}{\sqrt{\sigma_c}} \left( \frac{b_0}{(-i\omega\mu)^{1/2}} \right) \quad (15)$$

[0029] Figures 4 and 5 confirm the validity of Equation (15). Values shown in Figure 4 are calculated responses of PCM and FCM tools in a uniform formation with conductivity of 0.1 S/m with a transmitter current of 1 Amp. Figure 4 shows three pairs of data curves: 401 and 403; 411 and 413; and 421 and 423. Within each pairing, the differences of the individual curves are due only to the conductivity of the mandrel. Curves 401 and 403 are measured using a receiver separated from the transmitter by 0.3m. Curve 401 is measured with a mandrel having  $5.8 \times 10^7$  S/m and Curve 403 assumes perfect conductivity. Similarly, curves 411 and 413 are measured using receiver separated from the transmitter by 0.9m. Curve 411 is measured with a mandrel having  $5.8 \times 10^7$  S/m and Curve 413 assumes perfect conductivity. Lastly, curves 421 and 423 are measured using receiver separated from the transmitter by 1.5m. Curve 421 is measured with a mandrel having  $5.8 \times 10^7$  S/m and Curve 423 assumes perfect conductivity. Curves 401, 411, 421, indicative of the curves for FCM

diverge from curves 403, 413, and 423, respectively, in the manner shown in Eq. (15), (i.e.,  $1/\omega^{1/2}$  divergence).

[0030] Figure 5 shows that, as a function of frequency, the difference of FCM and PCM responses follows the rule of  $1/\omega^{1/2}$  with a very high accuracy. The scale value represents the difference in values between responses obtained for PCM and FCM (PCM-FCM in A/m) at several frequencies. Actual formation conductivity is 0.1 S/m. Curve 501 demonstrates this difference for a receiver-transmitter spacing of 0.3m. Curves 503 and 505 demonstrate this difference for receiver transmitter spacing of 0.9m and 1.5m, respectively.

[0031] Figure 6 shows the inability of prior methods of MFFW to correct data acquired from FCM to that of PCM. The results are from conductivity measurements in a uniform space with conductivity of 0.1 S/m and in a space with conductivity 0.4 S/m containing a borehole. The borehole has a radius of 11 cm and a conductivity of 10 S/m. In both models, PCM and FCM responses are calculated and shown. In the FCM case, the mandrel conductivity is  $2.8 \times 10^7$  S/m. As mentioned previously, MFFW is applicable to PCM tools. Figure 6 shows the results of PCM (603 and 613) do not depend on tool spacing and borehole parameters. Obtained values for apparent conductivity are very close to the real formation conductivity. However, for an FCM tool, such as 601 and 611, there is a dependence of MFFW on borehole parameters and tool length. The present invention addresses two of the major effects: the residual influence of the imperfect mandrel conductivity, and borehole effects.

[0032] Figure 7 illustrates convergence of the method of the present invention as the number of terms in the expansion of Eq. (13) increases. Eight frequencies are used for the MFFM processing: 100, 140, 200, 280, 400, 460, 800, and 1600 kHz. Curve 703 shows results with an expansion having 3 terms. Curve 703 shows a large deviation from true conductivity at long tool length. Curves 704, 705, and 706 show results with an expansion having 4, 5, and 6 terms respectively. About 5 or 6 terms of the Taylor series are required for an accurate correction to true conductivity of 0.1 S/m. Figure 7 also illustrates the ability of convergence regardless of tool length.

Significantly, the factor  $k$  (equal to  $15594 \text{ S}/(\text{Amp}/\text{m}^2)$ ) for transforming magnetic field to conductivity is independent of spacing.

[0033] Figure 8 presents the results of the method of the present invention in  
5 formations with and without borehole. Data points 801 and 805 show data received from formation having 0.4 S/m and 0.1 S/m respectively, with no borehole effects. Data points 803 shows data received from formation having conductivity 0.4 S/m with a borehole having 10 S/m. Figure 8 shows that the effect of the borehole is completely eliminated by the method of the present invention. Figure 8 also shows  
10 that after applying the method of the present invention, the value of the response data is independent of the spacing of the receivers. This second conclusion enables a tool design for deep-looking MWD tools using short spacing, further enabling obtaining data from the background formation (100 and 110 in Figure 1A) and reducing difficulties inherent in data obtained from an invasion zone (103 in Figure 1A). In  
15 addition, focused data are not affected by the near borehole environment. Results of Figure 8 can be compared to Figure 3.

[0034] We next address the issue of optimum design of the MFF acquisition system for deep resistivity measurements in the earth formation. One approach with limited  
20 value is a hardware design. This is based on the observation that at relatively low frequencies, the main effect of the finite conductivity can be described by the first term in the expansion. Since  $b_0$  in eqn. (15) does not depend upon formation parameters, we can call this term the "direct field." The hardware design is based on the use of a 3-coil configuration for calibrating out the tool response in air. The use of  
25 such bucking coils is disclosed in US 6,586,939 to *Fanini et al*, having the same assignee as the present invention and the contents of which are incorporated herein by reference.

[0035] Since the coefficient  $b_0$  in eqn. (15) is slightly different for different  
30 frequencies, accurate compensation of the direct field is only possible for one frequency. For all other frequencies, the remaining direct field must be calibrated out numerically. Since the direct field is inversely proportional to the square root of the pipe conductivity, and the pipe conductivity will change with temperature, additional temperature correction may be used. The hardware solution requires the use of

bucking coils. In Table I, we present signals for the main and bucking coils and the remaining direct field for a 3-coil tool at eight frequencies used for calibration in air. The drill pipe conductivity was taken as  $1.4 \times 10^6 \text{ S/m}$ , which is a typical value for stainless steel. For the example shown, the spacings for the main and bucking receivers are 1.5.m and 1.0 m respectively. The 3-coil tool was fully compensated in air for a frequency of 38kHz. The remaining signals are relatively small, allowing for a stable numerical calibration.

Table 1

| Frequency<br>kHz | In-phase voltage<br>Bucking coil in air<br>(V) | In-phase voltage<br>Main coil in air<br>(V) | Unbalanced<br>voltage 3-coil in<br>air (V) | Numerical<br>compensation<br>% |
|------------------|------------------------------------------------|---------------------------------------------|--------------------------------------------|--------------------------------|
| 5                | 0.131E-06                                      | 0.398E-07                                   | 0.920E-10                                  | 0.23                           |
| 11.2             | 0.192E-06                                      | 0.584E-07                                   | 0.695E-10                                  | 0.12                           |
| 38               | 0.345E-06                                      | 0.105E-06                                   | 0.000E+00                                  | 0.00                           |
| 85               | 0.512E-06                                      | 0.156E-06                                   | -0.139E-09                                 | -0.09                          |
| 151              | 0.680E-06                                      | 0.207E-06                                   | -0.423E-09                                 | -0.20                          |
| 293              | 0.946E-06                                      | 0.289E-06                                   | -0.143E-08                                 | -0.50                          |
| 666              | 0.143E-05                                      | 0.443E-06                                   | -0.679E-08                                 | -1.53                          |
| 999              | 0.177E-05                                      | 0.554E-06                                   | -0.148E-07                                 | -2.68                          |

10

[0036] One drawback of the MFF processing, as in any software or hardware focusing technique, is subtraction of the signal and consequent noise amplification in the focused data. For example, if in the original signal the random error was 2% and after some focusing technique we eliminated 80% of the signal, the relative error in the resulting signal will become 10%. In this case, the relative noise in the focused data is 5 times higher than in the original signal. In the present invention, methods have been developed for estimating the noise amplification in the multi-frequency focusing and for optimizing the operating frequencies with respect to the noise amplification. As described in the appendix, we solve the following system of linear equations to extract the coefficient in the expansion that is proportional to the frequency  $\omega^{3/2}$ .

20



$$\begin{pmatrix} H(\omega_1) \\ H(\omega_2) \\ \vdots \\ H(\omega_{m-1}) \\ H(\omega_m) \end{pmatrix} = \begin{pmatrix} \omega_1^{1/2} & \omega_1^1 & \omega_1^{3/2} & \omega_1^{5/2} & \cdots & \omega_1^{n/2} \\ \omega_2^{1/2} & \omega_2^1 & \omega_2^{3/2} & \omega_2^{5/2} & \cdots & \omega_2^{n/2} \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ \omega_m^{1/2} & \omega_m^1 & \omega_m^{3/2} & \omega_m^{5/2} & \cdots & \omega_m^{n/2} \end{pmatrix} \begin{pmatrix} s_{1/2} \\ s_1 \\ s_{3/2} \\ s_{5/2} \\ \vdots \\ s_{n/2} \end{pmatrix}. \quad (\text{A1.14})$$

Or in short notations:

$$\vec{H} = \hat{A} \vec{s} \quad (16)$$

5

where  $A$  is the frequency matrix. Since we usually use more frequencies than the number of terms in expansions, we apply the least square approach to solve this equation:

$$\vec{s} = (\hat{A}^T \hat{A})^{-1} \hat{A}^T \vec{H}. \quad (17)$$

10

[0037] Since the matrix  $A$  depends only on the operating frequencies, we can try to optimize the frequency selection to provide the most stable solution of the linear system A1.13. This system can be rewritten in the form:

$$15 \quad \vec{H} = s_{1/2} \vec{\omega}^{1/2} + s_1 \vec{\omega}^1 + s_{3/2} \vec{\omega}^{3/2} + \dots + s_n \vec{\omega}^n, \quad (18)$$

where

$$\vec{\omega}^p = (\omega_1^p, \omega_2^p, \dots, \omega_m^p)^T.$$

20 The frequency set  $\omega_1, \omega_2, \dots, \omega_m$  is optimal when the basis  $\vec{\omega}^{1/2}, \vec{\omega}^1, \vec{\omega}^{3/2}, \dots, \vec{\omega}^{n/2}$  is as much linearly independent as possible. The measure of the linear independence of any basis is the minimal eigenvalue of the Gram matrix  $C$  of its vectors normalized to unity:

$$C_{i,j} = \left( \frac{\vec{\omega}^{p_i}}{\|\vec{\omega}^{p_i}\|}, \frac{\vec{\omega}^{p_j}}{\|\vec{\omega}^{p_j}\|} \right). \quad (19)$$

The matrix  $C$  can be equivalently defined as follows: we introduce matrix  $B$  as

$$25 \quad \hat{B} = \hat{A}^T \hat{A} \quad (20)$$

and normalize it

$$C_{i,j} = \frac{B_{i,j}}{\sqrt{B_{i,i} B_{j,j}}} . \quad (21)$$

5 [0038] Then maximizing the minimum singular value of matrix  $C$  will provide the most stable solution for which we are looking. In the present invention, use is made of a standard SVD routine based on Golub's method to extract singular values of matrix  $C$  and the Nelder-Mead simplex optimization algorithm to search for the optimum frequency set. Details of the implementation are discussed below with  
10 reference to Fig. 12. Optimization was started with the HDIL frequency range (8 frequencies: 10, 14, 20, 28, 40, 56, 80, 160 kHz) but the program was allowed to search in a wider frequency range from 5 to 999 kHz. As a result of optimization, the following 8 frequencies were selected as optimum: 5, 11.2, 38, 85, 151, 293, 666, 999 kHz. The minimum singular value was six orders of magnitude higher for the  
15 optimum frequency set compared to the initial HDIL frequency range. We notice that the optimum frequency set includes the minimum and the maximum frequencies allowed in the optimization process, which makes sense for the interpolation problem (A1.14).

Eqn (17) can be rewritten as

$$\vec{s} = \hat{D} \vec{H} \quad (22)$$

where

$$\hat{D} = (\hat{A}^T \hat{A})^{-1} \hat{A}^T . \quad (23)$$

25 If an error distribution of the vector  $H$  is described by a covariation matrix  $\Sigma_H$ , it can be shown that the error distribution for the vector  $s$  could be calculated as

$$\hat{\Sigma}_s = \hat{D} \hat{\Sigma}_H \hat{D}^T \quad (24)$$

Assuming that the random noise in the magnetic field is independent at different frequencies (all non-diagonal elements in matrix  $\Sigma_H$  are zeros), then the standard  
30 deviation (square root of the diagonal elements) can be calculated as a constant

relative error (1% for all frequencies) multiplied by the signal at the particular frequency.

To evaluate the error amplification in the coefficient  $j$  (Eq. A1.14), we use the following equation:

$$EA_j = 100 * \sqrt{\frac{\sum_{j,j}}{s_j}} \quad (25)$$

[0039] In one embodiment of the invention, we use  $j = 3$  for the coefficient with the frequency  $\omega^{3/2}$  if we apply a rigorous expansion. In an alternate embodiment of the invention, we use  $j = 2$  and omit from the expansion a negligible term proportional to  $\omega^{1/2}$ . In Fig. 9, we present error amplification for a 3-coil MWD tool ( $L1 = 1.5$  m,  $L2 = 1$  m) on a steel pipe as a function of the distance to the remote layer. We consider four different MFF configurations.

- (a) Wide frequency range (optimum set described above) with 4 terms in the expansion (excluding term proportional  $\omega^{1/2}$ ) denoted by 1027;
- (b) Wide frequency range with 5 terms, denoted by 1025;
- (c) Narrow frequency range (HDIL range presented above) with 4 terms, denoted by 1023, and
- (d) Narrow frequency range with 5 terms, denoted by 1021.

We can see that the error amplification factor is significantly smaller for the optimum set of frequencies compared to the HDIL frequency range (6–10 times depending on the number of terms). We can also observe that the optimum set of frequencies with 4 terms in the expansion almost does not amplify noise (the amplification factor is below 2 when the distance to the remote layer is smaller than 10 m). Because the MFF transformation has a low vertical resolution, we can apply spatial filtering to compensate for the MFF error amplification.

[0040] Still referring to Fig. 9, we notice that increasing the number of terms from 4 to 5 increases the error amplification factor 2 times for the wide frequency range and 3 times for the narrow frequency range. In Fig. 12, we present the MFF voltage (the rigorous definition of the MFF voltage is given below) for the same model and tool configurations as in Fig. 11. We observe that the signal levels for both frequency sets are higher for the 4-term expansion compared to the 5-term expansion. At the same

time, a very small change occurring in the MFF signal when the boundary moves from 0.1 to 1 m indicates an excellent compensation of the near-borehole signal (the more number of terms, the less change in the MFF response).

- 5 [0041] The frequency Taylor series for the imaginary part of magnetic field has the following form:

$$Im(H) = \sum_{k=1}^{k=\infty} s_k \omega^{\frac{k}{2}} \quad (23)$$

$$s_{2j}=0; \quad j=1,2,\dots,$$

Transforming the series to a new variable  $\omega\mu$ , we can express the imaginary part of the magnetic field measured at an angular frequency  $\omega$  as

$$10 \quad H(\omega) = MFF \cdot (\omega\mu)^{3/2} + OtherTerms, \quad (24)$$

Here,  $MFF$  is a coefficient  $s_{3/2}$  obtained by solving the system A1.14 using  $\omega\mu$  rather than  $\omega$ . For illustrative purposes, we assume that:

- (a) the transmitter has a single turn and effective area  $S_t$  (total area minus area  
15 occupied by the metal pipe);  
(b) the transmitter current equals 1 Amp;  
(c) the receiver has a single turn and effective area  $S_r$ .

Rewriting **Eq. (24)** for the listed conditions, we obtain

$$V(\omega) = MFF \cdot (\omega\mu)^{5/2} \cdot S_t \cdot S_r + OtherTerms. \quad (25)$$

- 20 Based on **Eq. (25)**, we define the MFF voltage as

$$MFF_v = MFF \cdot (\omega\mu)^{5/2} \cdot S_t \cdot S_r \quad (26)$$

- [0042] Next, we address the issue of what frequencies to choose in **Eqn. (26)** from the multiple frequencies used to solve the system A1.14. We decided to select the  
25 frequency at which the signal contributes most to the MFF result and assign this frequency a unit moment - similar to the way the signal levels are evaluated in multi-receiver geometrical focusing systems. For this purpose, we express the MFF signal as a sum of signals at all the frequencies with different coefficients. Let us start from the magnetic fields:

$$30 \quad MFF = \sum_{i=1}^m \alpha_i H_i, \quad (27)$$

where  $m$  is the total number of frequencies;  $H_i$ —magnetic field measured at frequency  $i$ .

We can define the coefficients  $\alpha_i$  as

$$\alpha_i = \hat{D}(3,i), \quad (28)$$

- 5 where  $\hat{D}(3,i)$  means element  $i$  of the third row of the matrix  $D$ . Following Eqn. (26), we can rewrite Eqn. (27) in terms of voltages:

$$MFF_v = \sum_{i=1}^m \beta_i V_i, \quad (29)$$

where

$$\beta_i = \alpha_i \cdot \frac{(\omega_{\max} \mu)^{5/2}}{\omega_i \mu}. \quad (30)$$

- 10 Based on eqns.( 28) and (30), we can evaluate the contribution of every term in eqn.(29), find the main one, and select the frequency for the MFF voltage calculations, eqn. (26). In all our benchmarks, for both sets of frequencies, the main contribution derives from the lowest frequency (there were only two cases where the second frequency contribution was slightly higher). In Table 2, we present the
- 15 contribution of each frequency to the MFF response for the 3-coil MWD tool. The tool has a steel pipe with a wide frequency range and 4 terms used in the expansion. Each column in Table 2 represents a model with the different distance to the remote boundary. The voltage is normalized by  $IS_t S_r (\omega_{\max} \mu)^{5/2}$  where  $I$  represents the transmitter current.

20

Table 2. Contribution of each frequency term into MFF voltage

| f(kHz) | 0.1 m     | 1 m       | 2 m       | 4 m       | 6 m       | 8 m       | 10 m      | 29 m      |
|--------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 5.00   | -0.168E-1 | -0.133E-1 | -0.769E-2 | -0.350E-2 | -0.209E-2 | -0.147E-2 | -0.116E-2 | -0.766E-3 |
| 11.2   | -0.939E-2 | -0.729E-2 | -0.402E-2 | -0.166E-2 | -0.953E-3 | -0.680E-3 | -0.560E-3 | -0.454E-3 |
| 38.0   | 0.138E-2  | 0.103E-2  | 0.506E-3  | 0.179E-3  | 0.106E-3  | 0.862E-4  | 0.795E-4  | 0.798E-4  |
| 85.0   | 0.555E-2  | 0.403E-2  | 0.176E-2  | 0.605E-3  | 0.418E-3  | 0.383E-3  | 0.377E-3  | 0.397E-3  |
| 151.   | 0.521E-2  | 0.378E-2  | 0.154E-2  | 0.572E-3  | 0.457E-3  | 0.452E-3  | 0.460E-3  | 0.483E-3  |
| 293.   | 0.164E-2  | 0.131E-2  | 0.518E-3  | 0.243E-3  | 0.232E-3  | 0.240E-3  | 0.248E-3  | 0.255E-3  |
| 666.   | -0.318E-3 | -0.866E-3 | -0.400E-3 | -0.299E-3 | -0.331E-3 | -0.348E-3 | -0.354E-3 | -0.355E-3 |
| 999.   | -0.145E-3 | 0.175E-3  | 0.100E-3  | 0.987E-4  | 0.111E-3  | 0.116E-3  | 0.116E-3  | 0.116E-3  |

To assure that the main term coefficient is equal to 1, we divide all coefficients by  $\beta_{\max}$ . Then **Eqn. (26)** becomes

$$MFF_V = MFF \cdot (\omega_{\max} \mu)^{5/2} \cdot S_t \cdot S_r / \beta_{\max}. \quad (31)$$

5 [0043] In **Fig. 10**, we present an example of the MFF voltage calculated for the 3-coil MWD tool ( $L_1=1.5$  m,  $L_2=1$  m) on a steel pipe for four different MFF configurations (two frequency sets for 4 and 5 terms in the expansion A1.14). We can observe that the configuration with a wide frequency range with 4 terms provides the highest signal level compared to the other three configurations. After introducing the MFF  
10 voltage we can estimate how much signal we lose in our focusing system. Actually, we estimate how much signal is left in the MFF transformation as a ratio of the MFF voltage to the voltage measured at the frequency with the largest contribution into the MFF signal. We call this the MFF focusing factor and express it as a percentage:

$$MFF\_Focusing\_Factor = 100 \cdot \frac{MFF\_voltage}{V(\omega_{\max})}. \quad (32)$$

15

[0044] In **Fig. 11**, we present the MFF focusing factor calculated for a steel pipe MWD tool for the same benchmark and MFF configurations as discussed earlier for **Figs. 11** and **12**. We can see that for a 10-m distance to the remote cylindrical layer the best configuration with a wide frequency range and 4 terms cancels only 30% of the signal (leaves 70%) and the worst configuration (narrow frequency range and 5  
20 terms) cancels almost 90% of the signal. **1061** and **1063** correspond to the wide frequency band, four and five terms respectively, while **1065** and **1067** correspond to the narrow frequency band, four and five terms respectively.

25 [0045] Let us discuss the maxima of the MFF Focusing Factor. We can observe that they well agree with the minima on the Error Amplification curves, **Fig. 9**, and these positions are very consistent for all benchmark models. We believe that these maxima reflect the depths at which sensitivity of the particular MFF configurations are most favorable. For example, the narrow frequency, five term configuration has a  
30 maximum sensitivity at about 6–7 m, while wide frequency four term configuration has a maximum at about 4–5 m. This correlates with the fact that the narrow

frequency, five term configuration has the lowest focusing factor and the largest error amplification.

[0046] The present invention has been discussed with reference to a MWD sensing device conveyed on a BHA. The method is equally applicable for wireline conveyed devices. In particular, the method of selecting frequencies can be used even for the case where the mandrel has either zero conductivity or infinite conductivity. The difference is that instead of equation (A1.14), we use an equation that does not have the mandrel term, i.e.

$$10 \quad \begin{pmatrix} H(\omega_1) \\ H(\omega_2) \\ \cdot \\ \cdot \\ \cdot \\ H(\omega_{m-1}) \\ H(\omega_m) \end{pmatrix} = \begin{pmatrix} \omega & \omega_1^{3/2} & \omega_1^{5/2} & \cdot & \cdot & \cdot & \omega_1^{n/2} \\ \omega & \omega_2^{3/2} & \omega_2^{5/2} & \cdot & \cdot & \cdot & \omega_2^{n/2} \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \omega & \omega_{m-1}^{3/2} & \omega_{m-1}^{5/2} & \cdot & \cdot & \cdot & \omega_{m-1}^{n/2} \\ \omega & \omega_m^{3/2} & \omega_m^{5/2} & \cdot & \cdot & \cdot & \omega_m^{n/2} \end{pmatrix} \begin{pmatrix} S_1 \\ S_{3/2} \\ S_{5/2} \\ \cdot \\ \cdot \\ \cdot \\ S_{n/2} \end{pmatrix} \quad (31)$$

[0047] Turning now to **Fig. 12**, we discuss the determination of an optimal frequency step. At 1101, the number of frequencies, the range of frequencies and the number of terms of the expansion ( $n$  in **eqn. A1.14** or **eqb. 31**) are selected. As noted above, the number and initial values of frequencies selected was taken from the prior art HDIL tool, i.e., 10, 14, 20, 28, 40, 56, 80 and 160 kHz. This is a matter of convenience since the hardware for operating the logging tool at eight frequencies already existed. Other choices are available and are intended to be covered by the scope of the present invention. The allowable range is also somewhat limited by the hardware—as noted above, the optimum frequency set included the minimum and maximum frequencies allowed in the optimization process. The number of terms in the expansion is a tradeoff between two conflicting requirements. Increasing the number of terms does a better job of correcting for near borehole effects, but also reduces the MFF signal and increases the noise level. Our experience has shown that typically, a four or five term expansion is adequate for an eight frequency tool. Clearly, the number of terms of the expansion has to be less than the number of frequencies used. The initial values for the frequencies is specified 1103. A singular value decomposition is performed 1105

to get the singular values of the matrix  $C$  from **eqn. (21)**. Next, for the range of frequencies and the number of frequencies, the set of frequencies that gives the largest value for the minimum singular eigenvalue of  $C$  is determined **1107**.

5   **[0048]** Such an optimization process could be carried out with brute force gradient based techniques at a high computational cost. In the present invention, the Nelder-Mead method is used for the optimization. The Nelder-Mead method does not require the computation of gradients. Instead, only a scalar function (in the present instance, the minimum singular eigenvalue) is used and the problem is treated as a simplex  
10   problem in  $n + 1$  dimensions. Another advantage of simplex methods is their ability to get out of local minima—a known pitfall of gradient based techniques.

**[0049]** One application of the method of the present invention (with its ability to make resistivity measurements upto 20 m away from the borehole) is in reservoir  
15   navigation. In development of reservoirs, it is common to drill boreholes at a specified distance from fluid contacts within the reservoir. An example of this is shown in **Fig. 13** where a porous formation denoted by **1205a**, **1205b** has an oil water contact denoted by **1213**. The porous formation is typically capped by a caprock such as **1203** that is impermeable and may further have a non-porous interval denoted by  
20   **1209** underneath. The oil-water contact is denoted by **1213** with oil above the contact and water below the contact: this relative positioning occurs due to the fact the oil has a lower density than water. In reality, there may not be a sharp demarcation defining the oil-water contact; instead, there may be a transition zone with a change from high oil saturation at the top to a high water saturation at the bottom. In other situations, it  
25   may be desirable to maintain a desired spacing from a gas-oil. This is depicted by **1214** in **Fig. 13**. It should also be noted that a boundary such as **1214** could, in other situations, be a gas-water contact.

**[0050]** In order to maximize the amount of recovered oil from such a borehole, the  
30   boreholes are commonly drilled in a substantially horizontal orientation in close proximity to the oil water contact, but still within the oil zone. US Patent RE35386 to *Wu et al*, having the same assignee as the present application and the contents of which are fully incorporated herein by reference, teaches a method for detecting and sensing boundaries in a formation during directional drilling so that the drilling



operation can be adjusted to maintain the drillstring within a selected stratum is presented. The method comprises the initial drilling of an offset well from which resistivity of the formation with depth is determined. This resistivity information is then modeled to provide a modeled log indicative of the response of a resistivity tool  
5 within a selected stratum in a substantially horizontal direction. A directional (e.g., horizontal) well is thereafter drilled wherein resistivity is logged in real time and compared to that of the modeled horizontal resistivity to determine the location of the drill string and thereby the borehole in the substantially horizontal stratum. From this, the direction of drilling can be corrected or adjusted so that the borehole is maintained  
10 within the desired stratum. The configuration used in the *Wu* patent is schematically denoted in **Fig. 13** by a borehole **125** having a drilling assembly **1221** with a drill bit **1217** for drilling the borehole. The resistivity sensor is denoted by **1219** and typically comprises a transmitter and a plurality of sensors.

15 **[0051]** As noted above, different frequency selections/ expansion terms have their maximum sensitivity at different distances. Accordingly, in one embodiment of the invention, the frequency selection and the number of expansion terms is based on the desired distance from an interface in reservoir navigation. It should be noted that for purposes of reservoir navigation, it may not be necessary to determine an absolute  
20 value of formation resistivity: changes in the focused signal using the method described above are indicative of changes in the distance to the interface. The direction of drilling may be controlled by a second processor or may be controlled by the same processor that processes the signals.

25 **[0052]** While the foregoing disclosure is directed to the preferred embodiments of the invention, various modifications will be apparent to those skilled in the art. It is intended that all such variations within the scope and spirit of the appended claims be embraced by the foregoing disclosure.

APPENDIX: TAYLOR'S FREQUENCY SERIES FOR MWD  
ELECTROMAGNETIC TOOL

[0053] We intend to evaluate the asymptotic behavior of magnetic field on the surface of a metal mandrel as described in Eq. (6):

$$5 \quad H_{\alpha}(P) = H_{\alpha}^0(P) + \beta \int_S \left\{ \bar{H}^{M\alpha} \bar{h} \right\} dS \quad (A1.1)$$

The primary and auxiliary magnetic fields,  $H_{\alpha}^0$  and  $^{M\alpha} \bar{h}$ , depend only on formation parameters. The total magnetic field,  $H_{\alpha}$ , depends on both formation parameters and mandrel conductivity. The dependence on mandrel conductivity,  $\sigma_c$ , is reflected only in parameter  $\beta$ :

$$10 \quad \beta = \frac{1}{k_c} = \frac{1}{\sqrt{-i\omega\mu\sigma_c}} \quad (A1.2)$$

The perturbation method applied to Eq.(A1.1) leads to the following result:

$$H_{\alpha} = \sum_{i=0}^{i=\infty} {}^{(i)}H_{\alpha} \quad (A1.3)$$

$${}^{(0)}H_{\alpha} = H_{\alpha}^0 \quad (A1.4)$$

$${}^{(i)}H_{\alpha} = \beta \int_S \left\{ {}^{(i-1)}\bar{H}^{M\alpha} \bar{h} \right\} dS \quad (A1.5)$$

$i = 1, \dots, \infty$

15 [0054] Let us consider the first order approximation that is proportional to the parameter  $\beta$ :

$${}^{(1)}H_{\alpha} = \beta \int_S \left\{ {}^{(0)}\bar{H}^{M\alpha} \bar{h} \right\} dS = \beta \int_S \left\{ \bar{H}_0^{M\alpha} \bar{h} \right\} dS \quad (A1.6)$$

The integrand in Eq. (A1.6) does not depend on mandrel conductivity. Therefore, the integral in right-hand side, Eq. (A1.6), may be expanded in wireline-like Taylor series

20 with respect to the frequency:

$$\int_S \left\{ \bar{H}_0^{M\alpha} \bar{h} \right\} dS \approx b_0 + (-i\omega\mu)b_1 + (-i\omega\mu)^{3/2}b_{3/2} + (-i\omega\mu)^2b_2 + \dots \quad (A1.7)$$

In axially symmetric models, coefficients  $b_j$  have the following properties:

- $b_0$  does not depend on formation parameters. It is related to so called 'direct field';
- 25 •  $b_1$  is linear with respect to formation conductivity. It is related to Doll's approximation;

- $b_{3/2}$  depends only on background conductivity and does not depend on near borehole parameters;
- $b_2$  includes dependence on borehole and invasion.

5 [0055] Let us substitute Eq.(A1.7) into Eq.(A1.6):

$$^{(1)}H_\alpha = \frac{1}{\sqrt{\sigma_c}} \left( \frac{b_0}{(-i\omega\mu)^{1/2}} + (-i\omega\mu)^{1/2} b_1 + (-i\omega\mu) b_{3/2} + (-i\omega\mu)^{3/2} b_2 + \dots \right)$$

(A1.8)

Eq.(A3.3), (A3.4), and (A3.8) yield:

$$H_\alpha \approx H_\alpha^0 + \frac{1}{\sqrt{\sigma_c}} \left( \frac{b_0}{(-i\omega\mu)^{1/2}} + (-i\omega\mu)^{1/2} b_1 + (-i\omega\mu) b_{3/2} + (-i\omega\mu)^{3/2} b_2 + \dots \right)$$

(A1.9)

Collecting traditionally measured in MFF terms  $\sim\omega^{3/2}$ , we obtain:

$$(-i\omega\mu)^{3/2} (H_\alpha)_{3/2} \approx (-i\omega\mu)^{3/2} (H_\alpha^0)_{3/2} + \frac{(-i\omega\mu)^{3/2} b_2}{\sqrt{\sigma_c}} \quad (A1.10)$$

The first term in the right hand side, Eq.(A1.10), depends only on background formation. The presence of imperfectly conducting mandrel makes the MFF measurement dependent also on a near borehole zone parameters (second term, coefficient  $b_2$ ) and mandrel conductivity,  $\sigma_c$ . This dependence, obviously, disappears for a perfect conductor ( $\sigma_c \rightarrow \infty$ ). We should expect a small contribution from the second term since conductivity  $\sigma_c$  is very large.

20 [0056] To measure the term  $\sim\omega^{3/2}$ , we can modify MFF transformation in such a way that contributions proportional to  $1/(-i\omega\mu)^{1/2}$  and  $(-i\omega\mu)^{1/2}$ , Eq. (A1.9), are cancelled. We also can achieve the goal by compensating the term  $\sim 1/(-i\omega\mu)^{1/2}$  in the air and applying MFF to the residual signal. The latter approach is preferable because it improves the MFF stability (less number of terms needs to be compensated). Let us consider a combination of compensation in the air and MFF in more detail. It follows from Eq. (A1.9) that the response in the air,  $H_\alpha(\sigma=0)$ , may be expressed in the following form:

$$H_\alpha(\sigma=0) \approx H_\alpha^0(\sigma=0) + \frac{1}{\sqrt{\sigma_c}} \left( \frac{b_0}{(-i\omega\mu)^{1/2}} \right) \quad (A1.11)$$

Compensation of the term  $\sim b_0$ , Eq.(A1.11), is important. Physically, this term is due to *strong currents on the conductor surface* and its contribution (not relating to formation parameters) may be very significant. Equations (A1.9) and (A1.11) yield the following compensation scheme:

$$5 \quad H_\alpha - H_\alpha(\sigma = 0) \approx (-i\omega\mu)(H_\alpha)_1 + (-i\omega\mu)^{3/2}(H_\alpha)_{3/2} + \frac{1}{\sqrt{\sigma_c}}((-i\omega\mu)^{1/2}b_1 + (-i\omega\mu)b_{3/2} + (-i\omega\mu)^{3/2}b_2 + \dots) \quad (A1.12)$$

Considering measurement of imaginary component of the magnetic field, we obtain:

$$\text{Im}[H_\alpha - H_\alpha(\sigma = 0)] \approx -\left\{ \frac{1}{\sqrt{\sigma_c}} \left( \frac{\omega\mu}{\sqrt{2}} \right)^{1/2} b_1 + \omega\mu(H_\alpha)_1 + \left( \frac{\omega\mu}{\sqrt{2}} \right)^{3/2} \left( (H_\alpha)_{3/2} + \frac{b_2}{\sqrt{\sigma_c}} \right) \right\} \quad (A1.13)$$

- 10 **[0057]** Equation (A1.13) indicates that in MWD applications, two frequency terms must be cancelled as opposed to only one term in wireline. Equation, (A1.4), modified for MWD applications has the following form:

$$\begin{pmatrix} H(\omega_1) \\ H(\omega_2) \\ \vdots \\ H(\omega_{m-1}) \\ H(\omega_m) \end{pmatrix} = \begin{pmatrix} \omega_1^{1/2} & \omega_1^1 & \omega_1^{3/2} & \omega_1^{5/2} & \cdot & \cdot & \cdot & \omega_1^{n/2} \\ \omega_2^{1/2} & \omega_2^1 & \omega_2^{3/2} & \omega_2^{5/2} & \cdot & \cdot & \cdot & \omega_2^{n/2} \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ \omega_{m-1}^{1/2} & \omega_{m-1}^1 & \omega_{m-1}^{3/2} & \omega_{m-1}^{5/2} & \cdot & \cdot & \cdot & \omega_{m-1}^{n/2} \\ \omega_m^{1/2} & \omega_m^1 & \omega_m^{3/2} & \omega_m^{5/2} & \cdot & \cdot & \cdot & \omega_m^{n/2} \end{pmatrix} \begin{pmatrix} S_{1/2} \\ S_1 \\ S_{3/2} \\ S_{5/2} \\ \cdot \\ \cdot \\ \cdot \\ S_{n/2} \end{pmatrix} \quad (A1.14)$$

- 15 The residual signal (third term) depends on the mandrel conductivity but the examples considered in the report illustrate that this dependence is negligible due to very large conductivity of the mandrel. Similar approaches may be considered for the voltage measurements.

## CLAIMS

## CLAIMS

- 1 1. A method of determining a resistivity of an earth formation comprising:
  - 2 (a) conveying a resistivity measuring instrument having at least one
  - 3 transmitter and at least one receiver spaced apart from said at least one
  - 4 transmitter;
  - 5 (b) activating said at least one transmitter at a number  $m$  of frequencies
  - 6 having selected associated values  $(\omega_i, i = 1, m)$  and inducing signals in
  - 7 said at least one receiver, said induced signals indicative of said
  - 8 resistivity of said earth formation; and
  - 9 (c) applying a multifrequency focusing (MFF) to said induced signals to
  - 10 give a focused signal;
  - 11 wherein said associated values are selected to increase linear independence of
  - 12 vectors defined at least in part by said associated values and a number of terms
  - 13  $n$  of said MFF.
  - 14
- 1 2. The apparatus of claim 1 wherein said resistivity measuring instrument has a
  - 2 mandrel (housing) with a portion having a finite, non-zero conductivity and
  - 3 wherein said MFF accounts for said finite, non-zero conductivity;
  - 4
- 1 3. The method of claim 1 wherein said vectors are defined as
  - 2  $\vec{\omega}^{1/2}, \vec{\omega}^1, \vec{\omega}^{3/2}, \dots, \vec{\omega}^{n/2}$ , with
  - 3  $\vec{\omega} = [\omega_1, \omega_2, \dots, \omega_m]^T$ , where  $[\cdot]^T$  denotes a transpose.
  - 4
- 1 4. The method of claim 2 wherein said vectors are defined as
  - 2  $\vec{\omega}^1, \vec{\omega}^{3/2}, \dots, \vec{\omega}^{n/2}$ , with
  - 3  $\vec{\omega} = [\omega_1, \omega_2, \dots, \omega_m]^T$ , where  $[\cdot]^T$  denotes a transpose.
  - 4

- 1 5. The method of claim 1 further comprising selecting said associated values  
2 based at least in part on a singular value decomposition (SVD) of a matrix  
3 determined from said vectors.  
4
- 1 6. The method of claim 1 further comprising selecting said associated values and  
2 said number of terms of said MFF based at least in part on an error  
3 amplification of said MFF.  
4
- 1 7. The method of claim 1 further comprising selecting said associated values and  
2 said number of terms of said MFF based at least in part on an MFF voltage  
3 related to said MFF  
4
- 1 8. The method of claim 1 comprising selecting said associated values and said  
2 number of terms of said MFF based at least in part on an MFF focusing factor.  
3
- 1 9. The method of claim 1 further comprising determining a formation resistivity  
2 from said focused signal.  
3
- 1 10. The method of claim 2 wherein said resistivity measuring instrument is  
2 conveyed on a bottomhole assembly (BHA) into said borehole, said BHA  
3 having a device for extending said borehole, the method further comprising  
4 determining a distance to an interface based at least in part on said determined  
5 resistivity.  
6
- 1 11. The method of claim 10 further comprising altering a direction of drilling of  
2 said BHA based at least in part on said determined distance.  
3
- 1 12. The method of claim 2 wherein said resistivity measuring instrument is  
2 conveyed on a bottomhole assembly (BHA) into said borehole, said BHA  
3 having a device for extending said borehole, the method further comprising:  
4 (i) monitoring a change in said focused signal during continued drilling of  
5 said wellbore, and  
6 (ii) controlling said drilling based at least in part on said monitoring.  
7

- 1     13.     The method of claim 12 wherein controlling said drilling further comprises  
2             maintaining said BHA at a desired distance from an interface in said earth  
3             formation.  
4
- 1     14.     The method of claim 13 further comprising selecting said associated values  
2             and said number of terms of said MFF based at least in part on said desired  
3             distance.  
4
- 1     15.     The method of claim 1 further comprising using a plurality of bucking coils to  
2             substantially compensate for a direct field, at one of said frequencies, between  
3             said at least one transmitter and said at least one receiver.  
4
- 1     16.     An apparatus for determining a resistivity of an earth formation comprising:  
2             (a)     a resistivity measuring instrument conveyed in a borehole in said earth  
3             formation, said resistivity measuring instrument having:  
4                     (A)     a mandrel (housing),  
5                     (B)     at least one transmitter on said mandrel which operates at a  
6                     number  $m$  of frequencies having selected associated values ( $\omega_i$ ,  
7                      $i = 1, m$ ) and produces electromagnetic fields in said earth  
8                     formation, and  
9                     (C)     at least one receiver spaced apart from said at least one  
10                     transmitter which produce signals resulting from interaction of  
11                     said electromagnetic fields with said earth formation; and  
12             (b)     a processor which applies a multifrequency focusing (MFF) to said  
13             produced signals to give a focused signal;  
14             wherein said associated values are selected to increase linear independence of  
15             vectors defined by said associated values and a number of terms  $n$  of said  
16             MFF.  
17
- 1     17.     The apparatus of claim 16 wherein said mandrel comprises a portion having a  
2             finite non-zero conductivity and wherein said MFF accounts for said finite  
3             non-zero conductivity.  
4
- 1     18.     The apparatus of claim 16 wherein said vectors are defined as

2  $\vec{\omega}^{1/2}, \vec{\omega}^1, \vec{\omega}^{3/2}, \dots, \vec{\omega}^{n/2}$ , with

3  $\vec{\omega} = [\omega_1, \omega_2, \dots, \omega_m]^T$ , where  $[.]^T$  denotes a transpose.

4

1 19. The apparatus of claim 17 wherein said vectors are defined as

2  $\vec{\omega}^1, \vec{\omega}^{3/2}, \dots, \vec{\omega}^{n/2}$ , with

3  $\vec{\omega} = [\omega_1, \omega_2, \dots, \omega_m]^T$ , where  $[.]^T$  denotes a transpose.

4

1 20. The apparatus of claim 16 wherein said associated values are selected based at  
2 least in part on a singular value decomposition (SVD) of a matrix determined  
3 from said vectors.

4

1 21. The apparatus of claim 16 wherein said associated values and said number of  
2 terms of said MFF are selected based at least in part on an error amplification  
3 of said MFF.

4

1 22. The apparatus of claim 16 wherein said associated values and said number of  
2 terms of said MFF are selected based at least in part on an MFF voltage  
3 related to said MFF

4

1 23. The apparatus of claim 16 wherein said associated values and said number of  
2 terms of said MFF are selected based at least in part on an MFF focusing  
3 factor.

4

1 24. The apparatus of claim 16 wherein said processor is at a downhole location.

2

1 25. The apparatus of claim 16 wherein processor further determines a formation  
2 resistivity from said focused signal.

3


1 26. The apparatus of claim 17 further comprising a bottomhole assembly (BHA)  
2 carrying said resistivity measuring instrument into said borehole, said BHA  
3 having a device for extending said borehole, and wherein said processor




- 4 further determines a distance to an interface based at least in part on said  
5 determined resistivity.  
6
- 1 27. The apparatus of claim 26 further comprising a processor for controlling a  
2 direction of drilling of said BHA based at least in part on said determined  
3 distance.  
4
- 1 28. The apparatus of claim 26 wherein said processor controls a direction of  
2 drilling of said BHA based at least in part on said determined distance.  
3
- 1 29. The apparatus of claim 17 further comprising a bottomhole assembly (BHA)  
2 which:  
3 (i) conveys said resistivity measuring instrument into said borehole, and  
4 (ii) has a device for extending said borehole;  
5 wherein said processor monitors a change in said focused signal during  
6 continued drilling of said wellbore.  
7
- 1 30. The apparatus of claim 29 further comprising a processor which controls said  
2 drilling based at least in part on said monitoring.  
3
- 1 31. The apparatus of claim 29 wherein said processor controls said drilling based  
2 at least in part on said monitoring.  
3
- 1 32. The apparatus of claim 30 wherein said a processor maintains said BHA at a  
2 desired distance from an interface in said earth formation.  
3
- 1 33. The apparatus of claim 32 wherein said associated values and said number of  
2 terms of said MFF are selected based at least in part on said desired distance.  
3
- 1 34. The apparatus of claim 16 further comprising a plurality of bucking coils  
2 which substantially compensate for a direct field, at one of said frequencies,  
3 between said at least one transmitter and said at least one receiver.  
4


- 1 35. The apparatus of claim 16 wherein said at least one transmitter comprises a  
2 plurality of transmitters.  
3
- 1 36. The apparatus of claim 16 wherein said at least one receiver comprises a  
2 plurality of receivers.  
3
- 1 37. A method of estimating a resistivity of an earth formation comprising:  
2 (a) conveying a resistivity measuring tool conveyed into a borehole in  
3 the earth formation, the resistivity measuring tool having a mandrel  
4 (housing) with a finite, non-zero conductivity:  
5 (b) operating a transmitter on said resistivity measuring tool at a  
6 plurality of frequencies;  
7 (c) receiving signals at least one receiver on said resistivity measuring  
8 tool, said at least one receiver axially separated from said  
9 transmitter, said signals indicative of said resistivity of said earth  
10 formation; and  
11 (d) processing said received signals and estimating the resistivity of  
12 the earth formation, said processing taking into said account finite,  
13 non-zero conductivity of said mandrel.  
14
- 1 38. The method of claim 37, wherein processing said receive signals further  
2 comprises depicting said received signals using a Taylor expansion of  
3 frequency including a term  $\omega^{1/2}$  where  $\omega$  is an angular frequency.  
1
- 1 39. The method of claim 37, the results of said processing are substantially  
2 independent of a separation between said at least one receiver and said  
3 transmitter.  
4
- 1 40. The method of claim 37, wherein said processing further comprises:  
2 (i) determining a magnitude of said signals at each one of said  
3 plurality of frequencies;  
4 (ii) determining a relationship of said magnitudes with respect to  
5 frequency; and

- 6 (iii) calculating a skin effect corrected conductivity by calculating a  
7 value of said relationship which would obtain when said frequency  
8 is equal to zero.  
9
- 1 41. An apparatus for estimating a resistivity of an earth formation, said apparatus  
2 comprising:  
3 a) a mandrel (housing) on a measurement Bwhile-drilling (MWD) tool  
4 said mandrel having a finite non-zero conductivity having a finite,  
5 non-zero conductivity;  
6 b) a transmitter and at least one receiver spaced apart from said  
7 transmitter on said MWD tool, said transmitter operating at a plurality  
8 of frequencies and said at least one receiver receiving signals  
9 indicative of said resistivity; and  
10 c) a processor which processes said received signals and estimates said  
11 resistivity, said determination accounting for said finite non-zero  
12 conductivity.  
13
- 1 42. The apparatus of claim 41, wherein said determination is independent of a  
2 spacing of said at least one receiver from said transmitter.  
3
- 1 43. The apparatus of claim 41, wherein said processor performs a Taylor Series  
2 expansion in terms of frequency of said received signals. said expansion  
3 including a term in  $\omega^{1/2}$ , where  $\omega$  is an angular frequency..

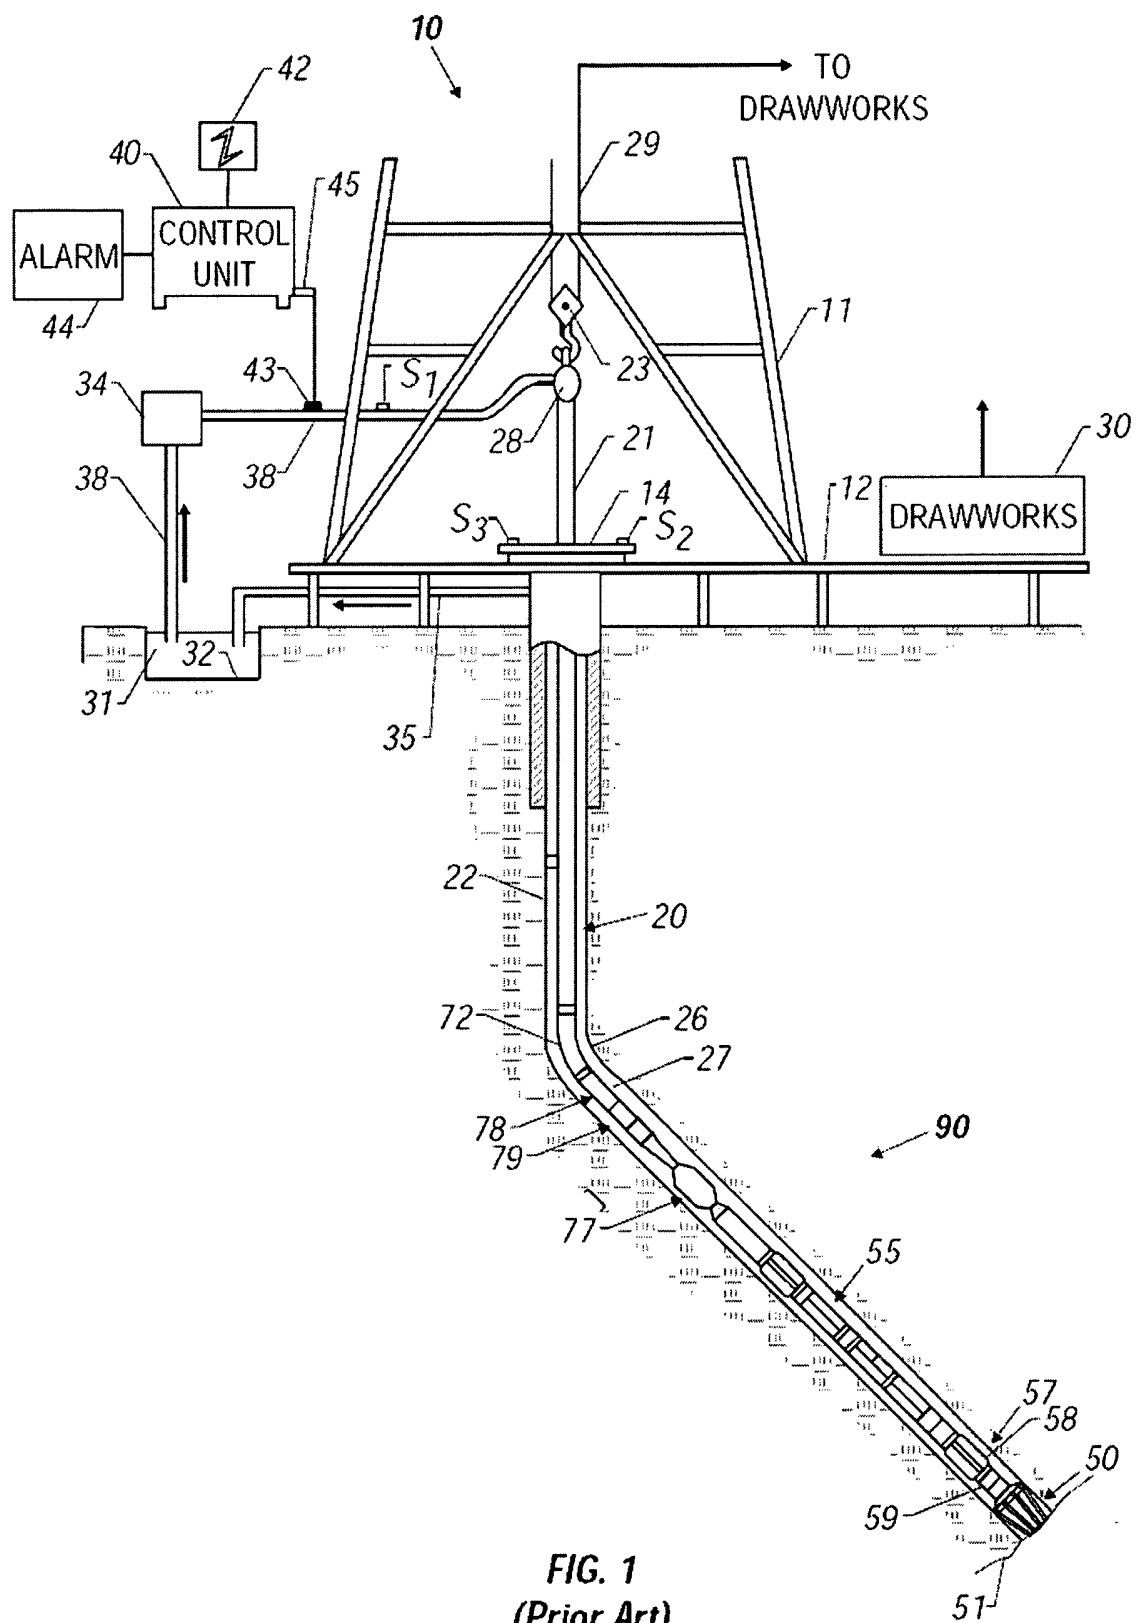

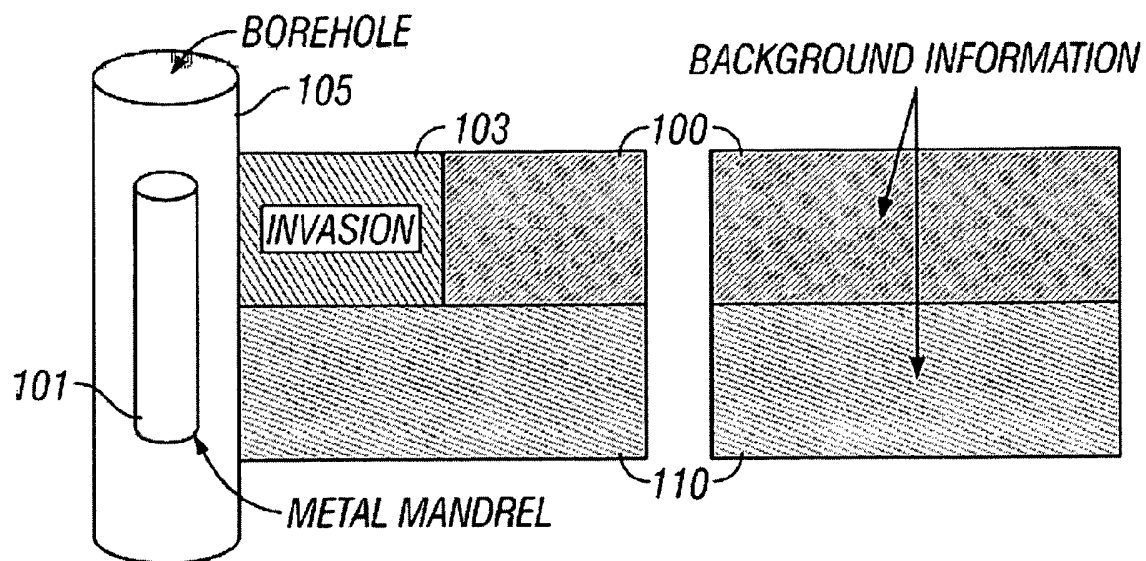

**FIG. 1A** Prior art

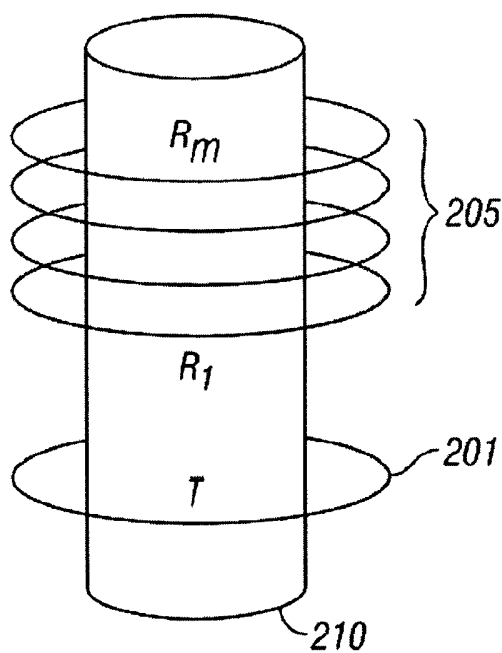

**FIG. 2** Prior art

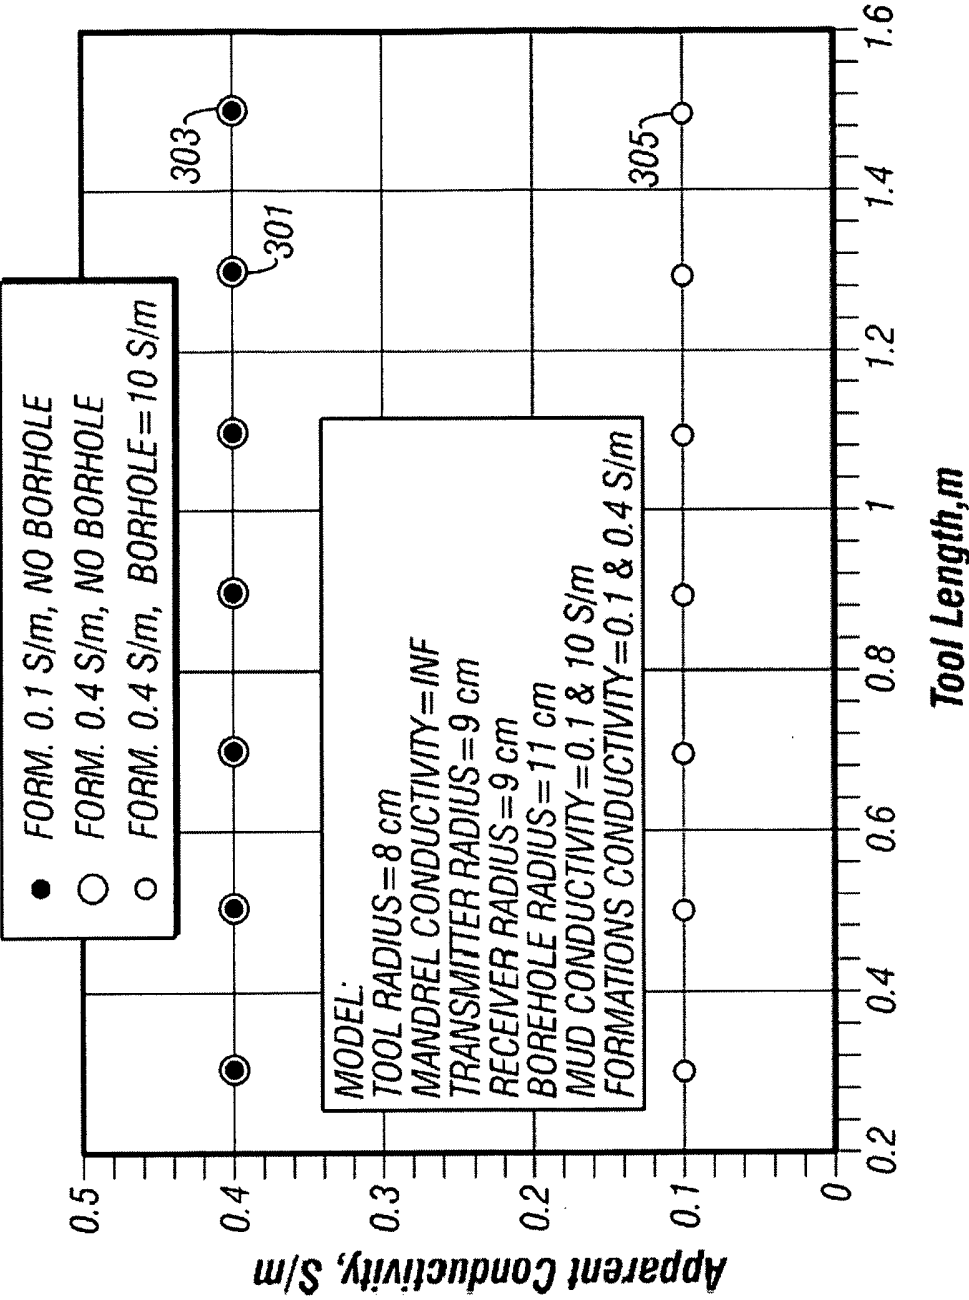


FIG. 3

Prior art

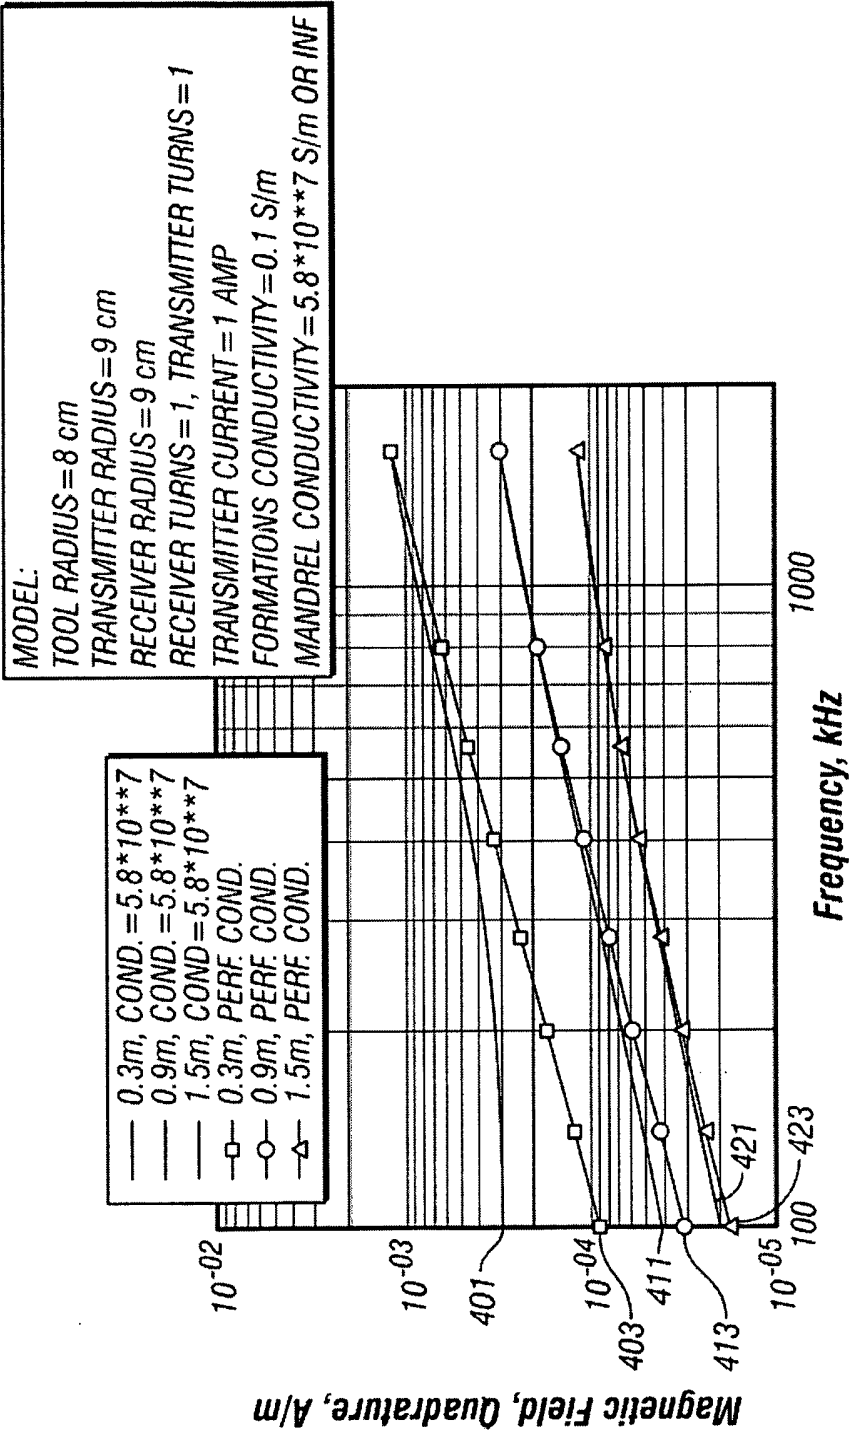


FIG. 4

Prior art

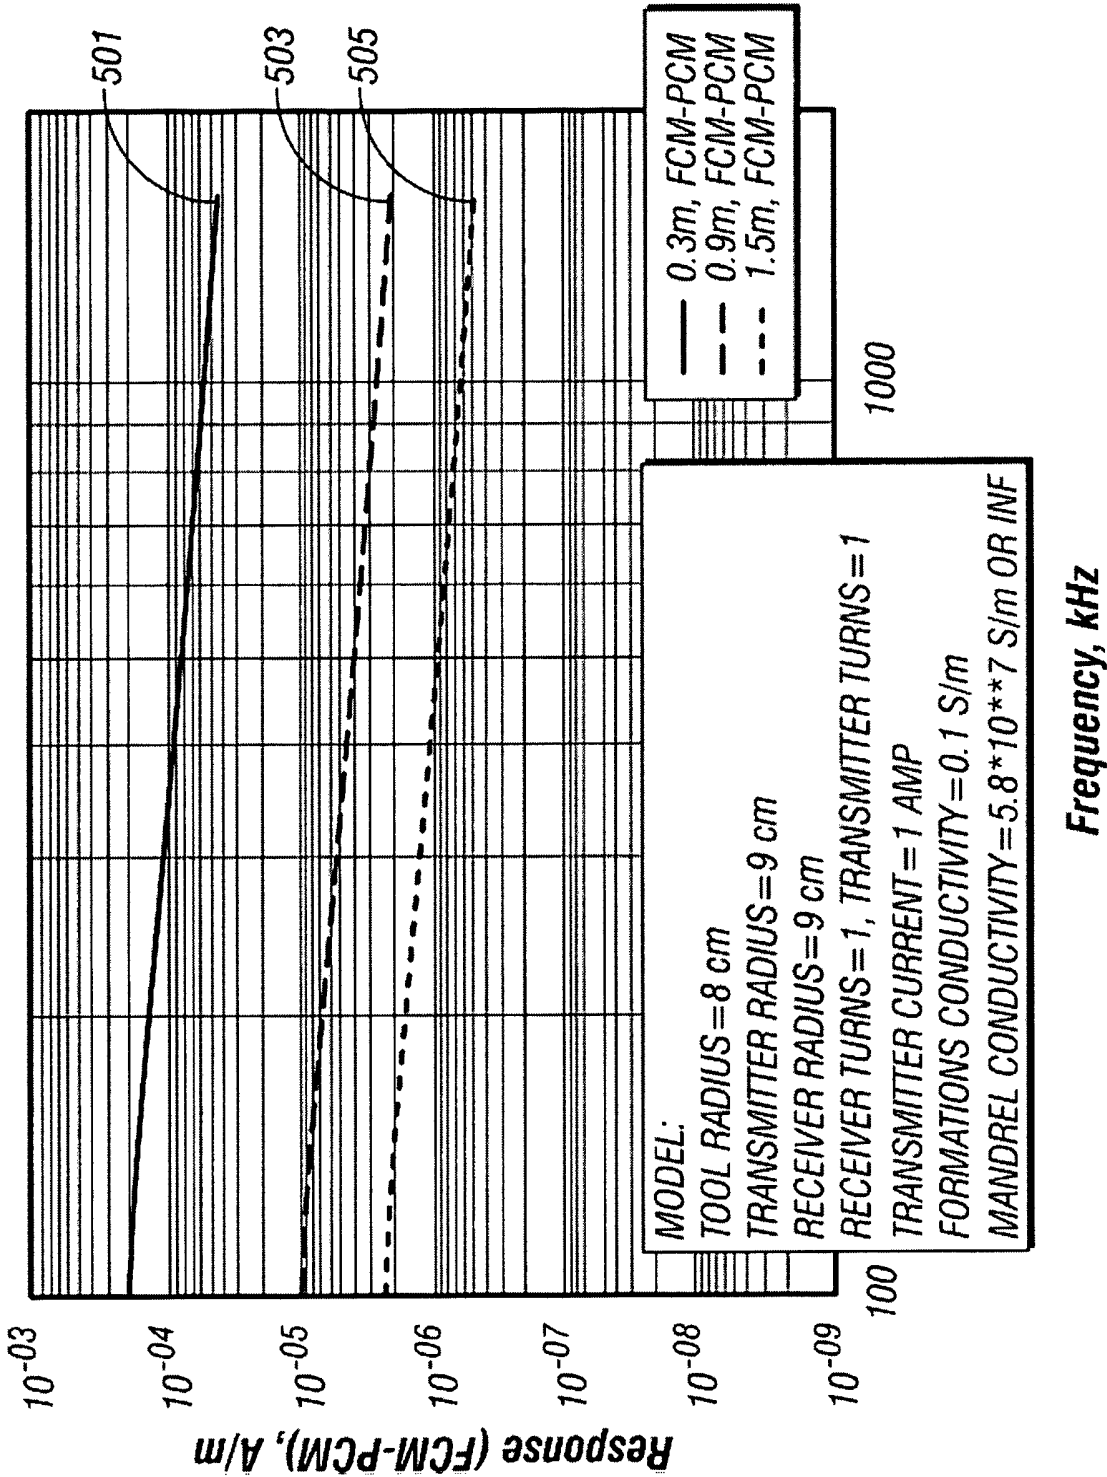


FIG. 5 Prior art



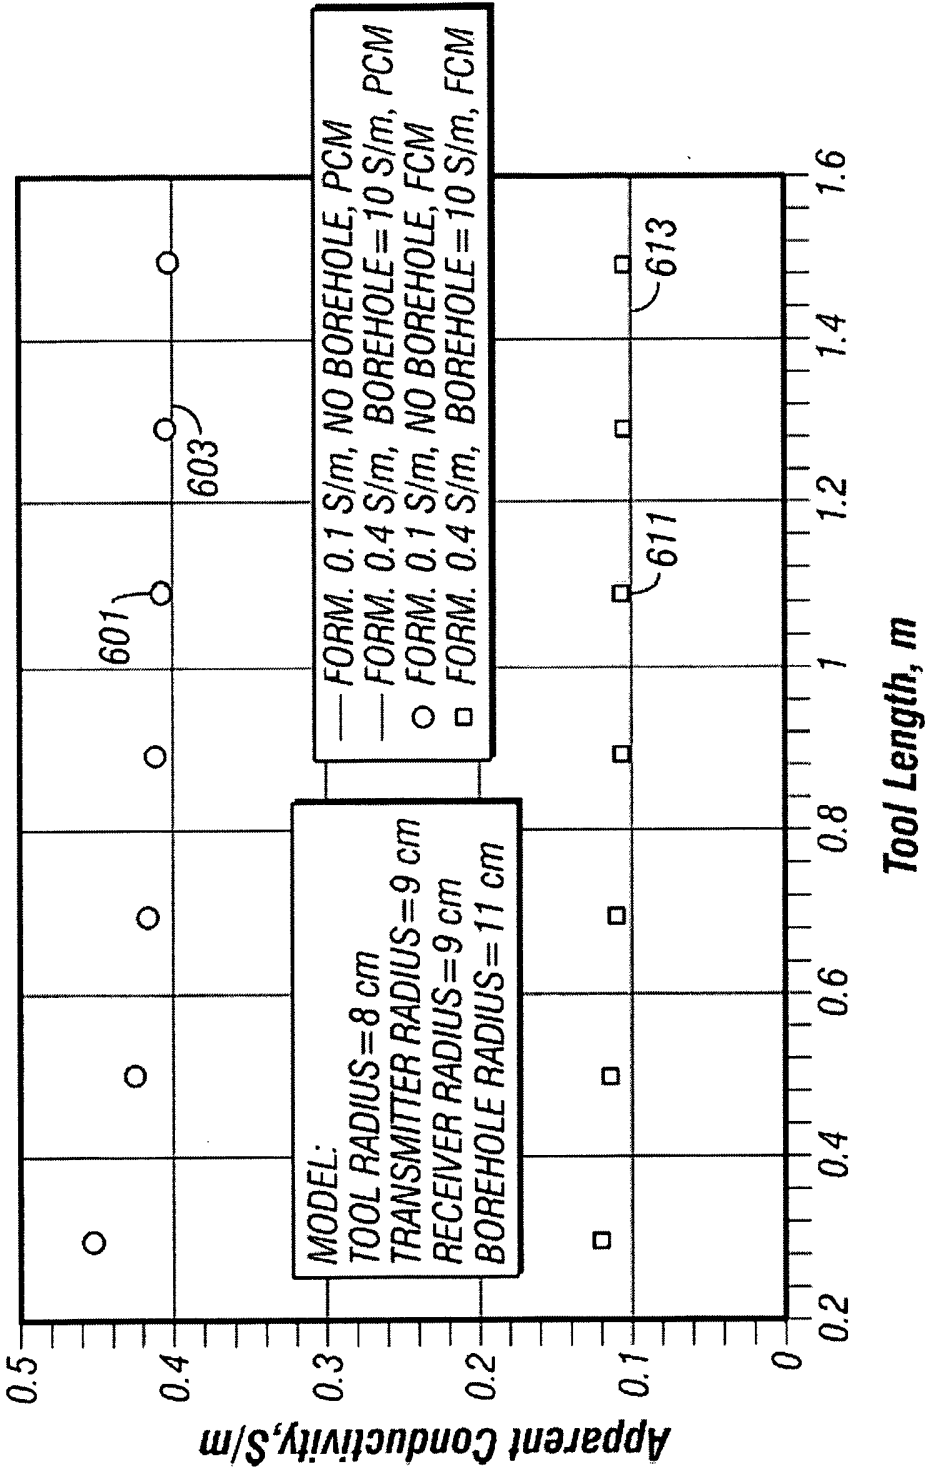


FIG. 6

Prior art

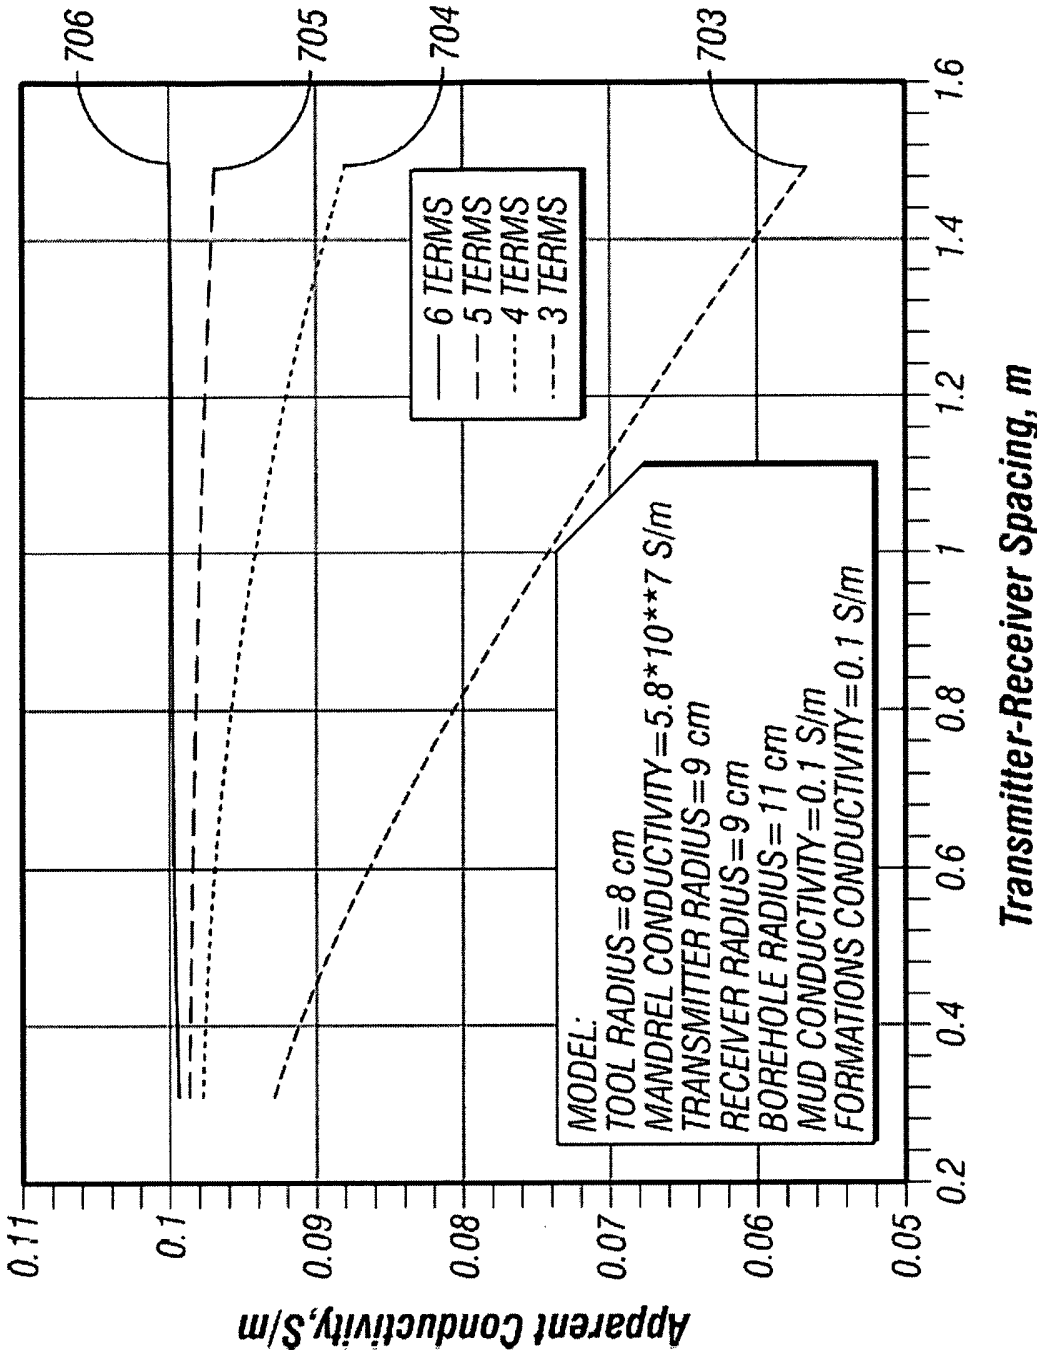


FIG. 7 Prior art

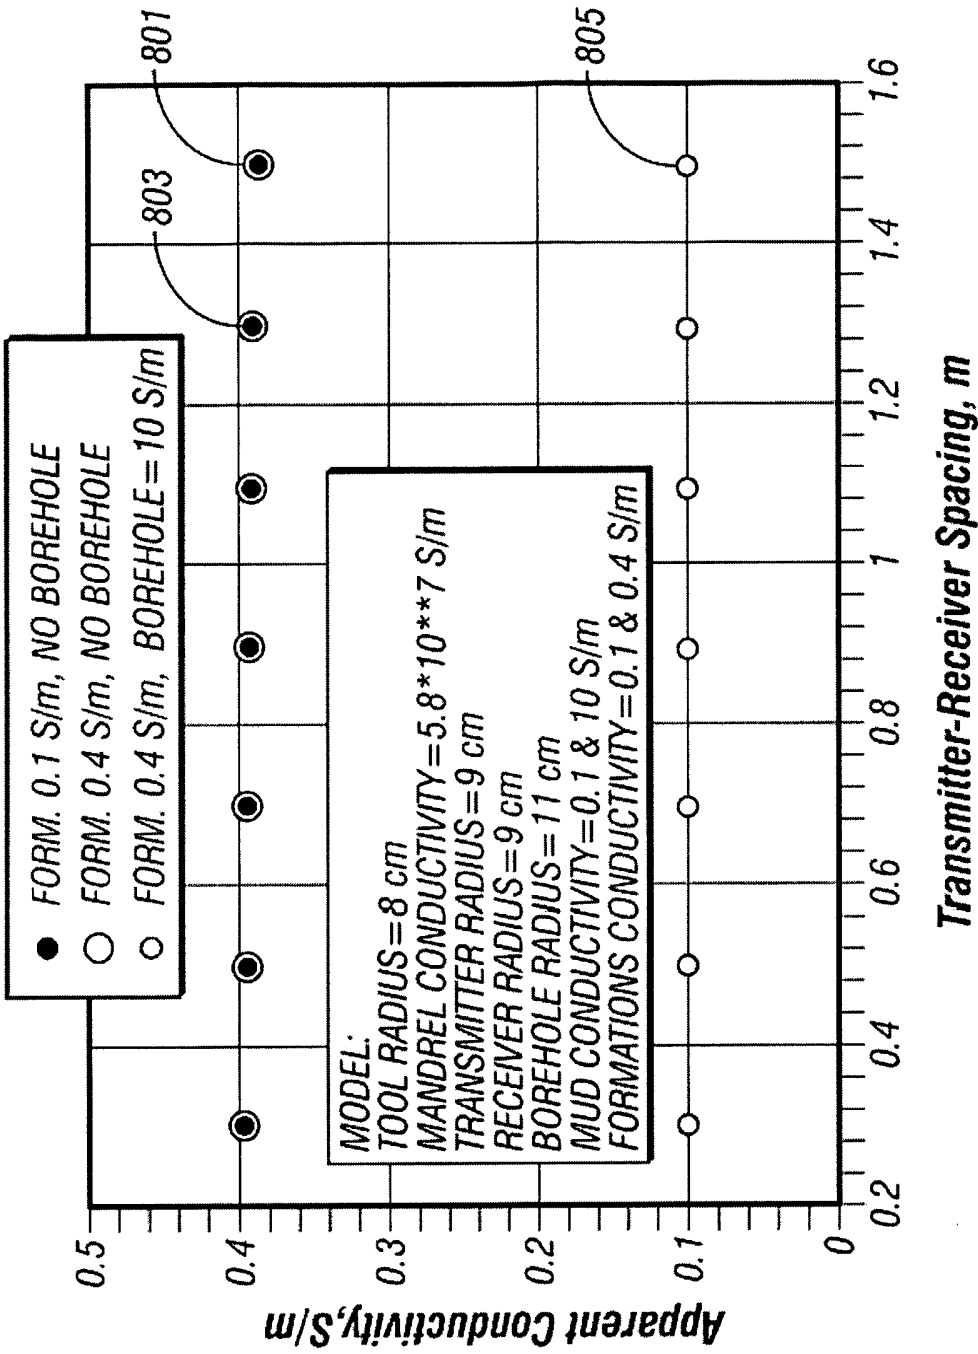


FIG. 8

Prior art

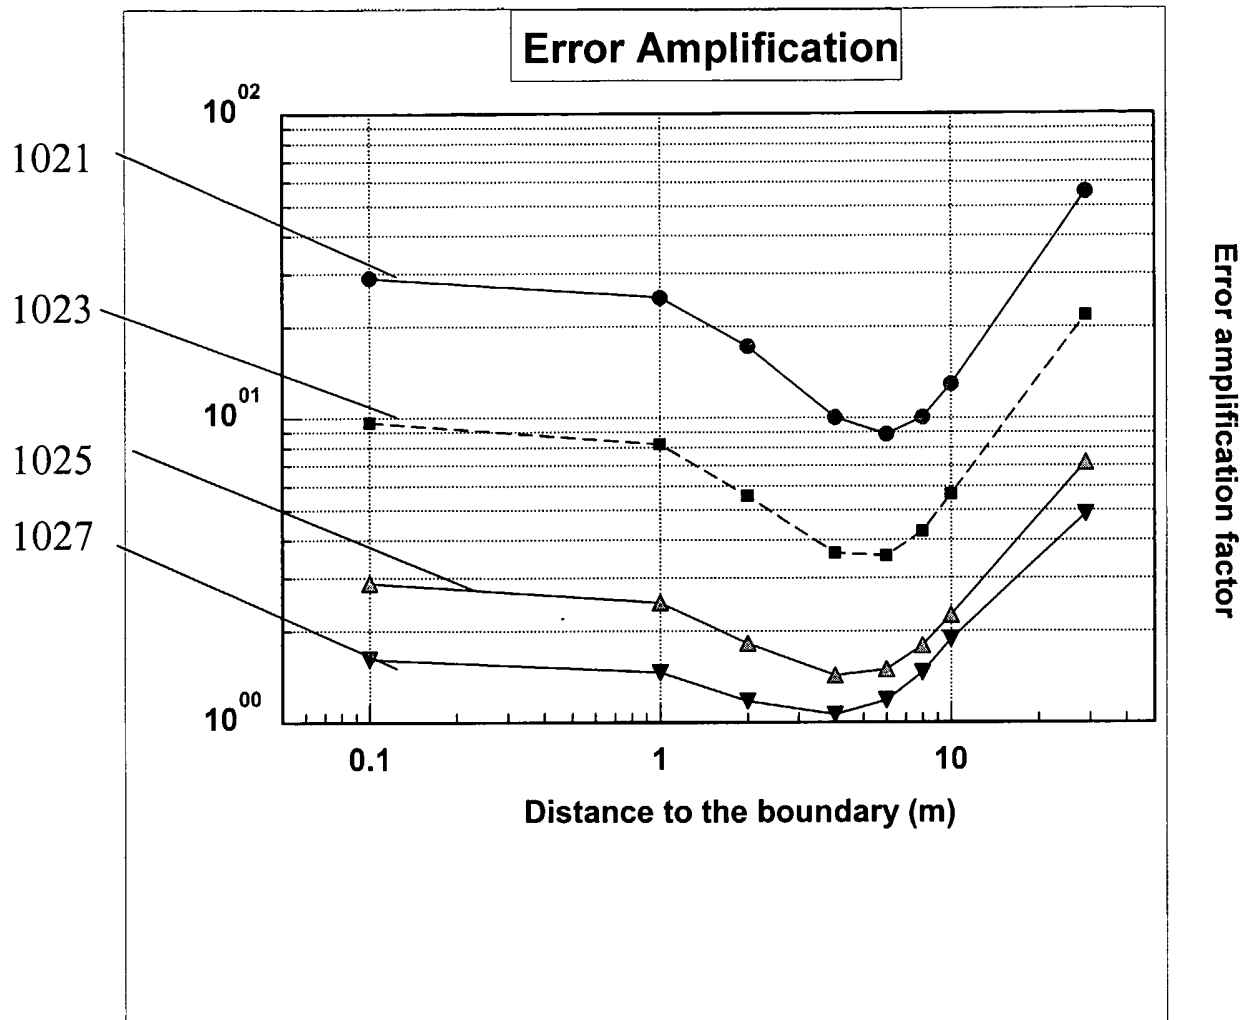
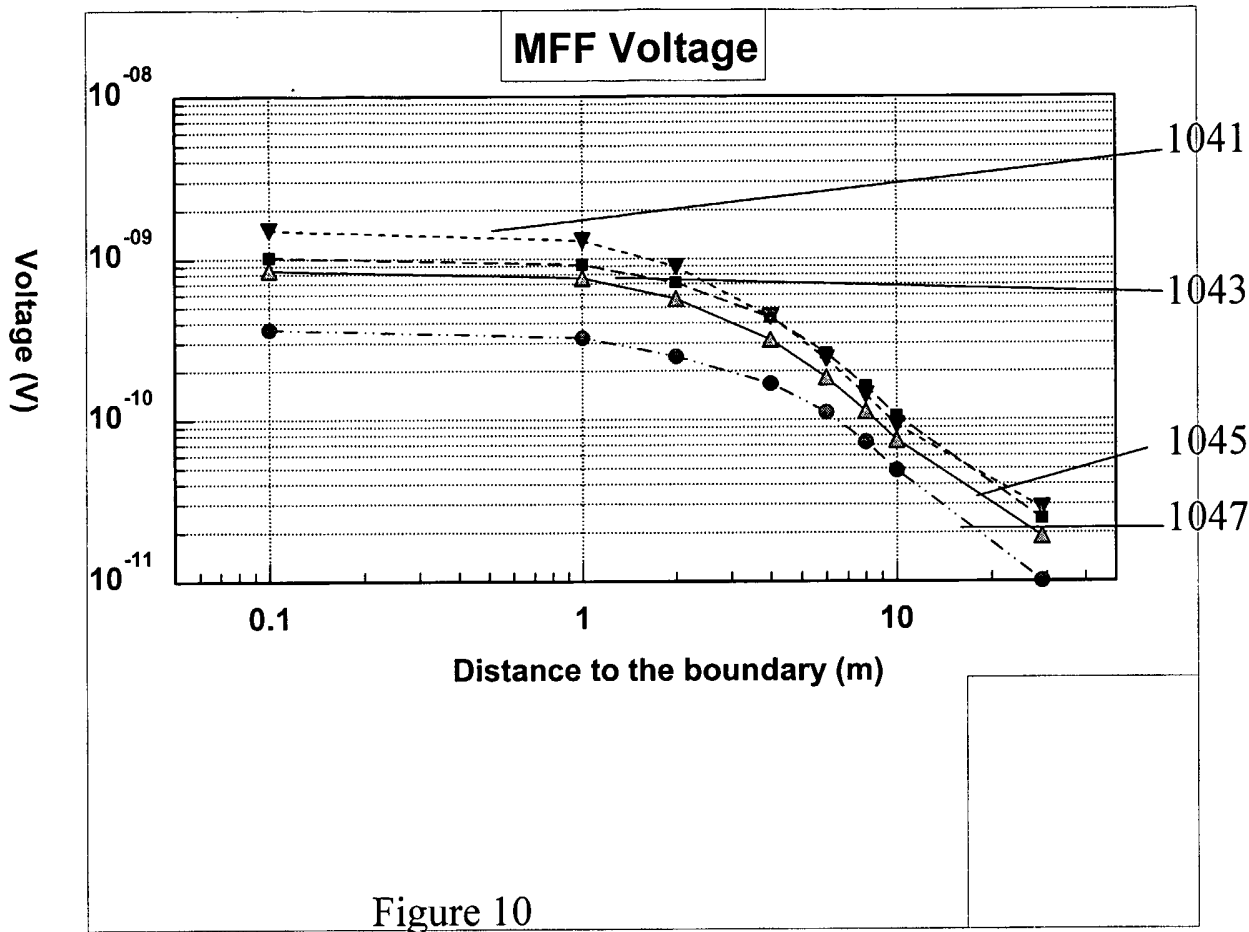
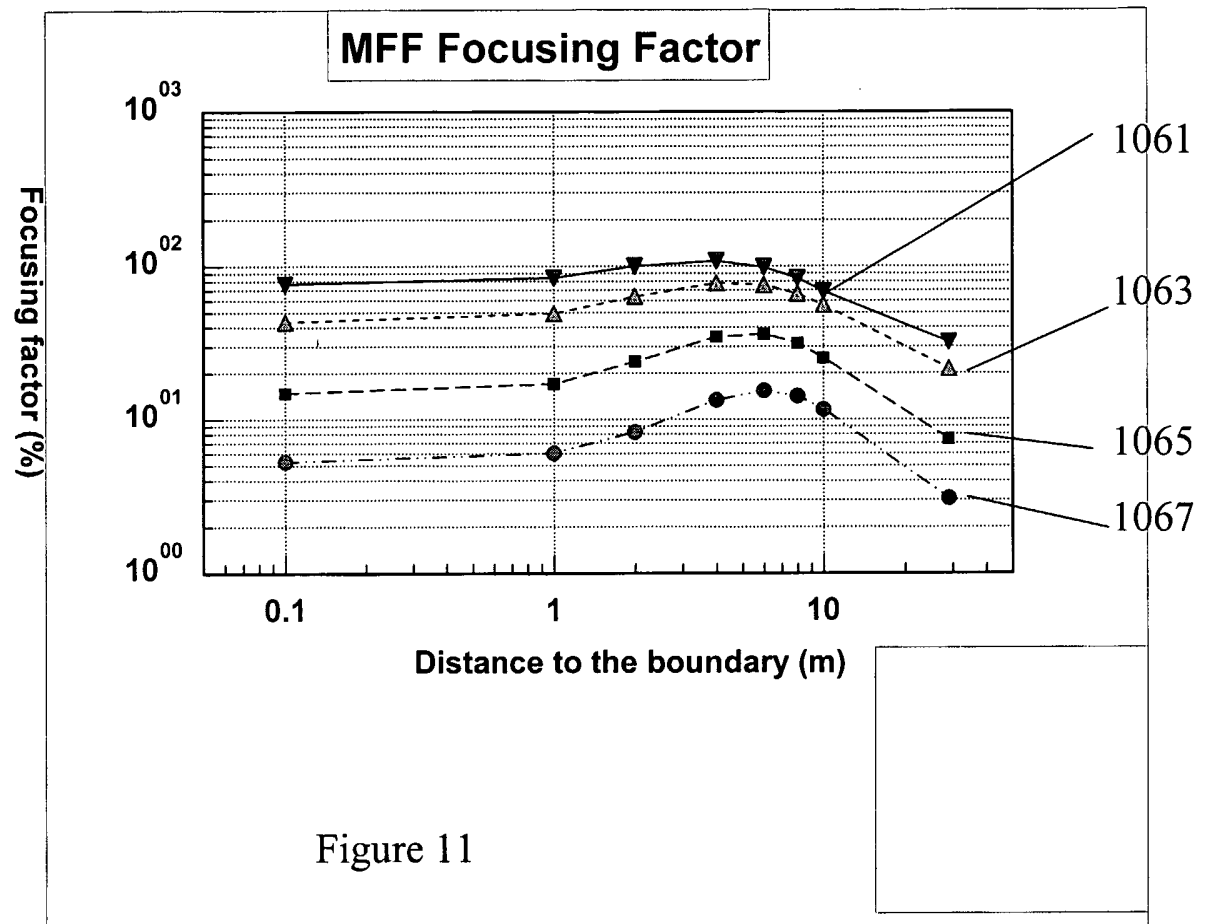


Figure 09





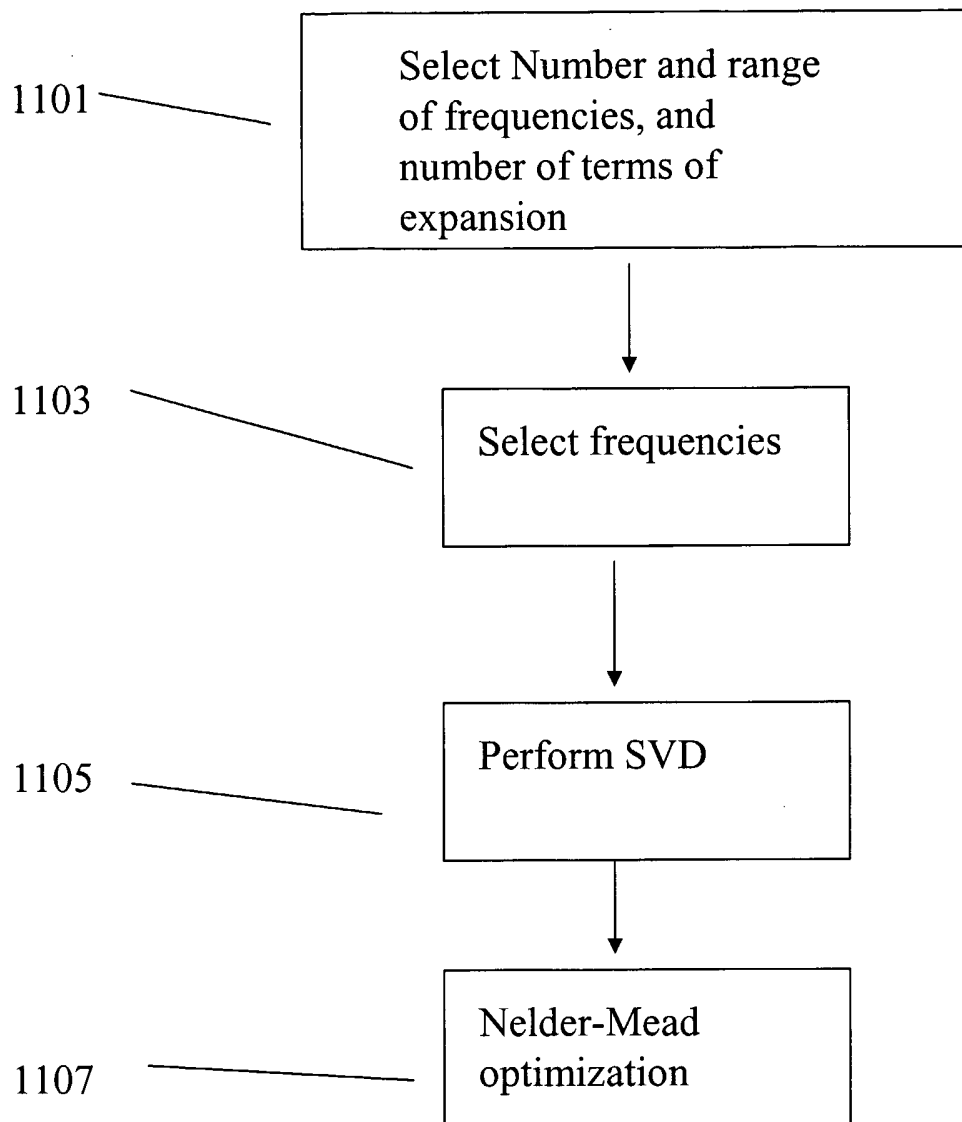


Figure 12

**ANY REFERENCE TO FIGURE 13 SHALL BE CONSIDERED NON-EXISTENT**



# INTERNATIONAL SEARCH REPORT

national application No

PCT/US2005/029404

## A. CLASSIFICATION OF SUBJECT MATTER

G01V3/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                                                        | Relevant to claim No. |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | US 2004/098201 A1 (TABAROVSKY LEONTY)<br>20 May 2004 (2004-05-20)<br>page 1, paragraph 10<br>page 3, paragraphs 29,37,38<br>page 4, paragraphs 38,39,41,43<br>claims 1,6-8,13; figures 1-8                                                                                                | 37-43                 |
| A         | YU L.; RABINOVICH M.; TABAROVSKY L.; WANG T.: "The Reduction of Near Zone Effects on the Multi-component Induction Logging Tool"<br>SOCIETY OF PETROLEUM ENGINEERS, SPE,<br>5 October 2003 (2003-10-05), - 8 October 2003 (2003-10-08) pages 1-6, XP002362435<br>Denver, USA<br>pages 2,3 | 1-43                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

12 January 2006

Date of mailing of the international search report

10/02/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schneiderbauer, K

# INTERNATIONAL SEARCH REPORT

national application No  
PCT/US2005/029404

| C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT |                                                                                                                                                                                                                                                                                                                                            |                       |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Category*                                            | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                                                                                                         | Relevant to claim No. |
| A                                                    | US 2003/155925 A1 (TABAROVSKY LEONTY ABRAHAM ET AL) 21 August 2003 (2003-08-21) paragraphs '0017!, '0018!, '0068!, '0069! claim 1                                                                                                                                                                                                          | 1-43                  |
| A                                                    | <p>-----</p> <p>TABAROVSKY L.; EPOV M.; RABINOVICH M.: "Measuring Formation Anisotropy Using Multifrequency Processing of Transverse Induction Measurements" SOCIETY OF PETROLEUM ENGINEERS, SPE, 30 September 2001 (2001-09-30), - 3 October 2001 (2001-10-03) pages 1-7, XP002362436 Richardson, USA the whole document</p> <p>-----</p> | 1-43                  |

## INTERNATIONAL SEARCH REPORT

international application No.  
PCT/US2005/029404

### Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers allsearchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

#### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-36

Method of (apparatus for) conveying a measuring instrument with transmitter(s) and receivers in a borehole and operating the transmitter(s)/receivers at a plurality of frequencies. Applying a MFF to the measured data and selecting frequencies to increase independence of certain vectors.

---

2. claims: 37-43

Method of (apparatus for) conveying a measuring instrument with transmitter(s) and receivers in a borehole and operating the transmitter(s)/receivers at a plurality of frequencies. Processing the received signals taking into account the finite non-zero conductivity of the mandrel.

---

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2005/029404

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)                                                | Publication<br>date                                  |
|-------------------------------------------|---------------------|---------------------------------------------------------------------------|------------------------------------------------------|
| US 2004098201 A1                          | 20-05-2004          | AU 2003290897 A1<br>CA 2506170 A1<br>WO 2004046507 A2<br>US 2005030059 A1 | 15-06-2004<br>03-06-2004<br>03-06-2004<br>10-02-2005 |
| US 2003155925 A1                          | 21-08-2003          | NONE                                                                      |                                                      |