

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/021052 A1

(51) International Patent Classification⁷: **A61L 9/12**,
A01M 1/20

(21) International Application Number:
PCT/CH2004/000526

(22) International Filing Date: 20 August 2004 (20.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0320461.7 2 September 2003 (02.09.2003) GB

(71) Applicant (for all designated States except US): **GIVAUDAN SA [CH/CH]**; Chemin de la Parfumerie 5, CH-1214 Vernier (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BROWN, Colin** [GB/GB]; 135 Binfield Road, Bracknell Berkshire RG42 2BD (GB). **NAISH, Guy Edward** [GB/GB]; 28 Mullein

Road, Bicester Oxfordshire OX26 3WE (GB). **GOHIL, Kishen** [GB/GB]; 21 Consfield Av., New Malden Surrey KT3 6HB (GB).


(74) Agent: **MCSTEA, John, Anthony**; Ueberlandstrasse 138, CH-8600 Duebendorf (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, ZW).

[Continued on next page]

(54) Title: VOLATILE LIQUID DISSEMINATING DEVICE

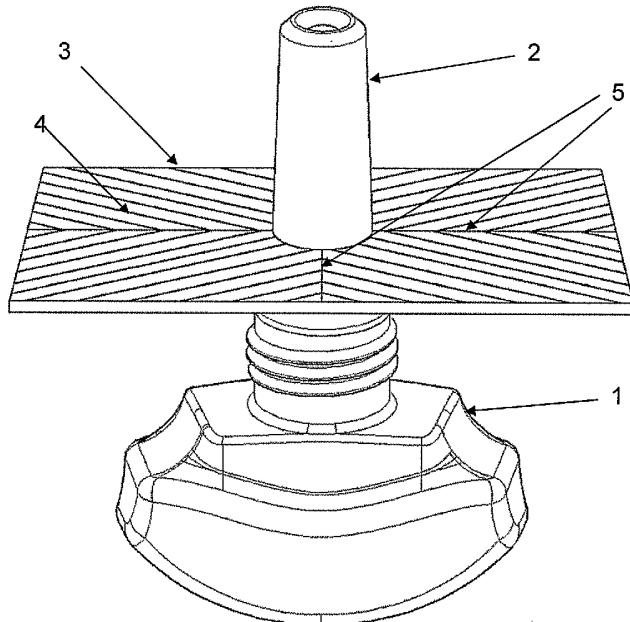

(57) **Abstract:** An apparatus for disseminating a volatile liquid, such as a fragrance, into an atmosphere from a reservoir (1), dissemination being achieved by means of a transfer member (2) in contact with the liquid and a capillary member in liquid transfer contact with the transfer member. The capillary member comprises an evaporating surface (3) bearing primary capillary channels, at least some of these primary capillary channels being intersected by at least one secondary capillary channel, the secondary capillary channel being substantially smaller in cross-sectional area than that of the primary channels, such that liquid will flow in both primary and secondary channels.

WO 2005/021052 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

VOLATILE LIQUID DISSEMINATING DEVICE

This invention relates to capillary members for use in apparatus adapted to disseminate volatile liquids into an atmosphere.

5

A common method of disseminating volatile liquids, such as fragrances and insecticides, into an atmosphere is by evaporation from a porous transfer member, such as a fibrous wick, which is in contact with a reservoir of volatile liquid. This system has drawbacks, such as the low surface area for evaporation and the tendency for fractionation of liquids 10 that are mixtures. It has been proposed to fit to such a transfer member a capillary member, in the form of a sheet that extends essentially perpendicularly from the transfer member and that comprises channels of capillary dimensions, to which volatile liquid can pass and travel along for evaporation. This sheet generally contacts the transfer member by means of a hole in the sheet through which the transfer member protrudes and within which it fits snugly, at 15 least some of the capillary channels being in contact with the transfer member, such that liquid can transfer from the member to the sheet ("liquid transfer contact").

A further type of capillary member is described in US 4,913,350. In this case, a capillary member is inserted directly into the liquid without the need for a transfer member. Such a 20 capillary member can have a narrow part for insertion into a reservoir, leading to a wider evaporation surface, the member typically having a shape resembling a small tennis racquet. This capillary member does not suffer from the fractionation effects of porous wicks.

The problem with currently-known capillary members is that the available patterns and 25 configurations have proved ineffective at ensuring efficient evaporation. For example, in the case of a sheet, individual channels spreading radially from the transfer member become further and further apart, and only a small portion of the possible evaporative surface is utilised. A suggestion for overcoming this has been a cross-hatched surface, that is, a series of parallel channels is crossed by another series of parallel channels. While in theory this 30 allows liquid to flow to the entire surface, practically this is not the case, as it has been found that the volatile liquids show a marked reluctance not only to flow into a channel ("secondary channel") crossing the channel they are in, but also to cross the channel intersection and continue along the original ("primary") channel. In the case of a capillary

member comprising an evaporating surface on which is a series of capillary channels that is inserted directly into a liquid reservoir, only those channels in contact with the liquid will make up the evaporative surface, which will thus be limited by the amount of capillary rise up these elements.

5

It has now been surprisingly found that this problem can be at least substantially overcome and evaporation from a substantial portion of the surface area of a capillary member can be assured by a simple and inexpensive construction. The invention therefore provides an apparatus adapted to disseminate a volatile liquid into an atmosphere from a reservoir,

- 10 10 dissemination being achieved by means of a transfer member in contact with the liquid and a capillary member in liquid transfer contact with the transfer member, the capillary member comprising an evaporating surface bearing primary capillary channels, at least some of these primary capillary channels being intersected by at least one secondary capillary channel, the secondary capillary channel being substantially smaller in cross-
- 15 15 sectional area than that of the primary channels, such that liquid will flow in both primary and secondary channels.

The invention additionally provides a method of disseminating a volatile liquid to an atmosphere by evaporation from an evaporating surface, comprising conveying the liquid

- 20 20 from a reservoir by means of a transfer means to the evaporating surface in liquid transfer contact therewith, the evaporating surface comprising primary capillary channels, at least some of these primary capillary channels being intersected by at least one secondary capillary channel, the secondary capillary channel being substantially smaller in cross-sectional area than that of the primary channels, such that liquid will flow in both primary
- 25 25 and secondary channels.

With such a structure, it has been surprisingly found that the liquid not only flows across the intersection readily to continue along the channel, but it also flows into the intersecting channel. Thus, the provision of appropriately-placed and -sized secondary channels ensures

- 30 30 that substantially the entire evaporating surface may be used.

The evaporating surface is a surface whose length and breadth are appreciably larger than its thickness, which surface bears capillary channels. The shape of the surface is not

significant, and it can be chosen from any suitable decorative or practical shape. The capillary channels may be on one or both sides of the surface. The surface and its capillary channels may be provided by any convenient means, for example, by injection moulding or engraving.

The transfer member may be any such member suitable for transferring volatile liquid from a reservoir to an evaporating surface. For example, it may be a porous wick of the type well known to the art, and it may be made of any suitable material, such as cellulose, graphite or ceramic material. In such a case, the capillary evaporating surface extends substantially

- 10 perpendicularly from the wick, and it may be attached thereto by any convenient means. For example, the wick may be supplied with an annular groove into which the capillary member fits. It may also comprise a slot, which mates with a matching tab in the capillary member. A further possibility is a transfer member that is frusto-conical, that is, it tapers slightly as it extends away from the reservoir. This allows for easy mounting of a capillary sheet that has
- 15 a mounting hole intermediate in diameter between the maximum and minimum diameters of the transfer means. The skilled person will, by the exercise of the ordinary skill of the art, readily be able to devise further variants lying within the scope of the invention.

Alternatively, the transfer member may comprise capillary channels in the manner of US

- 20 Patent No.4,913,350. In this case, the evaporating surface may simply comprise a broadening of the transfer member at its upper end, often resulting, as previously mentioned, in a shape similar to that of a small tennis racquet.

An alternative capillary transfer member may be provided by a gap of capillary proportions

- 25 formed at the junction of two flat surfaces. This leads to the capillary channels of the evaporating surface.

By "capillary channels" is meant channels open to the atmosphere and of such dimensions that capillary flow will occur within them. Provided this happens, the channels can be any

- 30 suitable shape and dimension, and suitable dimensions for any given application may readily be determined by simple experiment. Typical primary capillary channels are of "V" shaped cross section and have dimensions of 0.1-0.5mm width at the top, 0.1-0.5mm depth with the "V" angle of the channel being 10-25 degrees. Preferred primary channels are

approximately 0.2mm wide at the open top, approximately 0.4mm vertically deep and have an angle of approximately 24 degrees.

At least some of the primary channels are intersected by at least one secondary channel.

5 Preferably all primary channels are intersected by the at least one secondary channel, more preferably by a multiplicity of secondary channels. The object is to provide capillary channels covering a large surface area, and the precise pattern or arrangement is not critical.

Although it is preferred that liquid transfer contact be between the transfer member and the 10 primary channels (from which most evaporation takes place), this is not necessary, and it is possible to use at least one secondary channel to transfer the liquid from the transfer member to the primary channels.

The secondary channel or channels is or are of substantially smaller cross-sectional area 15 than that of the main channels. Because of the varying natures of volatile liquids, what exactly constitutes "substantially smaller" will differ, sometimes considerably, from case to case. However, given the concept that flow across the entire surface is a result of the use of two different channel sizes, the skilled person can readily determine for each liquid and each dimension of main channel what constitutes "substantially smaller" in respect of the 20 intersecting channel. The secondary channels are generally (and preferably) substantially narrower than the primary channels. As a guide (and without limiting the invention in any way), typical dimensions for the release of a fragrance are, for a secondary channel, a depth of 0.05mm. and a cross-sectional area of less than 90%, preferably less than 50%, of that of a primary channel. It is not necessary that the secondary channel be as deep as the primary 25 channel, but it should naturally be sufficiently deep that liquid can flow into it. Preferably, both primary and secondary channels are of equal depth. However, it is possible and permissible that the secondary channels be deeper than the primary channels.

As hereinabove mentioned, the particular pattern of channels is not critically important and 30 a wide variety is possible. For example, a pattern of primary channels may extend radially from the contact with the transfer member and the secondary channels may form a series of concentric circles, extending out to the edge of the sheet. Another possibility is a series of

parallel primary channels intersected by at least one other series of parallel secondary channels.

In a very simple embodiment, a series of primary channels may be parallel grooves and the 5 secondary channel may be at least one thin slit cut into or completely through the evaporating surface. In a further embodiment of this type, the evaporating surface may comprise a number of sections that fit together, the boundaries where they meet providing the desired slit or slits. In such a case, the primary channel pattern may be optimised. For example, the sheet may be in four equal portions that fit tightly into a holding plate, and the 10 primary channels in each portion may extend in parallel fashion away from the transfer member, the assembled sheet having a "herringbone" appearance.

In a further embodiment of the invention, the primary capillary channels may extend to the end of the sheet, and there be blocked by a transverse barrier, such as a wall, placed across 15 the open channel ends, so as to define a secondary capillary channel that allows liquid to flow between channels.

The capillary sheets of this invention may be made of any suitable material that is not affected by the volatile liquid over the desired lifetime of the sheet. The channels therein 20 may be provided by any convenient means, for example, by injection molding or by engraving.

The invention is further described with reference to the drawings, which depict preferred embodiments and which are not limiting on the scope of the invention.

25

Figure 1 is a perspective view of an embodiment of the invention.

Figure 2 is a perspective, exploded view of an evaporating surface for use in the embodiment of Figure 1.

30

Figure 3 is a longitudinal cross-section of a further embodiment of the invention.

Figure 4 is a longitudinal cross-section of a further embodiment of the invention, with additional detail of one aspect.

In Figure 1, a reservoir 1 contains volatile liquid, to be disseminated into an atmosphere.

- 5 This liquid leaves the reservoir by means of a porous wick 2. Fitted around this porous wick is an evaporation surface 3, bearing on this surface series of capillary channels 4. The evaporation surface 3 is actually made up of four plates, which fit tightly together, meeting at joins 5, which are relatively narrow in comparison with the capillary channels 4.
- 10 A better comprehension of the evaporating surface can be gained by studying Figure 2. Here can be seen the four quarter-plates 6 that make up the evaporation surface. These fit into a holding plate 7, which has a centrally-located hole 8, to permit mounting on the wick 2. Those parts of the quarter-plates 6 that contact the wick 2 are shaped so that they fit sufficiently tightly around the wick such that the capillary channels on the quarter-plates are
- 15 in liquid transfer contact with the wick. In this embodiment, the capillary channels of the individual quarter-plates are parallel to each other, the central radius of each quarter-plate being radial to the wick. The four thus form a "herringbone" pattern. The joints 5 between the quarter-plates 6 form secondary capillary channels, and they convey liquid to primary channels that are not in direct contact with the wick. In addition, the gaps formed where the
- 20 edges of the holding plate and the quarter-plates also act as secondary channels and convey liquid. The liquid can therefore be disseminated over the entire evaporating surface.

The embodiment shown in Figure 3 comprises a reservoir 9 containing a volatile liquid 10.

Into a neck 11 of the reservoir is fitted a stopper 12. Through this stopper goes an

- 25 evaporating surface and transfer member, generally indicated as 13. The transfer member 14, through which liquid is drawn from the reservoir is a flat capillary member 14 having capillary channels 15. The transfer member extends into a flat planar evaporating surface 16. This evaporating surface not only includes the continuation of the capillary channels 15 of the transfer member 14, but also additional capillary channels 17 parallel to those
- 30 channels. In this case, the evaporating surface is square (although it can be any desired functional or decorative shape), and it additionally bears diagonally-extending secondary channels 18 of smaller size than the capillary channels 15 and 17, which allows the liquid to flow into all the capillary channels, including those not in direct connection with the liquid.

In the embodiment of Figure 4, liquid is transferred from a liquid transfer member by means of a secondary channel. A reservoir 19 is fitted with a cap 20 that has a planar closure 21 extending across the open neck. Through a hole in this closure fits a cylindrical wick 22, 5 which leads to a planar diffusion member 23. The wick sits on the bottom of the reservoir, such that the planar diffusion member does not rest on the planar closure, but is supported slightly above it, to define a secondary capillary channel 26 between the two. The diameter of the planar diffusion member 23 is less than that of the internal diameter of the cap 20, leaving an annular space around the edge of the diffusion member. Into this is fitted a 10 curved plate 24 that bears primary capillary channels 25 on its outwardly-facing face.

In operation, a liquid moves from the reservoir via the wick 22 to the secondary capillary channel 26. It moves along this channel until it reaches the ends of the primary capillary channels 25. It then moves up these channels and evaporates into the atmosphere.

Claims:

1. An apparatus adapted to disseminate a volatile liquid into an atmosphere from a reservoir, dissemination being achieved by means of a transfer member in contact with the liquid and a capillary member in liquid transfer contact with the transfer member, the capillary member comprising an evaporating surface bearing primary capillary channels, at least some of these primary capillary channels being intersected by at least one secondary capillary channel, the secondary capillary channel being substantially smaller in cross-sectional area than that of the primary channels, such that liquid will flow in both primary and secondary channels.
10
2. An apparatus according to claim 1, in which the transfer member is a substantially cylindrical porous wick and the evaporating surface is a sheet extending substantially perpendicularly from the wick, the sheet bearing capillary channels on at least one surface.
15
3. An apparatus according to claim 1, in which the transfer member is a capillary member that extends from the liquid to the evaporating surface.
- 20 4. An apparatus according to claim 3, in which the transfer member and the evaporating surface are formed in one piece.
5. An apparatus according to claim 1, in which the transfer member is a gap of capillary proportions formed at the junction of two flat surfaces.
25
6. An apparatus according to claim 1, in which the evaporating surface comprises a number of sections bearing primary capillary channels, the boundaries where they meet providing the secondary channel or channels.
- 30 7. An apparatus according to claim 6, in which the primary capillary channels in each section are parallel and extend away from the transfer member, the assembled sheet having a "herringbone" pattern.

8. An apparatus according to claim 1, in which the primary capillary channels extend to the end of the sheet and are there blocked by a transverse barrier placed across the open channel ends, so as to define a secondary capillary channel that allows liquid to flow between channels.

5


9. An apparatus according to claim 1, in which at least one secondary channel transfers the liquid from the transfer member to the primary channels.

10. A method of disseminating a volatile liquid to an atmosphere by evaporation from an evaporating surface, comprising conveying the liquid from a reservoir by means of a transfer means to the evaporating surface in liquid transfer contact therewith, the evaporating surface comprising primary capillary channels, at least some of these primary capillary channels being intersected by at least one secondary capillary channel, the secondary capillary channel being substantially smaller in cross-sectional area than that of the primary channels, such that liquid will flow in both primary and secondary channels.

15


1/4

Fig.1

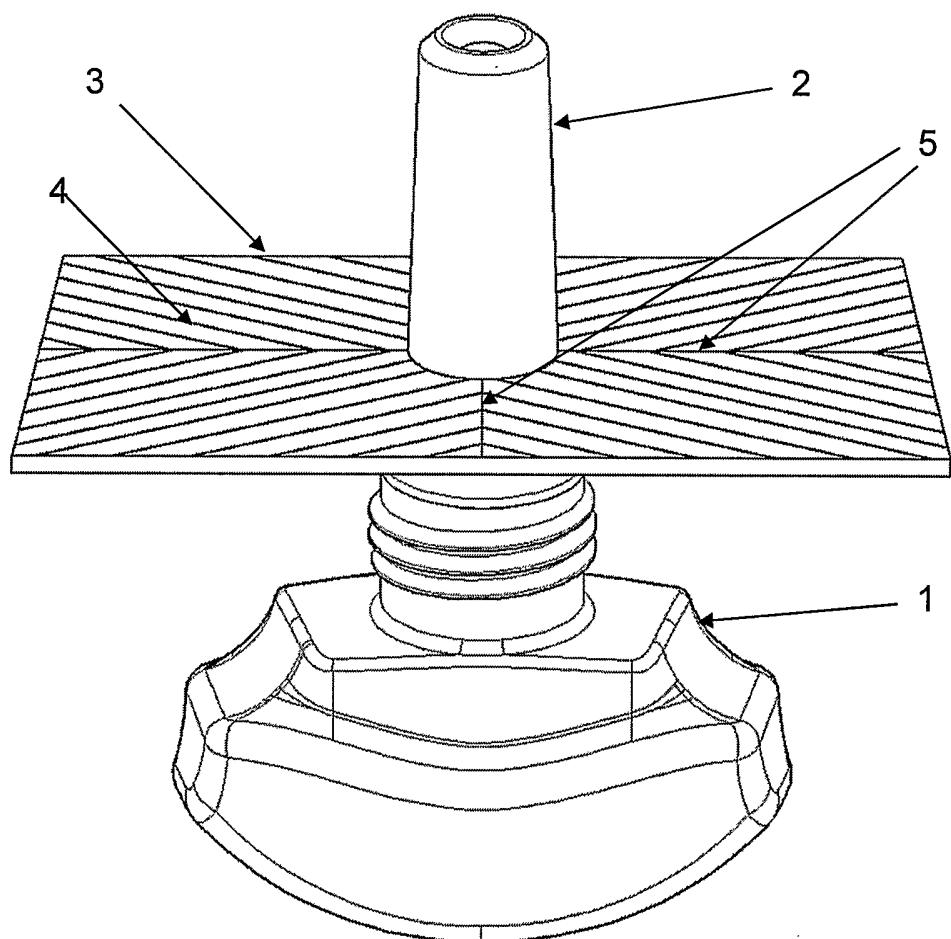


2/4

Fig.2

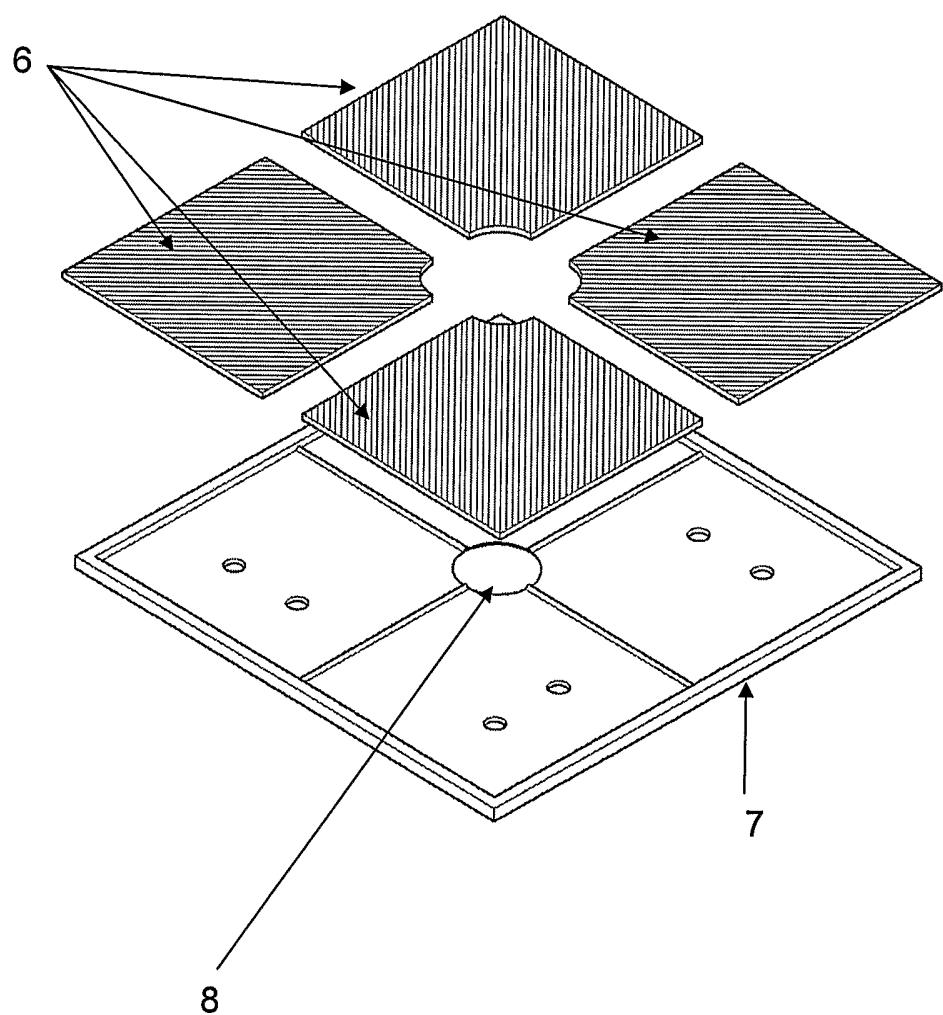


3/4

Fig.3

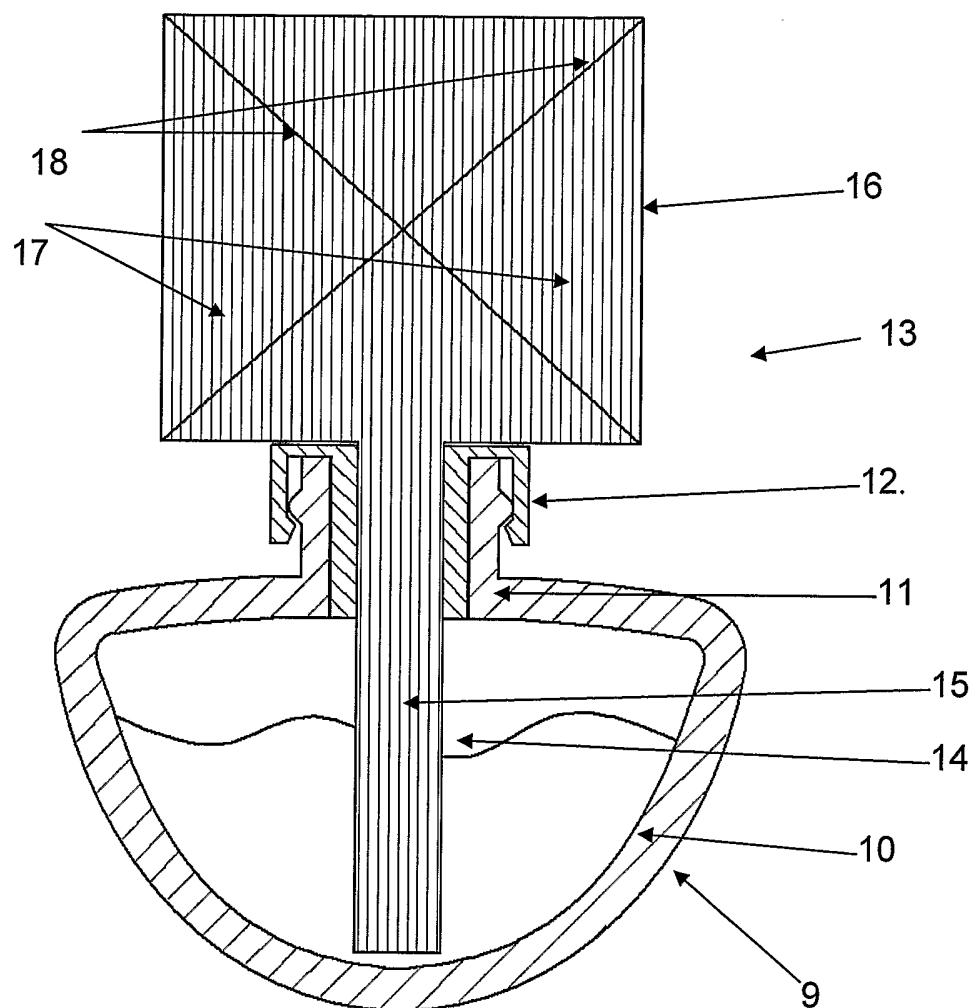

4/4

Fig.4

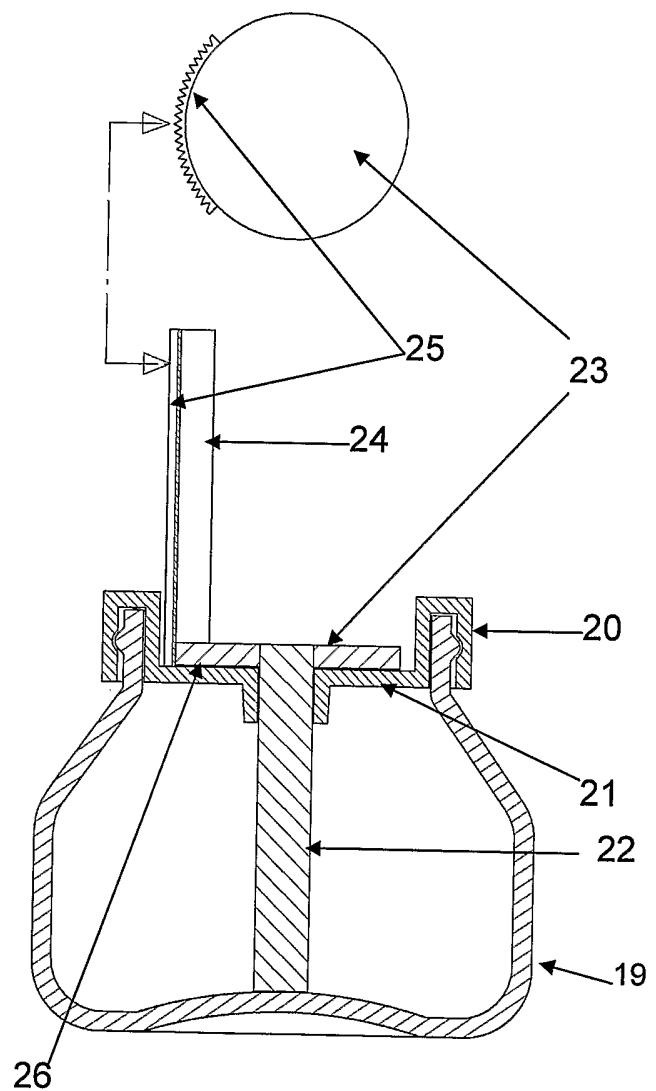

INTERNATIONAL SEARCH REPORT

International Application No

/CH2004/000526

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A61L9/12 A01M1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 A61L A01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/34302 A (JONES STUART MICHAEL RUMAN ; RECKTT BENKISER UK LTD (GB)) 2 May 2002 (2002-05-02)	1,3,4,6, 10
Y	page 2, line 19 - page 4, line 3 page 5, line 16 - line 20 page 8, line 7 - line 20; figure 2	5
P,X	WO 2004/032620 A (JOHNSON & SON INC S C) 22 April 2004 (2004-04-22) the whole document	1,3,10
X	WO 01/23008 A (GIVAUDAN SA ; GOHIL KISHEN (GB); HART GERALD LESLIE (GB); NAISH GUY ED) 5 April 2001 (2001-04-05) page 8, line 5 - line 16 page 10, line 29 - page 11, line 5; figure 3	1-4,10
	----- ----- -----	-/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority, claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 October 2004

Date of mailing of the international search report

20/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marti, P

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/CH2004/000526

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 99/03514 A (JOHNSON & SON INC S C) 28 January 1999 (1999-01-28) page 4, line 11 - line 14 page 4, line 22 - line 27 page 6, line 1 - line 3; figure 2 -----	5
A	FR 2 522 270 A (BERGER PRODUITS) 2 September 1983 (1983-09-02) the whole document -----	1-10
A	EP 0 501 601 A (RECKITT & COLMAN INC) 2 September 1992 (1992-09-02) the whole document -----	1,5,10
A	WO 98/16262 A (JOHNSON & SON INC S C) 23 April 1998 (1998-04-23) the whole document -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/CH2004/000526

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0234302	A	02-05-2002	AU BR CA EP WO GB US	9577301 A 0114841 A 2426220 A1 1328299 A1 0234302 A1 2370225 A ,B 2004060997 A1	06-05-2002 16-09-2003 02-05-2002 23-07-2003 02-05-2002 26-06-2002 01-04-2004
WO 2004032620	A	22-04-2004	US WO	2004065750 A1 2004032620 A1	08-04-2004 22-04-2004
WO 0123008	A	05-04-2001	EP AT AU AU AU BR CA CA DE DE WO EP EP JP JP SG US US	1088562 A1 242014 T 748785 B2 5355500 A 6699000 A 0004489 A 2321352 A1 2339777 A1 60003134 D1 60003134 T2 0123008 A1 1088561 A1 1133323 A1 2001162156 A 2003510133 T 87165 A1 2004164181 A1 6708897 B1	04-04-2001 15-06-2003 13-06-2002 05-04-2001 30-04-2001 19-06-2001 29-03-2001 02-09-2002 10-07-2003 08-04-2004 05-04-2001 04-04-2001 19-09-2001 19-06-2001 18-03-2003 19-03-2002 26-08-2004 23-03-2004
WO 9903514	A	28-01-1999	US AT AU BR CA CN DE DE EP JP NZ WO	5875968 A 236662 T 8500698 A 9810908 A 2295652 A1 1264311 T 69813238 D1 69813238 T2 1001817 A1 2001510077 T 502177 A 9903514 A1	02-03-1999 15-04-2003 10-02-1999 08-08-2000 28-01-1999 23-08-2000 15-05-2003 06-11-2003 24-05-2000 31-07-2001 29-06-2001 28-01-1999
FR 2522270	A	02-09-1983	FR FR	2522270 A1 2539031 A2	02-09-1983 13-07-1984
EP 0501601	A	02-09-1992	US AT AU AU BR CA DE DE DK EP ES IE	5121881 A 104155 T 638621 B2 9007391 A 9200012 A 2058747 A1 69200099 D1 69200099 T2 501601 T3 0501601 A1 2051144 T3 914561 A1	16-06-1992 15-04-1994 01-07-1993 09-07-1992 08-09-1992 05-07-1992 19-05-1994 28-07-1994 12-09-1994 02-09-1992 01-06-1994 15-07-1992

INTERNATIONAL SEARCH REPORT

Information on patent family members

ational Application No

, /CH2004/000526

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 0501601	A	MX	9200023 A1	01-07-1992
		NZ	241195 A	26-01-1994
		ZA	9110194 A	28-10-1992
WO 9816262	A	23-04-1998	AU	4898597 A
			WO	9816262 A1