



(51) International Patent Classification:

F23Q 2/16 (2006.01) F23Q 2/28 (2006.01)

(21) International Application Number:

PCT/EP2016/080851

(22) International Filing Date:

13 December 2016 (13.12.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **SOCIÉTÉ BIC** [FR/FR]; 14, rue Jeanne d'Asnières, 92110 Clichy (FR).

(72) Inventors: **MUSTE - HERRERA, Jordi**; Av. Catalunya n° 25B, 1°-4, 43002 Tarragona (ES). **ALTES -SABATE, Josep**; Pl. Garcia Lorca n° 7, 1°-A, 43006 Tarragona (ES). **GONZALVO - TARRAGO, Eloi**; Av. Roma n° 20, 6°-G, 43005 Tarragona (ES).

(74) Agent: **CABINET PLASSERAUD**; 66 rue de la Chaussée d'Antin, 75440 Paris Cedex 09 (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,

KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLAME PRODUCING ASSEMBLY AND METHOD FOR MANUFACTURING SUCH A FLAME PRODUCING ASSEMBLY

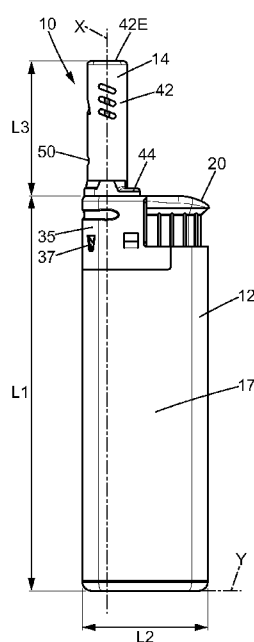


FIG. 1

(57) Abstract: A flame producing assembly comprising a pocket lighter (12) and a sub-unit assembly (14) comprising an extended wand (42), a rigid support (44) and an helical spring (46), the pocket lighter (12) being connected to the sub-unit assembly (14), the pocket lighter (12) comprising a piezoelectric ignition device (18), the rigid support (44) being located inside the extended wand (42), the rigid support (44) having an longitudinal inner opening (64), the extended wand (42) being electrically coupled to the piezoelectric ignition device (18), wherein the pocket lighter (12) is connected directly to the sub-unit assembly (14) and wherein the helical spring (46) extends along the longitudinal inner opening (64).

**FLAME PRODUCING ASSEMBLY AND METHOD FOR MANUFACTURING
SUCH A FLAME PRODUCING ASSEMBLY**

FIELD OF THE DISCLOSURE

5 The invention relates to a flame producing assembly and more particularly a utility lighter in which the flame is directed downwards. Such a flame producing assembly can be used for example to ignite candles, barbecue grills, fireplaces or campfires.
10 Another aspect of the invention is a method for manufacturing such a flame producing assembly.

BACKGROUND OF THE DISCLOSURE

 In order to light candles, a utility lighter is directed downwards, contrary to a light for lighting a
15 cigarette for instance, in which the flame is directed upwards. So, to ignite a candle (or other such for example a barbecue grill) while keeping the fingers and especially the thumb of the user away from the flame, the utility lighter must have its flame away
20 from the activation button. Therefore, it is already known to use utility lighters provided with an extended wand at the end of which the flame emanates. Patent document EP0446162B1 discloses such a utility lighter. A utility lighter as already disclosed has several
25 components located inside the extended wand in order to ignite the flame, that leads to a complexity of the assembly during the manufacturing. Therefore, there is a need to provide a utility lighter which is easier to manufacture.

30 **SUMMARY OF THE DISCLOSURE**

 According to the invention, a flame producing

assembly is designed in such a way that it is easy to manufacture and that the flame is ignited away from the finger to a user. To this end, the flame producing assembly according to the invention comprises a pocket
5 lighter and a sub-unit assembly comprising an extended wand, a rigid support and an helical spring, the pocket lighter being connected to the sub-unit assembly, the pocket lighter comprising a piezoelectric ignition device, the rigid support being located inside the
10 extended wand, the rigid support having an longitudinal inner opening, the extended wand being electrically coupled to the piezoelectric ignition device, the pocket lighter being connected directly to the sub-unit assembly, and the helical spring extending along the
15 longitudinal inner opening. Such a configuration of the components of the flame producing assembly has the advantage to be easily assembled to each other.

In various embodiments of the invention, one and/or the other of the following features may be
20 incorporated in the flame producing assembly of the invention, alone or in mutual combination:

- the helical spring extends along the entire length of the longitudinal inner opening, which has the advantage to facilitate the fabrication of a utility
25 lighter;

- the helical spring has a gas duct function, allowing a reduction in the number of elements required to provide a utility lighter;

- the pocket lighter comprises a reservoir and the
30 helical spring is in fluid communication with the reservoir, the gas being released from the reservoir

can thus pass through the helical spring;

- the helical spring comprises a material having electrical properties allowing the conveyance of the electric charge produced by the piezoelectric ignition
5 device, the helical spring having therefore an electrical conduction function. Such a feature allows preventing the use of any electrical wiring;

- the helical spring is electrically coupled to the piezoelectric ignition device, which allows the
10 helical being an electrical conductor;

- the rigid support comprises a protrusion and the extended wand comprises a recess, the recess being adapted to cooperate with the protrusion, such a cooperation allowing a good holding of the rigid
15 support inside the extended wand;

- the helical spring has a length comprised between 5mm and 120mm and an outer diameter comprised between 0,5mm and 2mm, the helical is therefore long enough to pass through the rigid support;

- the helical spring comprises a first end portion and a second end portion, the second end portion being a diffuser, an additional diffuser being thus not
20 necessary;

- the rigid support extends along a longitudinal
25 axis between a connecting end and a free end, wherein the extended wand extends along the longitudinal axis between a connecting end and a free end, wherein the helical spring has a first end portion and a second end portion, the second end portion being a diffuser
30 protruding among the free end of the rigid support toward the free end of the extended wand along the

longitudinal axis, such an arrangement providing a favorable space to ignite the flammable gas;

- the helical spring has a pitch comprised between 0,1mm and 0,6mm;

5 - the first end portion of the helical spring has a pitch comprised between 0,2 mm and 0,6 mm, the first end portion is thus well dimensioned to fulfill sufficient deformation for a proper electrical contact with the top of jet;

10 - the second end portion of the helical spring has a pitch comprised between 0,2 mm and 0,6 mm, the second end portion is thus well dimensioned to fulfill a diffuser feature;

 - at least a portion of the helical spring being
15 located in the longitudinal inner opening has a pitch smaller than the pitch of the top portion, to an extent that it facilitates the insertion of the helical spring in the rigid support;

 - the sub-unit assembly is rigid, which makes it
20 easier the assembly the snap-fit assembly between the sub-unit assembly and the pocket lighter;

 - the sub-unit assembly is snap-fitted to the pocket lighter, thereby allowing a large-scale production.

25 Another object of the present invention is a method for manufacturing a flame producing assembly, the flame producing assembly comprising a pocket lighter and sub-unit assembly, the sub-unit assembly being snap-fitted to the pocket lighter. A snap-fit
30 assembly of the utility lighter has the advantage to be easily implemented and faster than the assemblies

already known.

Furthermore, the sub-unit assembly comprises an extended wand and a rigid support, and the extended wand and the rigid support are snap-fitted together.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

Other characteristics and advantages of the invention will readily appear from the following description of one embodiment, provided as non-limitative examples, in reference to the accompanying
10 drawings.

Figure 1 is a lateral view of a utility lighter, comprising a sub-unit assembly and a pocket lighter, according to a first embodiment of the invention.

Figure 2 is a perspective view of the utility
15 lighter of figure 1.

Figure 3 is a cross-sectional view of the utility lighter according to the first embodiment of the invention, the utility lighter being not actuated.

Figure 4 is a cross-sectional view of the utility
20 lighter according to the first embodiment of the invention, the utility lighter being actuated.

Figure 5 is a cross-sectional view of the sub-unit assembly according to the first embodiment of the invention.

25 Figure 6 is a perspective view of the extended wand according to the invention.

Figure 7 is a perspective view of the rigid support according to the first embodiment of the invention.

30 Figure 8 is a lateral view of the helical spring according to the invention.

Figure 9 is a lateral view of a utility lighter, comprising a sub-unit assembly and a pocket lighter, according to a second embodiment of the invention.

Figure 10 is a cross-sectional view of the utility lighter according to the second embodiment of the invention, the utility lighter being not actuated.

Figure 11 is a cross-sectional view of the utility lighter according to the first embodiment of the invention, the utility lighter being actuated.

Figure 12 is a perspective view of the rigid support according to the second embodiment of the invention.

DETAILED DESCRIPTION OF THE DISCLOSURE

Figures 1 and 2 illustrate a utility lighter according to the present invention. The utility lighter comprises a pocket lighter 12 and a sub-unit assembly 14. The pocket lighter 12 comprises a body 17, a pusher 20 and a cover 35. The pocket lighter 12 extends along a longitudinal axis X. The length L1 of the pocket lighter 12 along the longitudinal axis X is comprised between 5cm and 12cm. More precisely, the length L1 of the pocket lighter 12 is approximately 8cm. The width L2 of the pocket lighter 12 is measurable along a transversal axis Y, which is perpendicular to the longitudinal axis X. The width L2 can be comprised between 1,5cm and 3cm. For example, the width L2 can be approximately 2,5cm.

As depicted in figures 3 and 4, the pocket lighter 12 further comprises a piezoelectric ignition device 18. The pocket lighter 12 is also provided with a pusher 20. The piezoelectric ignition device 18 is

connected to the pusher 20. The connection between the pusher 20 and the piezoelectric ignition device 18 is such that the pusher 20 and a portion of the piezoelectric ignition device 18 which is the closest to the pusher 20 are firmly attached together. Consequently, when a user pushes the pusher 20 inward the pocket lighter 12, the piezoelectric ignition device 18 is compressed to produce an elevated potential difference between its two poles 18- and 18+.

A first pole 30 is connected to a jet 24 and a second pole 32 is connected to an electrode spring 22. The electrode spring 22 is connected at a first end to the pusher 20. The second end of the electrode spring 22 is connected to the sub-unit assembly 14. The jet 24 comprises an upper end 26 and a lower end 28, regarding the longitudinal axis X. In addition, the jet 24 is movable along the longitudinal axis X. The piezoelectric ignition device 18 provides a potential difference between the first pole 30, located at the level of the upper end 26 of the jet 24 and the second pole 32, located at the second end of the electrode spring 22, which is in contact with the sub-unit assembly 14. The first pole 30 and the second pole 32 are electrically insulated from one another by an insulated member 31. The pocket lighter 12 also comprises a reservoir 16 of gaseous fuel. A valve 34 is located between the reservoir 16 and the jet 24. The reservoir 16 is in fluid communication with the valve 34. The jet 24 is movable along the longitudinal axis X inside the valve 34 between an open position and a closed position to selectively release gaseous fuel.

Besides, the pocket lighter 12 comprises a biased pivotal arm 36. The biased pivotal arm 36 is located between the piezoelectric ignition device 18 and the jet 24. In addition, the biased pivotal arm 36 is made of an electrical conductive material. Thus, the biased pivotal arm 36 conducts the electrical potential from the piezoelectric ignition device 18 to the first pole 30. For example, the material of the biased pivotal arm 36 is made of electrical conductive material. For example, the biased pivotal arm is made of metal or carbon filled resin. As the pusher 20 compresses the piezoelectric ignition device 18, the pusher 20 also acts on the biased pivotal arm 36 which is operatively connected to the jet 24 in order to open the outlet of the valve 34 to selectively release gaseous fuel. An arm spring 38 is placed underneath the biased pivotal arm 36. The arm spring 38 allows maintaining the jet 24 in the closed position. Moreover, the pocket lighter 12 comprises a cover 35. The cover 35 is usually provided for limiting the access of the ignition of the pocket lighter. In the present embodiment, the cover 35 comprises several abutments 37. The abutments 37 cooperates with parts of the sub-unit assembly 14 in order to snap-fit the sub-unit assembly 14 and the pocket lighter 12 together. In addition, a cylindrical seal 40 is placed above the jet 24. The cylindrical seal 40 provides the gaseous seal between the upper end 26 of the jet 24 when lifted by the pivotal arm 36 and the lower portion of the sub-unit assembly 14, the top of the jet 24 being in electrical contact with the lower end 56 of the helical spring 46.

As depicted in figure 5, the sub-unit assembly 14 comprises a rigid support 44, a helical spring 46 and an extended wand 42. The extended wand 42 extends along the longitudinal axis X. The length L3 of the sub-unit assembly 14 along the longitudinal axis X and extending outside the pocket lighter 12 is comprised between 1,0cm and 5cm. More precisely, the length L3 of the sub-unit assembly 14 is approximately 2,7cm. When the sub-unit assembly 14 is mounted on the pocket lighter 12, the extended wand has a free end 42E. The free end 42E extends away from the pocket lighter 12. Figure 7 shows the rigid support 44 without the others elements of the sub-unit assembly 14. The rigid support 44 comprises a plastic material, and thus does not have electrical conductive properties.

As it can be seen in figures 3, 4 and 5, the rigid support 44 is mounted inside the extended wand 42. When the sub-unit assembly 14 is mounted on the pocket lighter 12, the rigid support 44 has a free end 44E, extending away from the pocket lighter 12. The free end 44E of the rigid support 44 is located on the same side of the free end 42E of the extended wand 42 along the longitudinal axis X. An inner space 66 is kept free between the free end 44E of the rigid support 44 and the free end 42E of the extended wand 42. As depicted in figure 5, the inner space 66 is located inside the extended wand 42, but outside the rigid support 44.

A protrusion 52 is provided on the external surface of the rigid support 44. This protrusion 52 cooperates with a recess 50 of the extended wand 42. The cooperation of these two elements holds the rigid

support 44 in position inside the extended wand 42. The rigid support 44 is further provided with a first notch 72 and a second notch 74. The first notch 72 and the second notch 74 allow to assemble the sub-unit assembly 5 14 to the pocket lighter 12. Thus, the connection of the sub-unit assembly 14 to the pocket lighter 12 is possible by corresponding abutment 37. The first notch 72, the second notch 74 and the abutments 37 are snap-fitted together. When snap-fitted, this connection is 10 not removable. The rigid support 44 comprises also a longitudinal inner opening 64. The longitudinal inner opening 64 extends along the longitudinal axis X and allows the helical spring 46 to pass inside. Thus the helical spring 46 traverses from side to side the rigid 15 support 44 through the longitudinal inner opening 64. The helical spring 46 is guided and maintained inside the extended wand 42 by the rigid support 44.

A shown in figure 8, the helical spring 46 has a length L4, taken along the longitudinal axis X, 20 comprised between 5mm and 120mm. More preferably, the length L4 of the helical spring 46 is of 32 mm. The outer diameter D46 of the helical spring 46 is comprised between 0,5mm and 2mm. For example, the outer diameter D46 is of 1mm.

25 Actually, as shown in figure 5, when the sub-unit assembly 14 is assembled on the pocket lighter 12, the rigid support 44 protrudes outside the pocket lighter 12 and along the longitudinal axis X at a length L5. The length L5 is thus measured between the free end 44E 30 of the rigid support 44 and a contact line 13 between the sub-unit assembly 14 and the cover 35. The length

L5 can be comprised between 5mm and 40mm. For instance, the length L5 is of 12,5mm. In addition, still when the sub-unit assembly 14 is assembled on the pocket lighter 12, the helical spring 46 protrudes to a length L6
5 outside the pocket lighter 12 and along the longitudinal axis X. The length L6 is thus measured between a free end 46E of the helical spring 46 and the free end 44E of the rigid support 44. The length L6 can be comprised between 2mm and 10mm. For instance, the
10 length L6 is of 4mm. Therefore, we can understand that the free end 46E of the helical spring 46 is located inside the extended wand 42, but outside the free end 44E of the rigid support 44.

Besides, when assembled together, the helical
15 spring 46, the rigid support 44 and the extended wand 42 extend concentrically around the longitudinal axis X, outside the pocket lighter 12. The arrangement being such that the helical spring 46 is the closest element from the longitudinal axis X, the extended wand 42
20 being the furthest element from the longitudinal axis X, and the rigid support 44 being located concentrically between the extended wand 42 and the helical spring 46. Therefore, as depicted in figure 5, the outer diameter D46 of the helical spring 46 is
25 smaller than the outer diameter D42 of the extended wand 42, and the outer diameter D44 of the rigid support 44 is comprised between the outer diameter D42 of the extended wand 42 and the outer diameter D46 of the helical spring 46. For example:

30 - the outer diameter D42 of the extended wand 42 can have a dimension comprised between 5mm and 11mm,

- the outer diameter D44 of the rigid support 44 can have a dimension comprised between 4mm and 10mm,

- the outer diameter D46 of the helical spring 46 can have a dimension comprised between 0,5mm and 2mm.

5 Coming back to figure 8, the helical spring 46 comprises three portions along its length: a first end portion 58, a middle portion 60 and a second end portion 62. The first end portion 58 is provided to cooperate with the jet 24. The middle portion 60 is
10 provided to be received in the longitudinal inner opening 64 of the rigid support 44. The top portion 62 is provided to protrude in the inner space 66 of the length L6 when the long helical spring 46 is assembled in the sub-unit assembly 14. In such a configuration,
15 the helical spring 46 has a free end 46E which corresponds to the end of the top portion 62. Thus, as shown for example in figure 5, the free end 46E of the helical spring 46 is located on the same side of the free ends 42E and 44E of the extended wand 42 and the
20 rigid support 44. In addition, the free end 46E of the helical spring 46 is located inside the extended wand 42, but outside the free end 44E of the rigid support 44.

 The pitch of the three portions 58, 60, 62 of the
25 helical spring 46 is comprised between 0,1mm and 0,6mm. The pitch of the middle portion 60 can be comprised between 0,1mm and 0,2mm. For example, the pitch of the middle portion 60 is 0,1 mm. The pitch of the first end portion 58 is comprised between 0,2mm and 0,6mm. The
30 pitch of the second end portion 62 is comprised between 0,2mm and 0,6mm. Regarding the entire helical spring

46, the pitch of the middle portion 60 is always smaller than the pitch of the first end portion 58 and the pitch of the second end portion 62. Actually, the coils of the middle portion 60 are dead coils. In other words, the coils of the middle portion 60 are jointive whereas coils of the first end portion 58 and the second end portion 62 are not jointive. Such dimensioning has the following interesting features. In the area of the first end portion 58, the pitch is dimensioned such that the first end portion 58 easily contacts the upper end 26 of the jet 24. Indeed, the coils of the first end portion 58 are not jointive. The helical spring 46 can therefore be compressed in the first end portion 58. Thus, the helical spring 46 contacts the upper end 26 of the jet 24 in being in compression, which guarantees a suitable contact between these two members. In the area of the second end portion 62, the pitch is dimensioned in order to suitably diffuse the gas in the air and thus in order to create an easily flammable mixture of air and gas in the inner space 66. In others words, the second end portion 62 of the helical spring 46 is the gas diffuser of the utility lighter. Consequently, the helical spring 46 according the invention fulfills the function of diffuser for the utility lighter 10. In the area of the middle portion 60, the coils of the helical spring 46 delimit an inner duct 56. The inner duct 56 extends concentrically along the longitudinal axis X. The pitch of the helical spring 46 in the area of the middle portion 60 is so small that the gas cannot easily go through the coils. The gas is thus confined inside the

helical spring 46 and thus inside the inner duct 56. Therefore, the helical spring 46 according to the invention fulfills a function of gas duct for the utility lighter 10. In addition, the coils being
5 jointive in the middle portion 60, they create a rigid portion which facilitates the insertion of the helical spring 46 in the rigid support 44 during the assembly.

Actually, according to one embodiment of the present invention, the pitches of the first end portion
10 58 and the second end portion 62 are identical. Therefore, the helical spring is symmetrical with respect to a perpendicular axis S through its middle along its length L4. The pitch of the first end portion 58 is similar to the pitch of the second end portion 62
15 in order to insert the helical spring 46 in any longitudinal direction inside the longitudinal inner opening 64 during the assembly of the sub-unit assembly 14. Any free end of the helical spring 46 can thus be inserted at first inside the longitudinal inner opening
20 64. Consequently, this feature facilitates the assembly of the sub-unit assembly 14 by avoiding a step of differentiation between the first end portion 58 and the second end portion 62. According to another embodiment of the present invention, the pitches of the
25 first end portion 58 and the second end portion 62 are not identical. However, in such a configuration, the pitch of the middle portion 60 is still smaller than the pitch of the first end portion 58 and the pitch of the second end portion 62.

30 As better shown in figure 6, the sub-unit assembly comprises the extended wand 42. The extended wand 42

has a general cylinder shape, which extends along the longitudinal axis X. The extended wand 42 comprises an aperture 54 at its upper end. The upper end of the extended wand 42 corresponds to its free end 42E when
5 the sub-unit assembly 14 is assembled with the pocket lighter 12 to form the utility lighter 10, as illustrated in figures 3 and 4. The flame escapes from this aperture 54. The extended wand 42 further comprises at its lower end 42L, opposite to the free
10 end 42E, an extension 48. This extension 48 has a general shape of a tongue, and has a free end 48E. The length L7 of the extension 48 along the longitudinal axis X is measured between the lower end 42L of the extended wand 42 and the free end 48E of the extension
15 48. The length L7 of the extension 48 can be comprised between 5mm and 15mm. For instance, the length L7 is of 11,5mm. During the actuating downwards of the pusher 20, the extension 48 allows for contact of the extended wand 42 with the electrode spring 22. The electrical
20 potential created at the second pole 32 is therefore transmitted to the extended wand 42 through the extension 48. In other words, the electrode spring 22 is connected to the sub-unit assembly 14 by means of the extension 48. The extended wand 42 also comprises
25 an antenna 43. The antenna 43 protrudes forwards the inner space 66. The antenna 43 has a general triangular shape when viewed from the face. The antenna 43 comprises a base 45 and a tip 47. The distance D5 between the tip 47 and the free end of the helical
30 spring 46 is favorable for the apparition of the electrical arc, which results of the potential

difference created by the piezoelectric ignition device 18. For example, as illustrated in figure 5, the distance D5 between the tip 47 and the free end of the helical spring 46 is comprised between 2,5mm and 3 mm.

5 The electrical arc is thus created in an interelectrode space which is located in the inner space 66. When the arc electric created between the tip end 47 of the antenna 43 and the free end of the helical spring 46 (i. e. the end of the top portion 62) meets the mixture
10 of gas and air, a flame is so created. As a result, the flame escape from the utility lighter 10 through the aperture 54, located at the free end 42E of the extended wand 42.

The sub-unit assembly 14 thus assembled is rigid.
15 Especially, the sub-unit assembly 14 is rigid enough to not bent and to keep a straight and elongated shape during the assembly between the sub-unit assembly 14 and the pocket lighter 12. The feature is made possible partly thanks to the rigid support 44 and the extended
20 wand 42.

When the sub-unit assembly 14 and the pocket lighter are connected together, the ignition of a flame is as follow. A user pushes downwards the pusher 20. The piezoelectric ignition device 18 is thus actuated
25 and creates a first electric potential on the electrode spring 22 and a second electric potential on the biased pivotal arm 36. The extension 48 contacting the electrode spring 22, the first electric potential is then transmitted to the extension 48. Because of the
30 electrical conductive properties of the extended wand 42, the first electric potential is conducted along the

extended wand, and especially until the tip 47 of the antenna 43. When the pusher 20 is pushed downwards, the biased pivotal arm 36 contacts the piezoelectric ignition device 18. The second electric potential is thus transmitted to the biased pivotal arm 36. Then, the second electric potential is transmitted to the jet 24. The second electric potential is therefore transmitted to the helical spring 46 through the upper end 26 of the jet 24. The helical spring 46 of the present invention fulfills therefore a function of electrical conductor. The first electric potential and the second electric potential create therefore a potential difference which is favorable to the creation of an electrical arc in the interelectrode space. However, despite the electrical properties of the extended wand 42, there is no risk of electric shock for a user, since the first pole 30 is surrounded by the body 17 of the pocket lighter 12. The body 17 being made of a non-electrical conductive material, the user cannot therefore touch the first pole 30. In the meantime, when the pusher 20 is pushed downwards, it actuates the biased pivotal arm 36 which raises the jet 24. The jet 24 releases the valve 34. As a result the gas is released from the reservoir 16 and through the jet 24 and the helical spring 46 until the second end portion 62 of the helical spring 46. The mixture of gas and air thus created in the inner space 66 then catches fire should it meets the electrical arc.

Figures 9, 10, 11 and 12 illustrate a second embodiment of a utility lighter 10 according to the invention. In this second embodiment, the rigid support

44 and the cover 35 are formed in a sole molded piece 33. This molded piece 33, shown in figure 12, is molded in an electrically insulating thermoplastic resin. The sub-unit assembly 14, according to this second embodiment, thus comprises also the cover 35. Such a molded piece 33 has the advantage of reducing the number of pieces required, since the cover 35 and the rigid support 44 are the same piece. In addition, there is no more need for abutments 37 and second notch 74, since the rigid support 44 and the cover 35 are already assembled together. Furthermore, such an embodiment improves the insulation of the electrical circuit by avoiding short-circuit through the cover 35. Indeed, the cover 35, usually metallic, could create a failure in the ignition. When the cover is made of an electrically insulating thermoplastic resin, there is no more risk of any short-circuit. Besides, this feature protects the user of a possible electrical discharge in his fingers.

The molded piece 33 comprises two protrusions 39, which allows it to be snap-fitted to the body 17 of the pocket lighter 12. When snap-fitted, this connection between the molded piece 33 and the body 17 is not removable. Figure 9 illustrates only one protrusion 39, the other protrusion 39 being hidden by the cover.

This second embodiment provides another advantage that consists on a greater precision of positioning of this molded piece 33 with respect to the pocket lighter 12 and therefore to the jet 24. Thus the achievement of a good sealing between the upper part 26 of the jet 24 and the cylindrical seal 40 is facilitate.

The present invention further concerns a method for manufacturing a flame producing assembly. The method consists first to provide the sub-unit assembly 14. To this aim, the helical spring 46 is inserted
5 inside the rigid support 42. Then, this set is snap-fitted inside the extended wand 42, forming therefore the sub-unit assembly 14. After that, the sub-unit assembly 14 according to the first embodiment, is snap-fitted on the cover 35 of the pocket lighter 12, the
10 cover 35 being previously attached to the body 17 of the pocket lighter 12. According to the second embodiment, the sub-unit assembly is snap-fitted directly on the body 17 of the pocket lighter 12. In this way, according to either the first or the second
15 embodiment, the sub-unit assembly 14 is fixedly attached to the pocket lighter 12. Such an assembly has the advantage to be easily implemented. In addition, the assembly of the utility lighter 10 according to the second embodiment has the advantage to be easier
20 assembled than the utility lighter 10 according to the first embodiment, the preliminary fixing step of the cover 35 on the body 17 not being required. An assembly on an automatic machine for producing several flames producing assembly is therefore achievable.

CLAIMS

1. A flame producing assembly comprising a pocket lighter (12) and a sub-unit assembly (14) comprising an
5 extended wand (42), a rigid support (44) and an helical spring (46), the pocket lighter (12) being connected to
the sub-unit assembly (14), the pocket lighter (12) comprising a piezoelectric ignition device (18), the
rigid support (44) being located inside the extended
10 wand (42), the rigid support (44) having an longitudinal inner opening (64), the extended wand (42)
being electrically coupled to the piezoelectric ignition device (18),

wherein the pocket lighter (12) is connected
15 directly to the sub-unit assembly (14); and

wherein the helical spring (46) extends along the longitudinal inner opening (64).

2. The flame producing assembly according to claim 1,
20 wherein the helical spring (46) extends along the entire length of the longitudinal inner opening (64).

3. The flame producing assembly according to anyone of claims 1 to 2, wherein the helical spring (46) has a
25 gas duct function.

4. The flame producing assembly according to anyone of claims 1 to 3, wherein the pocket lighter (12) comprises a reservoir (16) and wherein the helical
30 spring (46) is in fluid communication with the reservoir (16).

5. The flame producing assembly according to anyone of claims 1 to 4, wherein the helical spring (46) comprises a material having electrical properties
5 allowing the conveyance of the electric charge produced by the piezoelectric ignition device (18).

6. The flame producing assembly according to anyone of claims 1 to 5, wherein the helical spring (46) is
10 electrically coupled to the piezoelectric ignition device (18).

7. The flame producing assembly according to anyone of claims 1 to 6, wherein the rigid support (44)
15 comprises a protrusion (52) and the extended wand (42) comprises a recess (50), the recess (50) being adapted to cooperate with the protrusion (52).

8. The flame producing assembly according to anyone
20 of claims 1 to 7, wherein the helical spring (46) has a length comprised between XX and XX and an outer diameter (D46) comprised between XX and XX.

9. The flame producing assembly according to anyone
25 of claims 1 to 8, wherein the helical spring (46) comprises a first end portion (58) and a second end portion (62), the second end portion (62) being a diffuser.

30 10. The flame producing assembly according to anyone of claims 1 to 9, wherein the rigid support (44)

extends along a longitudinal axis (X) between a connecting end and a free end (44E), wherein the extended wand (42) extends along the longitudinal axis (X) between a connecting end and a free end (42E),
5 wherein the helical spring (46) has a first end portion (58) and a second end portion (62), the second end portion (62) protruding among the free end (44E) of the rigid support (44) toward the free end (42E) of the extended wand (42) along the longitudinal axis (X).

10

11. The flame producing assembly according to anyone of claims 1 to 10, wherein the helical spring (46) has a pitch comprised between xx and xx.

15

12. The flame producing assembly according to anyone of claims 1 to 11, wherein the first end portion (58) of the helical spring (46) has a pitch comprised between 0,2mm and 0,6mm.

20

13. The flame producing assembly according to anyone of claims 1 to 12, wherein the second end portion (62) of the helical spring (46) has a pitch comprised between 0,2mm and 0,6mm.

25

14. The flame producing assembly according to anyone of claims 1 to 13, wherein at least a portion of the helical spring (46) being located in the longitudinal inner opening (64) has a pitch smaller than the pitch of the second end portion (62).

30

15. The flame producing assembly according to

anyone of claims 1 to 14, wherein the sub-unit assembly (14) is rigid.

16. The flame producing assembly according to
5 anyone of claims 1 to 15, wherein the sub-unit assembly (14) is snap-fitted to the pocket lighter (12).

17. A method for manufacturing a flame producing
assembly, the flame producing assembly comprising a
10 pocket lighter (12) and sub-unit assembly (14), wherein the sub-unit assembly (14) is snap-fitted to the pocket lighter (12).

18. The method for manufacturing a flame
15 producing assembly according to claim 17, wherein the sub-unit assembly (14) comprises an extended wand (42) and a rigid support (44), and wherein the extended wand (42) and the rigid support (44) are snap-fitted together.

20

25

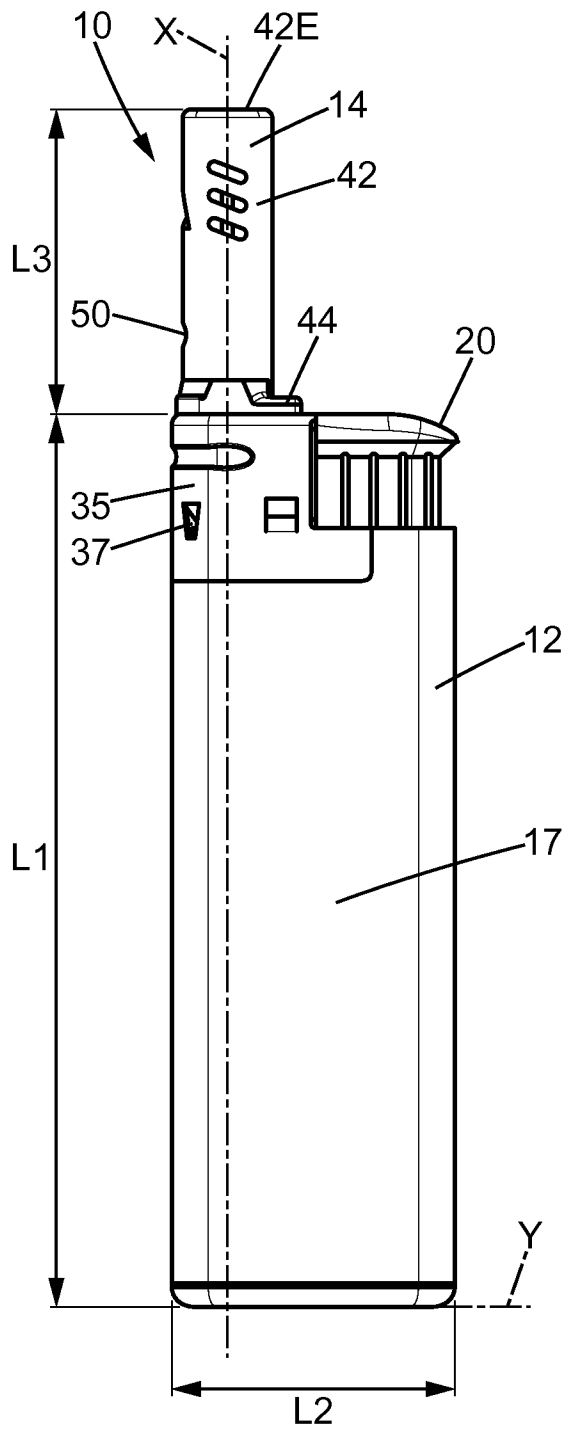


FIG. 1

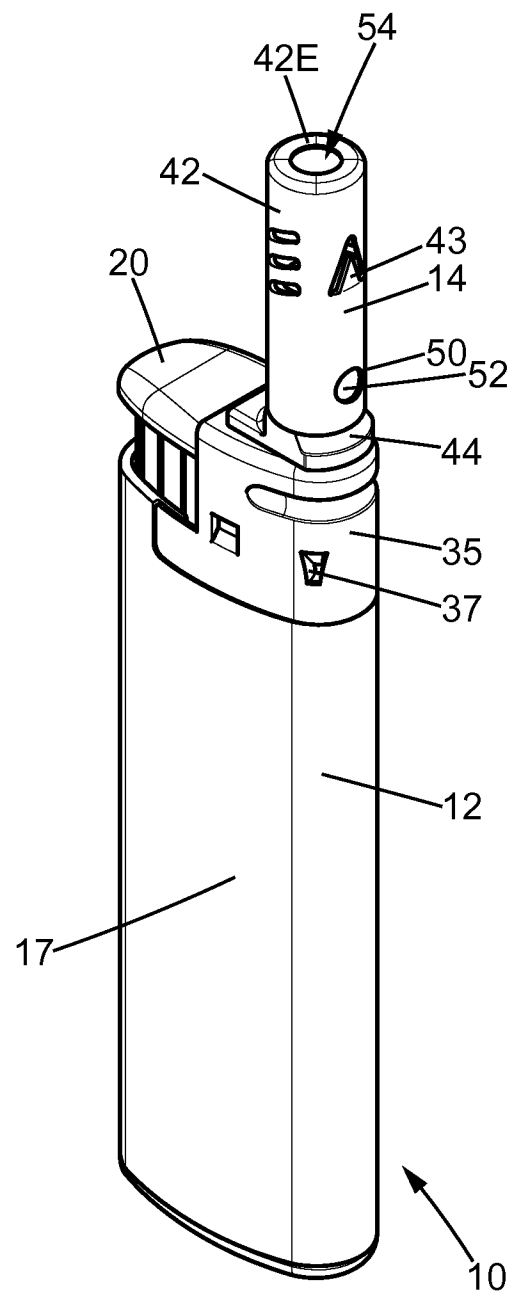


FIG. 2

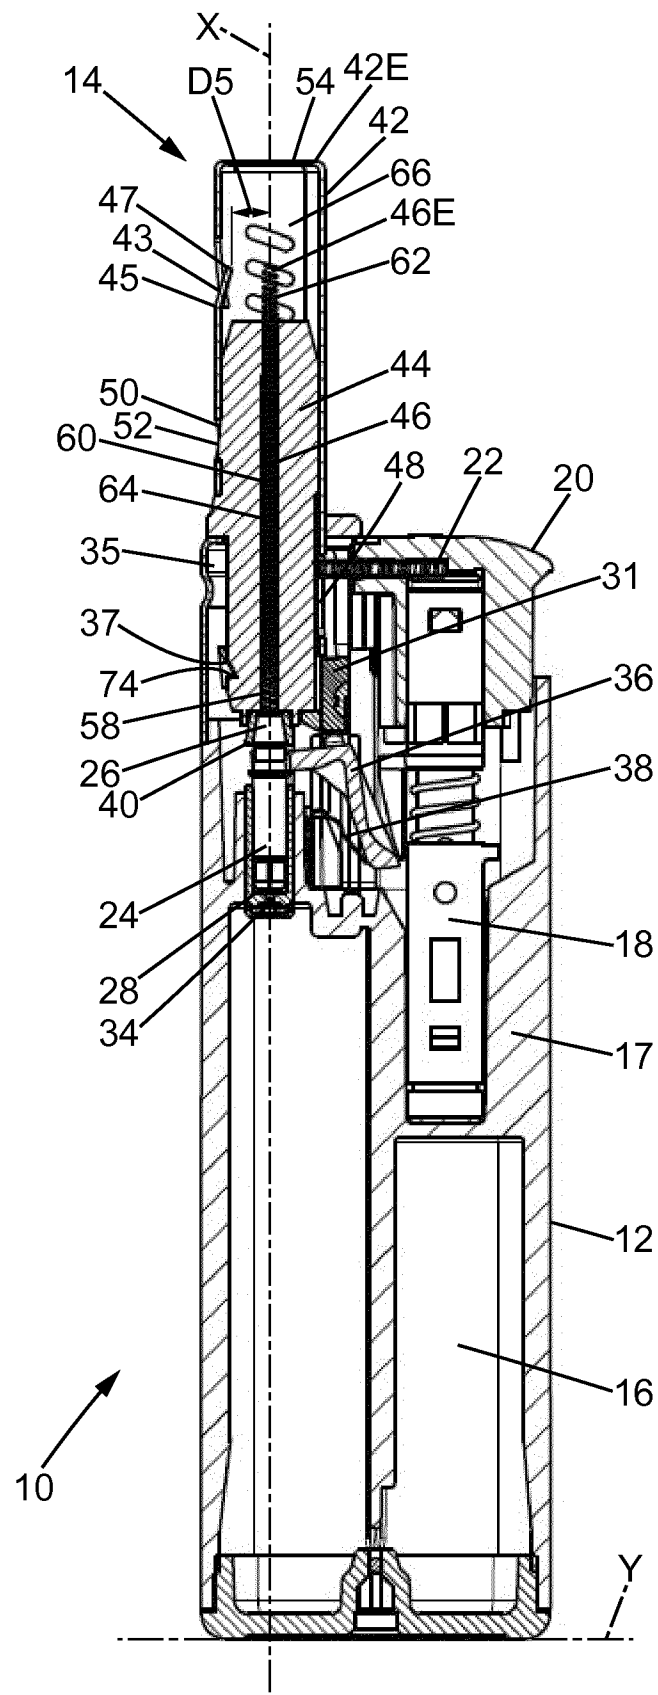


FIG. 3

3/9

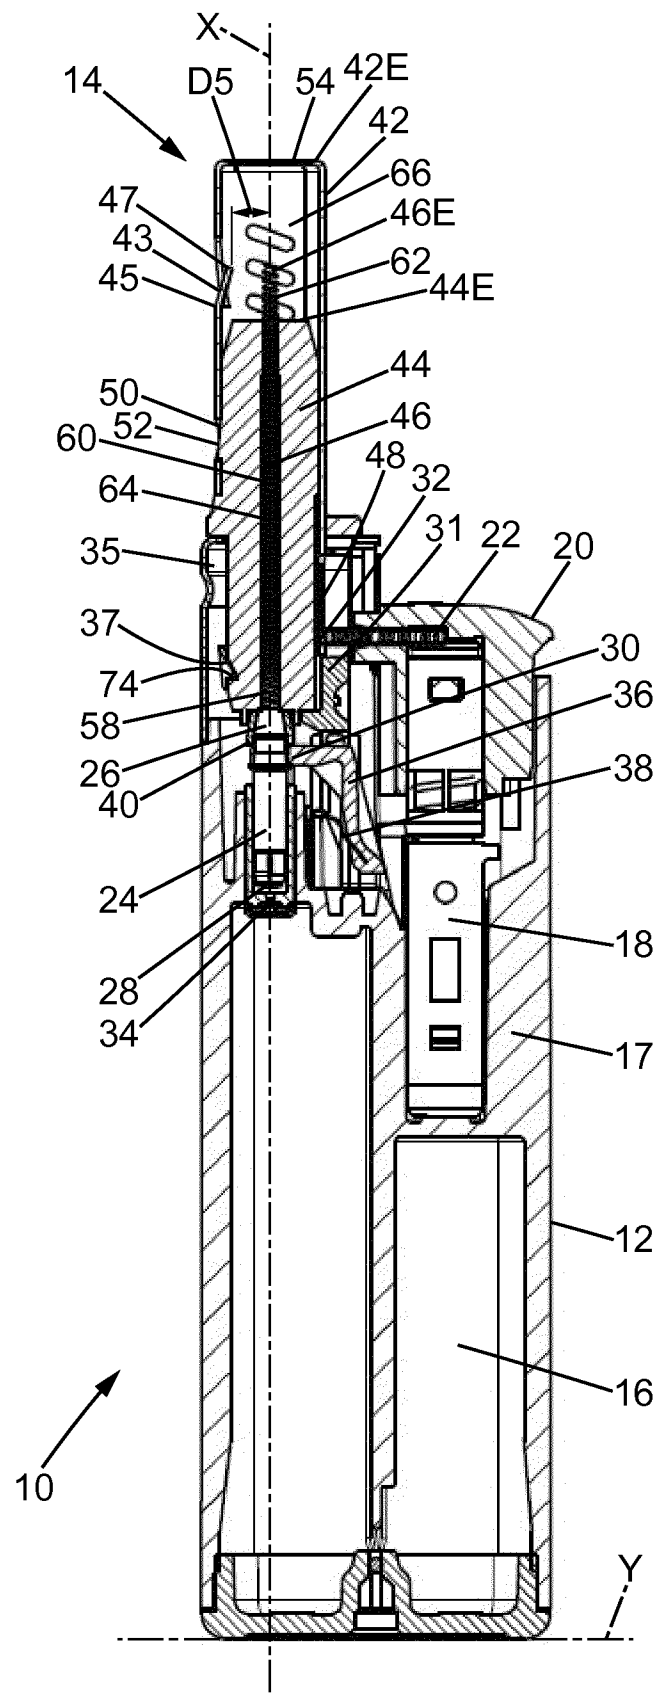


FIG. 4

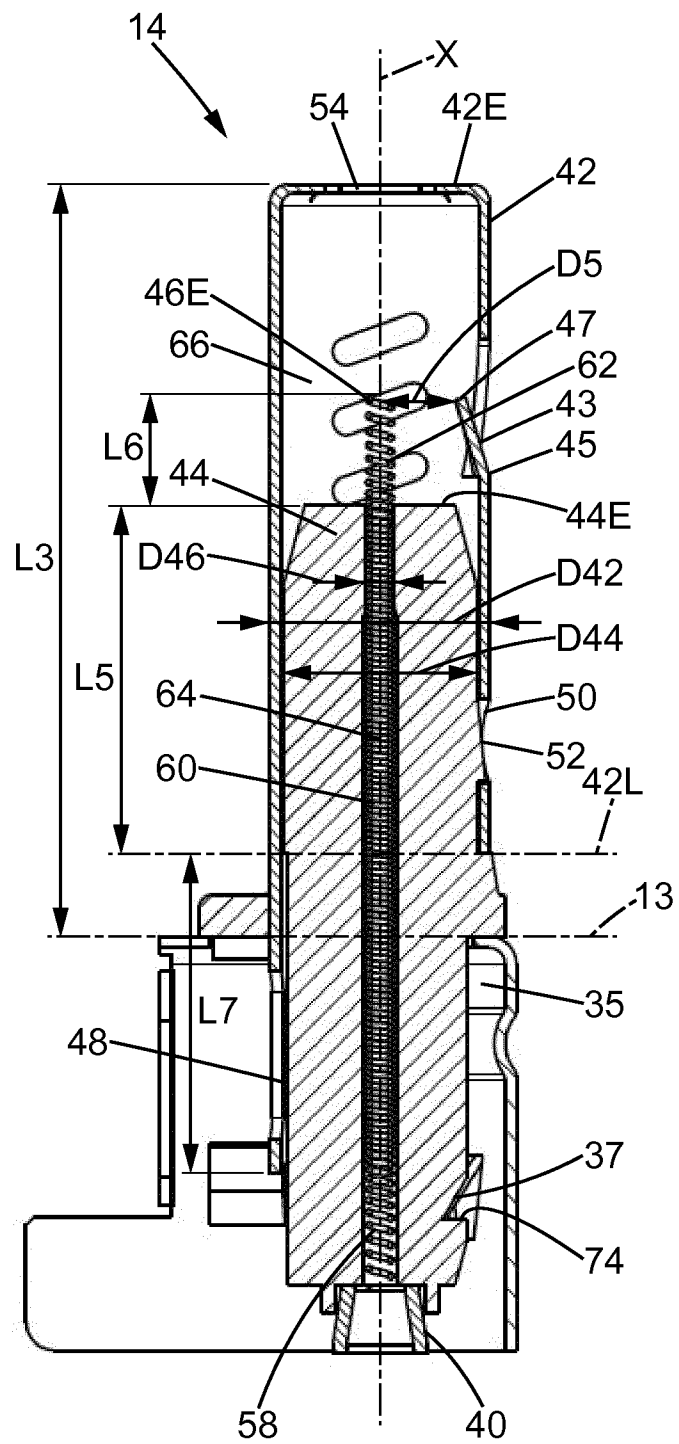


FIG. 5

5/9

FIG. 6



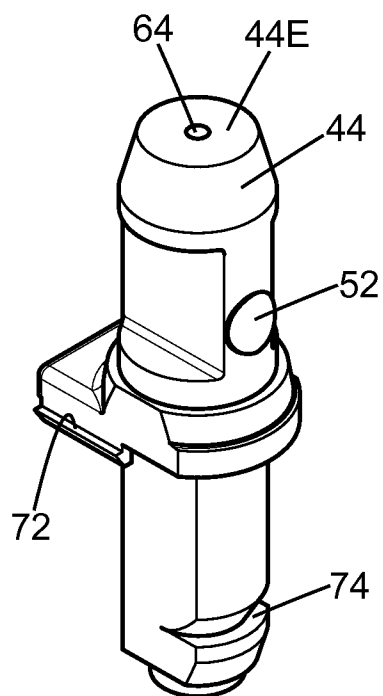


FIG. 7

FIG. 8

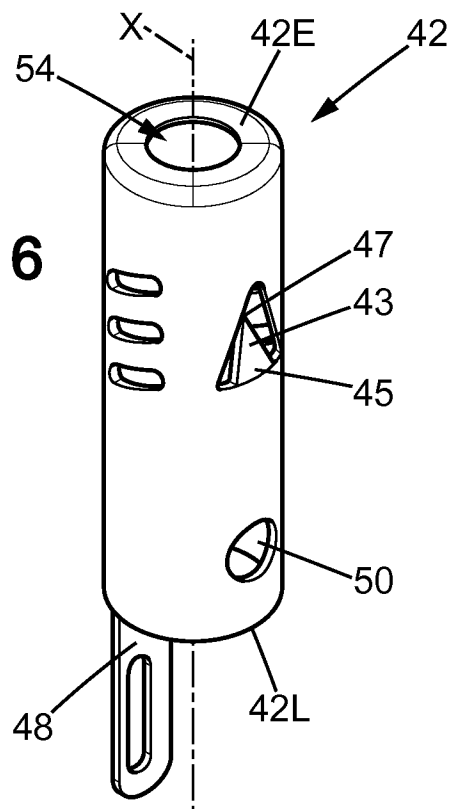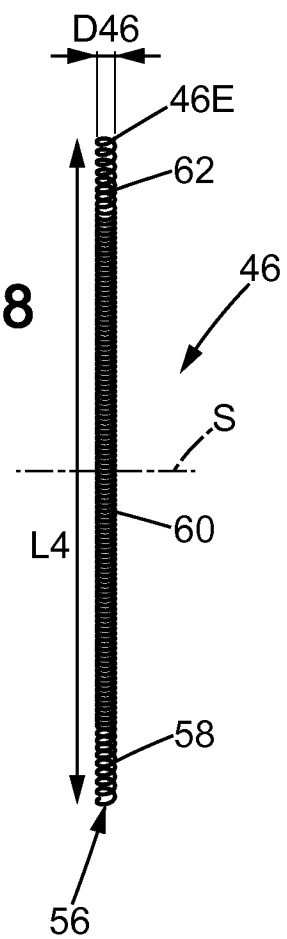

6/9

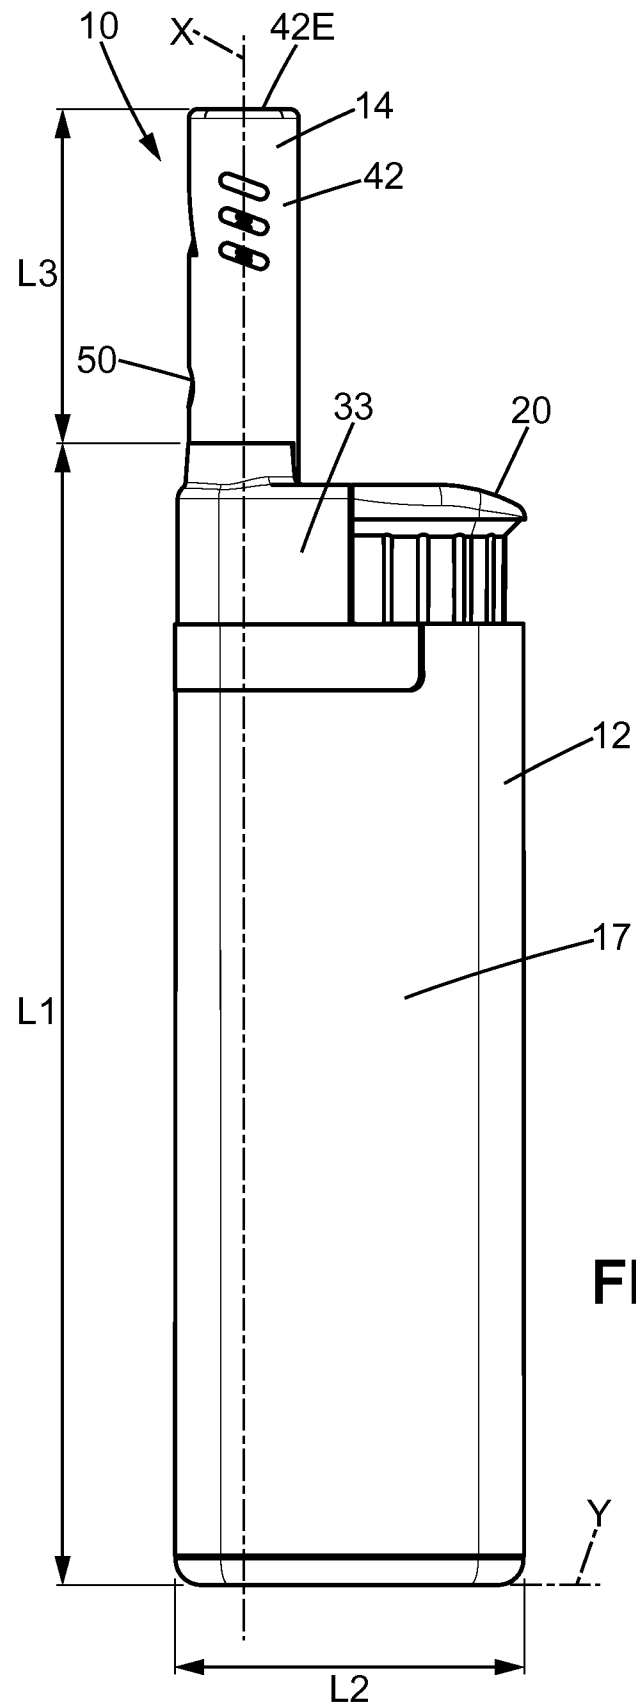


FIG. 9

7/9

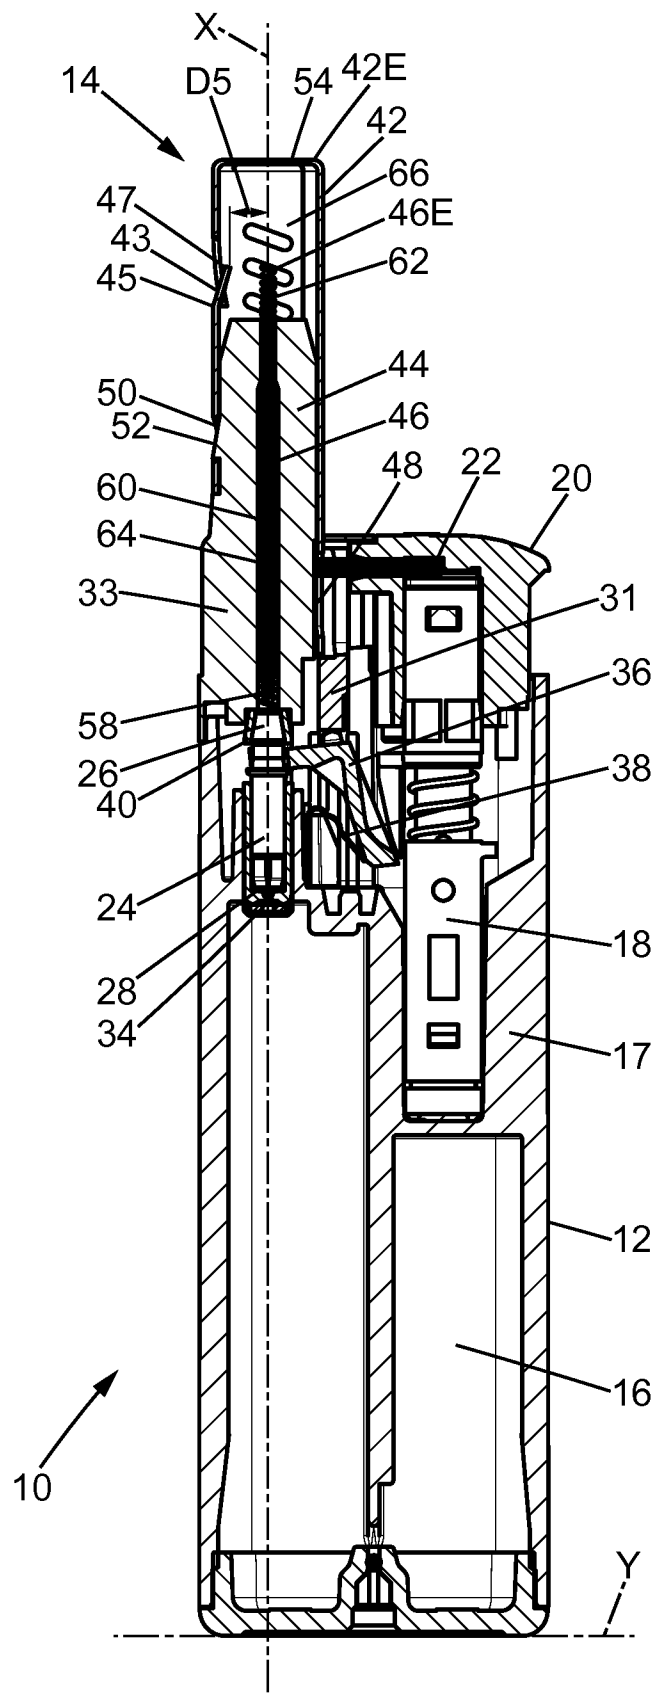


FIG. 10

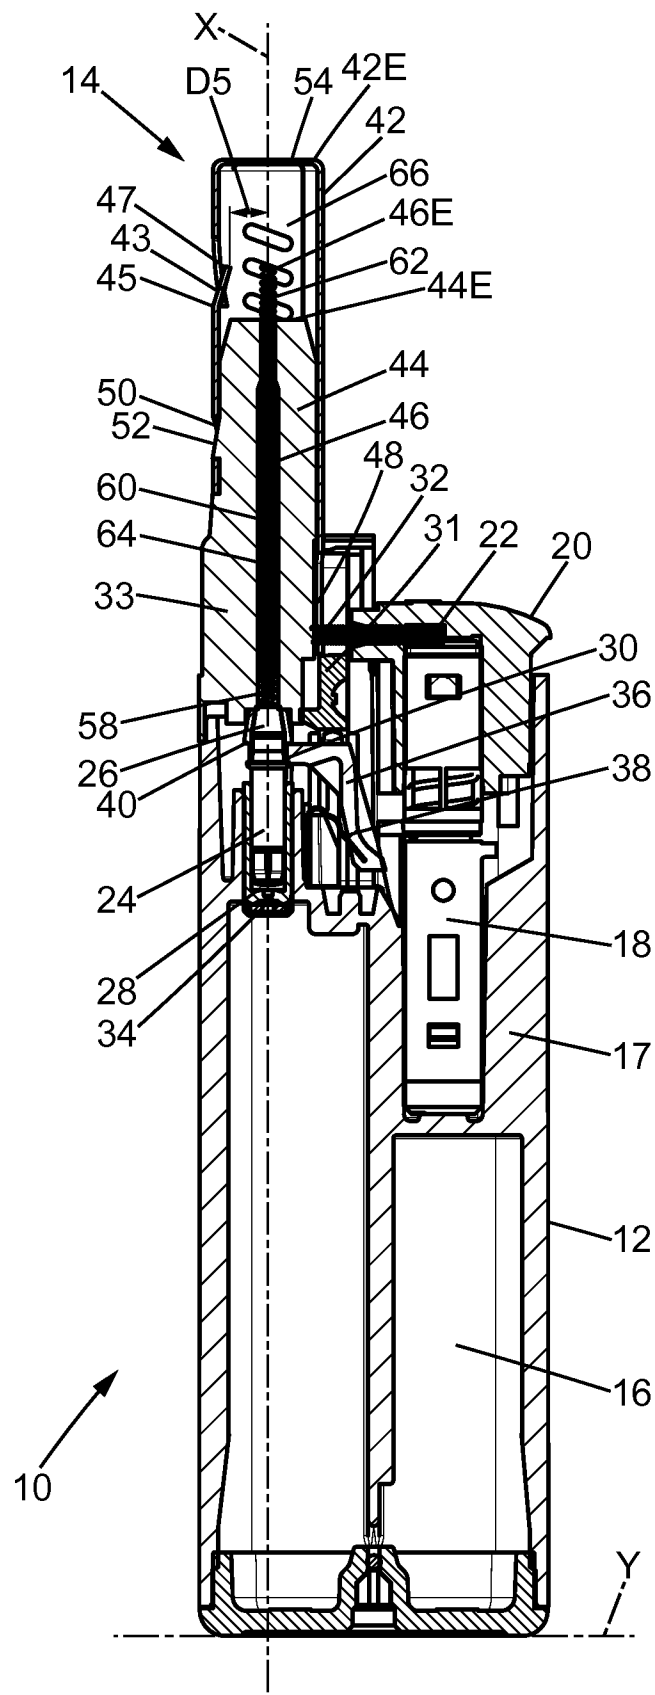


FIG. 11

9/9

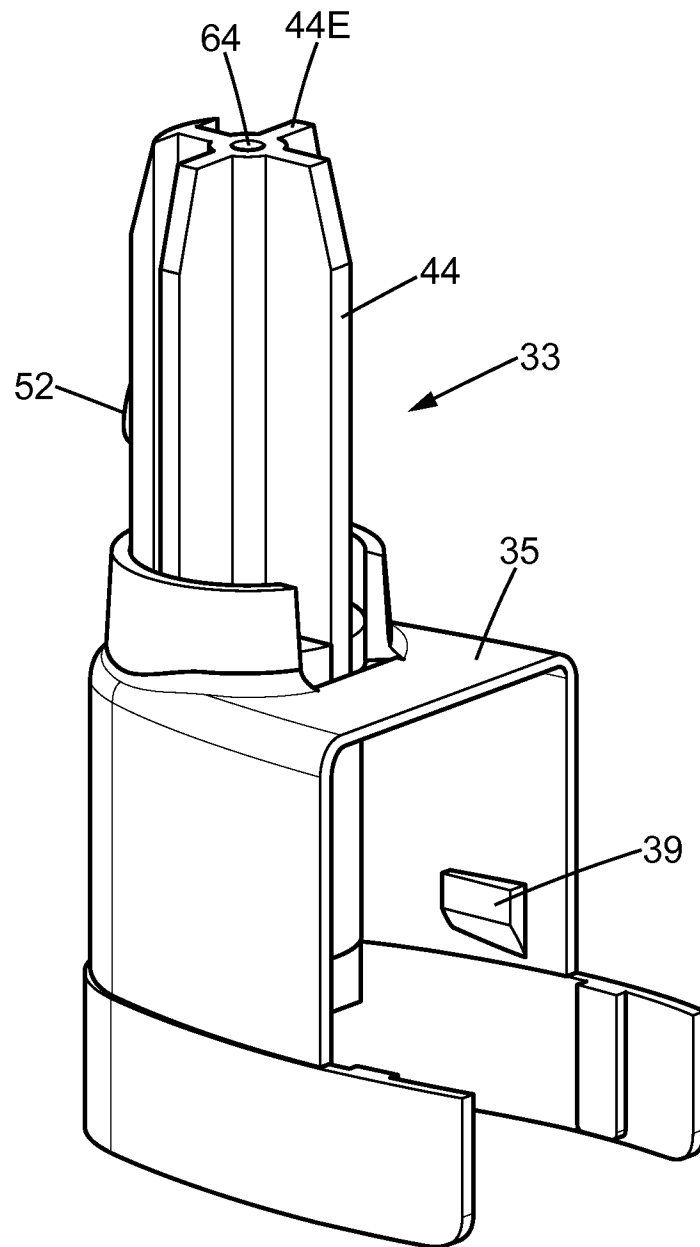


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2016/080851

A. CLASSIFICATION OF SUBJECT MATTER

INV. F23Q2/16 F23Q2/28
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F23Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/281039 A1 (LUO XIN W [CN]) 14 December 2006 (2006-12-14) page 2, paragraph 29 - page 3, paragraph 44 figures 1-4	1-6,8, 10-18
X	US 2005/053881 A1 (SGROI ANTHONY [US] ET AL) 10 March 2005 (2005-03-10) page 4, paragraph 52 - page 12, paragraph 137 figures 1-14	1-6,8, 11,15-18
X	US 4 778 380 A (NITTA TOMIO [JP]) 18 October 1988 (1988-10-18) column 2, line 31 - column 5, line 9 figures 1-6	1,3-9, 11,15-18
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 September 2017

Date of mailing of the international search report

05/10/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Rudolf, Andreas

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2016/080851

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 980 242 A (MAN AMAN CHUNG KAI [HK]) 9 November 1999 (1999-11-09) column 3, line 66 - column 7, line 32 figures 1-9 -----	1,3-9, 11,15-18
A	US 5 865 614 A (HSU KUN-CHUNG [TW]) 2 February 1999 (1999-02-02) page 2, line 3 - page 3, line 16 figures 1-4 -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/080851

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006281039	A1	14-12-2006	NONE
US 2005053881	A1	10-03-2005	AU 2005258313 A1 05-01-2006
		BR PI0512501 A 11-03-2008	
		CA 2571869 A1 05-01-2006	
		CN 101061348 A 24-10-2007	
		EP 1924806 A2 28-05-2008	
		JP 4833967 B2 07-12-2011	
		JP 2008504511 A 14-02-2008	
		US 2005053881 A1 10-03-2005	
		US 2008070173 A1 20-03-2008	
		WO 2006002414 A2 05-01-2006	
US 4778380	A	18-10-1988	EP 0259743 A1 16-03-1988
			JP H0547951 Y2 17-12-1993
			JP S6349172 U 02-04-1988
			US 4778380 A 18-10-1988
US 5980242	A	09-11-1999	US 5980242 A 09-11-1999
			US 6168423 B1 02-01-2001
US 5865614	A	02-02-1999	NONE