



(19) **United States**

(12) **Patent Application Publication**
CHEN et al.

(10) **Pub. No.: US 2019/0387609 A1**

(43) **Pub. Date:** **Dec. 19, 2019**

(54) LIQUID COOLING DEVICE

(71) Applicant: **Cooler Master Co., Ltd.**, New Taipei
(TW)

(72) Inventors: **Hsin-Hung CHEN**, New Taipei (TW);
Chien-Liang Lin, New Taipei (TW)

(21) Appl. No.: 16/197,621

(22) Filed: **Nov. 21, 2018**

(30) **Foreign Application Priority Data**

Jun. 13, 2018 (TW) 107120264

Publication Classification


(51) **Int. Cl.**
H05K 1/02 (2006.01)
H05K 7/20 (2006.01)

(52) U.S. Cl.

CPC **H05K 1/0203** (2013.01); **H05K 7/20272**
(2013.01); **H05K 2201/064** (2013.01); **H05K**
2201/10409 (2013.01); **H05K 7/20254**
(2013.01)

(57) **ABSTRACT**

A liquid cooling device, which is configured to be in thermal contact with a first and a second heat sources which are disposed on a PCB, includes a first and a second thermal plates and a first and a second thermal blocks. The first thermal plate is configured to be disposed on the PCB. The second thermal plate is disposed on the first thermal plate. The thermal plates together form a storage space configured to store a coolant. The thermal blocks are configured to respectively be in thermal contact with the heat sources. The thermal blocks are movably disposed on the second thermal plate, such that protruding heights of the thermal blocks from the second thermal plate are adjustable respectively according to a gap width between the first heat source and the second thermal plate and a gap width between the second heat source and the second thermal plate.

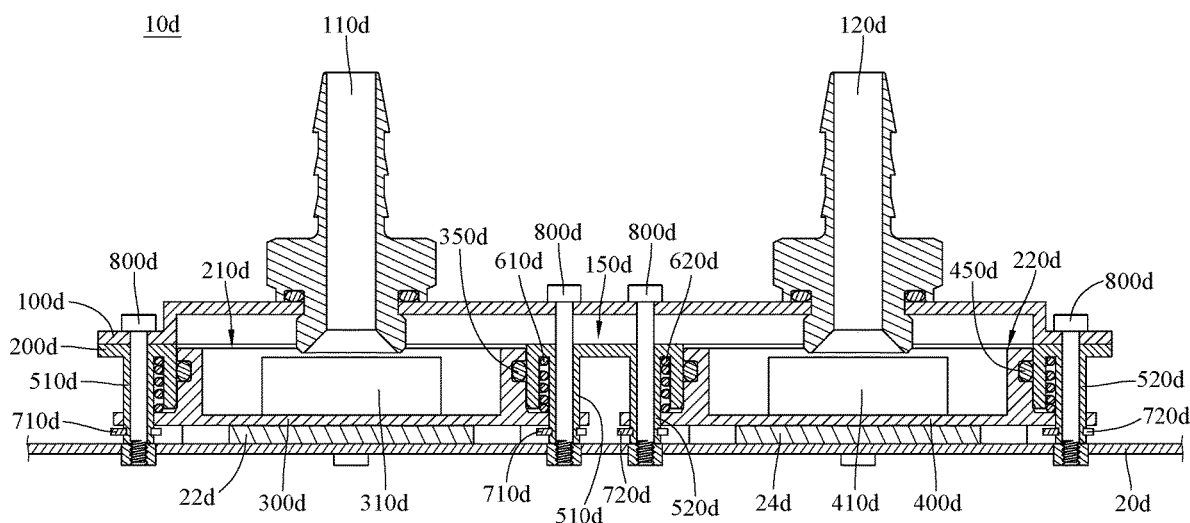

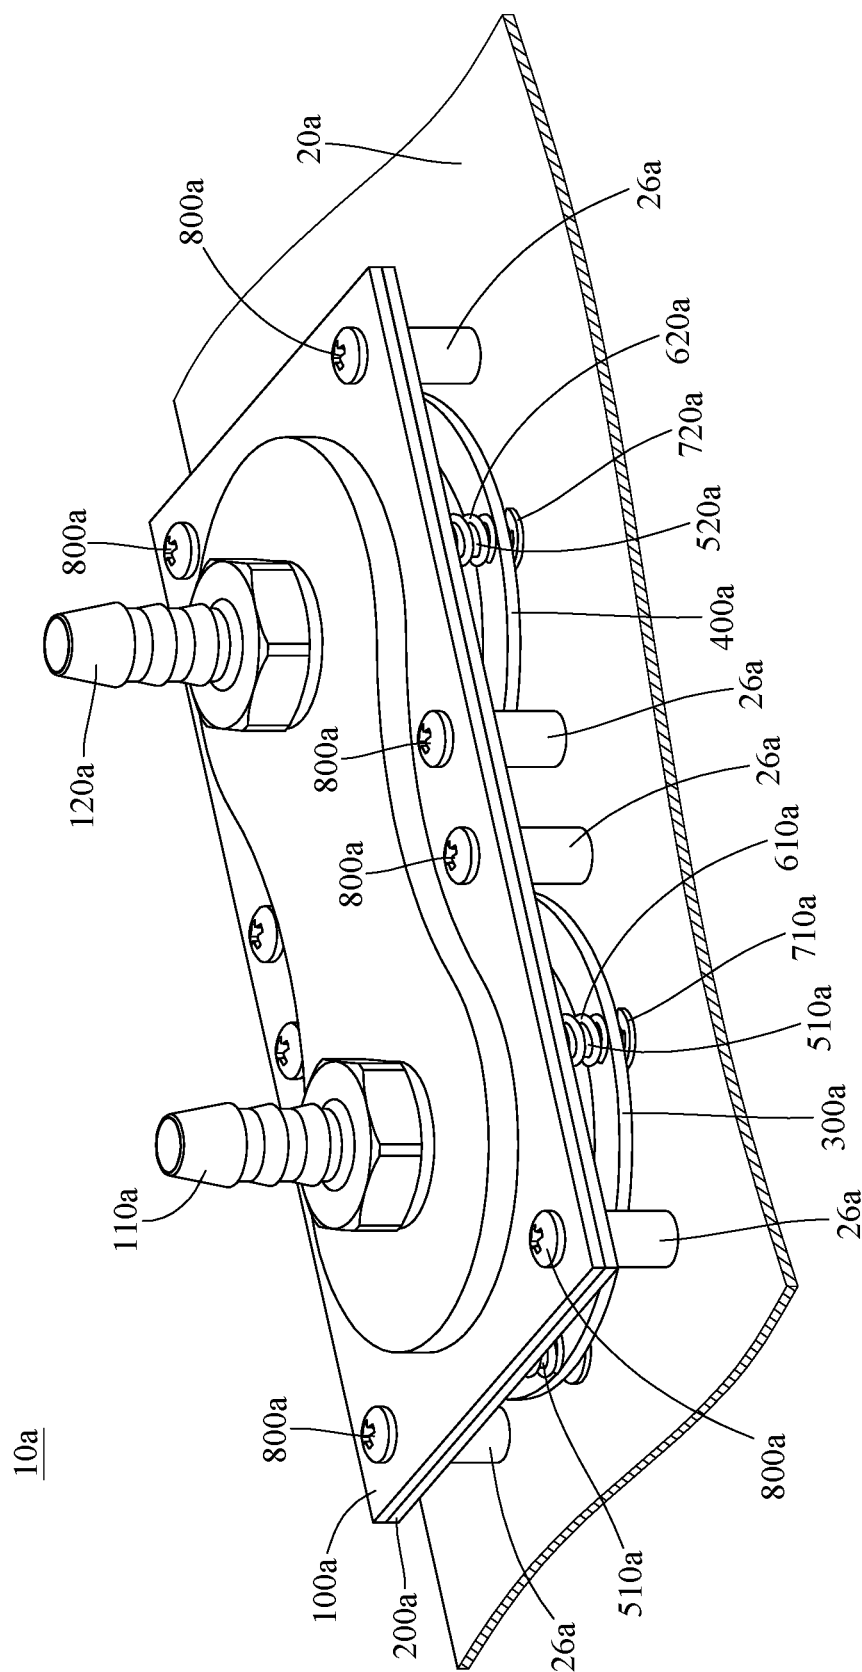


FIG. 1

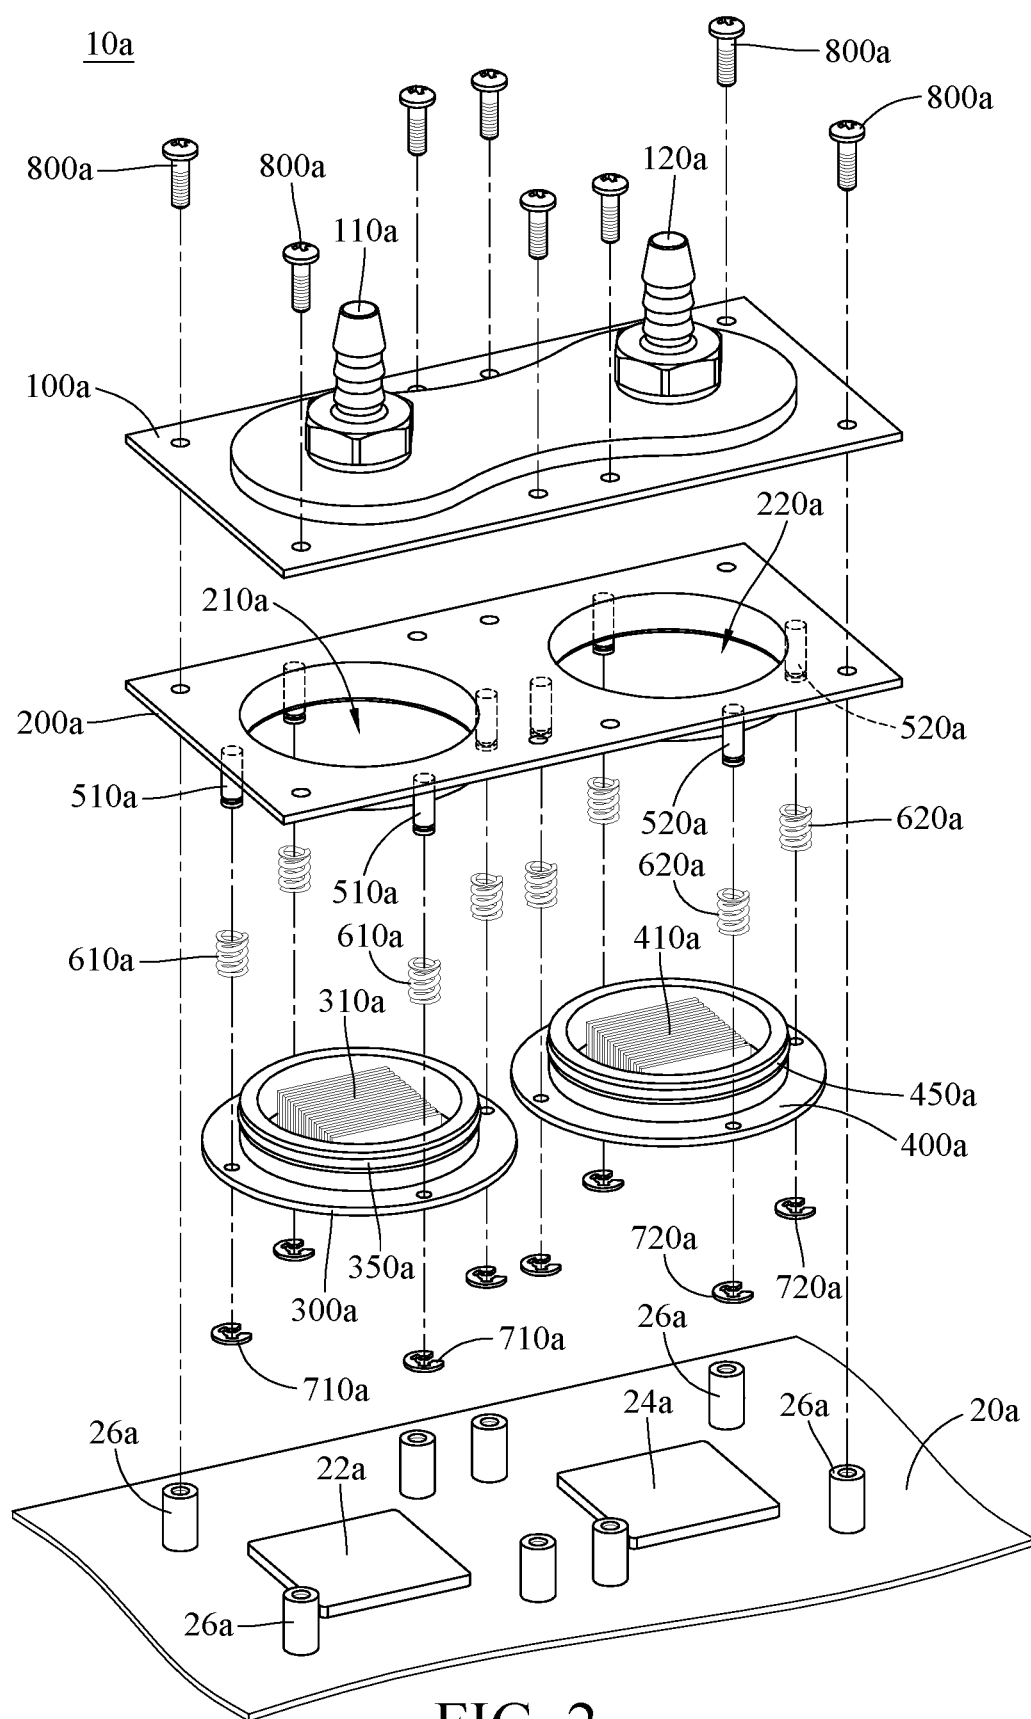


FIG. 2

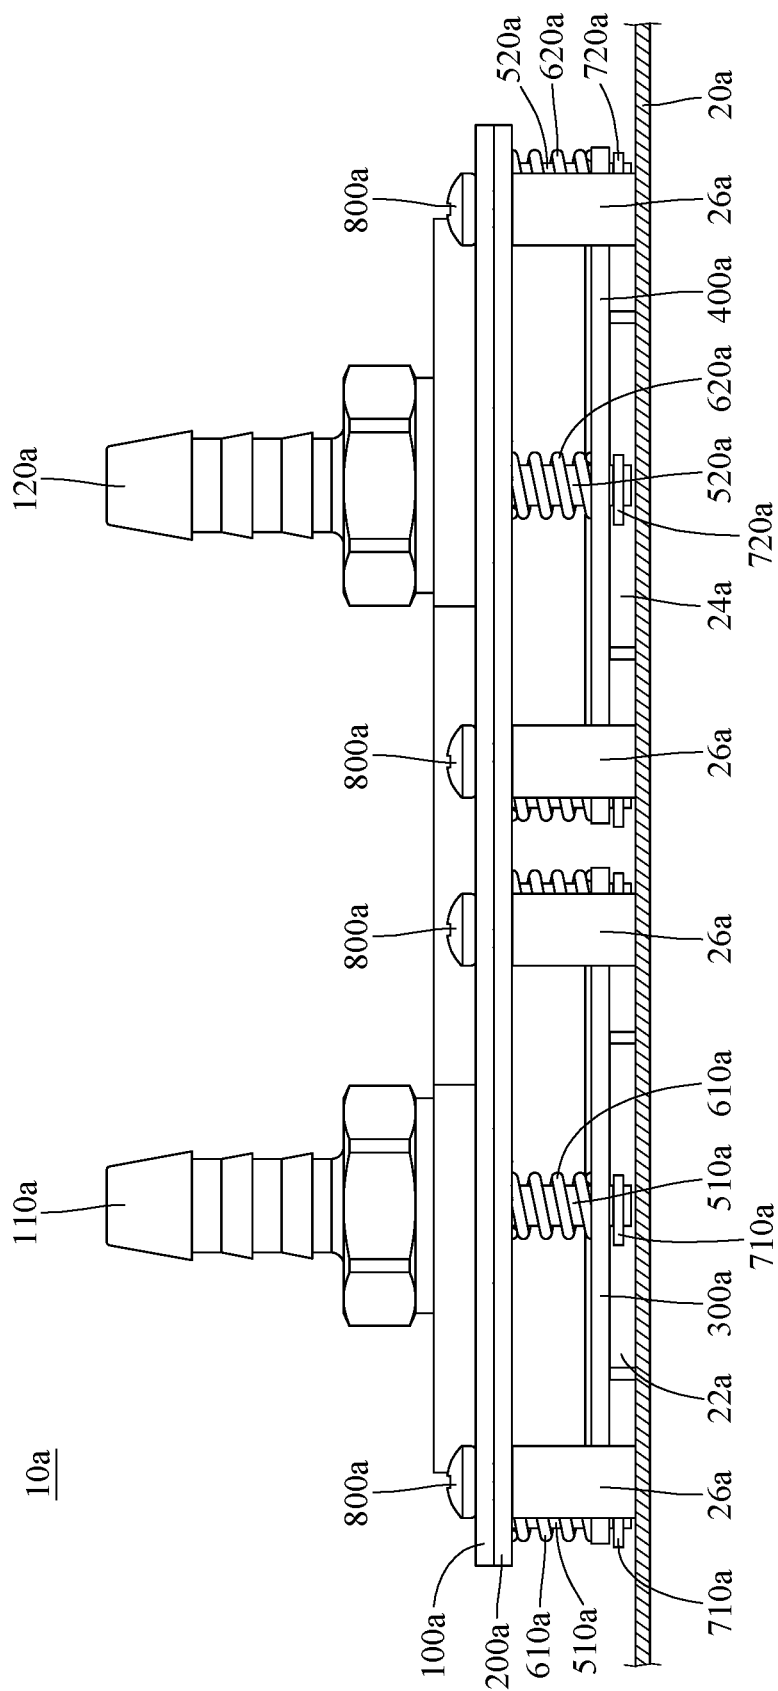


FIG. 3

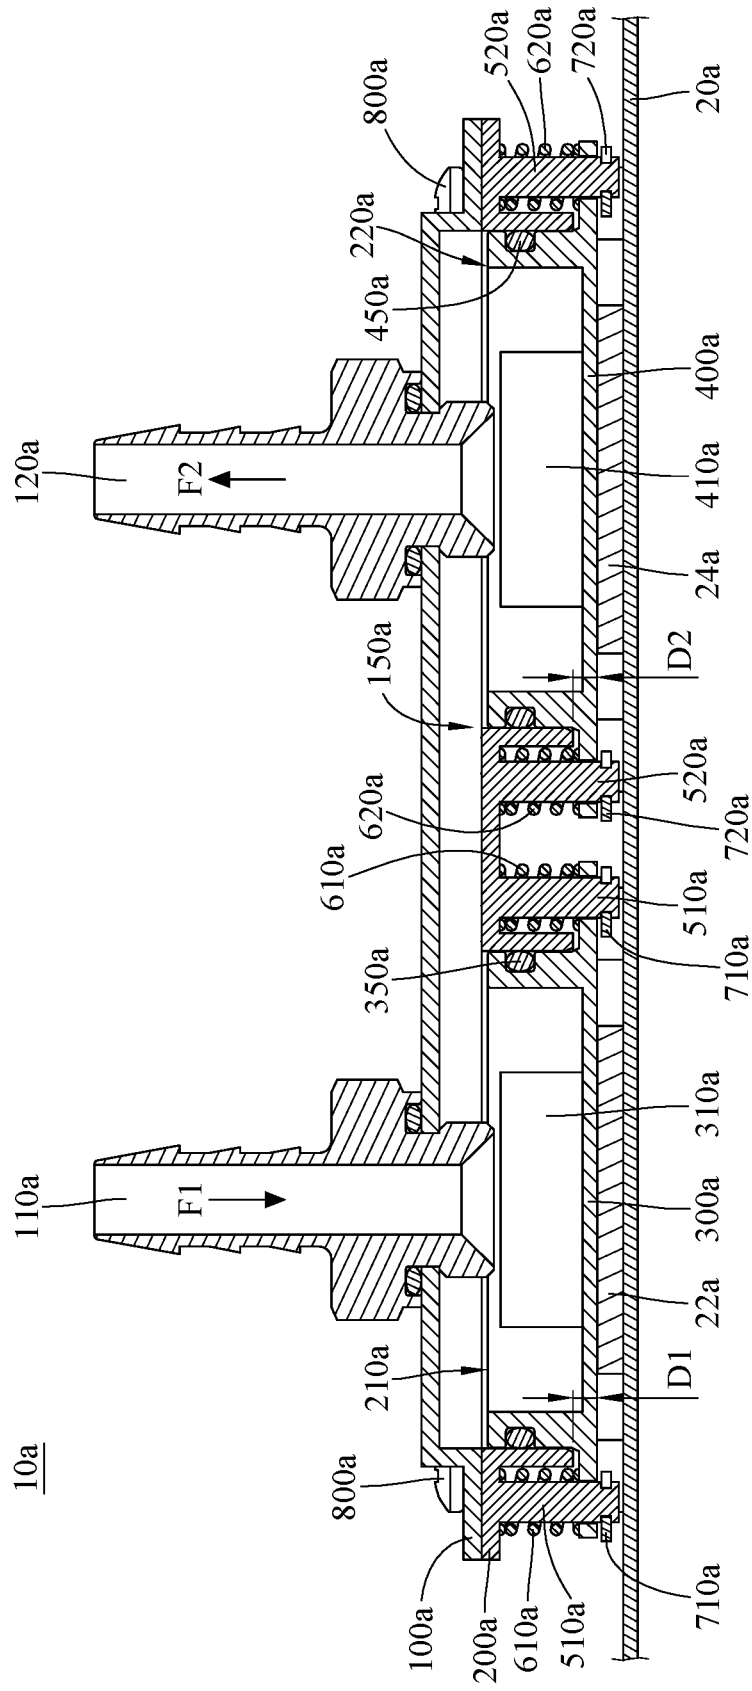


FIG. 4

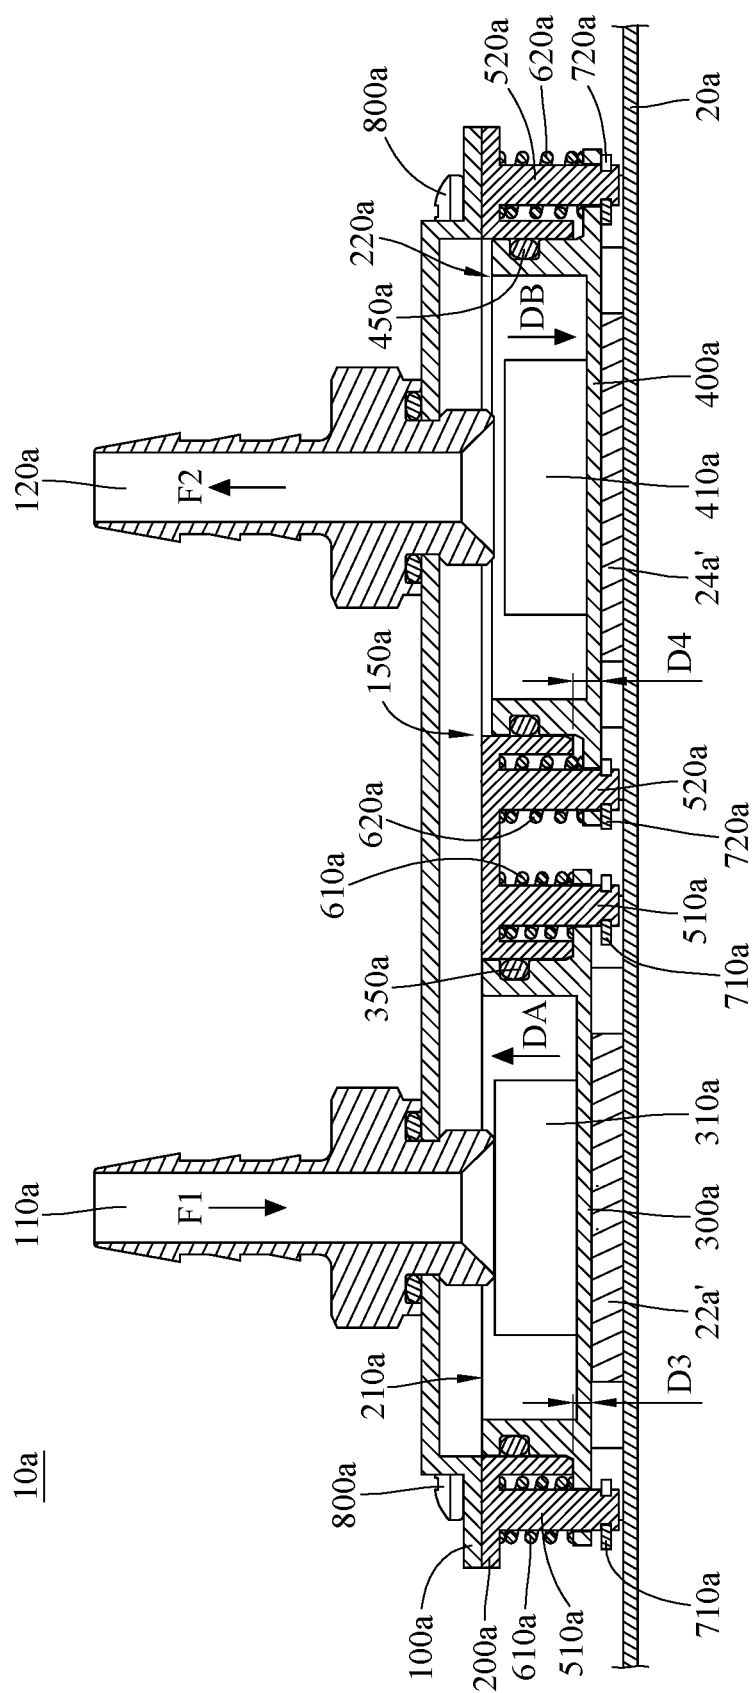


FIG. 5

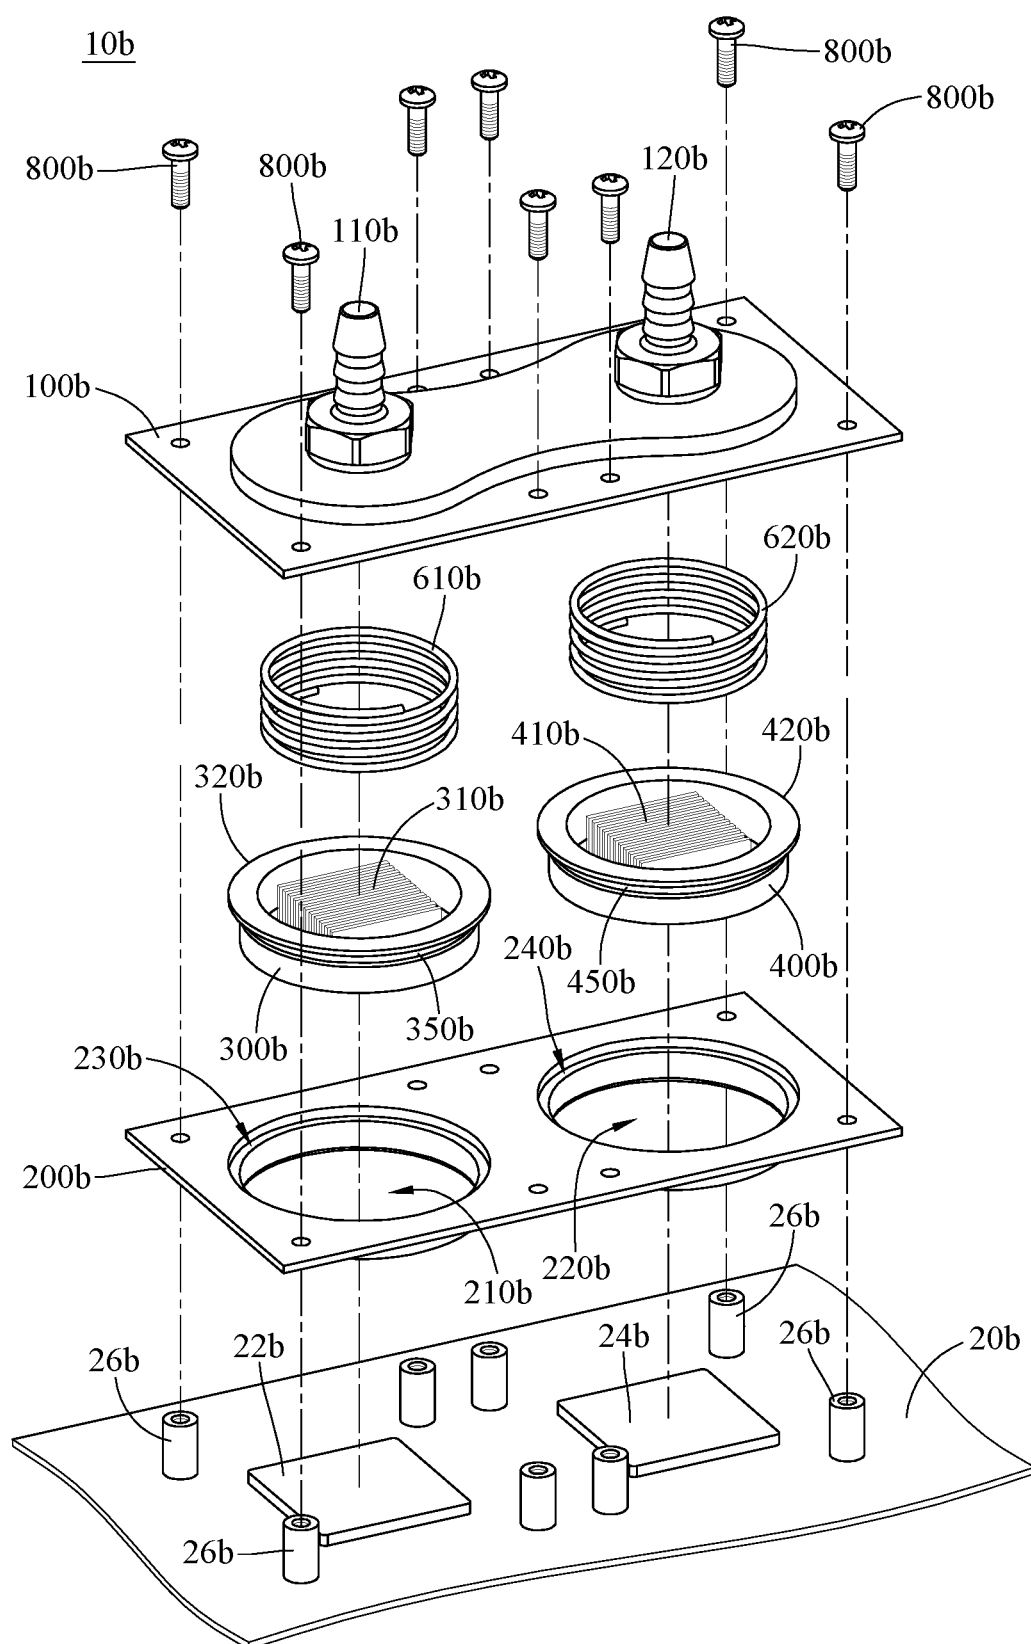


FIG. 6

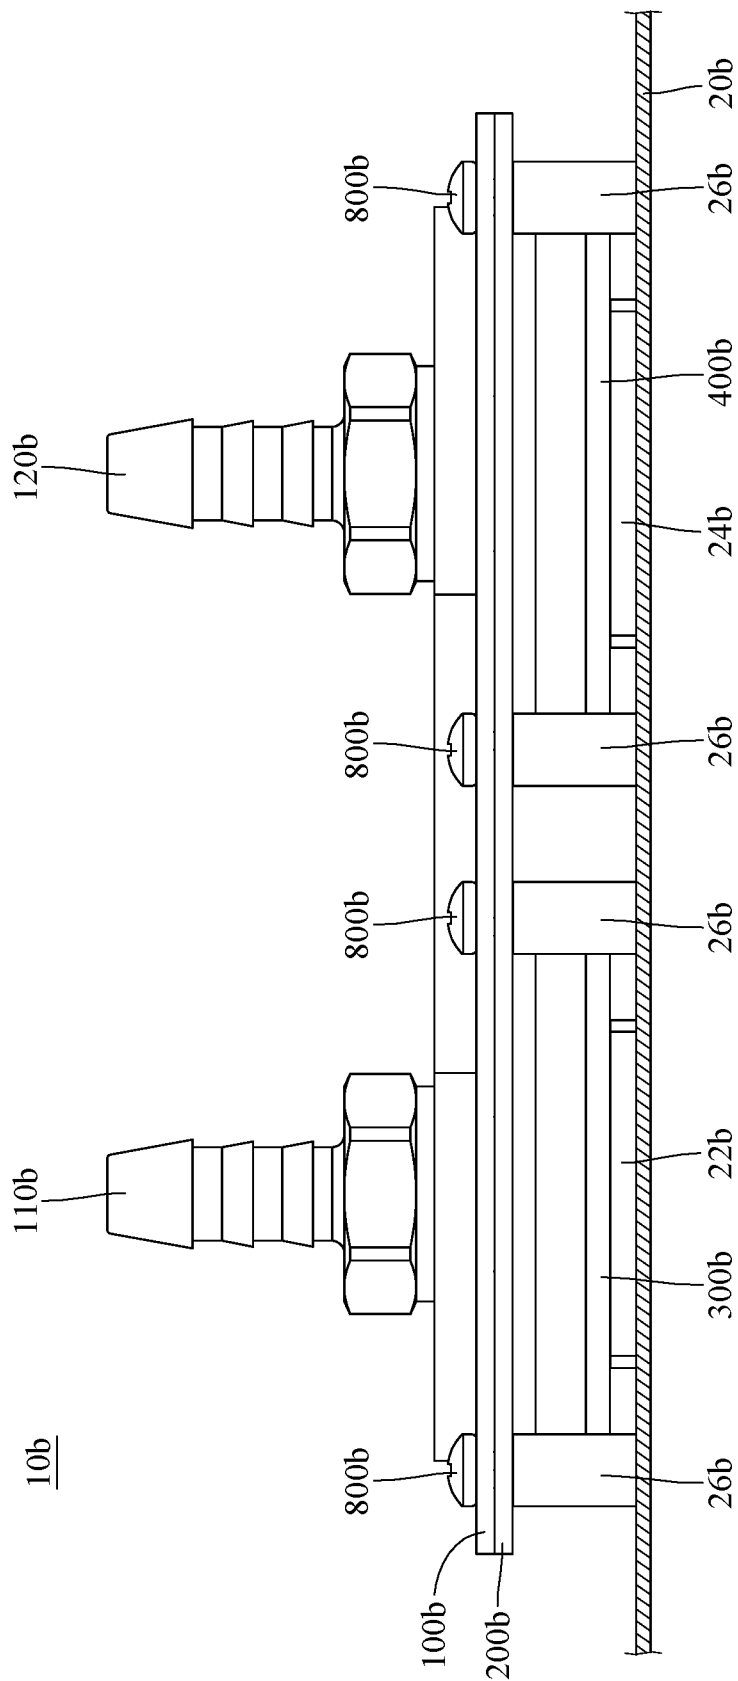


FIG. 7

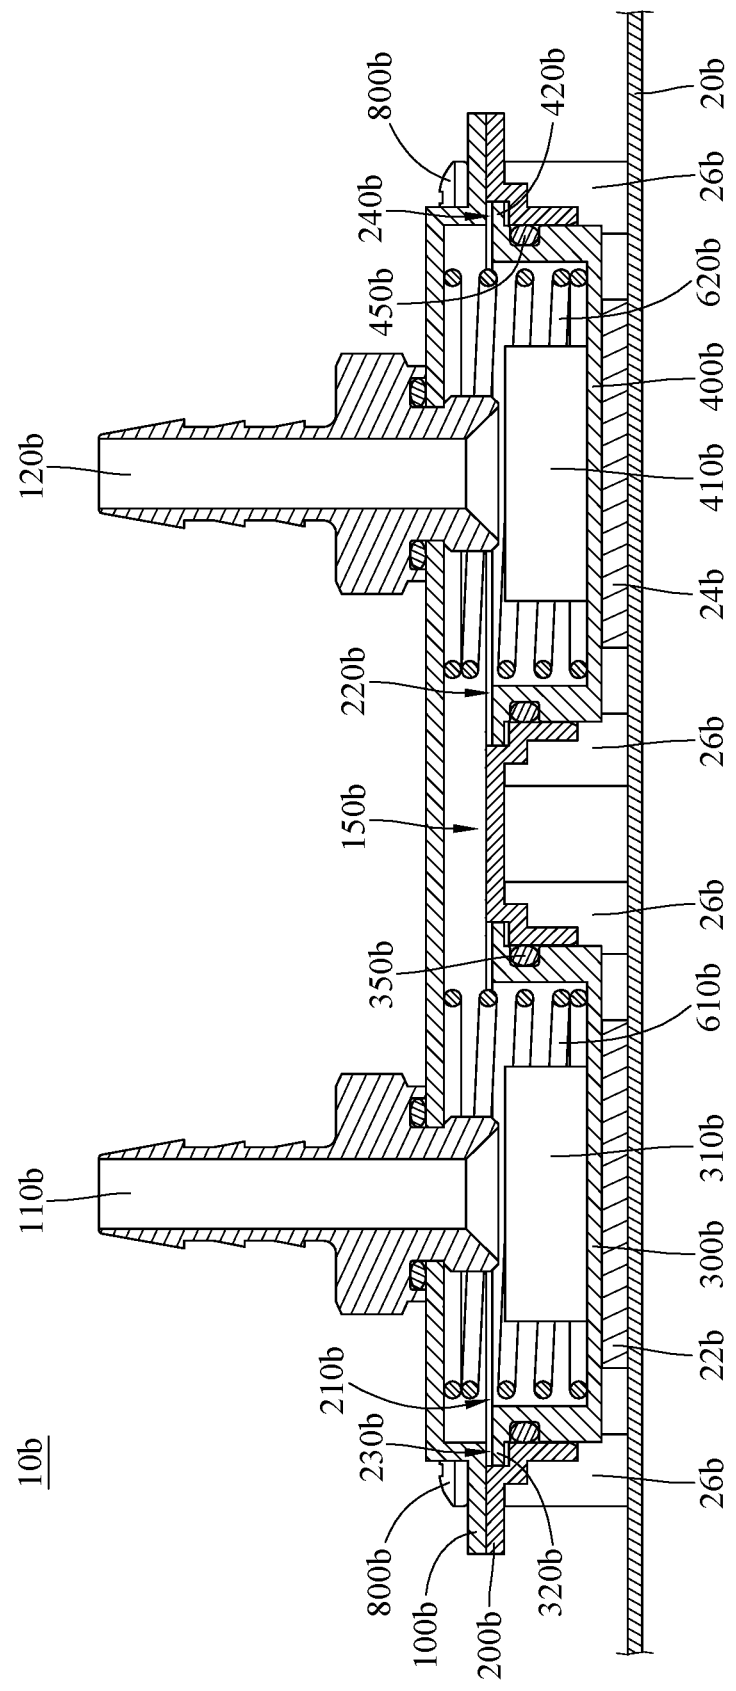
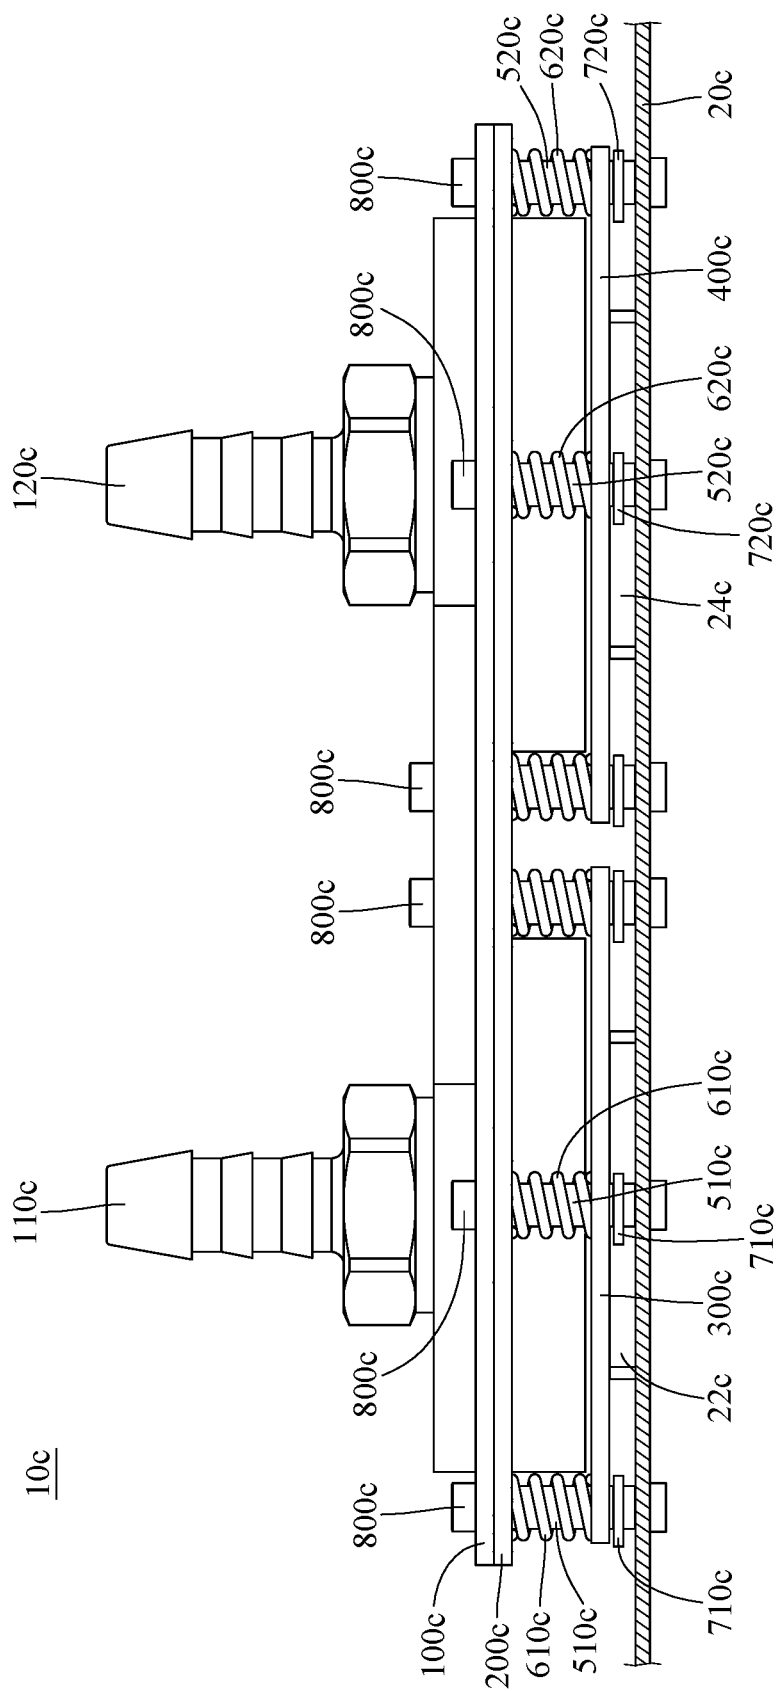


FIG. 8



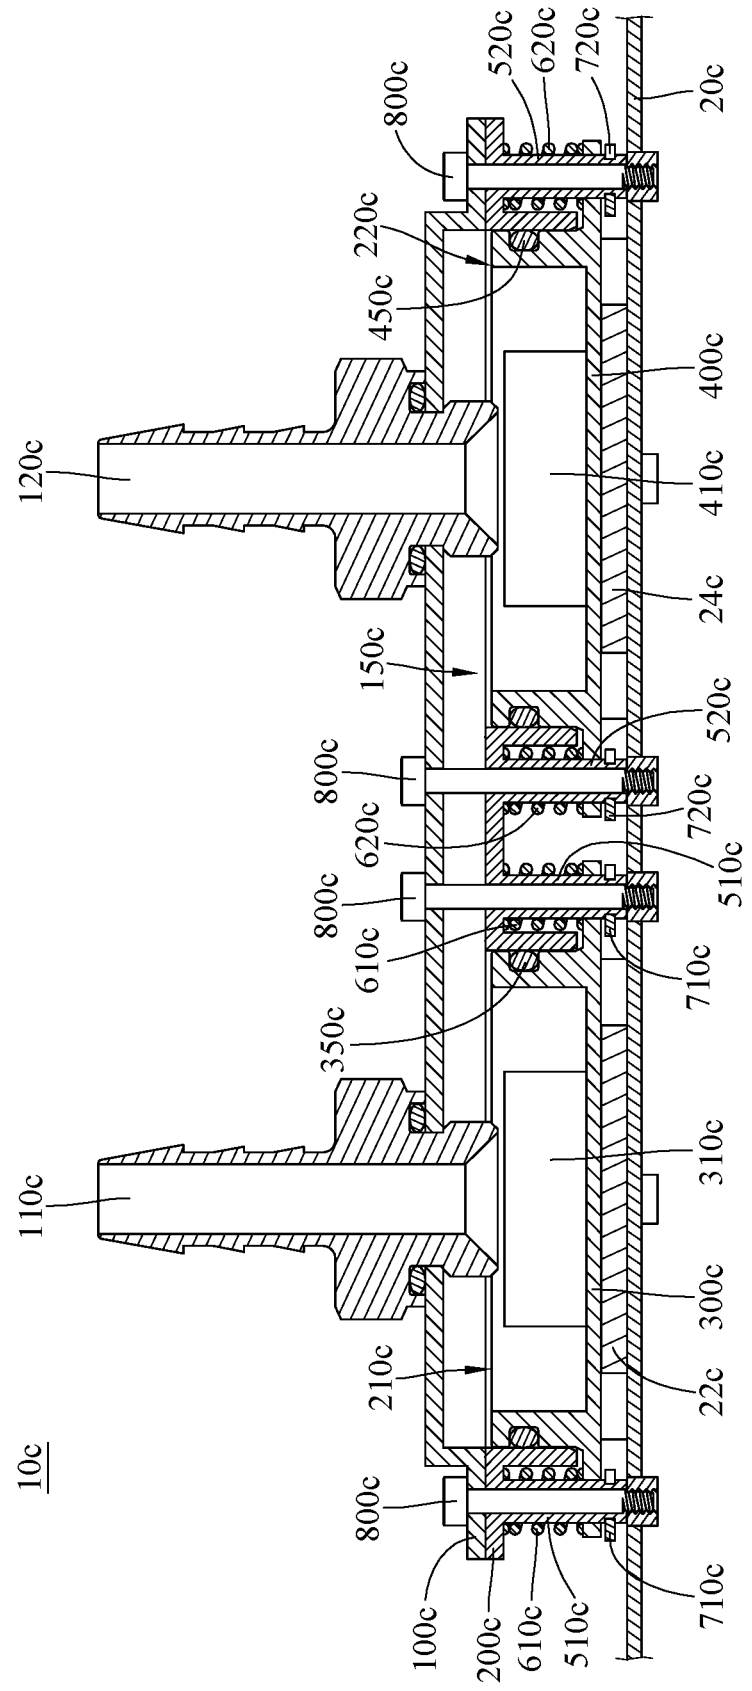


FIG. 10

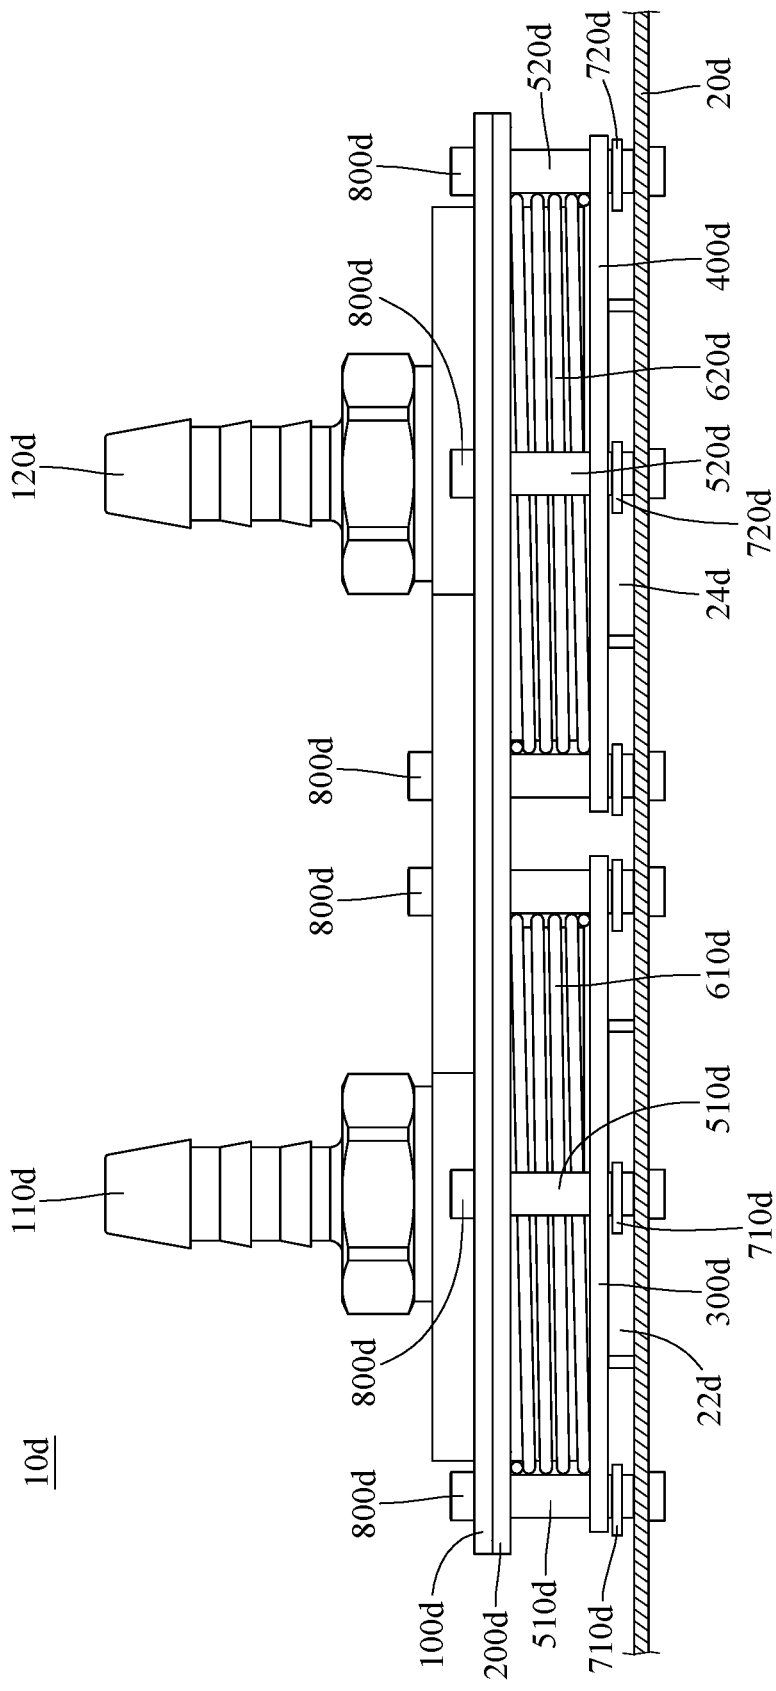


FIG. 11

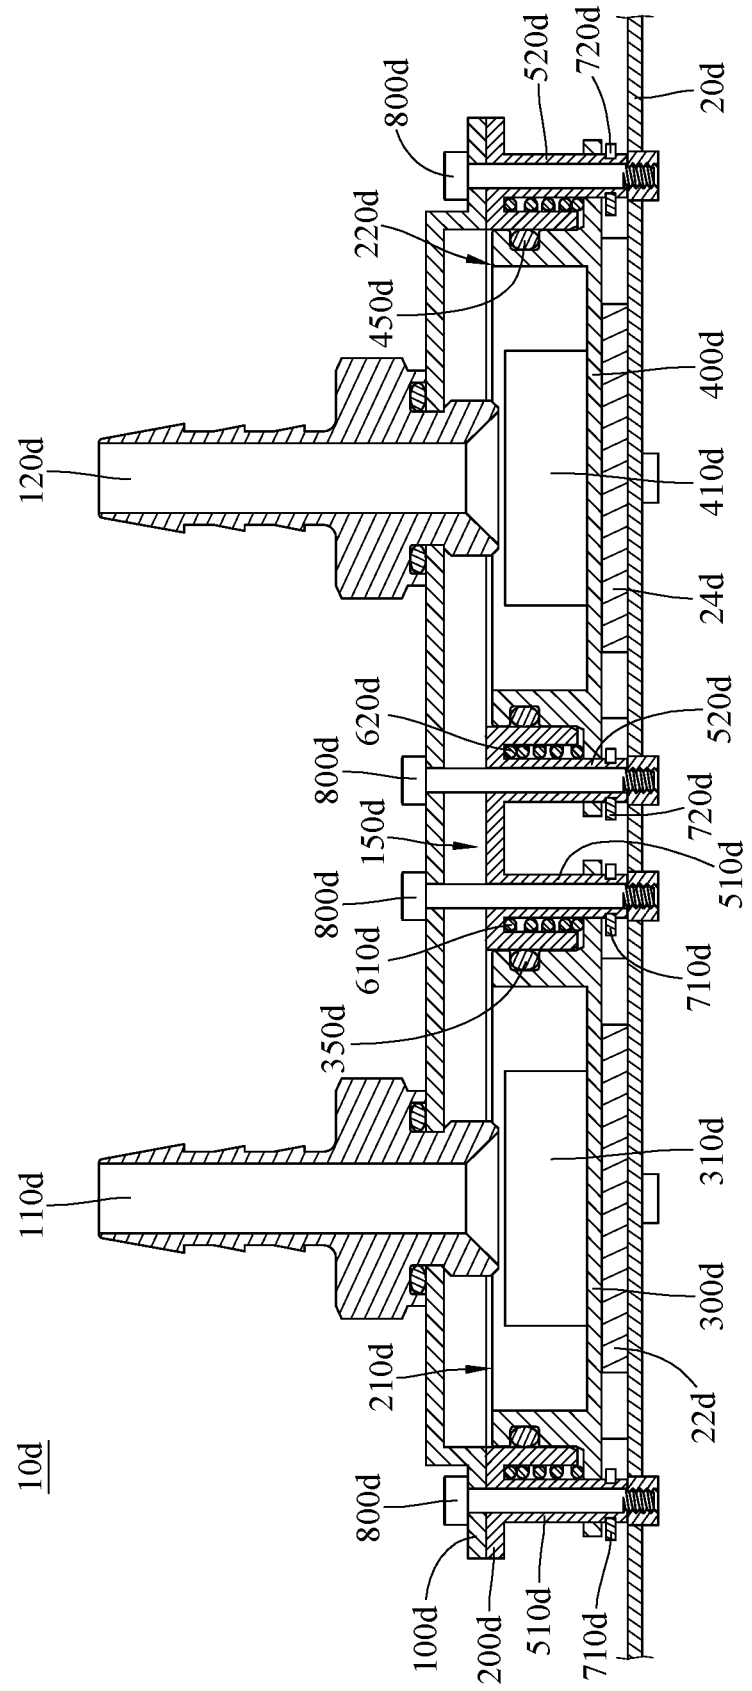


FIG. 12

LIQUID COOLING DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This non-provisional application claims priority under 35 U.S.C. § 119(a) on Patent Application No(s). 107120264 filed in Taiwan on Jun. 13, 2018, the entire contents of which are hereby incorporated by reference.

TECHNICAL FIELD

[0002] The disclosure relates to a liquid cooling device, more particularly to a liquid cooling device having a movable thermal block.

BACKGROUND

[0003] In a computer system, a central processing unit, a north bridge chip, a south bridge chip and a graphics processing unit on a motherboard all are integrated circuit chips. The integrated circuit chips are the main heat source in the computer system. In order to quickly remove heat generated by these integrated circuit chips, a liquid cooling system utilizes a cold plate to directly contact back surfaces of these integrated circuit chips, and utilizes coolant flowing through the cold plate to take unwanted heat to a radiator through a liquid circulation.

[0004] The arrangement of the cold plate and the heat source may be one-to-one or one-to-many. In the former case, the pressure of the cold plate pressing on the heat source is the only factor that needs to be taken into consideration for ensuring thermal contact between the cold plate and the heat source. However, in the latter case, it is unlikely for a single cold plate to be in tight contact with multiple heat sources because there are assembling tolerances among each heat source and thus the heat dissipation capacity of the cold plate is not effectively exerted.

SUMMARY

[0005] The present disclosure provides a liquid cooling device which solves the problem of a single cold plate unable to be in tight contact with multiple heat sources due to assembling tolerances among different heat sources existing in the conventional liquid cooling system.

[0006] One embodiment of the disclosure provides a liquid cooling device configured to be in thermal contact with a first heat source and a second heat source which are disposed on a printed circuit board. The liquid cooling device includes a first thermal plate, a second thermal plate, a first thermal block and a second thermal block. The first thermal plate is configured to be disposed on the printed circuit board. The second thermal plate is disposed on the first thermal plate. The first thermal plate and the second thermal plate together form a storage space, and the storage space is configured to store a coolant. The first thermal block is configured to be in thermal contact with the first heat source, and the second thermal block is configured to be in thermal contact with the second heat source. The first thermal block and the second thermal block are movably disposed on the second thermal plate, such that a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate, and a protruding height of the second thermal block from the second thermal

plate is adjustable according to a gap width between the second heat source and the second thermal plate.

[0007] One embodiment of the disclosure provides a liquid cooling device configured to be in thermal contact with a first heat source and a second heat source which are disposed on a printed circuit board. The liquid cooling device includes a first thermal plate, a second thermal plate, a first thermal block and a second thermal block. The first thermal plate is configured to be disposed on the printed circuit board. The second thermal plate is disposed on the first thermal plate. The first thermal plate and the second thermal plate together form a storage space, and the storage space is configured to store a coolant. The first thermal block is configured to be in thermal contact with the first heat source, and the second thermal block is configured to be in thermal contact with the second heat source. The second thermal block is immovably fixed on the second thermal plate. The first thermal block is movably disposed on the second thermal plate, such that a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate.

[0008] One embodiment of the disclosure provides a liquid cooling device configured to be in thermal contact with a first heat source which is disposed on a printed circuit board. The liquid cooling device includes a first thermal plate, a second thermal plate, a first thermal block and a first elastic component. The first thermal plate is configured to be disposed on the printed circuit board. The second thermal plate is disposed on the first thermal plate. The first thermal plate and the second thermal plate together form a storage space, and the storage space is configured to store a coolant. The first thermal block is configured to be in thermal contact with the first heat source, and the first thermal block is movably disposed on the second thermal plate. The first elastic component surrounds the first thermal block. One end of the first elastic component is connected to the second thermal plate, and another end of the first elastic component is connected to the first thermal block so that the first elastic component forces the first thermal block to move away from the first thermal plate, and a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate.

[0009] One embodiment of the disclosure provides a liquid cooling device configured to be in thermal contact with a first heat source which is disposed on a printed circuit board. The liquid cooling device includes a first thermal plate, a second thermal plate, a first thermal block, a plurality of first guiding pillars and a plurality of first elastic components. The first thermal plate is configured to be disposed on the printed circuit board. The second thermal plate is disposed on the first thermal plate. The first thermal plate and the second thermal plate together form a storage space, and the storage space is configured to store a coolant. The first thermal block is configured to be in thermal contact with the first heat source, and the first thermal block is movably disposed on the second thermal plate. One end of each of the first guiding pillars is fixed on the second thermal plate, another end of each of the first guiding pillars is integrated into the first thermal block. The first elastic components respectively surround the first guiding pillars. One end of each of the first elastic components is connected to the second thermal plate, and another end of each of the

first elastic components is connected to the first thermal block so that the first elastic components force the first thermal block to move away from the first thermal plate, and a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate.

[0010] One embodiment of the disclosure provides a liquid cooling device configured to be in thermal contact with a first heat source which is disposed on a printed circuit board. The liquid cooling device includes a first thermal plate, a second thermal plate, a first thermal block and a plurality of first guiding pillars. The first thermal plate is configured to be disposed on the printed circuit board. The second thermal plate is disposed on the first thermal plate. The first thermal plate and the second thermal plate together form a storage space and the storage space is configured to store a coolant. The first thermal block is configured to be in thermal contact with the first heat source, and the first thermal block is movably disposed on the second thermal plate. One end of each of the first guiding pillars is fixed on the second thermal plate, another end of each of the first guiding pillars is integrated into the first thermal block so as to guide the first thermal block to move relative to the second thermal plate. The fasteners are respectively disposed through the first thermal plate, the second thermal plate and the plurality of first guiding pillars and configured to be fixed to the printed circuit board.

[0011] According to the liquid cooling device as described above, in some embodiments, there are a plurality of thermal blocks disposed on the second thermal plate to be in thermal contact with the heat sources, and at least one of the thermal blocks is movably disposed on the second thermal plate, such that the protruding height of the movable thermal block from the second thermal plate is adjustable according to the gap width between the heat source and the second thermal plate. As such, regardless of the mechanical interference between the heat source and the thermal block or the gap between the heat source and the thermal block, the thermal blocks are ensured to be in thermal contact with the heat sources.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The present disclosure will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only and thus are not intending to limit the present disclosure and wherein:

[0013] FIG. 1 is a perspective view of a liquid cooling device disposed on a printed circuit board in accordance with a first embodiment of the present disclosure;

[0014] FIG. 2 is an exploded view of FIG. 1;

[0015] FIG. 3 is a side view of FIG. 1;

[0016] FIG. 4 is a cross-sectional view of FIG. 1;

[0017] FIG. 5 is a cross-sectional view of the liquid cooling device in FIG. 1 when the liquid cooling device is in thermal contact with two heat sources which are different in height;

[0018] FIG. 6 is an exploded view of a liquid cooling device in accordance with a second embodiment of the present disclosure;

[0019] FIG. 7 is a side view of the liquid cooling device in accordance with the second embodiment of the present disclosure;

[0020] FIG. 8 is a cross-sectional view of FIG. 7;

[0021] FIG. 9 is a side view of a liquid cooling device disposed on a printed circuit board in accordance with a third embodiment of the present disclosure;

[0022] FIG. 10 is a cross-sectional view of FIG. 9;

[0023] FIG. 11 is a side view of a liquid cooling device disposed on a printed circuit board in accordance with a fourth embodiment of the present disclosure; and

[0024] FIG. 12 is a cross-sectional view of FIG. 11.

DETAILED DESCRIPTION

[0025] In the following detailed description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosed embodiments. It will be apparent, however, that one or more embodiments may be practiced without these specific details. In other instances, well-known accommodation structures and devices are schematically shown in order to simplify the drawing.

[0026] Please refer to FIG. 1 to FIG. 4. FIG. 1 is a perspective view of a liquid cooling device disposed on a printed circuit board in accordance with a first embodiment of the present disclosure, FIG. 2 is an exploded view of FIG. 1, FIG. 3 is a side view of FIG. 1, and FIG. 4 is a cross-sectional view of FIG. 1.

[0027] In this embodiment, a liquid cooling device 10a is provided. The liquid cooling device 10a is, for example, a water cooling plate applied to an electronic control unit in order to cool a heat source in the electronic control unit. In detail, the electronic control unit includes, for example, a printed circuit board 20a, a first heat source 22a and a second heat source 24a. The first heat source 22a and the second heat source 24a are disposed on the printed circuit board 20a. The liquid cooling device 10a is configured to be in thermal contact with the first heat source 22a and the second heat source 24a, such that coolant flowing through the liquid cooling device 10a is able to cool the first heat source 22a and the second heat source 24a. The first heat source 22a and the second heat source 24a are, for example, central processing units or graphics processing units.

[0028] The liquid cooling device 10a includes a first thermal plate 100a, a second thermal plate 200a, a first thermal block 300a and a second thermal block 400a.

[0029] The second thermal plate 200a is disposed on the first thermal plate 100a, and the first thermal plate 100a and the second thermal plate 200a together form a storage space 150a. The storage space 150a is configured to store coolant (not shown in figures). The coolant is, for example, water or refrigerant. Furthermore, the first thermal plate 100a has a liquid inlet 110a and a liquid outlet 120a which are connected to the storage space 150a, allowing coolant to flow into the storage space 150a via the liquid inlet 110a (as shown by arrow F1) and flow out of the storage space 150a via the liquid outlet 120a (as shown by arrow F2).

[0030] The first thermal block 300a has a plurality of first cooling fins 310a which are located in the storage space 150a and able to increase the heat exchange rate between the coolant and the first thermal block 300a in the storage space 150a. Similarly, the second thermal block 400a has a plurality of second cooling fins 410a which are located in the storage space 150a and able to increase the heat exchange rate between the coolant and the second thermal block 400a in the storage space 150a.

[0031] The first thermal block 300a is configured to be in thermal contact with the first heat source 22a, and the second

thermal block **400a** is configured to be in thermal contact with the second heat source **24a**. Both the first thermal block **300a** and the second thermal block **400a** are movably disposed on the second thermal plate **200a**, such that a protruding height of the first thermal block **300a** from the second thermal plate **200a** is adjustable according to a gap width between the first heat source **22a** and the second thermal plate **200a**, and a protruding height of the second thermal block **400a** from the second thermal plate **200a** is adjustable according to a gap width between the second heat source **24a** and the second thermal plate **200a**.

[0032] In detail, the second thermal plate **200a** further has a first through hole **210a** and a second through hole **220a**. The first through hole **210a** and the second through hole **220a** are connected to the storage space **150a**, the first thermal block **300a** is slidably disposed in the first through hole **210a**, and the second thermal block **400a** is slidably disposed in the second through hole **220a**.

[0033] The liquid cooling device **10a** further includes a first sealing component **350a**, a second sealing component **450a**, a plurality of first guiding pillars **510a**, a plurality of second guiding pillars **520a**, a plurality of first retaining rings **710a**, a plurality of second retaining rings **720a**, a plurality of first elastic components **610a** and a plurality of second elastic components **620a**.

[0034] The first sealing component **350a** is located between and clamped by the second thermal plate **200a** and the first thermal block **300a**, and the second sealing component **450a** is located between and clamped by the second thermal plate **200a** and the second thermal block **400a**, such that the coolant in the storage space **150a** is prevented from leaking through a gap between the second thermal plate **200a** and the first thermal block **300a** or a gap between the second thermal plate **200a** and the second thermal block **400a** to the exterior.

[0035] One end of each of the first guiding pillars **510a** is fixed on the second thermal plate **200a** by welding or riveting. Another end of each of the first guiding pillars **510a** is integrated into the first thermal block **300a**. Specifically, the another end of each of the first guiding pillars **510a** is disposed through the first thermal block **300a**, and the first retaining rings **710a** are respectively attached to the first guiding pillars **510a** and located on one side of the first thermal block **300a** away from the first thermal plate **100a** for restricting movement of the first thermal block **300a**, and thereby the another end of each of the first guiding pillars **510a** is integrated into the first thermal block **300a**. In addition, the second thermal plate **200a** and each of the first retaining rings **710a** respectively function as movement limitation means for a top dead center and a bottom dead center of the first thermal block **300a**. In this embodiment, a distance between the top dead center and the bottom dead center is, but not limited to, 0.8 mm. In other embodiments, a distance between the top dead center and the bottom dead center may be determined by assembling tolerances of each heat source.

[0036] Similarly, one end of each of the second guiding pillars **520a** is fixed on the second thermal plate **200a** by welding or riveting. Another end of each of the second guiding pillars **520a** is disposed through the second thermal block **400a**. Specifically, the another end of each of second guiding pillars **520a** is disposed through the second thermal block **400a**, and the second retaining rings **720a** are respectively attached to the second guiding pillars **520a** and

located on one side of the second thermal block **400a** away from the first thermal plate **100a** for restricting movement of the second thermal block **400a**, and thereby the another end of each of the second guiding pillars **520a** is disposed through the second thermal block **400a**. In addition, the second thermal plate **200a** and each of the second retaining rings **720a** respectively function as movement limitation means for a top dead center and a bottom dead center of the second thermal block **400a**.

[0037] The first elastic components **610a** are, for example, compression springs, and are respectively sleeved on the first guiding pillars **510a**. One end of each of the first elastic components **610a** presses against the first thermal plate **100a**, and another end of each of the first elastic components **610a** presses against the first thermal block **300a** so that the first elastic components **610a** force the first thermal block **300a** to move away from the first thermal plate **100a**. That is, when the first thermal block **300a** is not in contact with the heat source, the first thermal block **300a** is constantly located at the bottom dead center thereof and presses against the first retaining rings **710a** by experiencing an elastic force applied by the first elastic components **610a**.

[0038] Similarly, the second elastic components **620a** are, for example, compression springs, and are respectively sleeved on the second guiding pillars **520a**. One end of each of the second elastic components **620a** presses against the second thermal plate **200a**, and another end of each of the second elastic components **620a** presses against the second thermal block **400a** so that the second elastic components **620a** force the second thermal block **400a** to move away from the first thermal plate **100a**. That is, when the second thermal block **400a** is not in contact with the heat source, the second thermal block **400a** is constantly located at the bottom dead center thereof and presses against the second retaining rings **720a** by experiencing an elastic force applied by the second elastic components **620a**.

[0039] The fasteners **800a** are, for example, screws, and are disposed through the first thermal plate **100a** and the second thermal plate **200a**. The fasteners **800a** are configured to be fixed to assembling studs **26a** of the printed circuit board **20a** so as to fix the first thermal plate **100a** above the printed circuit board **20a**, and as such, the first thermal block **300a** and the second thermal block **400a** are suspended on the second thermal plate **200a**. In other embodiments, the fasteners **800a** may be directly fixed to the board body of the printed circuit board **20a** without the assembling studs **26a** connected therebetween, but the present disclosure is not limited thereto.

[0040] As shown in FIG. 4, when the first thermal block **300a** and the second thermal block **400a** of the liquid cooling device **10a** respectively press against the first heat source **22a** and the second heat source **24a**, which are same in height, at the same time, a protruding height D1 of the first thermal block **300a** from the second thermal plate **200a** is equal to a protruding height D2 of the second thermal block **400a** from the second thermal plate **200a** due to a gap width between the first heat source **22a** and the second thermal plate **200a** being the same as a gap width between the second heat source **24a** and the second thermal plate **200a**.

[0041] Then, please refer to FIG. 5, FIG. 5 is a cross-sectional view of the liquid cooling device in FIG. 1 when the liquid cooling device is in thermal contact with two heat sources which are different in height. As shown in the figure, a thickness of the first heat source **22a'** is larger than that of

the first heat source **22a** shown in FIG. 1, and a thickness of the second heat source **24a'** is smaller than that of the second heat source **24a** shown in FIG. 1. In such a case, when the first thermal block **300a** and the second thermal block **400a** of the liquid cooling device **10a** are respectively placed on the first heat source **22a'** and the second heat source **24a'**, the first thermal block **300a** is moved upwards along a direction DA by being pushed by the first heat source **22a'**, and the second thermal block **400a** is moved downwards along a direction DB to press against the second heat source **24a'** by the second elastic components **620a**. In other words, due to the different thicknesses between the first heat source **22a'** and the second heat source **24a'**, a protruding height D3 of the first thermal block **300a** from the second thermal plate **200a** is different from a protruding height D4 of the second thermal block **400a** from the second thermal plate **200a**. As such, a mechanical interference between the first thermal block **300a** and the first heat source **22a'** is prevented, and a gap between the second thermal block **400a** and the second heat source **24a'** is prevented, thereby ensuring the first thermal block **300a** and the first heat source **22a'** being in thermal contact with each other, and the second thermal block **400a** and the second heat source **24a'** being in thermal contact with each other.

[0042] The two heat sources designed with different thicknesses are described as an example in the above embodiment. However, in actual practice, there may be other causes that may result in two heat sources having their contact surfaces located at different heights, such as different assembling tolerances between the heat sources.

[0043] In the abovementioned embodiment, the first thermal block **300a** and the second thermal block **400a** are slidably disposed in the first through hole **210a** and the second through hole **220a** which are connected to the storage space **150a**, but the present disclosure is not limited thereto. In other embodiments, the first thermal block **300a** and the second thermal block **400a** may be slidably disposed in a first through hole and a second through hole which are not connected to the storage space. In this case, there is no need to equip a water-proof component, such as a sealing component, between the second thermal plate **200a** and the first thermal block **300a** and the second thermal block **400a**.

[0044] Furthermore, in the abovementioned embodiment, the second thermal plate **200a** is integrated with the thermal blocks **300a** and **400a** by the guiding pillars **510a** and **520a** and the retaining rings **710a** and **720a**, but the present disclosure is not limited thereto. In other embodiments, the second thermal plate may be integrated with the thermal blocks by hooks.

[0045] In the abovementioned embodiment, the first elastic components **610a** and the second elastic components **620a** are located outside of the storage space **150a**, but the present disclosure is not limited thereto. Please refer to FIG. 6 to FIG. 8. FIG. 6 is an exploded view of a liquid cooling device disposed on a printed circuit board in accordance with a second embodiment of the present disclosure, FIG. 7 is a side view of the liquid cooling device in accordance with the second embodiment of the present disclosure, and FIG. 8 is a cross-sectional view of FIG. 7.

[0046] In this embodiment, a liquid cooling device **10b** is provided. The liquid cooling device **10b** includes a first thermal plate **100b**, a second thermal plate **200b**, a first thermal block **300b** and a second thermal block **400b**.

[0047] The second thermal plate **200b** is disposed on the first thermal plate **100b**, and the first thermal plate **100b** and the second thermal plate **200b** together form a storage space **150b**. The storage space **150b** is configured to store coolant. The coolant is, for example, water or refrigerant.

[0048] The first thermal block **300b** has a plurality of first cooling fins **310b** which are located in the storage space **150b** and able to increase the heat exchange rate between the coolant and the first thermal block **300b** in the storage space **150b**. Similarly, the second thermal block **400b** has a plurality of second cooling fins **410b** which are located in the storage space **150b** and able to increase the heat exchange rate between the coolant and the second thermal block **400b** in the storage space **150b**.

[0049] The first thermal block **300b** is configured to be in thermal contact with a first heat source **22b**, and the second thermal block **400b** is configured to be in thermal contact with a second heat source **24b**. Both the first thermal block **300b** and the second thermal block **400b** are movably disposed on the second thermal plate **200b**, such that a protruding height of the first thermal block **300b** from the second thermal plate **200b** is adjustable according to a gap width between the first heat source **22b** and the second thermal plate **200b**, and a protruding height of the second thermal block **400b** from the second thermal plate **200b** is adjustable according to a gap width between the second heat source **24b** and the second thermal plate **200b**.

[0050] In detail, the second thermal plate **200b** further has a first through hole **210b** and a second through hole **220b**. The first through hole **210b** and the second through hole **220b** are connected to the storage space **150b**, the first thermal block **300b** is slidably disposed in the first through hole **210b**, and the second thermal block **400b** is slidably disposed in the second through hole **220b**.

[0051] In addition, the second thermal plate **200b** further has a first restricting groove **230b** and a second restricting groove **240b**. The first restricting groove **230b** surrounds and is connected to the first through hole **210b**, and the second restricting groove **240b** surrounds and is connected to the second through hole **220b**. The first thermal block **300b** further has a first restricting protrusion **320b** slidably located in the first restricting groove **230b**. The second thermal block **400b** further has a second restricting protrusion **420b** slidably located in the second restricting groove **240b**. That is, two opposite surfaces of the first restricting groove **230b** respectively function as movement limitation means for a top dead center and a bottom dead center of the first thermal block **300b**. Similarly, two opposite surfaces of the second restricting groove **240b** respectively function as movement limitation means for a top dead center and a bottom dead center of the second thermal block **400b**.

[0052] The liquid cooling device **10b** further includes a first sealing component **350b**, a second sealing component **450b**, a plurality of first elastic components **610b** and a plurality of second elastic components **620b**.

[0053] The first sealing component **350b** is located between and clamped by the second thermal plate **200b** and the first thermal block **300b**, and the second sealing component **450b** is located between and clamped by the second thermal plate **200b** and the second thermal block **400b**, such that the coolant in the storage space **150b** is prevented from leaking through a gap between the second thermal plate

200b and the first thermal block **300b** or a gap between the second thermal plate **200b** and the second thermal block **400b** to the exterior.

[0054] The first elastic components **610b** and the second elastic components **620b** are, for example, compression springs, and are located in the storage space **150b**. Each of the first elastic components **610b** presses against the first thermal plate **100b** and the first thermal block **300b** at either end, such that when the first thermal block **300b** is not in contact with the heat source, the first thermal block **300b** is constantly located at the bottom dead center thereof away from the first thermal plate **100b** by experiencing an elastic force applied by the first elastic components **610b**. Similarly, each of the second elastic components **620b** presses against the first thermal plate **100b** and the second thermal block **400b** at either end, such that when the second thermal block **400b** is not in contact with the heat source, the second thermal block **400b** is constantly located at the bottom dead center thereof away from the second thermal plate **200b** by experiencing an elastic force applied by the second elastic components **620b**.

[0055] The fasteners **800b** are, for example, screws, and are disposed through the first thermal plate **100b** and the second thermal plate **200b**, and the fasteners **800b** are configured to be fixed to assembling studs **26b** of a printed circuit board **20b** so as to fix the first thermal plate **100b** above the printed circuit board **20b**, and as such, the first thermal block **300b** and the second thermal block **400b** are suspended on the second thermal plate **200b**. In other embodiments, the fasteners **800b** may be directly fixed to a board body of the printed circuit board **20b** without the assembling studs **26b** connected therebetween, but the present disclosure is not limited thereto.

[0056] In the abovementioned embodiment, the assembling studs **26a** and the guiding pillars **510a** and **520a** of the liquid cooling device **10a** are independent from one another, but the present disclosure is not limited thereto. Please refer to FIG. 9 to FIG. 12. FIG. 9 is a side view of a liquid cooling device disposed on a printed circuit board in accordance with a third embodiment of the present disclosure, FIG. 10 is a cross-sectional view of FIG. 9, FIG. 11 is a side view of a liquid cooling device disposed on a printed circuit board in accordance with a fourth embodiment of the present disclosure, and FIG. 12 is a cross-sectional view of FIG. 11.

[0057] In this embodiment, a liquid cooling device **10c** is provided. As shown in FIG. 9 and FIG. 10, in the liquid cooling device **10c**, some of fasteners **800c** are respectively disposed through a first thermal plate **100c**, a second thermal plate **200c** and first guiding pillars **510c**, and configured to be fixed to a printed circuit board **20c**. Furthermore, another some of the fasteners **800c** are respectively disposed through the first thermal plate **100c**, the second thermal plate **200c** and second guiding pillars **520c**, and configured to be fixed to the printed circuit board **20c**. That is, the fasteners **800c** are directly disposed through the guiding pillars and fixed to the printed circuit board **20c**, such that the printed circuit board **20c** is manufactured without assembling studs. In addition, in this embodiment, first elastic components **610c** and second elastic components **620c** may be respectively sleeved on the first guiding pillars **510c** and the second guiding pillars **520c**, which is the same as that shown in FIG. 1; alternatively, as shown in FIG. 11 and FIG. 12, first elastic

components **610d** and second elastic components **620d** are respectively sleeved on first thermal block **300d** and second thermal block **400d**.

[0058] In the abovementioned embodiment, the first thermal block **300a** and the second thermal block **400a** are movably disposed on the second thermal plate **200a**, but the present disclosure is not limited thereto. In other embodiments, one of the thermal blocks may be immovably disposed on the second thermal plate **200a**, and the other thermal block may be movably disposed on the second thermal plate **200a**. In detail, in the case that the first thermal block **300a** is movable and the second thermal block **400a** is immovable on the second thermal plate **200a**, since the existence of the second guiding pillars **520a** is no longer required, some of the fasteners **800a** are respectively disposed through the first thermal plate **100a**, the second thermal plate **200a** and the first guiding pillars **510a** and configured to be fixed to the printed circuit board **20a**, and another some of the fasteners **800a** are respectively disposed through the first thermal plate **100a** and the second thermal plate **200a** and configured to be fixed to the printed circuit board **20a**.

[0059] Moreover, the quantity of thermal blocks is plural in the abovementioned embodiments, but the present disclosure is not limited thereto. In other embodiments, there may be only one thermal block in a liquid cooling device, and an elastic component may be designed to surround the thermal block or surround a guiding pillar, and fasteners may be designed to be disposed through the guiding pillar.

[0060] According to the liquid cooling device as described above, in some embodiments, there are a plurality of thermal blocks disposed on the second thermal plate to be in thermal contact with the heat sources, and at least one of the thermal blocks is movably disposed on the second thermal plate, such that the protruding height of the movable thermal block from the second thermal plate is adjustable according to the gap width between the heat source and the second thermal plate. As such, regardless of the mechanical interference between the heat source and the thermal block or the gap between the heat source and the thermal block, the thermal blocks are ensured to be in thermal contact with the heat sources.

[0061] Furthermore, when the thermal blocks are designed to be independently movable with respect to one another, the strength of each spring may be designed differently from one another according to the differences of the heat sources, helping to control the contact strength and heat dissipation effect to meet respective thermal contact requirements of the heat sources.

[0062] The embodiments were chosen and described in order to best explain the principles of the disclosure and its practical applications, to thereby enable others skilled in the art to best utilize the disclosure and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the disclosure be defined by the following claims and their equivalents.

1. A liquid cooling device, configured to be in thermal contact with a first heat source and a second heat source which are disposed on a printed circuit board, the liquid cooling device comprising:

- a first thermal plate, configured to be disposed on the printed circuit board;
- a second thermal plate, disposed on the first thermal plate, the first thermal plate and the second thermal plate

together forming a storage space, and the storage space configured to store a coolant; and

a first thermal block and a second thermal block, wherein the first thermal block is configured to be in thermal contact with the first heat source, the second thermal block is configured to be in thermal contact with the second heat source; the first thermal block and the second thermal block are movably disposed on the second thermal plate, such that a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate, and a protruding height of the second thermal block from the second thermal plate is adjustable according to a gap width between the second heat source and the second thermal plate.

2. The liquid cooling device according to claim 1, further comprising at least one first elastic component and at least one second elastic component, wherein one end of the at least one first elastic component is connected to the first thermal plate or the second thermal plate, and another end of the at least one first elastic component is connected to the first thermal block so that the at least one first elastic component forces the first thermal block to move away from the first thermal plate; one end of the at least one second elastic component is connected to the first thermal plate or the second thermal plate, and another end of the at least one second elastic component is connected to the second thermal block so that the at least one second elastic component forces the second thermal block to move away from the first thermal plate.

3. The liquid cooling device according to claim 1, further comprising a plurality of first guiding pillars and a plurality of second guiding pillars, wherein one end of each of the plurality of first guiding pillars is fixed on the second thermal plate, another end of each of the plurality of first guiding pillars is integrated into the first thermal block, one end of each of the plurality of second guiding pillars is fixed on the second thermal plate, and another end of each of the plurality of second guiding pillars is disposed through the second thermal block.

4. The liquid cooling device according to claim 3, further comprising a plurality of first retaining rings and a plurality of second retaining rings, wherein the plurality of first retaining rings are respectively attached to the plurality of first guiding pillars and located on one side of the first thermal block away from the first thermal plate, and the plurality of second retaining rings are respectively attached to the plurality of second guiding pillars and located on one side of the second thermal block away from the first thermal plate.

5. The liquid cooling device according to claim 4, further comprising a plurality of first elastic components and a plurality of second elastic components, wherein the plurality of first elastic components are respectively sleeved on the plurality of first guiding pillars, one end of each of the plurality of first elastic components presses against the second thermal plate, and another end of each of the plurality of first elastic components presses against the first thermal block so that the plurality of first elastic components force the first thermal block to move away from the first thermal plate; the plurality of second elastic components are respectively sleeved on the plurality of second guiding pillars, one end of each of the plurality of second elastic

components presses against the second thermal plate, and another end of each of the plurality of second elastic components presses against the second thermal block so that the plurality of second elastic components force the second thermal block to move away from the first thermal plate.

6. The liquid cooling device according to claim 3, further comprising a plurality of fasteners, wherein some of the plurality of fasteners are respectively disposed through the first thermal plate, the second thermal plate and the plurality of first guiding pillars and configured to be fixed to the printed circuit board, and another some of the plurality of fasteners are respectively disposed through the first thermal plate, the second thermal plate and the plurality of second guiding pillars and configured to be fixed to the printed circuit board.

7. The liquid cooling device according to claim 2, wherein the at least one first elastic component and the at least one second elastic component are located in the storage space, two opposite ends of the first elastic component respectively press against the first thermal plate and the first thermal block, and two opposite ends of the second elastic component respectively press against the first thermal plate and the second thermal block.

8. The liquid cooling device according to claim 2, wherein the at least one first elastic component surrounds the first thermal block, the at least one second elastic component surrounds the second thermal block, two opposite ends of the first elastic component respectively press against the second thermal plate and the first thermal block, and two opposite ends of the second elastic component respectively press against the second thermal plate and the second thermal block.

9. The liquid cooling device according to claim 1, wherein the second thermal plate further has a first through hole and a second through hole, the first through hole and the second through hole are connected to the storage space, the first thermal block is slidably disposed in the first through hole, and the second thermal block is slidably disposed in the second through hole.

10. The liquid cooling device according to claim 9, wherein the second thermal plate further has a first restricting groove and a second restricting groove, the first restricting groove is connected to the first through hole, the second restricting groove is connected to the second through hole, the first thermal block further has a first restricting protrusion, the first restricting protrusion is slidably located in the first restricting groove, the second thermal block further has a second restricting protrusion, and the second restricting protrusion is slidably located in the second restricting groove.

11. The liquid cooling device according to claim 9, further comprising a first sealing component and a second sealing component, wherein the first sealing component is located between and clamped by the second thermal plate and the first thermal block, and the second sealing component is located between and clamped by the second thermal plate and the second thermal block.

12. The liquid cooling device according to claim 1, wherein the first thermal block further has a first cooling fin, the first cooling fin is located in the storage space, the second thermal block further has a second cooling fin, and the second cooling fin is located in the storage space.

13. The liquid cooling device according to claim 1, further comprising a plurality of fasteners, wherein the plurality of

fasteners are disposed through the first thermal plate and the second thermal plate and configured to be fixed to the printed circuit board.

14. The liquid cooling device according to claim **1**, wherein the first thermal plate further has a liquid inlet and a liquid outlet, and the liquid inlet and the liquid outlet are connected to the storage space.

15. A liquid cooling device, configured to be in thermal contact with a first heat source and a second heat source which are disposed on a printed circuit board, the liquid cooling device comprising:

- a first thermal plate, configured to be disposed on the printed circuit board;
- a second thermal plate, disposed on the first thermal plate, the first thermal plate and the second thermal plate together forming a storage space, and the storage space configured to store a coolant; and
- a first thermal block and a second thermal block, wherein the first thermal block is configured to be in thermal contact with the first heat source, the second thermal block is configured to be in thermal contact with the second heat source, the second thermal block is immovably fixed on the second thermal plate; the first thermal block is movably disposed on the second thermal plate, such that a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate.

16. The liquid cooling device according to claim **15**, further comprising at least one first elastic component, wherein one end of the at least one first elastic component is connected to the first thermal plate or the second thermal plate, and another end of the at least one first elastic component is connected to the first thermal block so that the at least one first elastic component forces the first thermal block to move away from the first thermal plate.

17. The liquid cooling device according to claim **15**, further comprising a plurality of first guiding pillars, wherein one end of each of the plurality of first guiding pillars is fixed on the second thermal plate, and another end of each of the plurality of first guiding pillars is integrated into the first thermal block.

18. The liquid cooling device according to claim **17**, further comprising a plurality of first retaining rings, wherein the plurality of first retaining rings are respectively attached to the plurality of first guiding pillars and located on one side of the first thermal block away from the first thermal plate.

19. The liquid cooling device according to claim **18**, further comprising a plurality of first elastic components, wherein the plurality of first elastic components are respectively sleeved on the plurality of first guiding pillars, one end of each of the plurality of first elastic components presses against the first thermal plate, and another end of each of the plurality of first elastic components presses against the first thermal block so that the plurality of first elastic components force the first thermal block to move away from the first thermal plate.

20. The liquid cooling device according to claim **17**, further comprising a plurality of fasteners, wherein some of the plurality of fasteners are respectively disposed through the first thermal plate, the second thermal plate and the plurality of first guiding pillars and configured to be fixed to the printed circuit board, and another some of the plurality

of fasteners are respectively disposed through the first thermal plate and the second thermal plate and configured to be fixed to the printed circuit board.

21. The liquid cooling device according to claim **15**, further comprising at least one first elastic component, wherein the at least one first elastic component is located in the storage space, and two opposite ends of the at least one first elastic component respectively press against the first thermal plate and the first thermal block.

22. The liquid cooling device according to claim **15**, further comprising at least one first elastic component, wherein the at least one first elastic component surrounds the first thermal block, and two opposite ends of the at least one first elastic component respectively press against the second thermal plate and the first thermal block.

23. The liquid cooling device according to claim **15**, wherein the second thermal plate further has a first through hole, the first through hole is connected to the storage space, and the first thermal block is slidably disposed in the first through hole.

24. The liquid cooling device according to claim **23**, wherein the second thermal plate further has a first restricting groove, the first restricting groove is connected to the first through hole, the first thermal block further has a first restricting protrusion, and the first restricting protrusion is slidably located in the first restricting groove.

25. The liquid cooling device according to claim **23**, further comprising a first sealing component, wherein the first sealing component is located between and clamped by the second thermal plate and the first thermal block.

26. The liquid cooling device according to claim **15**, wherein the first thermal block further has a first cooling fin, the first cooling fin is located in the storage space, the second thermal block further has a second cooling fin, and the second cooling fin is located in the storage space.

27. The liquid cooling device according to claim **15**, further comprising a plurality of fasteners, wherein the plurality of fasteners are disposed through the first thermal plate and the second thermal plate and configured to be fixed to the printed circuit board.

28. A liquid cooling device, configured to be in thermal contact with a first heat source which is disposed on a printed circuit board, the liquid cooling device comprising:

- a first thermal plate, configured to be disposed on the printed circuit board;
- a second thermal plate, disposed on the first thermal plate, the first thermal plate and the second thermal plate together forming a storage space, and the storage space configured to store a coolant;
- a first thermal block, configured to be in thermal contact with the first heat source, and the first thermal block movably disposed on the second thermal plate; and
- a first elastic component, surrounding the first thermal block, wherein one end of the first elastic component is connected to the second thermal plate, and another end of the first elastic component is connected to the first thermal block so that the first elastic component forces the first thermal block to move away from the first thermal plate, and a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate.

29. The liquid cooling device according to claim **28**, further comprising a plurality of first guiding pillars,

wherein one end of each of the plurality of first guiding pillars is fixed on the second thermal plate, and another end of each of the plurality of first guiding pillars is integrated into the first thermal block.

30. The liquid cooling device according to claim **29**, further comprising a plurality of first retaining rings, wherein the plurality of first retaining rings are respectively attached to the plurality of first guiding pillars and located on one side of the first thermal block away from the first thermal plate.

31. The liquid cooling device according to claim **29**, further comprising a plurality of fasteners, wherein the plurality of fasteners are respectively disposed through the first thermal plate, the second thermal plate and the plurality of first guiding pillars and configured to be fixed to the printed circuit board.

32. The liquid cooling device according to claim **28**, wherein the second thermal plate further has a first through hole, the first through hole is connected to the storage space, and the first thermal block is slidably disposed in the first through hole.

33. The liquid cooling device according to claim **32**, further comprising a first sealing component, wherein the first sealing component is located between and clamped by the second thermal plate and the first thermal block.

34. The liquid cooling device according to claim **28**, wherein the first thermal block further has a first cooling fin, and the first cooling fin is located in the storage space.

35. The liquid cooling device according to claim **28**, further comprising a plurality of fasteners, wherein the plurality of fasteners are disposed through the first thermal plate and the second thermal plate and configured to be fixed to the printed circuit board.

36. A liquid cooling device, configured to be in thermal contact with a first heat source which is disposed on a printed circuit board, the liquid cooling device comprising:

- a first thermal plate, configured to be disposed on the printed circuit board;
- a second thermal plate, disposed on the first thermal plate, the first thermal plate and the second thermal plate together forming a storage space, and the storage space configured to store a coolant;
- a first thermal block, configured to be in thermal contact with the first heat source, and the first thermal block movably disposed on the second thermal plate;
- a plurality of first guiding pillars, wherein one end of each of the plurality of first guiding pillars is fixed on the second thermal plate, another end of each of the plurality of first guiding pillars is integrated into the first thermal block; and
- a plurality of first elastic components, respectively surrounding the plurality of first guiding pillars, wherein one end of each of the plurality of first elastic components is connected to the second thermal plate, and another end of each of the plurality of first elastic components is connected to the first thermal block so that the plurality of first elastic components force the first thermal block to move away from the first thermal plate, and a protruding height of the first thermal block from the second thermal plate is adjustable according to a gap width between the first heat source and the second thermal plate.

37. The liquid cooling device according to claim **36**, further comprising a plurality of first retaining rings,

wherein the plurality of first retaining rings are respectively attached to the plurality of first guiding pillars and located on one side of the first thermal block away from the first thermal plate.

38. The liquid cooling device according to claim **36**, further comprising a plurality of fasteners, wherein the plurality of fasteners respectively disposed through the first thermal plate, the second thermal plate and the plurality of first guiding pillars and configured to be fixed to the printed circuit board.

39. The liquid cooling device according to claim **36**, wherein the second thermal plate further has a first through hole, the first through hole is connected to the storage space, and the first thermal block is slidably disposed in the first through hole.

40. The liquid cooling device according to claim **39**, further comprising a first sealing component, wherein the first sealing component is located between and clamped by the second thermal plate and the first thermal block.

41. The liquid cooling device according to claim **36**, wherein the first thermal block further has a first cooling fin, and the first cooling fin is located in the storage space.

42. The liquid cooling device according to claim **36**, further comprising a plurality of fasteners, wherein the plurality of fasteners are disposed through the first thermal plate and the second thermal plate and configured to be fixed to the printed circuit board.

43. A liquid cooling device, configured to be in thermal contact with a first heat source which is disposed on a printed circuit board, the liquid cooling device comprising:

- a first thermal plate, configured to be disposed on the printed circuit board;
- a second thermal plate, disposed on the first thermal plate, the first thermal plate and the second thermal plate together forming a storage space, and the storage space configured to store a coolant;
- a first thermal block, configured to be in thermal contact with the first heat source, and the first thermal block movably disposed on the second thermal plate;
- a plurality of first guiding pillars, wherein one end of each of the plurality of first guiding pillars is fixed on the second thermal plate, another end of each of the plurality of first guiding pillars is integrated into the first thermal block so as to guide the first thermal block to move relative to the second thermal plate; and
- a plurality of fasteners, respectively disposed through the first thermal plate, the second thermal plate and the plurality of first guiding pillars and configured to be fixed to the printed circuit board.

44. The liquid cooling device according to claim **43**, further comprising at least one first elastic component, wherein one end of the at least one first elastic component is connected to the first thermal plate or the second thermal plate, and another end of the at least one first elastic component is connected to the first thermal block so that the at least one first elastic component forces the first thermal block to move away from the first thermal plate.

45. The liquid cooling device according to claim **43**, further comprising a plurality of first retaining rings, wherein the plurality of first retaining rings are respectively attached to the plurality of first guiding pillars and located on one side of the first thermal block away from the first thermal plate.

46. The liquid cooling device according to claim **43**, wherein the second thermal plate further has a first through hole, the first through hole is connected to the storage space, and the first thermal block is slidably disposed in the first through hole.

47. The liquid cooling device according to claim **43**, further comprising a first sealing component, wherein the first sealing component is located between and clamped by the second thermal plate and the first thermal block.

* * * * *