


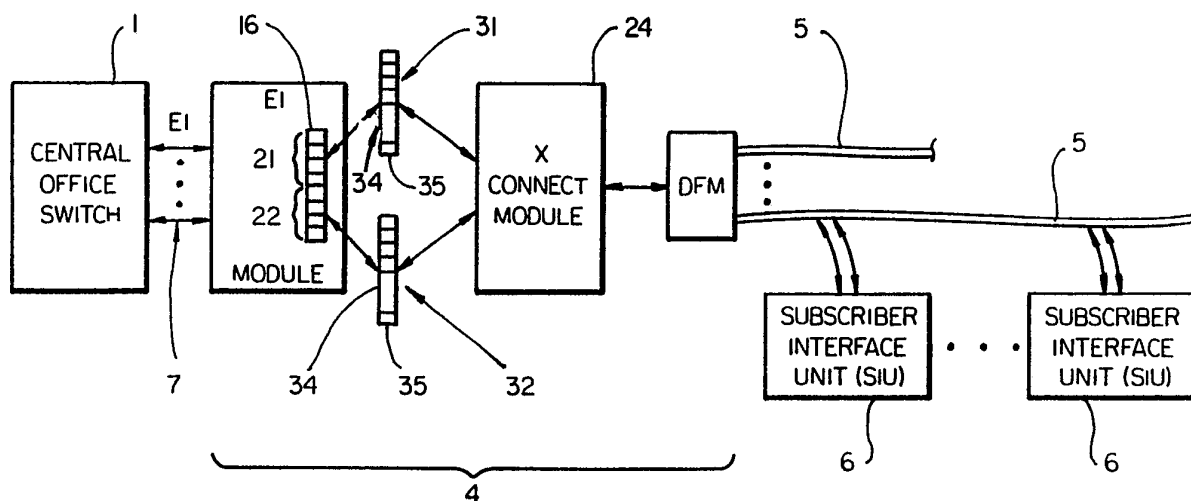

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04J 3/12	A1	(11) International Publication Number: WO 92/20175 (43) International Publication Date: 12 November 1992 (12.11.92)
(21) International Application Number: PCT/US92/03928 (22) International Filing Date: 11 May 1992 (11.05.92) (30) Priority data: 697,855 9 May 1991 (09.05.91) US (71) Applicant: RAYNET CORPORATION [US/US]; 155 Constitution Drive, Menlo Park, CA 94025 (US). (72) Inventors: ELLERSICK, William, F. ; 3076 Oak Knoll Drive, Redwood City, CA 94062 (US). SANESKI, Steven, Philip ; 10421 Colby Avenue, Cupertino, CA 95014 (US). (74) Agent: KOVACH, Dennis, E.; Raynet Corporation, 155 Constitution Drive, Menlo Park, CA 94025 (US).		(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), MC (European patent), NL (European patent), SE (European patent). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: METHOD AND APPARATUS FOR TRANSLATING SIGNALING INFORMATION**(57) Abstract**

An office interface unit (OIU) transfers data and signaling between a telephone local exchange and distribution lines. Information from the telephone local exchange is contained in repetitive frames containing signaling time slots which each contain two distinct nibbles of information. The OIU translates each local exchange signaling channel into first and second internal signaling channels, each internal signaling channel containing information representative of one signaling nibble therein. This simplifies DSO time slot interchange in the OIU. In addition, each internal signaling channel is provided with at least one additional significant signaling bit thereby providing additional signaling states so that the OIU equipment can account for multiple types of telephone local exchange equipment easily. Furthermore, each internal signaling channel is also provided with at least one data coding check bit thereby providing an easy and efficient method of determining whether or not bit errors are occurring in the OIU or equipment connected thereto.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

Method and Apparatus for Translating Signaling Information

5 The present invention relates to an apparatus and method for transferring data and signaling between a telephone local exchange and distribution lines, and in particular to an improvement in translating signaling information therebetween.

10 Telecommunication transmission systems include both data and signaling channels arranged in repetitive frames whereby the signaling channels contain signaling information for the data channels. Over multiple frames, signaling information for all data channels is transmitted. According to at least one international transmission standard referred to as an E1 format which conforms to specifications set forth in CCITT draft recommendations G.703, G.704 and G.732, 15 transmission frames consist of 32 channels, generally denoted as DS0s, each DS0 containing 8 bits, and each 8 bits being referred to as a byte. Each frame contains a framing channel followed by 15 data channels followed by a signaling channel followed by a further group of 15 data channels. 20 The signaling channel contains two groups of "ABCD" bits of information, and each group is referred to as a "nibble" herein, each nibble having 16 possible states for indicating signaling states for the data channels. The first ABCD nibble indicates a signaling state for the first group of data channels, with the second nibble representing 16 possible signaling states for the other group of 15 data channels within 25 the frame, the two nibbles forming a signaling byte.

A problem exists in cross connecting the data and signaling channels conveniently since their associated signaling information is 30 contained within a channel containing two distinct nibbles of information. Specifically, when reading out the DS0 channel information into a cross connect memory using cross connect information in another memory, each frame has to be read out twice so that both nibbles can be appropriately accessed and addressed to an 35 appropriate memory location. This requires that cross connect speed be

Z

doubled or that memory access speed be doubled over that which is necessary for reading into memory the data channels. In addition, means need to be provided for not disturbing an existing nibble in a signal memory when an additional signal nibble is being added to its
5 DS0 slot. Addressing these concerns complicates cross connect hardware and software in both a downstream and upstream transmission direction.

10 It is an object of the invention to provide an improved means and method for transferring data and signaling between a telephone local exchange and distribution lines which obviates the disadvantages referred to above when at least two nibbles of signaling information are contained in a single channel in each transmission frame.

15 It is a further object of the invention to translate a local exchange signaling channel containing two nibbles of signaling information therein into at least first and second internal signaling channels having a size approximately the same as office interface unit (OIU)-subscriber interface unit (SIU) data channels. The OIU transfers the data and
20 signaling between the local exchange and the SIUs and its associated distribution lines.

It is a further object of the invention to provide within the first and second internal signaling channels additional significant bits for
25 accomplishing further tasks with little additional software or hardware overhead complexity. One significant bit preferably comprises a data or coding checking means. According to a preferred embodiment, the coding check bit comprises a parity check bit whereby the signaling channel is provisioned to have only one of an odd or even number of
30 bits therein when operating normally so that if the designated odd or even number of bits is not detected a coding or parity error is indicated. Since signaling bits are subjected to many of the same operations as data channels, any time a common OIU or SIU failure such as when a stuck bit in a register occurs, errors caused in the data thereby will be

detectable by the OIU or SIU since the signaling channels will indicate parity failures.

According to one preferred embodiment, any time a signaling parity error is found, the contents of the signaling channel containing the parity error is not read into memory but rather the "old" contents of the signaling memory is retained for the particular signal in question in both the OIU and the SIU. This prevents erroneous signaling information from being entered into memory in the OIU and/or SIU.

Another preferred additional significant bit utilized in the internal signaling channels is the use of an additional signaling bit. The use of an additional signaling bit allows the OIU-SIUs to have twice as many signaling states as that provided by the telephone local exchange. The additional signaling states are particularly advantageous when the OIU is required to communicate with numerous types of telephone local exchange equipment, such as numerous kinds of switches, multiplexers, etc. since much of this equipment is manufactured according to different protocols and interfaces and, when any two differing pieces of equipment each have N different signaling states, if information from both of the pieces of equipment need to be cross connected within a common unit such as an OIU, the total number of possible desired signaling states oftentimes is greater than N. According to a preferred embodiment, the telephone local exchange provides ABCD signaling bits, and the OIU translates this signaling channel into ABCDE signaling thereby increasing the number of possible signaling states from 16 to 32.

According to a preferred embodiment, all local exchange data channels and all OIU-SIU data channels have 8 bits therein, as well as each internal signaling channel, with each internal signaling channel containing an "E" signaling bit and a data coding check bit and two unused bits. Eight bit channel allows for use of commonly available hardware, e.g. processors, memories, FIFOs, octal registers, etc.

These and other objects of the invention are achieved by an office interface unit (OIU) for transferring data and signaling between a telephone local exchange and distribution lines, the local exchange transmitting and receiving the data and signaling in a plurality of channels contained in repetitive local exchange frames, at least one of the channels comprising a local exchange signaling channel containing at least first and second local exchange signaling nibbles associated with first and second groups of local exchange data channels respectively, comprising:

10

for transmission of the data and signaling within at least part of the OIU and between the OIU and the distribution lines, means for translating the local exchange signaling channel into at least first and second internal signaling channels, the first internal signaling channel containing information representative of the first signaling nibble, the second internal signaling channel containing information representative of the second signaling nibble, the first internal signaling channel being associated with the first group of local exchange data channels and the second internal signaling channel being associated with the second group of local exchange data channels;

15

20

25

for transmission from the OIU to the local exchange, means for translating the first and second internal signaling channels into the local exchange signaling channel.

Further objects achieved by the invention are achieved by an information distribution system, comprising:

30

at least one optical fiber;

at least one subscriber interface unit (SIU);

35

at least one office interface unit (OIU), the optical fiber interconnecting the SIU and OIU, the OIU being connected to a

local exchange, the local exchange transmitting and receiving data and signaling in a plurality of channels contained in repetitive local exchange frames, at least one of the channels comprising a local exchange signaling channel containing at least first and second local exchange signaling nibbles associated with first and second groups of local exchange data channels respectively, the OIU comprising:

for transmission of the data and signaling within at least part of the OIU and between the OIU and distribution lines, means for translating the local exchange signaling channel into at least first and second internal signaling channels, the first internal signaling channel containing information representative of the first signaling nibble, the second internal signaling channel containing information representative of the second signaling nibble, the first internal signaling channel being associated with the first group of local exchange data channels and the second OIU signaling channel being associated with the second group of local exchange data channels;

for transmission from the OIU to the local exchange, means for translating the first and second internal signaling channels into the local exchange signaling channel.

Yet further objects achieved by the invention are achieved by a method for transferring data and signaling between a telephone local exchange and distribution lines, the local exchange transmitting and receiving the data and signaling in a plurality of channels contained in repetitive local exchange frames, at least one of the channels comprising a local exchange signaling channel containing at least first and second local exchange signaling nibbles associated with first and second groups of local exchange data channels respectively, comprising the steps of:

6

for transmission of the data and signaling within at least part of the OIU and between the OIU and the distribution lines, translating the local exchange signaling channel into at least first and second internal signaling channels, the first internal signaling channel containing information representative of the first signaling nibble, the second internal signaling channel containing information representative of the second signaling nibble, the first internal signaling channel being associated with the first group of local exchange data channels and the second internal signaling channel being associated with the second group of local exchange data channels;

for transmission from the OIU to the local exchange, translating the first and second internal signaling channels into the local exchange signaling channel.

These and other objects of the invention will be further explained by reference to the following drawings and detailed description.

FIG 1 is a block diagram illustrating one preferred distribution architecture according to the invention;

FIG 2 illustrates several different modules of an office interface unit illustrated in FIG 1.

The present invention relates to an improved telephone or data distribution system, and in particular to an improved OIU for transferring data and signaling between a local exchange, preferably a telephone local exchange, and distribution lines, the distribution lines preferably being optical fibers. The optical fibers can be arranged so as to provide point-to-point connections between the OIU and individual subscribers, or can be arranged such that the fiber is terminated at a subscriber interface unit (SIU) generally located close to a group of subscribers, with each of the subscribers within a group then connected to the SIU, either via electrical wire or further optical fibers.

According to preferred embodiments, each SIU is located at a street curb and is connected to any desired number of subscribers, in particular to as few as one to as many as 60. The SIUs can be connected to the OIU individually in a point-to-point star arrangement, or can be all connected to a single optical fiber with information contained therein being in a bus format, preferably time multiplexed. According to preferred embodiments, upstream writing by the SIUs toward the OIU is done in an asynchronous format to minimize and preferably eliminate the chance of collisions between packets of information of various SIUs when a logical bus format is used. A preferred protocol for upstream transmission comprise several overhead bytes of information at the beginning of a frame such as a clock acquisition dark byte, a clock acquisition training byte, a preamble byte, and a start of packet delimiting byte, as more fully explained in US patent application serial nos. 07/677,707 and 07/677,044, both filed March 29, 1991, assigned to the assignee of the invention, the disclosures of which are incorporated herein by reference. While an SIU can be connected to only a single subscriber, increasing the number of subscribers connected to each SIU increases the efficiency of the distribution network since the frame overhead bytes are spread over more payload (e.g. data channels). Preferably downstream transmissions to the SIUs are synchronous. The invention is compatible with any of the foregoing and other distribution architectures, topologies, and protocols.

25

The OIU's primary function is to transfer data and signaling between the local exchange and the distribution optical fiber(s) going to the SIU(s), to receive operations and maintenance commands from upstream operational support system software in the logical direction of the local exchange, to report events to the operational support software, to perform routine system integrity monitoring and redundancy switching, to coordinate operation and maintenance of the SIUs, and to control visual status indicators and alarms.

30

Preferably, non-blocking time slot interchange at the DSO level is performed in the OIU. This allows the distribution system to be configured from a keyboard at an operations and support subsystem (OSS), and to be engineered into existing telephone networks without knowledge of the distribution optical architecture. Any office feeder channel 2, 7 may be connected to any SIU channel. Time slot interchange also allows subscriber channels to be groomed to specific office feeders, which is important for support of several different kinds of services. According to a preferred embodiment, an OIU bus is run at a speed in excess of 5 megahertz, giving a capacity of 640 time slots, or nominally 512 DSOs plus 120 ABCD signaling bytes with 8 spares. The OIU provides the signaling cross connect between the SIUs and E1 feeders to the exchange or channel bank for voice frequency services. Some services, including E1 synchronous and ISDN basic and primary rate, are passed through the system as groups of clear channel DSOs, and do not undergo the signaling processing described herein. The OIU translates ABCD signaling on a per E1 basis to allow support of channel banks from multiple vendors and an upgrade path to direct digital switch interfaces.

20

FIG 1 illustrates one preferred embodiment of the invention whereby signaling and data information is transmitted between a telephone local exchange 1, such as a central office switch, and an OIU 4. The central office switch 1 oftentimes communicates with a remote extension thereof, e.g. a channel bank 3, which then in turn communicates with the OIU 4. The information transmitted can either be voice frequency (VF) information such as telephone signals, or integrated services digital network information (ISDN), denoted as 2B+D, which information normally occupies three 8 bit DSO data channels.

30

According to FIG 1, either or both of the central office switch 1 and channel bank 3 transmit information to the OIU synchronously in what is known as an E1 transmission format whereby the information is contained within repetitive frames having 32 channels, a first channel

35

comprising a framing channel, the following 15 channels comprising a first group of data channels, the next channel comprising a signaling channel having two 4 bit nibbles, with the remaining 15 channels comprising a second group of data channels. Each signaling nibble is associated with one of the two groups of data channels within each frame. The OIU is also connected via a communication link 11 with an operations support system (OSS). One or more pairs of distribution optical fibers 5 interconnect the OIU and one or more subscriber interface units (SIUs) which in turn are connected to multiple subscribers, denoted as telephone symbols 8 in FIG 1. Lines 9 interconnecting the subscribers 8 and the SIUs can be either optical or electrical, as desired. When the lines 9 are electrical, it is preferred that their length be no longer than 650 feet. Optical fiber 5 can be any desired length, though preferably kept to a length which results in a round trip propagation delay of less than one frame so time-of-flight corrections can easily be made, e.g. less than 10km for an 8 kHz frame frequency. Preferably, the OIU transmits synchronously, deriving reference clocks from a network reference clock illustrated in FIG 1 by signal line 12 or an internal clock (not shown).

20

Since each local exchange E1 frame contains a signaling channel having two signaling nibbles therein, when reading the data and signaling into memory for cross connecting, without the aid of the present invention, it is necessary to run the memory at a speed twice as fast as otherwise required for simply reading each data channel, with the additional complexity that any time a signaling nibble is added to a signaling channel already containing a nibble therein that the preexisting nibble not be disturbed.

According to the invention, by reference to FIG 2, local exchange frames 7 are read by an E1 module within the OIU 4. Each local exchange signaling channel 16, which each contains first and second signaling nibbles 21, 22, each signaling nibble preferably containing 4 bits, e.g. ABCD bits, is translated by the E1 module into first and second internal signaling channels 31, 32, respectively. These internal

35

signaling channels are then read into a cross connect module 24 which cross connects local exchange data channels, which can also be referred to as OIU data channels, along with their corresponding internal signaling channels using conventional control stores, memories, processors, etc. Thereafter, the cross connected signaling and data is transferred to a distribution fiber module (DFM) which arranges the data and signaling into repetitive OIU frames for transmission on distribution optical fibers 5 to one or more distribution SIUs 6. Any one of a variety of optional OIU frame protocols can be utilized, synchronous being preferred in the downstream direction.

According to the E1 frame protocol, the signaling nibbles each comprise four ABCD bits which indicate a maximum number of 16 possible states. Each nibble is translated into a corresponding internal signaling channel preferably 8 bits in length. Also each OIU data channel comprises 8 bits so conventional memories and processors can be utilized in the OIU. According to the invention, an expansion "E" signaling bit 34 is inserted into each internal signaling channel by the E1 module thereby increasing the possible number of signaling states from 16 to 32. This aspect of the invention allows the internal signaling information to account for different interface standards which exist for different manufacturers' equipment at the local exchange. Accordingly, the OIU can distinguish between a variety of equipment interfaces and accurately denote the desired signaling state using the internal signaling channel. Any desired internal signaling format can be used for the ABCDE bit configuration.

A further feature of the invention is the provision of at least one additional significant bit 35 within the internal signaling channels 31, 32, the additional significant bit being a data coding check bit 35. The check bit is utilized to give the OIU (and SIU if desired) the ability to determine if common errors are occurring in either the OIU equipment or SIU equipment. Specifically, the data coding check bit 35 is utilized so that for a "normal" signal the number of binary "1's" corresponds to only an even number or odd number as desired. Assuming that the data

//

coding check set up is such that normal operation is indicated by an odd number of 1's, any time the OIU detects an even number of 1's in a signaling channel a parity error is indicated. In this event, rather than reading the erroneous signaling data into OIU and SIU memory to replace previous signaling information therefore, e.g. the prior signaling information for the appropriate data channel, the erroneous signaling information is discarded and a notation in OIU memory is made of the occurrence of the signaling error. Upon the occurrence of a predetermined number of signaling errors being detected within a predetermined amount of frames or time, the OIU can initiate self diagnostic tests in an attempt to try and isolate and locate the cause of the error, and simultaneously also alert the OSS 10 so that appropriate alarms can be generated, and additional diagnostics implemented and directed by the OSS 10, if necessary. Since internal signaling channels are processed in series with OIU data channels, with multiple sets of data and signaling channels being processed in parallel within the OIU, a common hardware or software fault, such as a stuck register bit, which inevitably corrupts data, will similarly corrupt an associated signaling channel, and thus the addition of the parity bit to the internal signaling channel allows an efficient, convenient, and relatively inexpensive means of monitoring system integrity and performance and tracing down system faults.

According to the invention, ABCDE all zeros is used to indicate downstream signaling framing, downstream being towards the direction of the SIUs from the OIU, ABCDE all zeros being an otherwise illegal signaling state. Preferably upstream signaling framing is synchronized to downstream signaling framing and is not required to be sent upstream by the SIUs.

30

Since according to the invention E1 signaling nibbles are individually translated into individual DS0 time slots in the OIU, with the addition of a coding check bit and an additional signaling bit in each internal signaling channel, DS0 cross connect efficiency is improved with the additional advantages of now being able to distinguish between

35

12

different types of local exchange equipment due to the additional signaling states in each internal signaling channel. Also, the coding check bit provides an easy and convenient method for detecting transmission errors.

5

Though the invention has been described by reference to a fiber-to-the-curb system whereby subscribers are connected to SIUs, as previously indicated the invention is not dependent on any particular distribution architecture or topology, e.g. bus, star, PON (passive optical network), etc. Also, the invention, described by reference to an E1 transmission format, is not to be limited to only this format and applies to any format which combines a plurality of signaling nibbles into any one signaling channel. Accordingly, the invention is not to be limited by reference to any particular preferred embodiment described, rather it should only be limited by the appended claims.

10

15

1

2 What is claimed is:

3

1 1. An office interface unit (OIU) for transferring data and signaling
2 between a telephone local exchange and distribution lines, the local
3 exchange transmitting and receiving the data and signaling in a plurality
4 of channels contained in repetitive local exchange frames, at least one of
5 the channels comprising a local exchange signaling channel containing at
6 least first and second local exchange signaling nibbles associated with
7 first and second groups of local exchange data channels respectively,
8 comprising:

9

10 for transmission of the data and signaling within at least part of
11 the OIU and between the OIU and the distribution lines, means
12 for translating the local exchange signaling channel into at least
13 first and second internal signaling channels, the first internal
14 signaling channel containing information representative of the
15 first signaling nibble, the second internal signaling channel
16 containing information representative of the second signaling
17 nibble, the first internal signaling channel being associated with
18 the first group of local exchange data channels and the second
19 internal signaling channel being associated with the second group
20 of local exchange data channels;

21

22 for transmission from the OIU to the local exchange, means for
23 combining the first and second internal signaling channels into the
24 local exchange signaling channel.

25

1 2. The OIU of claim 1, further comprising means for cross
2 connecting individual data channels and their associated signaling
3 information within the OIU between any incoming OIU time slot and
4 any outgoing OIU time slot after having translated the local exchange
5 signaling channel into the first and second internal signaling channels.

6

1 3. The OIU of claim 1, the first and second internal signaling
2 channels being larger than the first and second local exchange signaling
3 nibbles, respectively.

4

1 4. The OIU of claim 3, each internal signaling channel containing a
2 group of significant bits which exceeds a size of its associated signaling
3 nibble by at least one bit, the at least one bit being used for translating
4 the local exchange signaling nibble into an internal signaling channel
5 having at least twice as many signaling states as the local exchange
6 signaling nibble.

7

1 5. The OIU of claim 4, the at least one bit comprising coding
2 checking means used for fault detection.

3

1 6. The OIU of claim 5, further comprising means for maintaining
2 prior contents of a given internal signaling channel in memory when
3 updated contents of the given internal signaling channel represents a
4 coding error.

5

1 7. The OIU of claim 1, each local exchange nibble consisting of 4
2 bits, each OIU signaling channel consisting of 8 bits, each data channel
3 consisting of 8 bits, and further comprising means for grouping the first
4 and second internal signaling channels and the first and second groups
5 of data channels into repetitive OIU frames for transmission between
6 the OIU and the distribution lines.

7

1 8. An information distribution system, comprising:

2

3 at least one optical fiber;

4

5 at least one subscriber interface unit (SIU);

6

7 at least one office interface unit (OIU), the optical fiber
8 interconnecting the SIU and OIU, the OIU being connected to a
9 local exchange, the local exchange transmitting and receiving data

and signaling in a plurality of channels contained in repetitive local exchange frames, at least one of the channels comprising a local exchange signaling channel containing at least first and second local exchange signaling nibbles associated with first and second groups of local exchange data channels respectively, the OIU comprising:

for transmission of the data and signaling within at least part of the OIU and between the OIU and SIU, means for translating the local exchange signaling channel into at least first and second internal signaling channels, the first internal signaling channel containing information representative of the first signaling nibble, the second internal signaling channel containing information representative of the second signaling nibble, the first internal signaling channel being associated with the first group of local exchange data channels and the second internal signaling channel being associated with the second group of local exchange data channels;

for transmission from the OIU to the local exchange, means for translating the first and second internal signaling channels into the local exchange signaling channel.

9. The system of claim 8, the SIU being located at a curb, and further comprising a plurality of electrical lines interconnecting the SIU with a plurality of subscribers, a length of each of the electrical lines being less than 650 feet, the OIU further comprising means for cross connecting individual data channels and their associated signaling information within the OIU between any incoming OIU time slot and any outgoing OIU time slot after having translated the local exchange signaling channel into the first and second internal signaling channels, the first and second internal signaling channels being larger than the first and second local exchange signaling nibbles, respectively, each

11 internal signaling channel containing a group of significant bits which
12 exceeds a size of its associated signaling nibble by at least one bit.

13

1 10. A method for transferring data and signaling between a telephone
2 local exchange and distribution lines, the local exchange transmitting
3 and receiving the data and signaling in a plurality of channels contained
4 in repetitive local exchange frames, at least one of the channels
5 comprising a local exchange signaling channel containing at least first
6 and second local exchange signaling nibbles associated with first and
7 second groups of local exchange data channels respectively, comprising
8 the steps of:

9

10 for transmission of the data and signaling within at least part of
11 the OIU and between the OIU and the distribution lines,
12 translating the local exchange signaling channel into at least first
13 and second internal signaling channels, the first internal signaling
14 channel containing information representative of the first
15 signaling nibble, the second internal signaling channel containing
16 information representative of the second signaling nibble, the first
17 internal signaling channel being associated with the first group of
18 local exchange data channels and the second internal signaling
19 channel being associated with the second group of local exchange
20 data channels;

21

22 for transmission from the OIU to the local exchange, translating
23 the first and second internal signaling channels into the local
24 exchange signaling channel.

25

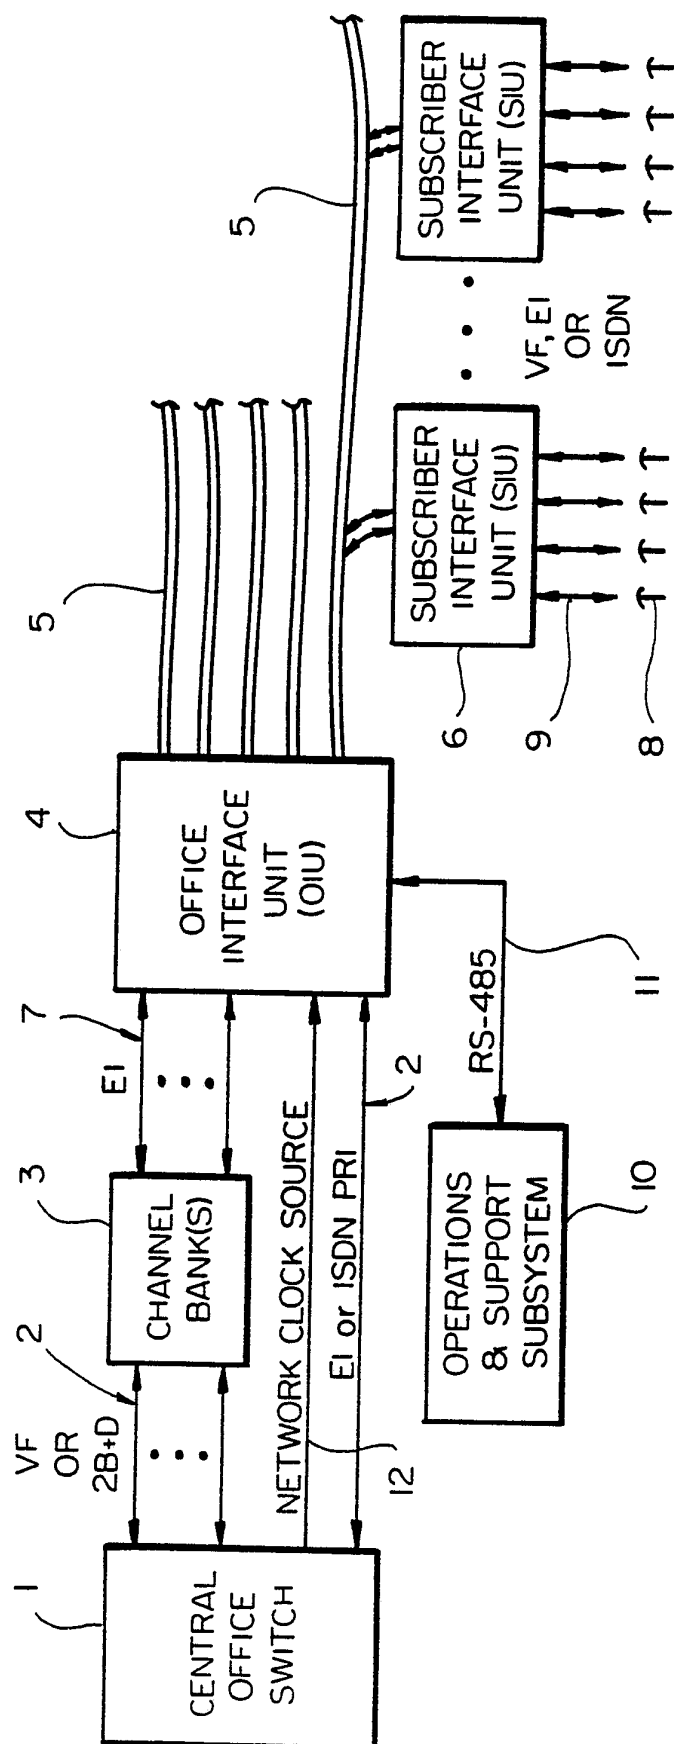


FIG-1

2/2

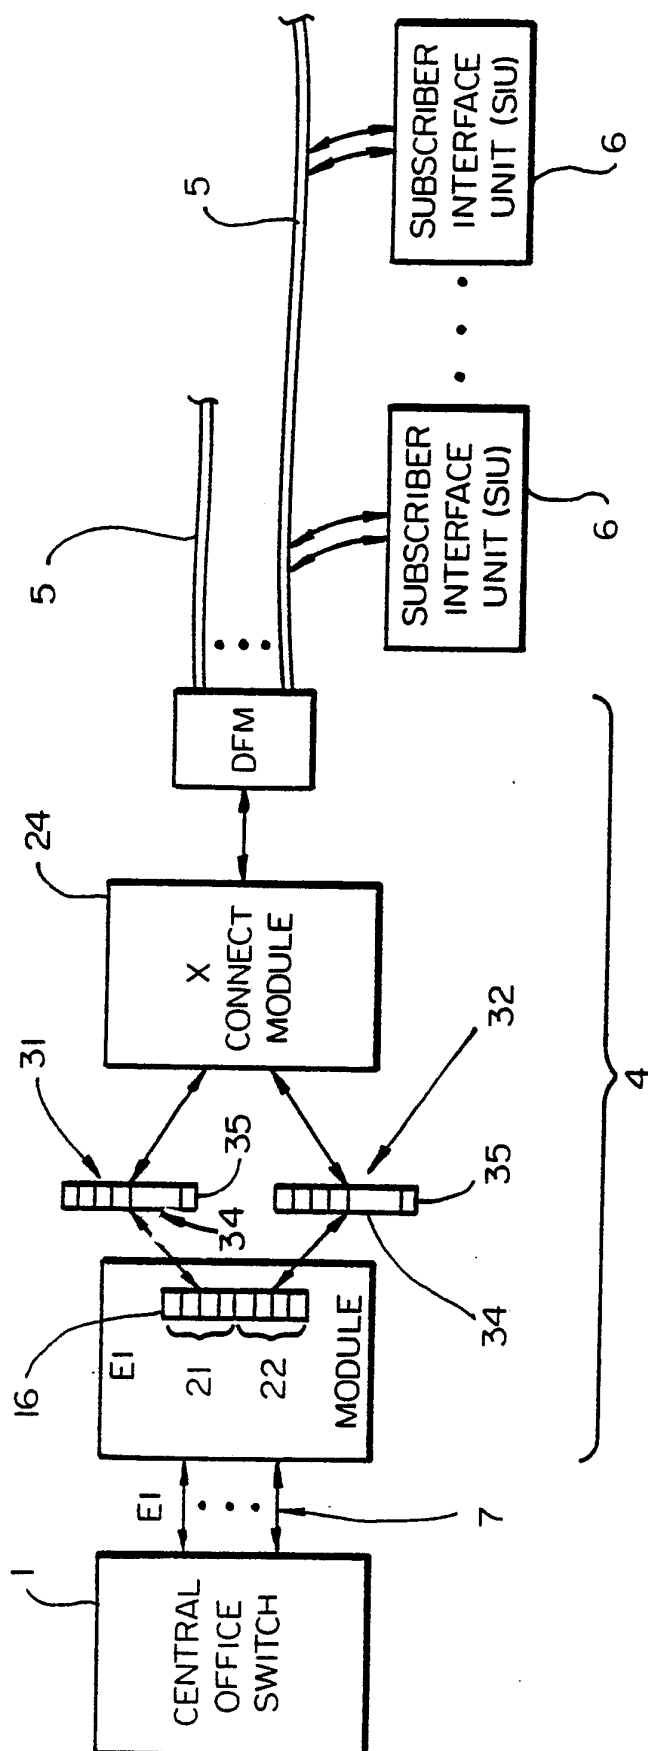


FIG_2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 92/03928

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 H04J3/12		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	H04J	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	EP,A,0 018 526 (TELEFONBAU UND NORMALZEIT GMBH) 12 November 1980	1,3,4,10
Y	see page 3, line 16 - page 4, line 19 see page 6, line 22 - page 7, line 13 see page 9, line 5 - page 10, line 9 ---	5,6,8
Y	US,A,4 059 731 (JOHN HENRY GREEN ET AL.) 22 November 1977 see column 2, line 33 - line 56 ---	6
Y	PROCEEDINGS IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS vol. 2, 22 June 1986, TORONTO (CA) pages 1105 - 1110; R.A. BILLHARDT ET AL.: 'A survey of the remote switching capabilities of the SESS switch' see page 1109, column 1, line 1, paragraph 11 see page 1109, column 2, line 24 - page 1110, column 1END --- -/--	5
¹⁰ Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
11 SEPTEMBER 1992	21.09.92	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	VAN DEN BERG J.G.J.	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
Y	<p>CONFERENCE PROCEEDINGS WESCANEX 88 11 May 1988, SASKATCHEWAN (CA) pages 101 - 107; ELMER H. HARA: 'A fiber optic network design for intelligent buildings' see page 103, column 2, line 25 - page 104, column 1, line 26 see page 105, column 1, line 28 - line 36</p> <p>---</p>	8

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. US 9203928
SA 60462**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 11/09/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0018526	12-11-80	DE-B- 2917572	31-07-80
		AT-T- 4364	15-08-83
		AU-A- 5786280	06-11-80

US-A-4059731	22-11-77	CA-A- 1085523	09-09-80
