

(21) Application No 9119228.6
(22) Date of filing 09.09.1991
(30) Priority data
(31) 02098592 (32) 20.09.1990 (33) JP

(71) Applicant
Honda Giken Kogyo Kabushiki Kaisha

(Incorporated in Japan)

No 1-1, 2-chome, Minami-aoyama,
Minato-ku, Tokyo, Japan

(72) Inventors
Masayuki Shiga
Makie Morota

(74) Agent and/or Address for Service
Frank B Dehn & Co
Imperial House, 15-19 Kingsway,
London, WC2B 6UZ,
United Kingdom

(51) INT CL⁵
B60R 21/32

(52) UK CL (Edition K)
G4N NHVS N5C2
U1S S1142

(56) Documents cited
GB 2005887 A GB 1430258 A

(58) Field of search
UK CL (Edition K) G4N NHVS
INT CL⁵ B60R
W.P.I.

(54) Vehicle occupant protective system

(57) The protective system is for an automotive vehicle having a driver's seat and an assistant driver's seat. A magnitude of detected deceleration 1 is compared with first (V_{TH1}) and second (V_{TH2}) threshold values, the second threshold value being greater than the first threshold value. If the magnitude of detected deceleration exceeds the second threshold value, both of a first air bag provided for the driver's seat and a second air bag provided for the assistant driver's seat are caused to be inflated even when the assistant driver's seat is not occupied, whereas if the magnitude of detected deceleration exceeds the first threshold value but does not exceed the second threshold value, the first air bag for the driver's seat alone is caused to be inflated when the assistant driver's seat is not occupied.

FIG.1

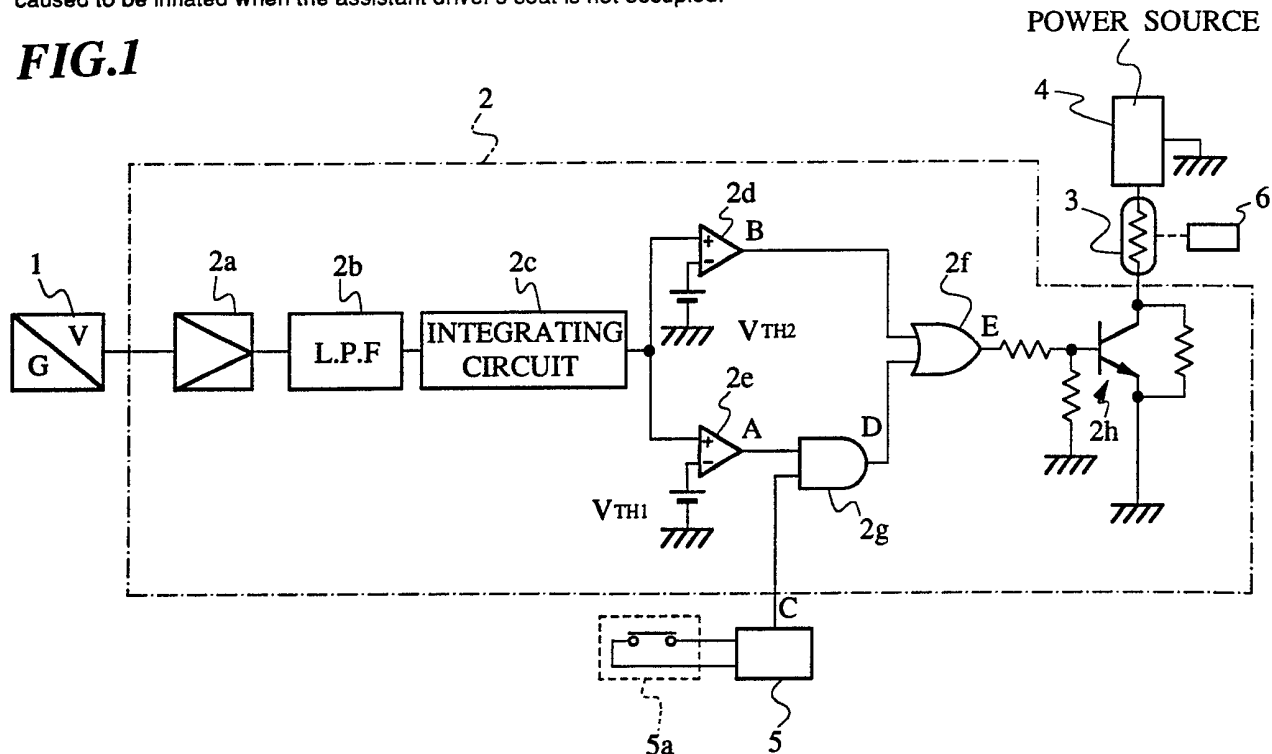


FIG. 1


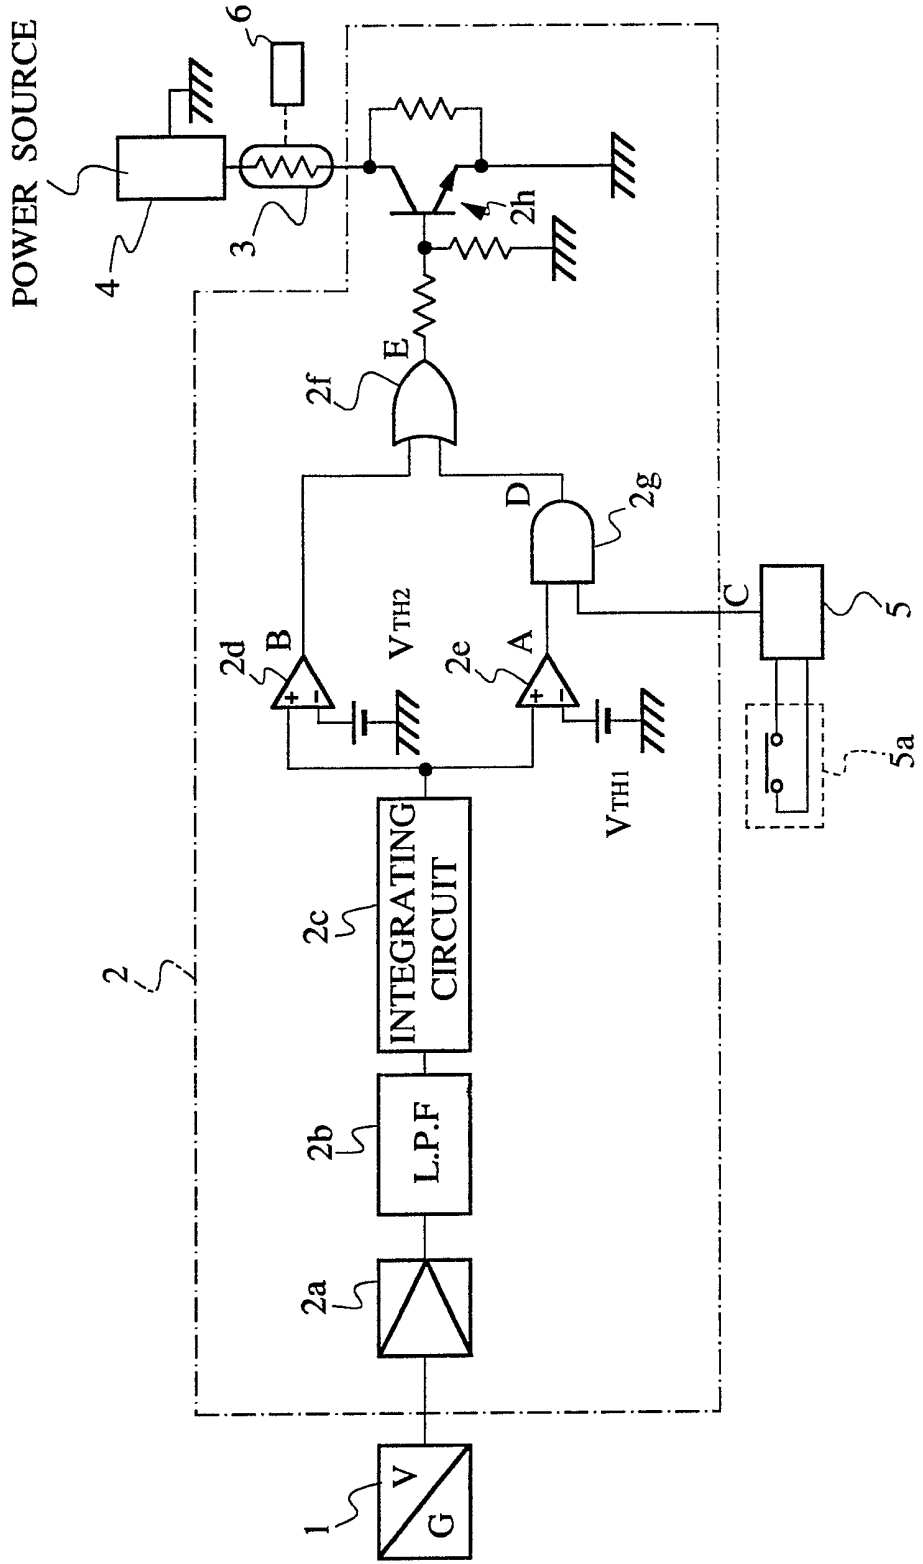


FIG.2

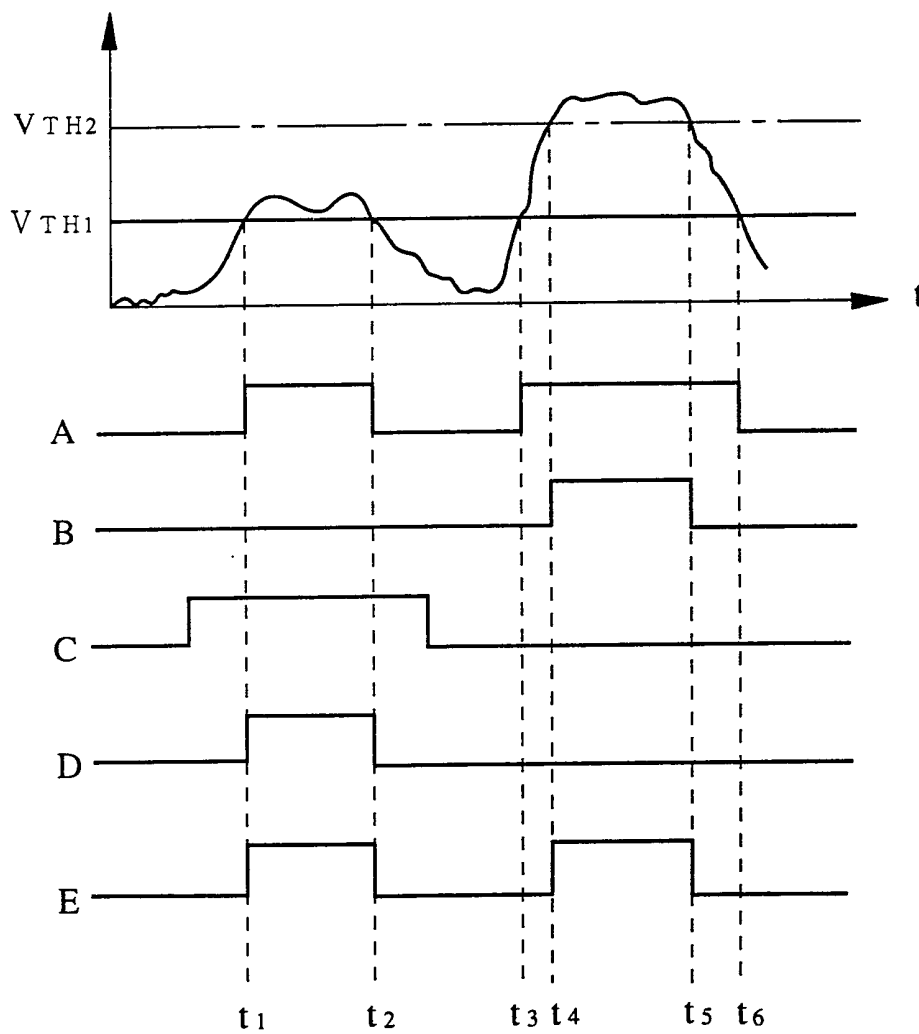

OCCUPANT PROTECTIVE SYSTEM

5 This invention relates to an occupant protective system for automotive vehicles, and more particularly to an occupant protective system adapted to protect occupants even when the shock upon crash of an automotive vehicle is very large.

10 As an occupant protective system of this kind, a system is conventionally known, which has air bag devices provided for the driver's seat and the assistant driver's seat of an automotive vehicle, respectively, each of the air bag devices comprising an acceleration sensor for detecting shock upon crash of the vehicle, an inflator (gas generator) which
15 generates a gas in response to a signal indicative of the detected acceleration supplied from the acceleration sensor, and an air bag which is inflated by the gas.

20 According to this known system, when the vehicle receives shock upon crash thereof, for example, the signal indicative of the detected acceleration is supplied to the inflator, and a squib in the inflator is ignited to generate nitrogen gas to thereby
25 inflate the air bag, whereby the occupant is protected from hitting against the steering wheel or the windshield.

30 However, in this occupant protective system, the air bag device provided for the assistant driver's seat is adapted not to operate if there is no occupant in the assistant driver's seat when the vehicle

receives shock upon crash thereof etc.

It is the object of the invention to improve the safety of the driver in the event of a severe impact.

To attain the above object, the invention provides
5 an occupant protective system for an automotive vehicle having a driver's seat and an assistant driver's seat, comprising a first air bag provided for the driver's seat of the vehicle, a second air bag provided for the assistant driver's seat, occupant detecting means for
10 detecting whether or not there is an occupant seated on said assistant driver's seat,

comparison means for comparing a magnitude of deceleration of said vehicle with first and second threshold values said second threshold value being
15 greater than said first threshold value; and

selecting means responsive to outputs from said comparison means and said occupant detecting means for causing both of said first and second air bags to be inflated even when no occupant is seated on said
20 assistant driver's seat, if said magnitude of deceleration exceeds said second threshold value, and for causing said first air bag alone to be inflated when no occupant is seated on said assistant driver's seat, if said magnitude of deceleration exceeds said first
25 threshold value and does not exceed said second threshold value.

The occupant protective system of the invention is capable of operating an air bag provided for the assistant driver's seat even when there is no occupant
30 seated in the assistant driver's seat, if the shock upon crash of the vehicle etc. is very large, to thereby more safely protect the occupant in the driver's seat.

Preferably, the comparison means comprises a first comparator for comparing the magnitude of
35 deceleration detected with the first threshold value, and a second comparator for comparing the magnitude of deceleration detected with the second threshold value, and the selecting means comprises an AND circuit

having one input supplied with an output from the first comparator and another input supplied with an output from the occupant detecting means, and an OR circuit having one input supplied with an output from the second comparator and another input supplied with an output from the AND circuit.

More preferably, the occupant detecting means has a switch provided at the assistant driver's seat for detecting an occupant seated thereon.

The term "deceleration" used throughout the present specification has its proper meaning, i.e. deceleration and acceleration, since a deceleration sensor used in the system of the invention may also be used as an acceleration sensor depending upon the direction in which it is mounted, the design of a signal processing circuit of the actuator system, etc.

An embodiment of the invention will now be described by way of example only, in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the arrangement of an actuator system of an occupant protective system according to an embodiment of the invention; and

Fig. 2 is a timing chart showing levels of outputs from various component parts appearing in Fig. 1.

Fig. 1 shows the arrangement of an actuator system of an occupant protective system according to the embodiment. In the figure, there is shown an actuator system of the occupant protective system for an air bag of same provided for the assistant driver's seat. The following description will refer to this actuator system alone, and drawings and description of

an actuator system for an air bag provided for the driver's seat are omitted. The actuator system of the occupant protective system mainly comprises a deceleration sensor 1 for detecting deceleration acting on the vehicle, a deceleration signal-processing circuit 2 for evaluating a signal

indicative of the detected deceleration supplied from the deceleration sensor 1, a squib 3 responsive to output from the deceleration signal-processing circuit 2 for actuating an air bag 6 and a power source 4 for feeding electricity to the squib 3.

Connected to the deceleration signal-processing circuit 2 is an occupant detecting device 5 having a seat switch 5a formed e.g. of a piezo-electric element. The occupant detecting device 5 generates a signal when an occupant is seated in the assistant driver's seat. The deceleration signal-processing circuit 2 includes an amplifier 2a the input side of which is connected to the deceleration sensor 1, and the output side is connected to comparators 2d, 2e via a low-pass filter 2b and an integrating circuit 2c. The comparator 2d is directly connected to an OR circuit 2f, whereas the comparator 2e is connected to the OR circuit 2f via an AND circuit 2g. Further, also connected to the input side of the AND circuit 2g is the occupant detecting device 5. The OR circuit 2f is connected to the base of a transistor 2h, and the squib 3 is connected to the collector of same. A first threshold voltage V_{TH1} is supplied to an inverting input terminal of the comparator 2e, while a second threshold voltage V_{TH2} higher than the first threshold voltage V_{TH1} is supplied to an inverting input terminal of the comparator 2d. The comparator 2e generates a high level output when voltage higher than the first threshold voltage V_{TH1} is supplied thereto from the integrating circuit 2c, while the

comparator 2d generates a high level output when voltage higher than the second threshold voltage V_{TH2} is supplied thereto from same.

The integrating circuit 2c integrates the signal
5 indicative of the detected deceleration supplied thereto from the deceleration sensor 1 via the amplifier 2a and the low-pass filter 2b, and supplies voltage higher than a predetermined value to the comparators 2d, 2e only when shock having a
10 predetermined or larger magnitude acts on the deceleration sensor 1 over a predetermined time period.

The operation of the thus constructed occupant protective system according to the invention will be
15 described with reference to the timing chart shown in Fig. 2. The symbols A, B, C, D, and E appearing in Figs. 1 and 2 indicate levels of outputs from the comparator 2e, the comparator 2d, the occupant detecting device 5, the AND circuit 2g, and the OR
20 circuit 2f, respectively.

If deceleration having a magnitude equal to or higher than a predetermined value is exerted on the deceleration sensor 1, the sensor 1 generates and supplies a signal indicative of the detected
25 deceleration to the deceleration signal-processing circuit 2. The signal is amplified by the amplifier 2a, and has its high frequency components removed by the low-pass filter 2b. Then, the signal is integrated by the integrating circuit 2c, which
30 supplies output voltage to the comparators 2d, 2e.

When the output voltage from the integrating circuit 2c assumes a value higher than the first threshold value V_{TH1} and equal to or lower than the second threshold value V_{TH2} , the comparator 2d does
35 not generate a high level output (as indicated by B of

Fig. 2). On the other hand, the other comparator 2e operates in response to output from the integrating circuit 2c to generate a high level output (as

5 indicated by A of same). On this occasion, if the assistant driver's seat is occupied, the seat switch 5a is closed, so that a high level signal indicative of detection of the occupant is supplied from the occupant detecting device 5 to the AND circuit 2g (as indicated by C of same). Accordingly, the AND circuit 10 2g generates a high level output (as indicated by D of same), which is supplied to the OR circuit 2f. Then the OR circuit 2f generates a high level output (as indicated by E of same), which is supplied to the transistor 2h to turn it on, whereby electric current 15 is supplied from the power source 4 to the squib 3. The squib 3 is heated to force nitrogen gas into the air bag 6, so that the air bag 6 is inflated to prevent the occupant from hitting against the windshield (t_1 to t_2 in Fig. 2).

20 In contrast, when there is no occupant seated on the assistant driver's seat in the above case, the signal indicative of detection of the occupant is not supplied to the AND circuit 2g, and hence the output from the AND circuit 2g remains low. Accordingly, the 25 transistor 2h is not turned on, so that the squib 3 is not heated and hence the air bag is not inflated. On this occasion, the air bag for the driver's seat is inflated by the other actuator system, to thereby prevent the driver from hitting against the steering 30 wheel etc.

Next, when the output voltage from the integrating circuit 2c exceeds the second threshold value V_{TH2} , both comparators 2d, 2e operate, and the comparator 2d supplies a high level output to the 35 OR circuit 2f (as indicated by B of Fig. 2, at t_4 to t_5). At the same time, the high level output from the comparator 2e is supplied to the AND circuit 2g (as

indicated by A of fig. 2, at t_3 to t_6), the output from which is dependent on whether the signal indicative of detection of the occupant is supplied thereto from the occupant detecting device 5.

5 However, as mentioned as above, the high level output from the comparator 2d is supplied to the OR circuit 2f, which in turn supplies the high level output to the base of the transistor 2h, so that the transistor 2h is turned on irrespective of the level of output
10 from the AND circuit 2g, to thereby actuate the squib 3 to inflate the air bag.

In other words, when shock having a magnitude larger than the larger threshold value acts on the vehicle, the air bag for the assistant driver's seat
15 is inflated as well as the air bag for the driver's seat, irrespective of whether or not there is an occupant seated on the assistant driver's seat. The air bag for the assistant driver's seat is designed such that it covers the whole area of the windshield
20 when it is inflated, so that the occupant on the driver's seat is more safely protected.

Although, in the above described embodiment, an electric deceleration sensor is used as the deceleration sensor, this is not limitative, but two
25 mechanical deceleration/acceleration sensors may be used, which operate upon occurrence of shocks having two different magnitudes corresponding respectively to two threshold values of voltage supplied to the comparators 2e, 2d. The use of such mechanical
30 sensors can provide the same effects as provided by the above described embodiment.

Claims

1. An occupant protective system for an automotive vehicle having a driver's seat and an assistant driver's seat, comprising a first air bag provided for said
5 driver's seat of said vehicle, a second air bag provided for said assistant driver's seat, occupant detecting means for detecting whether or not there is an occupant seated on said assistant driver's seat,

10 comparison means for comparing a magnitude of deceleration of said vehicle with first and second threshold values, said second threshold value being greater than said first threshold value; and

15 selecting means responsive to outputs from said comparison means and said occupant detecting means for causing both of said first and second air bags to be inflated even when no occupant is seated on said assistant driver's seat, if said magnitude of deceleration exceeds said second threshold value, and for
20 causing said first air bag alone to be inflated when no occupant is seated on said assistant driver's seat, if said magnitude of deceleration exceeds said first threshold value and does not exceed said second threshold value.

25 2. An occupant protective system as claimed in claim 1, wherein said comparison means comprises a first comparator for comparing said magnitude of deceleration detected with said first threshold value, and a second comparator for comparing said magnitude
30 of deceleration detected with said second threshold value, and said selecting means comprises an AND circuit having one input supplied with an output from said first comparator and another input supplied with an output from said occupant detecting means, and an
35 OR circuit having one input supplied with an output from said second comparator and another input supplied with an output from said AND circuit.

3. An occupant protective system as claimed in claim 1 or 2, wherein said occupant detecting means has a switch provided at said assistant driver's seat for detecting an occupant seated thereon.

4. An occupant protective system substantially as hereinbefore described with reference to the accompanying drawings.

Relevant Technical fields

- (i) UK CI (Edition K) G4N (NHVS)
- (ii) Int CI (Edition 5) B60R

Databases (see over)

- (i) UK Patent Office
- (ii) WPI

Search Examiner

D L SUMMERHAYES

Date of Search

3 DECEMBER 1991

Documents considered relevant following a search in respect of claims **ALL**

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
A	GB 2005887 A (DAIMLER)	1
A	GB 1430258 A (NISSAN)	1



Category	Identity of document and relevant passages	Relevant to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).