

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 July 2007 (26.07.2007)

PCT

(10) International Publication Number
WO 2007/084333 A1


- (51) International Patent Classification:
B65D 71/00 (2006.01)
- (21) International Application Number:
PCT/US2007/000737
- (22) International Filing Date: 11 January 2007 (11.01.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/758,339 12 January 2006 (12.01.2006) US
- (71) Applicant: GRAPHIC PACKAGING INTERNATIONAL, INC. [US/US]; 814 Livingston Court, Marietta, GA 30067 (US).
- (72) Inventors: COLTRI-JOHNSON, Andrea; 3138 Delacorte Drive, Acworth, GA 30101 (US). GOMES, Jean-Manuel; 2699 Shadow Bluff Drive, Marietta, GA 30062 (US).
- (74) Agents: ISAF, Louis, T. et al.; Womble Carlyle Sandridge & Rice, PLLC, P.O. Box 7037, Atlanta, GA 30357-0037 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
 — with international search report
 — before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CARRIER PACKAGE

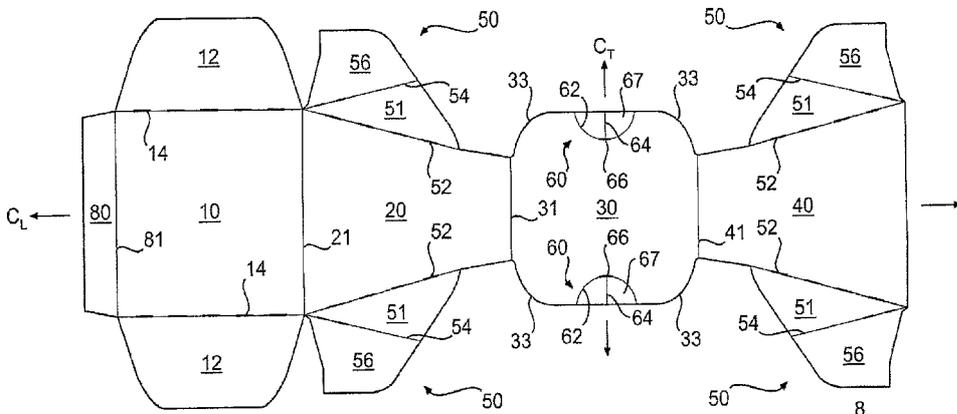

(57) Abstract: A wrap-around carrier package (150) has handle features (60) formed in a top panel (30) of the package. The handle features allow a user to deform and grasp the top panel .

WO 2007/084333 A1

CARRIER PACKAGE

RELATED APPLICATION

[0001] This application claims the benefit of U.S. Provisional Application No. 60/758,339, filed January 12, 2006, which is hereby incorporated by reference in its entirety.

BACKGROUND

[0002] Wrap-around carrier packages are typically formed by wrapping a carrier blank around a group of containers and securing the ends of the blank together. The containers are held in place by the tightly wrapped carrier and also, typically, by heel cutouts through which the bottom portions of the containers extend. In conventional wrap-around carrier packages, however, handles are not provided, or when handles are provided, they typically reduce the integrity of the package.

SUMMARY

[0003] According to a first embodiment of the invention, a carrier package comprises a carrier having a top panel, a first side panel connected to the top panel, a second side panel connected to the top panel and disposed on a side of the carrier package opposite to the first side panel, a bottom panel, and at least partially open first and second ends. A plurality of containers are accommodated in the carrier package. One or more handles features are formed in the top panel. The handle features allow deformation of the edges of the top panel, which allows a user to easily lift and carry the carrier package. The handle features may be designed to allow deformation of the top panel without tearing, so that the integrity of the carrier package is not overly compromised.

[0004] Those skilled in the art will appreciate the above stated advantages and other advantages and benefits of various additional embodiments reading the following detailed description of the embodiments with reference to the below-listed drawing figures.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

- [0005] According to common practice, the various features of the drawings discussed below are not necessarily drawn to scale. Dimensions of various features and elements in the drawings may be expanded or reduced to more clearly illustrate the embodiments of the invention.
- [0006] FIG. 1 is a plan view of a blank used to form a carrier package having handle features according to a first embodiment of the invention.
- [0007] FIGS. 2 and 3 illustrate the carrier package loaded with containers.
- [0008] FIG. 4 is a partial view of the carrier package illustrating the top panel of the carrier package.
- [0009] FIG. 5 illustrates the carrier package being grasped at the handle features and lifted.

DETAILED DESCRIPTION

- [0010] FIG. 1 is a plan view of a first side of a blank **8** used to form a carrier package **150** (illustrated in FIGS. 3-6) according to a first embodiment of the invention. As shown in FIG. 1, the carrier blank **8** may be wholly or partially symmetric about a longitudinal centerline C_L , and partially symmetric about a transverse centerline C_T . Therefore, certain elements in the drawing figures share common reference numerals in order to reflect the whole or partial longitudinal and/or transverse symmetries. The term "carrier package" generally refers to the erected carrier blank **8** and the containers **C** accommodated within the erected blank.
- [0011] The blank **8** comprises a bottom panel **10** foldably connected to a first side panel **20** at a first transverse fold line **21**, a top panel **30** foldably connected to the first side panel **20** at a second transverse fold line **31**, and a second side panel **40** foldably connected to the top panel **30** at a third transverse fold line **41**. An adhesive flap **80** may be foldably connected to the bottom panel **10** at a fourth transverse fold line **81**. Alternatively, an adhesive flap may be connected to the second side panel **40** at the opposite end of the blank **8**. The top panel **30** may have, for example, a generally square or rectangular shape with one or more

rounded, beveled or truncated corners 33. The bottom panel 10 may be, for example, generally square or rectangular.

[0012] A bottom end flap 12 may be foldably connected to each end of the bottom panel 10 at longitudinal fold lines 14. The bottom end flaps 12 serve to partially close the ends of the carrier package 150 (illustrated in FIGS. 3-6). A web portion 50 may be foldably connected to each end of the first side panel 20 at an oblique fold line 52. A web portion 50 may also be foldably connected to each end of the second side panel 40 at an oblique fold line 52. Each web portion 50 comprises a first web panel 51 and a second web panel 56 foldably connected to the first web panel 51 at an oblique fold line 54. The web portions 50, along with the bottom end flaps 12, serve to partially close the ends of the carrier package 150. The orientation of the oblique fold lines 52 causes the side panels 20, 40 to taper inwardly toward the top panel 30.

[0013] According to one aspect of the present invention, one or more handle features 60 may be formed in the top panel 30 for lifting, grasping and/or carrying of the carrier package 150. In the illustrated embodiment, two handle features 60 are formed in the top panel 30, one handle feature 60 being formed at each end edge of the top panel 30. In the exemplary embodiment, each handle feature 60 comprises a perimeter line of disruption in the form of a curved or arcuate line 62, with the perimeter line 62 delimiting a handle section 67. In FIG. 1, the perimeter lines 62 are generally semicircular, although other shapes, including discontinuous perimeter lines having linear sections, are within the scope of the present invention. A transverse, intermediate line of disruption 64 may extend from an edge of the top panel 30 to a location at or adjacent to the perimeter line 62. Longitudinal cuts or score lines 66 may be formed along or adjacent to the perimeter lines of disruption 62, such as at the intersections of the intermediate lines 64 with the perimeter lines 62.

[0014] The perimeter lines 62 and the intermediate lines 64 may be designed to allow deformation of the top panel 30 at the lines of disruption 62, 64, while not actually promoting tearing of the top panel 30 at the lines 62, 64. The lines 62, 64 may be, for example, fold lines, score lines, crease lines, cut-space lines,

combinations thereof, or other lines of disruption in the blank **8** allowing the top panel **30** to be deformed at the handle features **60**. The perimeter lines **62** may be, for example, continuous, substantially continuous or discontinuous in the blank **8**. The lines **66** can be cuts (e.g. slits) or scores at the apex of the perimeter lines **62** that facilitate pivoting of the handle section **67** when the top panel **30** is grasped at the handle features **60**.

[0015] According to one exemplary method, the carrier package **150** can be erected from the blank **8** by lying the blank flat, and placing a plurality of containers **C** (shown in **FIG. 2**) top side down on the interior surface of the top panel **30**. Glue or other adhesive may be applied to the exterior side of the adhesive flap **80** and/or to the interior side of the second side panel **40**. Glue or other adhesive is also applied to the exterior sides of each of the second web panels **56** and/or to the interior sides of the bottom end flaps **12**. The first and second side panels **20**, **40** are folded upwardly about the transverse fold lines **31**, **41**, respectively, toward the sides of the inverted containers **C**. The adhesive flap **80** is folded about the transverse fold line **81** so that it is adjacent to the container bottoms. The bottom panel **10** is then folded about the transverse fold line **21** so that it is adjacent to the container bottoms and so that its interior side contacts the exterior side of the adhesive panel **80** and is adhered thereto by the adhesive. The blank **8** is now wrapped around the containers **C** and has a generally tubular form, with open ends. Each of the web portions **50** is folded inwardly about the fold lines **52** so that they extend across the open ends of the tubular form and so that they abut the sides of adjacent containers **C**. The bottom end flaps **12** are folded upwardly about the fold lines **14** so that they adhere to the exteriors of the second web panels **56** at each end of the carrier, as shown in **FIGS. 2** and **3**.

[0016] According to an alternative method of erection, the adhesive flap **80** may be pre-glued to the second side panel **40** by folding at the transverse fold lines **21**, **41** so that the exterior side of the adhesive flap **80** contacts the interior side of the second side panel **40** and is adhered thereto. The pre-glued blank **8** may then be opened up into a generally tubular form, and the containers **C** transversely loaded into the tubular form through an open end of the blank. The open ends of the

tubular form may then be closed by the web panels **51, 56** and the bottom end flaps **12**.

[0017] Referring to **FIGS. 2 and 3**, the erected carrier package **150** includes the containers **C** securely retained therein, with the longitudinal axes of the generally cylindrical containers being perpendicular to the top and bottom panels **10, 30**. The exemplary carrier package **150** includes four beverage containers **C** arranged in a 2 x 2 arrangement, although other container arrangements are within the scope of the invention.

[0018] As shown in **FIGS. 2 and 3**, the ends of the carrier package **150** may be partially open, exposing upper portions of the sides of the containers **C** to view. The sides of the carrier package **150** are substantially closed by the tapered first and second side panels **20, 40**. During erection, the carrier package **150** can be wrapped relatively tightly around the containers **C** so that the web portions **50** slightly bend or otherwise deform at the lines of disruption **54**, which in turn causes the panels **51, 56** to partially conform to the exterior surfaces of adjacent containers **C**. In the illustrated embodiment, the web portions **50** and the bottom end flaps **12** close a substantial portion of the lower ends of the carrier package **150**. The degree to which the ends of the carrier package **150** are closed may be varied, for example, so that varying degrees of the containers **C** are visible.

[0019] **FIG. 4** is a partial view of the carrier package **150** illustrating the top panel **30**. The handle features **60** are arranged in the top panel **30** for lifting, grasping and/or carrying of the carrier package **150**. Each handle feature **60** provides a location at which the top panel **30** can be deformed according to a predetermined pattern in order to facilitate grasping of the carrier package **150**. Each handle feature **60** is located at an edge of the top panel **30**, adjacent to a partially open end of the carrier package **150**. Additional handle features may be, for example, located at other parts of the top panel **30**, such as at or adjacent to the fold lines **31, 41**.

[0020] **FIG. 5** illustrates a user accessing the handle features **60** in the top panel **30**. The carrier package **150** may be grasped by placing opposed fingers on the end edges of the top panel **30** at the handle sections **67**, and squeezing the top

panel 30 inwardly. Squeezing the top panel 30 at the handle features 60 causes the top panel 30 to deform inwardly at the opposed end edges of the top panel 30. Referring also to FIG. 4, the handle sections 67 may deform such that they pivot about the lines 62, 66, and bend inwardly at the lines 64. The handle features 60 may be located in the top panel 30 between adjacent containers C so that the handle sections 67 deform inwardly without interference from the containers C. Deformation of the top panel 30 provides a secure grip for lifting of the carrier package 150.

[0021] The exemplary carrier package 150 is illustrated as accommodating generally cylindrical 8.3 fluid ounce beverage cans. Other types of containers, however, can be accommodated within carrier packages according to the present invention. Generally cylindrical 12 ounce beverage cans, for example, could be used. The dimensions of the blank 8 may generally be altered to accommodate various container forms.

[0022] Additional containers C can be accommodated in a carrier package according to principles of the present invention, for example, by adjusting the length of the blank 8. For example, the top panel 30, the bottom panel 10 and the bottom end flaps 12 can be lengthened along the longitudinal direction of the blank 8 (measured from left to right in FIG. 1) in order to accommodate additional containers C. In one such alternative embodiment, a carrier package may be constructed that accommodates six containers arranged in three rows and two columns (3 x 2).

[0023] The blank according to the present invention can be, for example, formed from coated paperboard and similar materials. For example, the interior and/or exterior sides of the blank can be coated with a clay coating. The clay coating may then be printed over with product, advertising, price coding, and other information or images. The blank may then be coated with a varnish to protect information printed on the blank. The blank may also be coated with, for example, a moisture barrier layer, on either or both sides of the blank.

[0024] In accordance with the exemplary embodiments, the blank may be constructed of paperboard of a caliper such that it is heavier and more rigid than ordinary paper. The blank can also be constructed of other materials, such as cardboard, hard paper, or any other material having properties suitable for enabling the carrier package to function at least generally as described above. The blank can also be laminated to or coated with one or more sheet-like materials at selected panels or panel sections.

[0025] For purposes of the description presented herein, the term “line of disruption” can be used to generally refer to, for example, cut lines, score lines, crease lines, tear lines, fold lines, and combinations thereof, formed in a blank.

[0026] A fold line can be any substantially linear, although not necessarily straight, form of disruption or weakening in the blank that facilitates folding therealong. More specifically, but not for the purpose of narrowing the scope of the present invention, examples of fold lines include: score lines; crease lines; a cut or a series of cuts that extend partially into and/or completely through the material along a desired line of weakness; and various combinations of these features.

[0027] The above embodiment may be described as having one or panels adhered together by glue. The term “glue” is intended to encompass all manner of adhesives commonly used to secure various portions of the blank.

[0028] The description is not intended to limit the invention to the form disclosed herein. Also, it is intended that the appended claims be construed to include alternative embodiments, not explicitly defined in the detailed description.

WHAT IS CLAIMED IS:

1. A carrier package, comprising:
 - a bottom panel;
 - a top panel;
 - a first side panel;
 - a second side panel;
 - an at least partially open first end;
 - an at least partially open second end;
 - at least one handle feature in the top panel, the handle feature allowing deformation of the top panel at at least one edge of the top panel; and
 - a plurality of containers.

2. The carrier package of claim 1, wherein the first end of the carrier package is at least partially closed by a first bottom end flap.

3. The carrier package of claim 1 or 2, wherein the first end of the carrier package is at least partially closed by a first web portion foldably connected to the first side panel and a second web portion foldably connected to the second side panel.

4. The carrier package of claim 3, wherein the first web portion comprises:
 - a first web panel foldably connected to the first side panel; and
 - a second web panel foldably connected to the first web panel, the second web panel being adhered to the first bottom end flap.

5. The carrier package of claims 1-4, wherein the at least one handle feature comprises a first handle feature at the first end of the carrier package.

6. The carrier package of claims 1-5, wherein the first handle feature comprises a first perimeter line of disruption, the first perimeter line of disruption in part defining a first handle section of the first handle feature.

7. The carrier package of claim 6, wherein the first handle feature further comprises an intermediate line of disruption in the first handle section and extending to a first edge of the top panel.

8. The carrier package of claim 7, wherein the first handle feature further comprises a cut or score at or adjacent to the first perimeter line of disruption.

9. The carrier package of claims 1-8, wherein the plurality of containers comprises at least four generally cylindrical containers.

10. The carrier package of claims 1-9, wherein the containers are arranged in a two by two arrangement.

11. The carrier package of claim 1, wherein the at least one handle feature comprises a first handle feature at the first end of the carrier package.

12. The carrier package of claim 11, wherein the first handle feature comprises a first perimeter line of disruption, the first perimeter line of disruption in part defining a first handle section of the first handle feature.

13. The carrier package of claim 12, wherein the first handle feature further comprises an intermediate line of disruption in the first handle section and extending to a first edge of the top panel.

14. The carrier package of claim 13, wherein the first handle feature further comprises a cut at or adjacent to the first perimeter line of disruption.

15. The carrier package of claim 12, wherein the plurality of containers comprises four generally cylindrical containers arranged in a two by two arrangement, wherein each container has a longitudinal axis, the longitudinal axes of the containers being generally perpendicular to the bottom panel.

16. The carrier package of claims 1-15, wherein the first and second side panels taper inwardly towards the top panel.

17. The carrier package of claims 1-16, wherein the at least one handle feature comprises a first handle feature at a first end edge of the top panel and a second handle feature at a second end edge of the top panel.

18. A method of carrying a carrier package, comprising:
providing a carrier package according to claim 17;
placing at least one finger on the top panel at the first handle feature;
placing at least one finger on the top panel at the second handle feature;
deforming the top panel at the first and second handle features; and
lifting the carrier package.

19. A carrier package, comprising:
a bottom panel;
a top panel;
a first side panel connected to the bottom panel and to the top panel;
a second side panel connected to the bottom panel and to the top panel;
a partially open first end, the first end being at least partially closed by a first web portion foldably connected to the first side panel, a second web portion foldably connected to the second side panel, and a first bottom end flap foldably connected to the bottom panel;
a partially open second end;
a first handle feature at a first end edge of the top panel at the first end of the carrier package;

a second handle feature at a second end edge of the top panel at the second end of the carrier package; and

four containers in a two by two arrangement, each container having a longitudinal axis, the axes of the containers being generally perpendicular to the bottom panel.

20. The carrier package of claim 19, wherein the at least one handle feature comprises a first plurality of lines of disruption in the top panel.

21. The carrier package of claim 20, wherein the first plurality of lines of disruption comprises a first perimeter line of disruption, the first perimeter line of disruption extending at least adjacent to the first end edge of the top panel.

22. The carrier package of claim 21, wherein the first handle feature further comprises a first intermediate line of disruption extending to the first edge of the top panel and a cut or score at or adjacent to the first perimeter line of disruption.

23. The carrier package of claims 19-22, wherein the first web portion comprises a first web panel foldably connected to the first side panel, and a second web panel foldably connected to the first web panel, the second web panel being adhered to the first bottom end flap.

24. The carrier package of claims 19-23, wherein the first and second side panels taper inwardly towards the top panel.

25. A method of carrying a carrier package, comprising:
providing a carrier package according to claim 19;
placing at least one finger on the top panel at the first handle feature;
placing at least one finger on the top panel at the second handle feature;
deforming the top panel at the first and second handle features; and

lifting the carrier package.

26. A blank, comprising:

a bottom panel;

a first bottom end flap foldably connected to a first end of the bottom panel;

a second bottom end flap foldably connected to a second end of the bottom panel;

a top panel;

a first side panel;

a second side panel;

a first web portion foldably connected to a first end of the first side panel;

a second web portion foldably connected to a second end of the first side panel; and

a deformable first handle feature comprising at least one first line of disruption at a first end edge of the top panel.

27. The blank of claim 26, wherein the at least one first line of disruption comprises a first perimeter line of disruption, the first perimeter line of disruption in part defining a first handle section of the first handle feature and extending at least adjacent to the first end edge of the top panel.

28. The blank of claims 26 or 27, wherein the first handle feature further comprises:

a first intermediate line of disruption in the first handle section and extending to the first end edge of the top panel; and

a cut or score at or adjacent to the first perimeter line of disruption.

29. The blank of claims 26-28, wherein the first web portion comprises:

a first web panel foldably connected to the first side panel; and

a second web panel foldably connected to the first web panel.

30. The blank of claims 26-29, wherein the first and second side panels taper inwardly toward to the top panel.

31. The blank of claims 26-30, wherein the blank is constructed from paperboard.

1/4

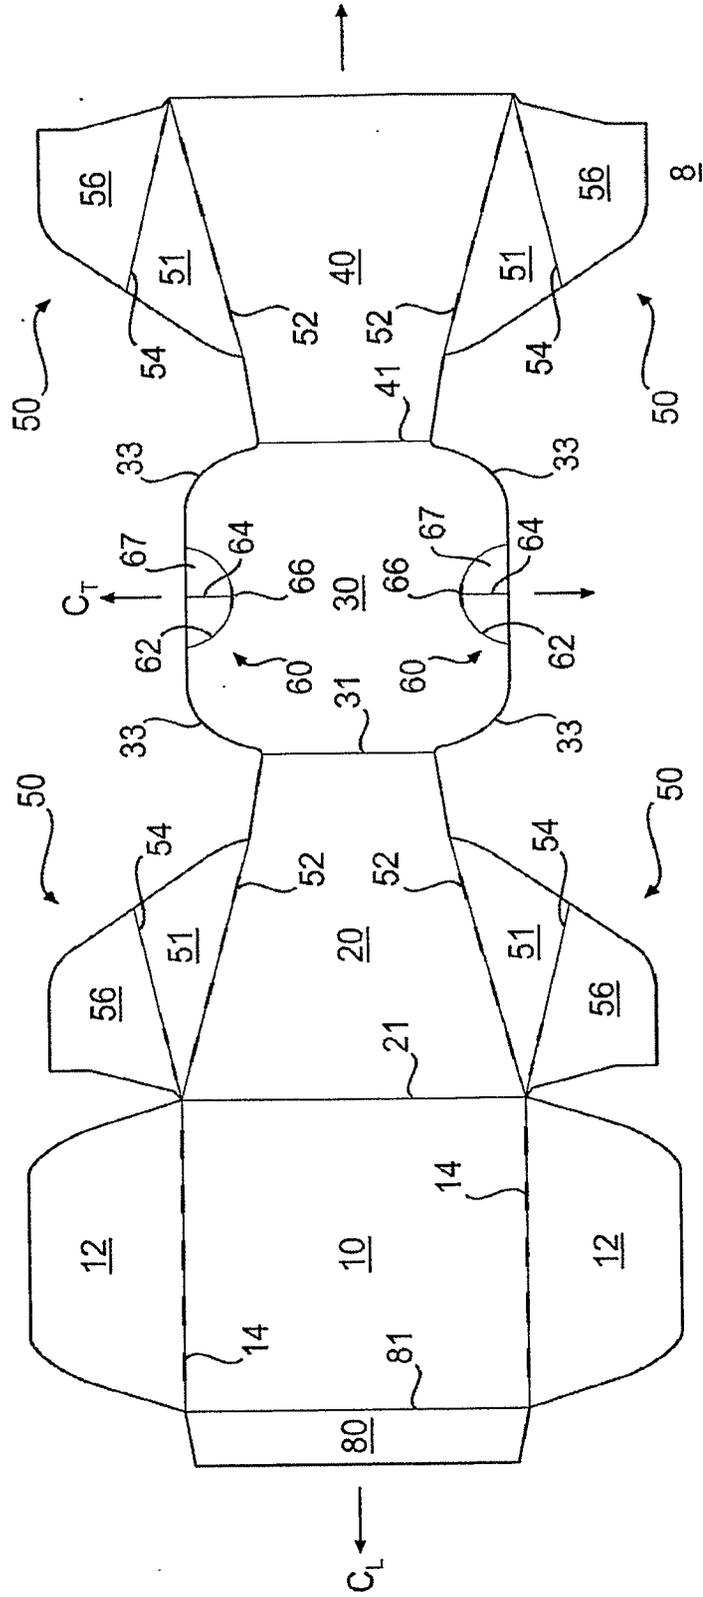


FIG. 1

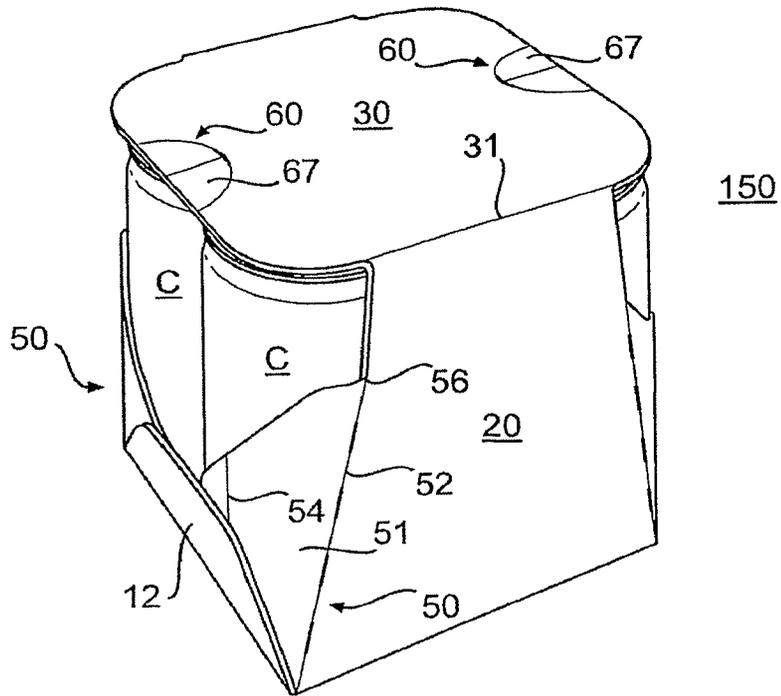


FIG. 2

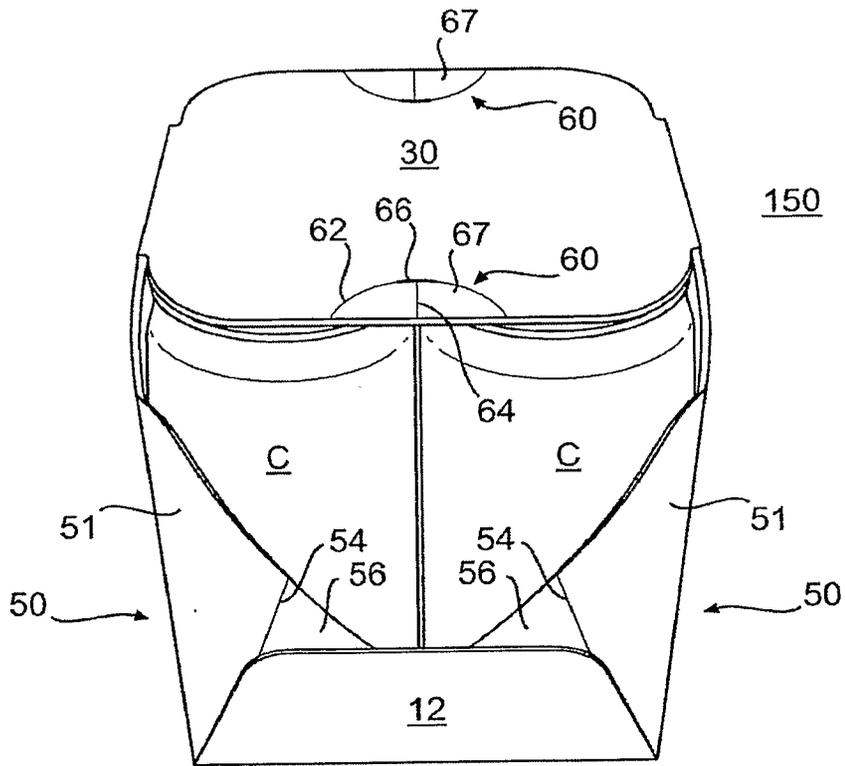


FIG. 3

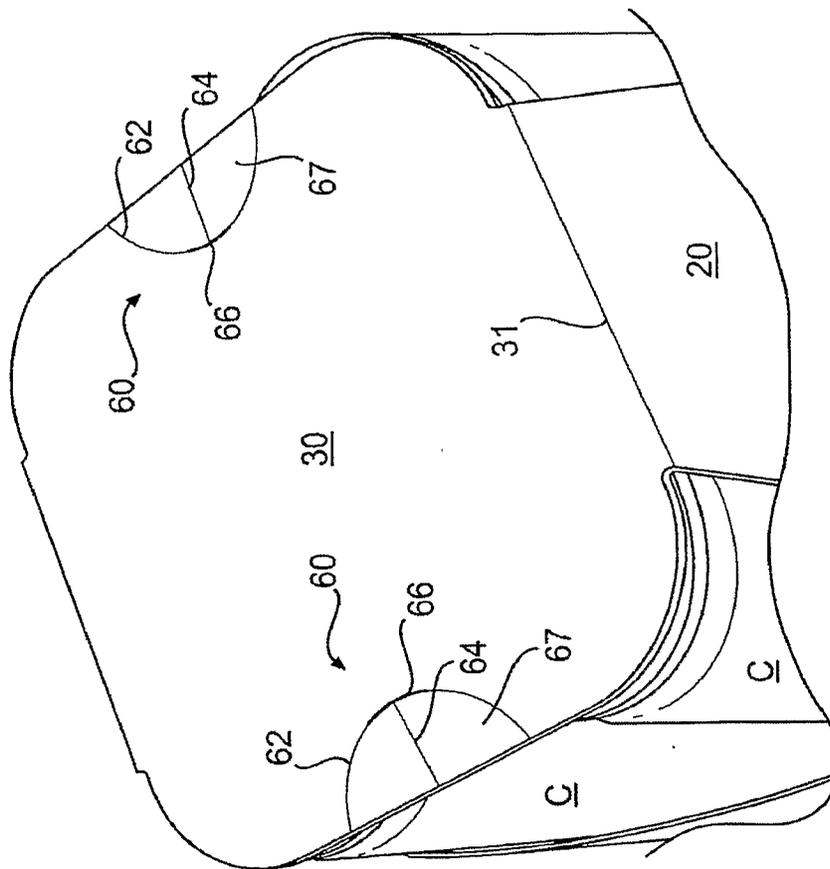


FIG. 4

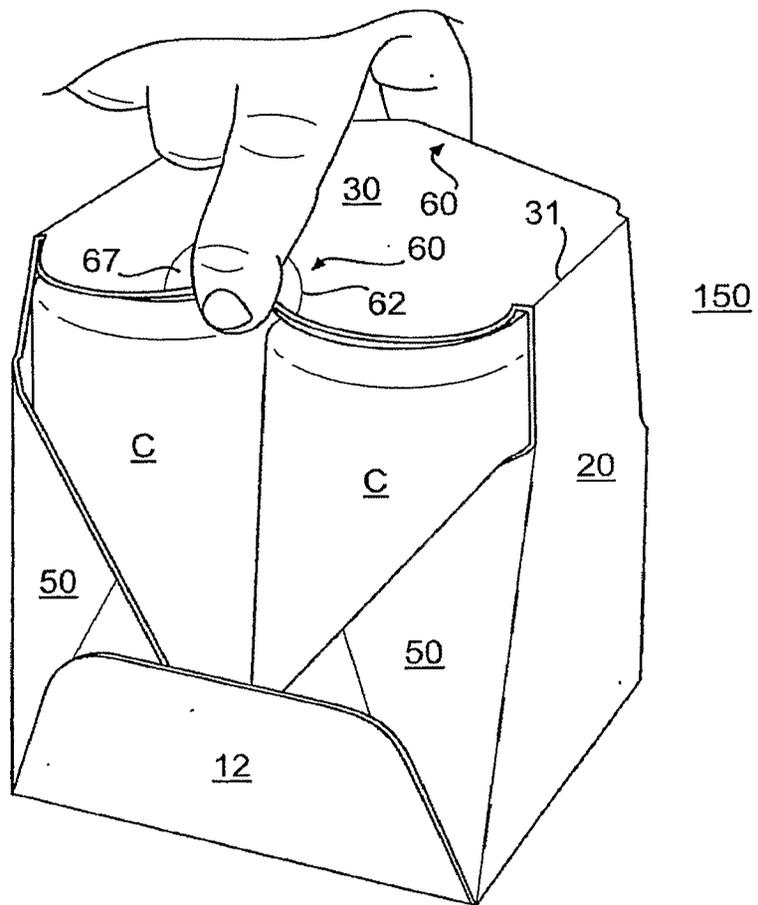


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/000737

A. CLASSIFICATION OF SUBJECT MATTER
INV. B65D71/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 635 452 A (HELMS CHARLES ROBERT) 18 January 1972 (1972-01-18) the whole document	1,3, 6-10, 12-18
X	US 3 593 849 A (HELMS CHARLES R ET AL) 20 July 1971 (1971-07-20) the whole document	1,3,6-8, 12-14,16
X	US 4 966 324 A (STEEL THOMAS C [US] THOMAS C STEEL [US]) 30 October 1990 (1990-10-30) column 6, line 18 - line 25; claim 1; figures 9,10	1,5,6, 11,17,26
A	US 4 972 991 A (SCHUSTER RICHARD L [US]) 27 November 1990 (1990-11-27) column 3, line 22 - column 4, line 25; claim 1; figures 1-5	1,19,26

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

30 May 2007

Date of mailing of the international search report

11/06/2007

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Janosch, Joachim

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2007/000737

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3635452	A	18-01-1972	NONE
US 3593849	A	20-07-1971	NONE
US 4966324	A	30-10-1990	NONE
US 4972991	A	27-11-1990	AT 114582 T 15-12-1994 AU 639550 B2 29-07-1993 AU 7482291 A 10-10-1991 BR 9106143 A 09-03-1993 CA 2077678 A1 10-09-1991 DE 69105490 D1 12-01-1995 DE 69105490 T2 20-04-1995 DK 518987 T3 15-05-1995 EP 0518987 A1 23-12-1992 ES 2065017 T3 01-02-1995 FI 924022 A 08-09-1992 GR 3015171 T3 31-05-1995 IE 910781 A1 11-09-1991 JP 3051447 B2 12-06-2000 JP 6508084 T 14-09-1994 MX 167845 B 15-04-1993 NO 923490 A 08-09-1992 NZ 237368 A 25-02-1993 WO 9113807 A1 19-09-1991 ZA 9101734 A 24-12-1991