

(86) Date de dépôt PCT/PCT Filing Date: 2003/09/01

(87) Date publication PCT/PCT Publication Date: 2004/03/18

(45) Date de délivrance/Issue Date: 2010/07/27

(85) Entrée phase nationale/National Entry: 2005/03/01

(86) N° demande PCT/PCT Application No.: DE 2003/002906

(87) N° publication PCT/PCT Publication No.: 2004/022425

(30) **Priorités/Priorities:** 2002/09/03 (DE102 40 511.5);
2003/06/25 (DE103 28 431.1)

(51) Cl.Int./Int.Cl. *B64C 1/14* (2006.01)

(72) Inventeurs/Inventors:

PUSCHMANN, CARSTEN, DE;
LESSAT, WOLFGANG, DE;
HASSE, JENS, DE


(73) Propriétaire/Owner:

AIRBUS OPERATIONS GMBH, DE

(74) **Agent:** GOWLING LAFLEUR HENDERSON LLP

(54) Titre : DISPOSITIF POUR AVERTIR D'UNE PRESSION DIFFERENTIELLE LORS DE L'OUVERTURE D'UN DISPOSITIF DE FERMETURE SOUMIS A UNE PRESSION D'UNE OUVERTURE MENAGEE DANS LE FUSELAGE D'UN AVION

(54) Title: DEVICE FOR WARNING OF DIFFERENTIAL PRESSURE DURING THE OPENING OF A PRESSURIZED CLOSING DEVICE PERTAINING TO AN OPENING IN THE FUSELAGE OF AN AEROPLANE

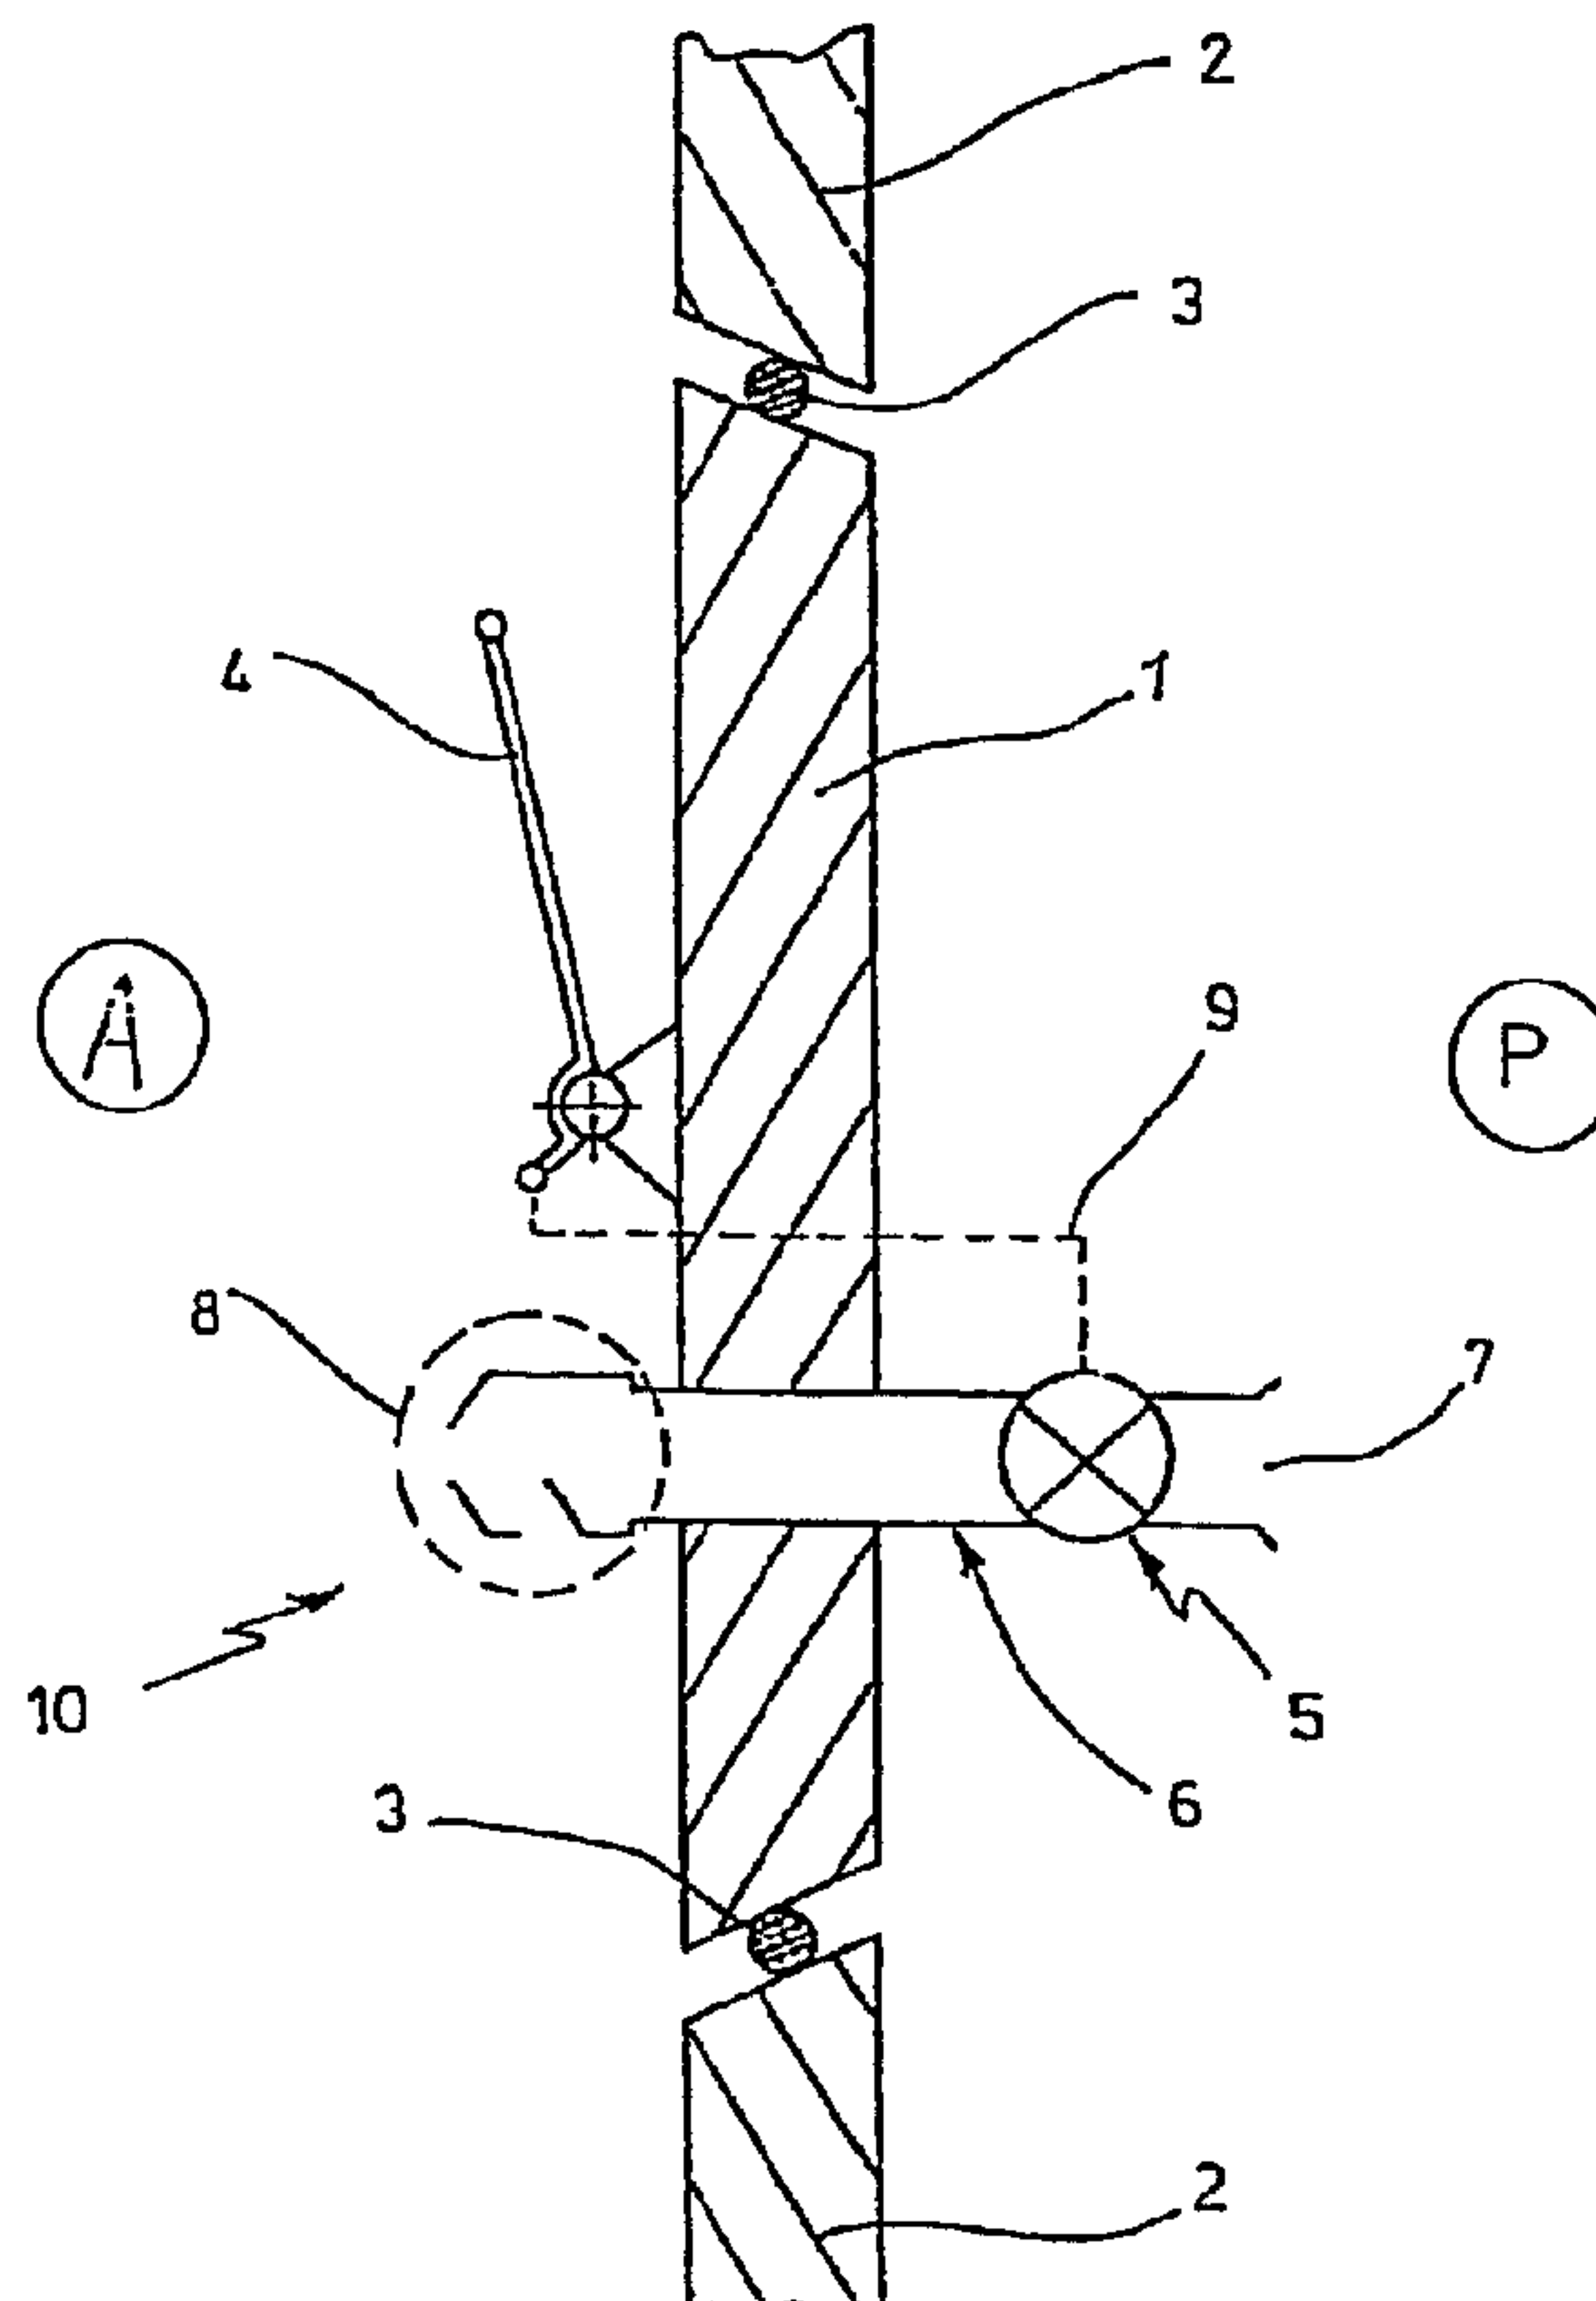

(57) **Abrégé/Abstract:**

An apparatus warns of differential pressure during the opening of a pressure-loaded door that closes an opening in an aircraft fuselage. An air guide passage extends from the side with higher pressure to the side with lower pressure. The air guide passage is

(57) **Abrégé(suite)/Abstract(continued):**

closeable by a valve that is controllable with a control lever operatively connected to a door opening mechanism. When there is a differential pressure between the two sides, upon opening of the valve the apparatus produces an acoustic signal as a differential pressure indication that is independent of a supply system and serves as a warning signal for the operator of the aircraft door.

Device For Warning Of Differential Pressure During The Opening
Of A Pressurized Closing Device Pertaining To An Opening In The
Fuselage Of An Aeroplane

ABSTRACT

5 An apparatus warns of differential pressure during the opening
of a pressure-loaded door that closes an opening in an aircraft
fuselage. An air guide passage extends from the side with higher
pressure to the side with lower pressure. The air guide passage
is closeable by a valve that is controllable with a control lever
10 operatively connected to a door opening mechanism. When there
is a differential pressure between the two sides, upon opening
of the valve the apparatus produces an acoustic signal as a
differential pressure indication that is independent of a supply
system and serves as a warning signal for the operator of the
15 aircraft door.

TITLE OF THE INVENTION

Device For Warning Of Differential Pressure During The Opening
Of A Pressurized Closing Device Pertaining To An Opening In The
Fuselage Of An Aeroplane

5 FIELD OF THE INVENTION

The invention relates to an apparatus for warning of differential pressure during the opening of a pressure-loaded closing device of an opening in the aircraft fuselage by means of an opening mechanism.

10 BACKGROUND INFORMATION

For aircraft doors as possible closing devices for openings in the aircraft fuselage, which are to be opened by a manual force after a landing even with a pressure difference between cabin (side of the higher pressure) and surrounding environment (side
15 of the lower pressure), there exists the danger, that the operator of the door suffers harm due to the rapid opening movement of the door or also due to the arising airflow from the cabin to the outside. Accidents prove that such endangerments can arise. In order to prevent this, there exists, for example
20 in passenger aircraft, an electrically driven optical warning mechanism consisting of a red lamp in the window area of the door, which begins to blink in connection with an existing differential pressure and a deactivated emergency slide trigger. Thereby, it is to be signaled to the operator, that an operation

of the door is potentially dangerous and should not be carried out so long until the pressure equalization has taken place. This is unobjectionable for a normal deplaning of the aircraft. In the case of an emergency evacuation of the aircraft, in which
5 all occupants must have exited from the aircraft within 90 seconds, untrained persons such as passengers would cease or abstain from the operation of the doors due to the blinking warning lamp. The consequence thereof would be a drastically delayed evacuation.

10 Furthermore, due to the necessary electrical energy supply, the warning function of the blinking lamp is limited to scenarios in which a current supply is available from the onboard power network or grid or an autonomous supply source.

SUMMARY OF THE INVENTION

15 Object of the present invention is thus to construct an electrically independent and reliable apparatus which indicates an existing differential pressure to trained persons in direct dependence on the operation of the door opening mechanism. Thereby, the possibility is to be provided, to initiate or carry
20 out a relieving of the pressure.

Simultaneously, the apparatus may not impair the operation of the door opening mechanism in an emergency situation, in order to enable a rapid evacuation of all occupants in the emergency case.

This object is achieved according to the invention by the measures set forth herein.

With the inventive warning apparatus, an acoustic warning signal is produced, which is triggered through the pressure compensation or equalization between cabin and surrounding environment. The acoustic signal is produced by a valve, of which the opening and closing is controlled by the operation of the door opening mechanism. In that regard, according to the invention, it is especially advantageous that the system manages to operate without electrical current supply and completely autonomously. The perception of the signal is not direction dependent, that is to say, that a particular orientation of the body is not necessary in order to perceive the warning. The warning is similarly not impaired by light conditions at different times of day or poor lighting conditions. It is a considerable advantage that the warning is directly coupled to an operating manipulation on the door that is to be opened.

Moreover, false alarms or signals are excluded and the warning apparatus achieves a very high reliability.

The coupling of the valve opening to the operation of the door opening mechanism independently of the position or setting of the emergency slide trigger of the aircraft door enables the operator (flight attendant) to recognize the operative connection or context and to cause the opening of the outlet valves of the

aircraft. Hereby, the safety for the cabin personnel is increased considerably.

Simultaneously, the evacuation capability of the aircraft is not limited, because an opening of the door is possible even with an
5 activated emergency slide.

A further advantage of this solution is the possibility, especially for aircraft already in service, to retrofit or after-equip the inventive warning apparatus on the aircraft doors in addition to or alternatively to already existing warning
10 mechanisms.

Further developments and advantageous embodiments of the invention are set forth in the dependent claims. Further individual details and advantages arise from the following description of example embodiments of the invention.

15 Possibilities for an acoustic warning of an operator of an aircraft door are recited in dependent claims.

Further inventive features enable a timely interruption of the opening process of the aircraft door, if a differential pressure arises and the warning apparatus functions in direct connection
20 with the opening mechanism. Through the provision of a two-stage execution of the opening process, whereby the coupling of the valve opening is connected with the first stage, for example through operating or removing a flap, it is ensured that an

undesired opening with an existing pressure difference is prevented.

Other dependent claims represent alternative arrangement possibilities of the warning apparatus in the door area of an aircraft fuselage.

Another advantageous further development according to one embodiment of the invention enables a warning function not only in an acoustic manner, but also through the feeling of a targeted oriented air stream.

In a further dependent claim, embodiments of an air guide passage in the aircraft door area are set forth.

A hole in the outer covering skin of the door can be avoided with the connection of the warning apparatus to the outside hand lever box according to further detailed example embodiments according to the invention.

Moreover, the arrangement of the control lever in operative connection with the valve according to further example embodiments is of great importance. Through the type and the arrangement of the utilized seal rubber and the further valve components, it is achieved that the valve is surely closed and an existing differential pressure continuously loads the seal rubber and thus surely closes the out-flow opening in the valve, as well as the opening of the valve being connected with an

acoustic signal, if a differential pressure exists. Also advantageous is the arising noise level in connection with the generation of the hissing/rushing noise behind the door interior paneling, because thereby an opening for further conveying the noise can be omitted. Thus, the noise insulation of the door is not impaired.

Through the suggested arrangement according to further claims, it is ensured that the locking process of the door is not impaired by the warning apparatus, but rather additionally supports or assists it in addition to the already existing elements, and also that adequate reaction time for a user still remains available during the opening process.

BRIEF DESCRIPTION OF THE DRAWINGS

Example embodiments of the invention are illustrated in the drawing, and will be described in further detail below in connection with the Figs. 1 to 7. In the figures, the same components are provided with the same reference characters.

It is shown by:

Fig. 1 the schematic view of an inventive apparatus for warning in a first embodiment;

Fig. 1A a development of the first embodiment of the warning apparatus according to Fig. 1;

Fig. 2 the inside view of a passenger door with an existing door opening mechanism, whereby the section A1 - A1 refers to a possible installation location for the apparatus for warning in a second embodiment as a pneumatic remaining pressure indicator;

Fig. 3 the entire mechanism of the pneumatic remaining pressure indicator at the installation location in a sectional view that is referenced with the section A1 - A1 in Fig. 2;

Fig. 4 the detail Z according to Fig. 3 with the illustration of a valve for the control of an acoustic warning signal in closed position as well as the lever necessary for the control on the locking shaft;

Fig. 5 the detail Z according to Fig. 3 with the illustration of the valve for the control of the warning signal in open position;

Fig. 6 the top plan view onto a bottom flange with a through-flow opening in the outside hand lever box; and

Fig. 7 the top plan view and a further sectional view of the closed valve and the control lever.

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS OF THE INVENTION

In Fig. 1, there is schematically shown an inventive apparatus for the warning 10 in a first embodiment carried out as an acoustic remaining pressure warning system with an operating level on the outer side of an aircraft. In the illustrated first example embodiment, the warning system 10 is integrated in a door 1, which especially offers the advantage that no additional installations are necessary outside of the door in a frame structure. Instead of a door 1, other openings, such as, for example, windows or flaps, are also conceivable, which comprise closing mechanisms and on which a pressure difference can arise. The door 1, a door frame 2, and a seal 3 form the barrier between the low pressure (outside environment A) and the higher pressure (passenger cabin P). For example, aircraft doors are embodied or constructed in such a manner. A necessarily provided door suspension and a similarly necessarily provided door locking mechanism are not illustrated in this embodiment. Also after the landing of the aircraft, a pressure difference can still arise between the passenger cabin and the environment. The illustrated door 1 has an opening direction toward the lower pressure (outside environment A), which makes a warning system 10 necessary for the protection of the operator. The warning system 10 can be arranged not only on the side with the lower pressure A, but rather as needed also on both sides or on the side impinged on by the higher pressure (P). The inventive remaining pressure warning system 10 consists of an air inlet 7, a valve 5, an air guide passage 6 in the embodiment of a connection pipe,

and a whistle 8. The valve 5 is connected via a mechanical connection 9 with a door operating lever 4. In the illustration as shown, the door operating lever 4 is mounted on the side of the lower pressure (A), but, just as well, embodiments are also possible, which provide the door operating lever 4 on the side of the higher pressure (P). Furthermore, embodiments are conceivable, which comprise respectively one operating lever 4 on both sides of the door 1. The energy that is necessary for producing the warning is acquired from the pressure difference between P and A. This principle includes the advantage that the apparatus for warning is deactivated when no differential pressure arises. It is further of advantage that the system 10 manages to operate without an energy source and works completely autonomously.

An arrangement of the apparatus 10 also next to the door 1, that is to say possibly in the door frame 2 or in (not illustrated) wall elements in the door area are similarly conceivable as embodiments.

The manner of operation of the warning system 10 is described in the following:

The valve 5 is closed with a closed and locked door 1. If a person opens the door 1 by means of the door operating lever 4, the valve 5 is opened via the mechanical connection 9 before the opening process. The mechanical connection 9 can be embodied as a Bowden cable link or a tension cable arrangement, as a

lever/rod mechanism or as a transmission (e.g. toothed gear wheel) mechanism or typically known actuator arrangements can find application. The door operating lever 4 as well as the mechanical connection 9 are adjusted so that the valve 5 is
5 opened before the door 1 is unlocked or unlatched and possibly could open by itself due to the differential pressure $P - A$. If no differential pressure between P and A is present, then also no warning will take place, and the operator can proceed with the opening process. If, however, a differential pressure $P - A$ is
10 present, this will give rise to an airflow through the air inlet 7, the now open valve 5, the connection pipe 6, and the whistle 8. The airflow through the whistle 8 produces a loud noise as a warning. With such an acoustic signal, the operator is warned against an unlocking and opening of the door 1. In combination
15 with the acoustic signal, or correspondingly as an individual sole means, through a clever or skillful arrangement of the connection pipe 6, the airflow can be directed through the door operating lever 4 or in a direction of the operating lever 4 onto the hand of the operator, if the operation is carried out on the
20 side of the lower pressure (outside environment A). Instead of the connection pipe 6, any other air guide channels are also conceivable. Every door operator will instinctively connect or associate the feeling of the airflow and/or the occurrence of a loud and surprising noise with the just-started action or
25 operation, and immediately interrupt this action or operation. Through the direct connection or association between his action and the arising warning signal, the causal connection or association is understandable for an operator of the door. In

a simple manner, a warning signal can be effectively produced, which indicates the danger of an undesired sudden impact-like opening of the door and therewith an endangerment of the operator.

5 It is provided, to embody the door opening mechanism in such a manner so that after activation of the warning system 10, sufficient reaction time still remains in order to interrupt the door opening process before the door opens itself or can be opened. For this purpose, a two-stage operating mechanism is
10 provided in a variation of the first embodiment illustrated in Fig. 1A. A flap 4A, which releases or opens the access to the opening lever 4, is to be opened first. The mechanical connection 9A for the activation of the warning system 10 is connected with this flap 4A, that is to say, before the door
15 opening lever 4 is operated, the warning system 10 can give off a signal for the warning. In a further embodiment of the invention, a two-stage opening can progress in such a manner that an opening of the lever is carried out up to a first position, here a corresponding signal can be reacted to, and then, possibly
20 after overcoming a blockage or detent, the opening of the door is carried out. In a further embodiment, the inventive apparatus 10 can also be provided as a supplement to existing pressure difference warning systems.

In the Figs. 2 et. seq., a second embodiment of the apparatus for
25 warning is illustrated in a constructive reduction to practice of the inventive idea. Fig. 2 shows the basic structural

construction of an aircraft door 1 as well as a door opening mechanism 100 for the opening and closing of the aircraft door 1. According to the invention, a pneumatic remaining pressure indicator 200 is provided on the door opening mechanism 100 as
5 a second embodiment of the warning apparatus (shown in Fig. 3), which signals a possible pressure difference between the aircraft cabin of an aircraft and the environment, if an opening of the aircraft door is to take place after the landing. The utility or applicability of the inventive mechanism for warning of a
10 differential pressure is, however, not limited to doors, but rather is possible also for gates, windows and flaps.

For the door opening of the aircraft door 1 from the inside, it is necessary to pull the inner hand lever 102 upwardly, in order to set the hand lever shaft 103 in rotation (counterclockwise).
15 This drives a connecting rod 104, which in turn sets the locking shaft 105 in rotation (clockwise). Thereby, the rotation of the hand lever shaft 103 and of the locking shaft 105 is the same except for the rotation direction. The section A1 - A1 in Fig. 1 (also see Fig. 3) references a possible position for the
20 inventive apparatus 200 for warning of differential pressure. The area of the outside hand lever box 106 as possible position of a through-flow opening 206 of the outside environment A and the passenger cabin P within an aircraft fuselage is located at the lower end of this section path.

25 Fig. 3 shows the complete mechanism of the warning apparatus 200 in the section A1 - A1. It consists of a flange 210 and

particularly a lower flange 210 that is secured on the outside hand lever box 106 and that has a through-flow opening 206 in the lever box 106. From the flange 210, a pipe 207 leads to a valve 209, which is regulated by a control lever 208, which is driven
5 by the rotation of the locking shaft 105. The pipe 207 can also be embodied in a flexible embodiment as an air guide hose/channel. If the locking shaft 105 of the door opening mechanism 100 turns in the clockwise direction in the course of the door opening process, then the control lever 208 opens the
10 valve 209. The air then flows out of the passenger cabin P through the valve 209, the connected pipe 207, the through-flow opening 206 and the lower flange 210 into the hand lever box 106, and from there into the outside environment A. Thereby, an acoustic warning signal, preferably a hissing/rushing warning
15 noise, is produced at the valve 209. With such a connection of the warning apparatus 200 on the outside hand lever box 106, a hole in the outside skin of the aircraft door 1 is advantageously avoided. Similarly of advantage is the arising noise level in the production of the hissing/rushing behind a door interior
20 covering or paneling (not shown), because thereby a passage for the further conveyance of the noise can be omitted. The noise insulation of the door is thus not impaired. Moreover, the noise is also audible outside of the cabin.

In Fig. 4, the exact manner of operation of the warning apparatus
25 200 is recognizable in connection with the enlarged illustration of the detail Z according to Fig. 3. The valve 209 is arranged on the aircraft door structure, a carrier or support 110, and is

opened or closed by the control lever 208. The motion of the control lever 208 is directly coupled to the rotation of the locking shaft 105. The Fig. 4 shows the closed position of the valve 209, in which the further travel of the control lever 208 past the dead center point provides that the locking shaft 105 can under no circumstances be loaded with a moment by the warning apparatus 200, which moment tries to unlock the locking elements of the door opening mechanism 100. With the illustrated arrangement, it is ensured that the locking of the door is not impaired by the warning apparatus 200, but rather actually supports or assists it in addition to the already existing elements. The valve 209 consists of the valve flange 213 into which the connection stub 214 to the pipe 207 can be directly screwed-in, a helical spiral compression spring 216, a slide bolt 215 with connected seal rubber 217, and a valve housing 211.

The arrangement of the mentioned components is carried out so that the helical spiral compression spring 216 is centered on the valve flange 213 and tries to upwardly press the slide bolt 215, which on its part is centered in the valve housing 211, in order to thereby lift the seal rubber 217 away from the valve flange 213 and thereby to open the valve 209. This is prevented by the control lever 208, on the free end of which a roller 218 is located, and which presses against the slide bolt 215 in the closed position of the valve 209. Instead of the helical spiral compression spring 216, a spring-loading through other types of springs is also possible, whereby the slide bolt can then be

omitted or replaced by a different mechanical element (for example a flap) for the closing of the out-flow opening.

The valve housing 211 has four in-flow openings 212, which are distributed in the circumferential direction and which produce the hissing/rushing as an acoustic warning after the opening of the valve 209.

In the closed position of the valve 209, the seal rubber 217 is loaded by the pressure difference between passenger cabin P and outside environment A. Thereby the seal security is further increased, because the flexible seal rubber 217 is loaded in addition to the pressure, which is exerted by the control lever 208 onto the slide bolt 215.

In Fig. 5, the valve 209 is shown in open position. Through turning or rotation of the locking shaft 105 during the door opening process, the control lever 208 is brought into this unlocked position upon reaching the end position of the inside hand lever 102. This motion occurs exactly in the same manner upon operation of the outside hand lever, because the inside hand lever rotates synchronously along with the operation of the outside hand lever.

In this position, the door 1 is completely unlocked by the elements of the door opening mechanism 100, lifted and can be opened. Because this position is not suitable for still providing a warning to the operator by means of the warning

apparatus 200, if a pressure difference exists between the passenger cabin and the outside environment, the warning becomes active at a very much earlier lever position, so that enough time remains for the operator to interrupt or abort his door opening
5 action in good time.

As can be seen from the Figs. 4 and 5, the control lever 208 begins to open the valve 209 already at the moment in which it has rotated out of the dead center point position and runs along the round flank of the slide bolt 215. In parallel to this, the
10 slide bolt 215 moves upwardly, driven by the helical spiral compression spring 216, and thus opens the through-flow in the valve flange 213. Thus, the control lever 208 already completely clears, frees or opens the valve 209 (=> warning noise) when the door 1 is not yet lifted and not yet completely unlocked.
15 Thereby there arises a handling free play for the operator of the door, in which he can decide to abort the door opening process due to the existing differential pressure.

For the further explanatory illustration of the inventive warning apparatus 200, the lower or bottom flange 210 is shown in a top
20 plan view in Fig. 6. With the flange 210, the pipe 207 with a through-flow opening 206 to the outside hand lever box 106 is positioned on the door structure of the passenger door 1, and preferably screw-mounted by means of securing means 219.

However, further positions on the door structure are also conceivable, for example laterally next to or below the outside hand lever box.

In Fig. 7, the manner of securing the valve 209 on the carrier or support 110 of the door structure is shown in supplemental views. In the sectional view B1 - B1, the closed valve 209 is illustrated, whereby the closing is achieved by pressing of the slide bolt 215 by means of the roller 218 of the control lever 208. In the top plan view as well as in the side view, it is shown that screw connections find application as securing means 220 in the illustrated embodiment.

The invention is especially directed, for example, to an apparatus for warning of differential pressure during opening of a pressure-loaded closure device 1 of an opening in an aircraft fuselage by an opening mechanism 4; 100, 105 including a control lever 4; 208 and a flap 4A that covers the control lever, characterized in that an air guide passage 6; 206, 207 is provided from a first side with higher pressure P to a second side with lower pressure A, wherein the air guide passage is closeable by a valve 5; 209, and the valve 5; 209 is operatively connected with and controlled by the flap so that the valve is opened upon operation of the flap, and the apparatus produces an acoustic signal upon opening of the valve 5; 209 when a differential pressure exists between the first and second sides.

A further inventive feature is characterized in that the apparatus further includes a signal producing device that produces the acoustic signal, and the valve 5 is connected with the signal producing device 8.

5 A further inventive feature is characterized in that at least one of the air guide passage 6 or the signal producing device 8, in connection with existence of the differential pressure, guides an airflow in a targeted manner in a direction toward a hand of a person operating the control lever or the flap.

10 A further inventive feature is characterized in that the valve 5 itself comprises means for producing the acoustic signal.

A further inventive feature is characterized in that the control lever 4 is embodied as a door operating lever, and the door operating lever or the flap is operatively connected with the
15 valve 5 via a mechanical connection 9 comprising a Bowden cable arrangement or a tension cable arrangement or a lever/rod mechanism or a transmission.

A further inventive feature is characterized in that, in the operation of the flap 4A a first condition is reached, in which
20 the valve 5 opens and, when the differential pressure exists, the acoustic signal is produced.

A further inventive feature is characterized in that the operation of the flap 4A further results in a second condition,

if the differential pressure does not exist and thus the opening process is able to further proceed.

A further inventive feature is characterized in that the closure device comprises a door, and the air guide passage 6 is provided
5 in the door 1.

A further inventive feature is characterized in that the closure device comprises a door, and the air guide passage 6 is provided in a door frame 2 surrounding the door 1.

A further inventive feature is characterized in that the air
10 guide passage is embodied as a connection pipe 6 or as a different type of air channel.

A further inventive feature is characterized in that the control lever 208 is provided on a free end thereof with a roller 218, which, for closing the valve 209, presses a spring-loaded slide
15 bolt 215 with a connected seal 217 onto a valve flange 213, and for opening the valve 209 the spring-loaded slide bolt 215 is released through rotation of the control lever 208 and thus clears an out-flow opening in the valve flange 213.

A further inventive feature is characterized in that the out-flow
20 opening in the valve flange 213, an in-flow opening 212 on a valve housing 211 as well as the seal 217 are embodied for producing the acoustic signal as a hissing/rushing acoustic signal.

A further inventive feature is characterized in that the seal 217 is loaded in a direction of the out-flow opening with an existing pressure difference between the first and second sides, and thereby closes the out-flow opening additionally to a pressure of the spring-loaded slide bolt 215.

A further inventive feature is characterized in that the pressure-loaded closure device comprises an aircraft door, the control lever 208 is arranged on a locking shaft 105 of the opening mechanism 100, and through rotation of the locking shaft 105, a free end of the control lever 208 is moved in a circular arc path, whereby the valve 209 is opened before the opening mechanism 100 completely releases the aircraft door.

A further inventive feature is characterized in that, for a closed condition of the valve 209, an over-travel of the control lever 208 past a dead center point thereof is provided on a motion path of a free end of the control lever 208.

The invention is further especially directed, for example, to an apparatus for warning of differential pressure during opening of a pressure-loaded aircraft door 1, which closes an opening in an aircraft fuselage, by an opening mechanism 4; 100, 105, characterized in that an air guide passage 6; 206, 207 is provided from a first side in a passenger cabin inside the aircraft fuselage, via a through-flow opening in the aircraft door, to a second side exposed to an outside environment outside of the aircraft fuselage, wherein the through-flow opening 206

is arranged in an outside hand lever box 106 that is provided in the aircraft door, and wherein the air guide passage is closeable by a valve 5; 209 that is controllable with a control lever 4; 208 of the opening mechanism 4; 100, 105 that is operatively
5 connected with the valve so that the apparatus produces an acoustic signal upon opening of the valve 5; 209 when a differential pressure exists between the first and second sides.

A further inventive feature is characterized in that the air guide passage proceeds via the valve 209 and a connected air
10 guide device 207 to the through-flow opening 206.

A further inventive feature is characterized in that the air guide device 207 is positioned by a flange 210 on a door structure 110 of the aircraft door in the hand lever box 106.

Patent Claims:

1 **1.** Apparatus for warning of differential pressure during
2 opening of a pressure-loaded closure device of an opening
3 in an aircraft fuselage by an opening mechanism including
4 a control lever and a flap that covers the control lever,
5 characterized in that an air guide passage is provided from
6 a first side with higher pressure to a second side with
7 lower pressure, wherein the air guide passage is closeable
8 by a valve, and the valve is operatively connected with and
9 controlled by the flap so that the valve is opened upon
10 operation of the flap, and the apparatus produces an
11 acoustic signal upon opening of the valve when a
12 differential pressure exists between the first and second
13 sides.

1 **2.** Apparatus according to claim 1, characterized in that the
2 apparatus further includes a signal producing device that
3 produces the acoustic signal, and the valve is connected
4 with the signal producing device.

1 **3.** Apparatus according to claim 2, characterized in that at
2 least one of the air guide passage or the signal producing
3 device, in connection with existence of the differential
4 pressure, guides an airflow in a targeted manner in a
5 direction toward a hand of a person operating the control
6 lever or the flap.

1 **4.** Apparatus according to claim 1, characterized in that the
2 valve itself comprises means for producing the acoustic
3 signal.

1 **5.** Apparatus according to claim 1, characterized in that the
2 control lever is embodied as a door operating lever, and
3 the door operating lever or the flap is operatively
4 connected with the valve via a mechanical connection
5 comprising a Bowden cable arrangement or a tension cable
6 arrangement or a lever/rod mechanism or a transmission.

1 **6.** Apparatus according to claim 1, characterized in that, in
2 the operation of the flap a first condition is reached, in
3 which the valve opens and, when the differential pressure
4 exists, the acoustic signal is produced.

1 **7.** Apparatus according to claim 6, characterized in that the
2 operation of the flap further results in a second
3 condition, if the differential pressure does not exist and
4 thus the opening process is able to further proceed.

1 **8.** Apparatus according to claim 1, characterized in that the
2 closure device comprises a door, and the air guide passage
3 is provided in the door.

1 **9.** Apparatus according to claim 1, characterized in that the
2 closure device comprises a door, and the air guide passage
3 is provided in a door frame surrounding the door.

1 **10.** Apparatus according to claim 1, characterized in that the
2 air guide passage is embodied as a connection pipe or as a
3 different type of air channel.

1 **11.** Apparatus according to claim 1, characterized in that the
2 control lever is provided on a free end thereof with a
3 roller, which, for closing the valve, presses a
4 spring-loaded slide bolt with a connected seal onto a valve
5 flange, and for opening the valve the spring-loaded slide
6 bolt is released through rotation of the control lever and
7 thus clears an out-flow opening in the valve flange.

1 **12.** Apparatus according to claim 11, characterized in that the
2 out-flow opening in the valve flange, an in-flow opening on
3 a valve housing as well as the seal are embodied for
4 producing the acoustic signal as a hissing/rushing acoustic
5 signal.

1 **13.** Apparatus according to claim 11, characterized in that the
2 seal is loaded in a direction of the out-flow opening with
3 an existing pressure difference between the first and
4 second sides, and thereby closes the out-flow opening
5 additionally to a pressure of the spring-loaded slide bolt.

1 **14.** Apparatus according to claim 1, characterized in that the
2 pressure-loaded closure device comprises an aircraft door,
3 the control lever is arranged on a locking shaft of the
4 opening mechanism, and through rotation of the locking
5 shaft, a free end of the control lever is moved in a
6 circular arc path, whereby the valve is opened before the
7 opening mechanism completely releases the aircraft door.

1 **15.** Apparatus according to claim 1, characterized in that, for
2 a closed condition of the valve, an over-travel of the
3 control lever past a dead center point thereof is provided
4 on a motion path of a free end of the control lever.

1 **16.** Apparatus for warning of differential pressure during
2 opening of a pressure-loaded aircraft door, which closes an
3 opening in an aircraft fuselage, by an opening mechanism,
4 characterized in that an air guide passage is provided from
5 a first side in a passenger cabin inside the aircraft
6 fuselage, via a through-flow opening in the aircraft door,
7 to a second side exposed to an outside environment outside
8 of the aircraft fuselage, wherein the through-flow opening
9 is arranged in an outside hand lever box that is provided
10 in the aircraft door, and wherein the air guide passage is
11 closeable by a valve that is controllable with a control
12 lever of the opening mechanism that is operatively
13 connected with the valve so that the apparatus produces an
14 acoustic signal upon opening of the valve when a

15 differential pressure exists between the first and second
16 sides.

1 **17.** Apparatus according to claim 16, characterized in that the
2 air guide passage proceeds via the valve and a connected
3 air guide device to the through-flow opening.

1 **18.** Apparatus according to claim 17, characterized in that the
2 air guide device is positioned by a flange on a door
3 structure of the aircraft door in the hand lever box.

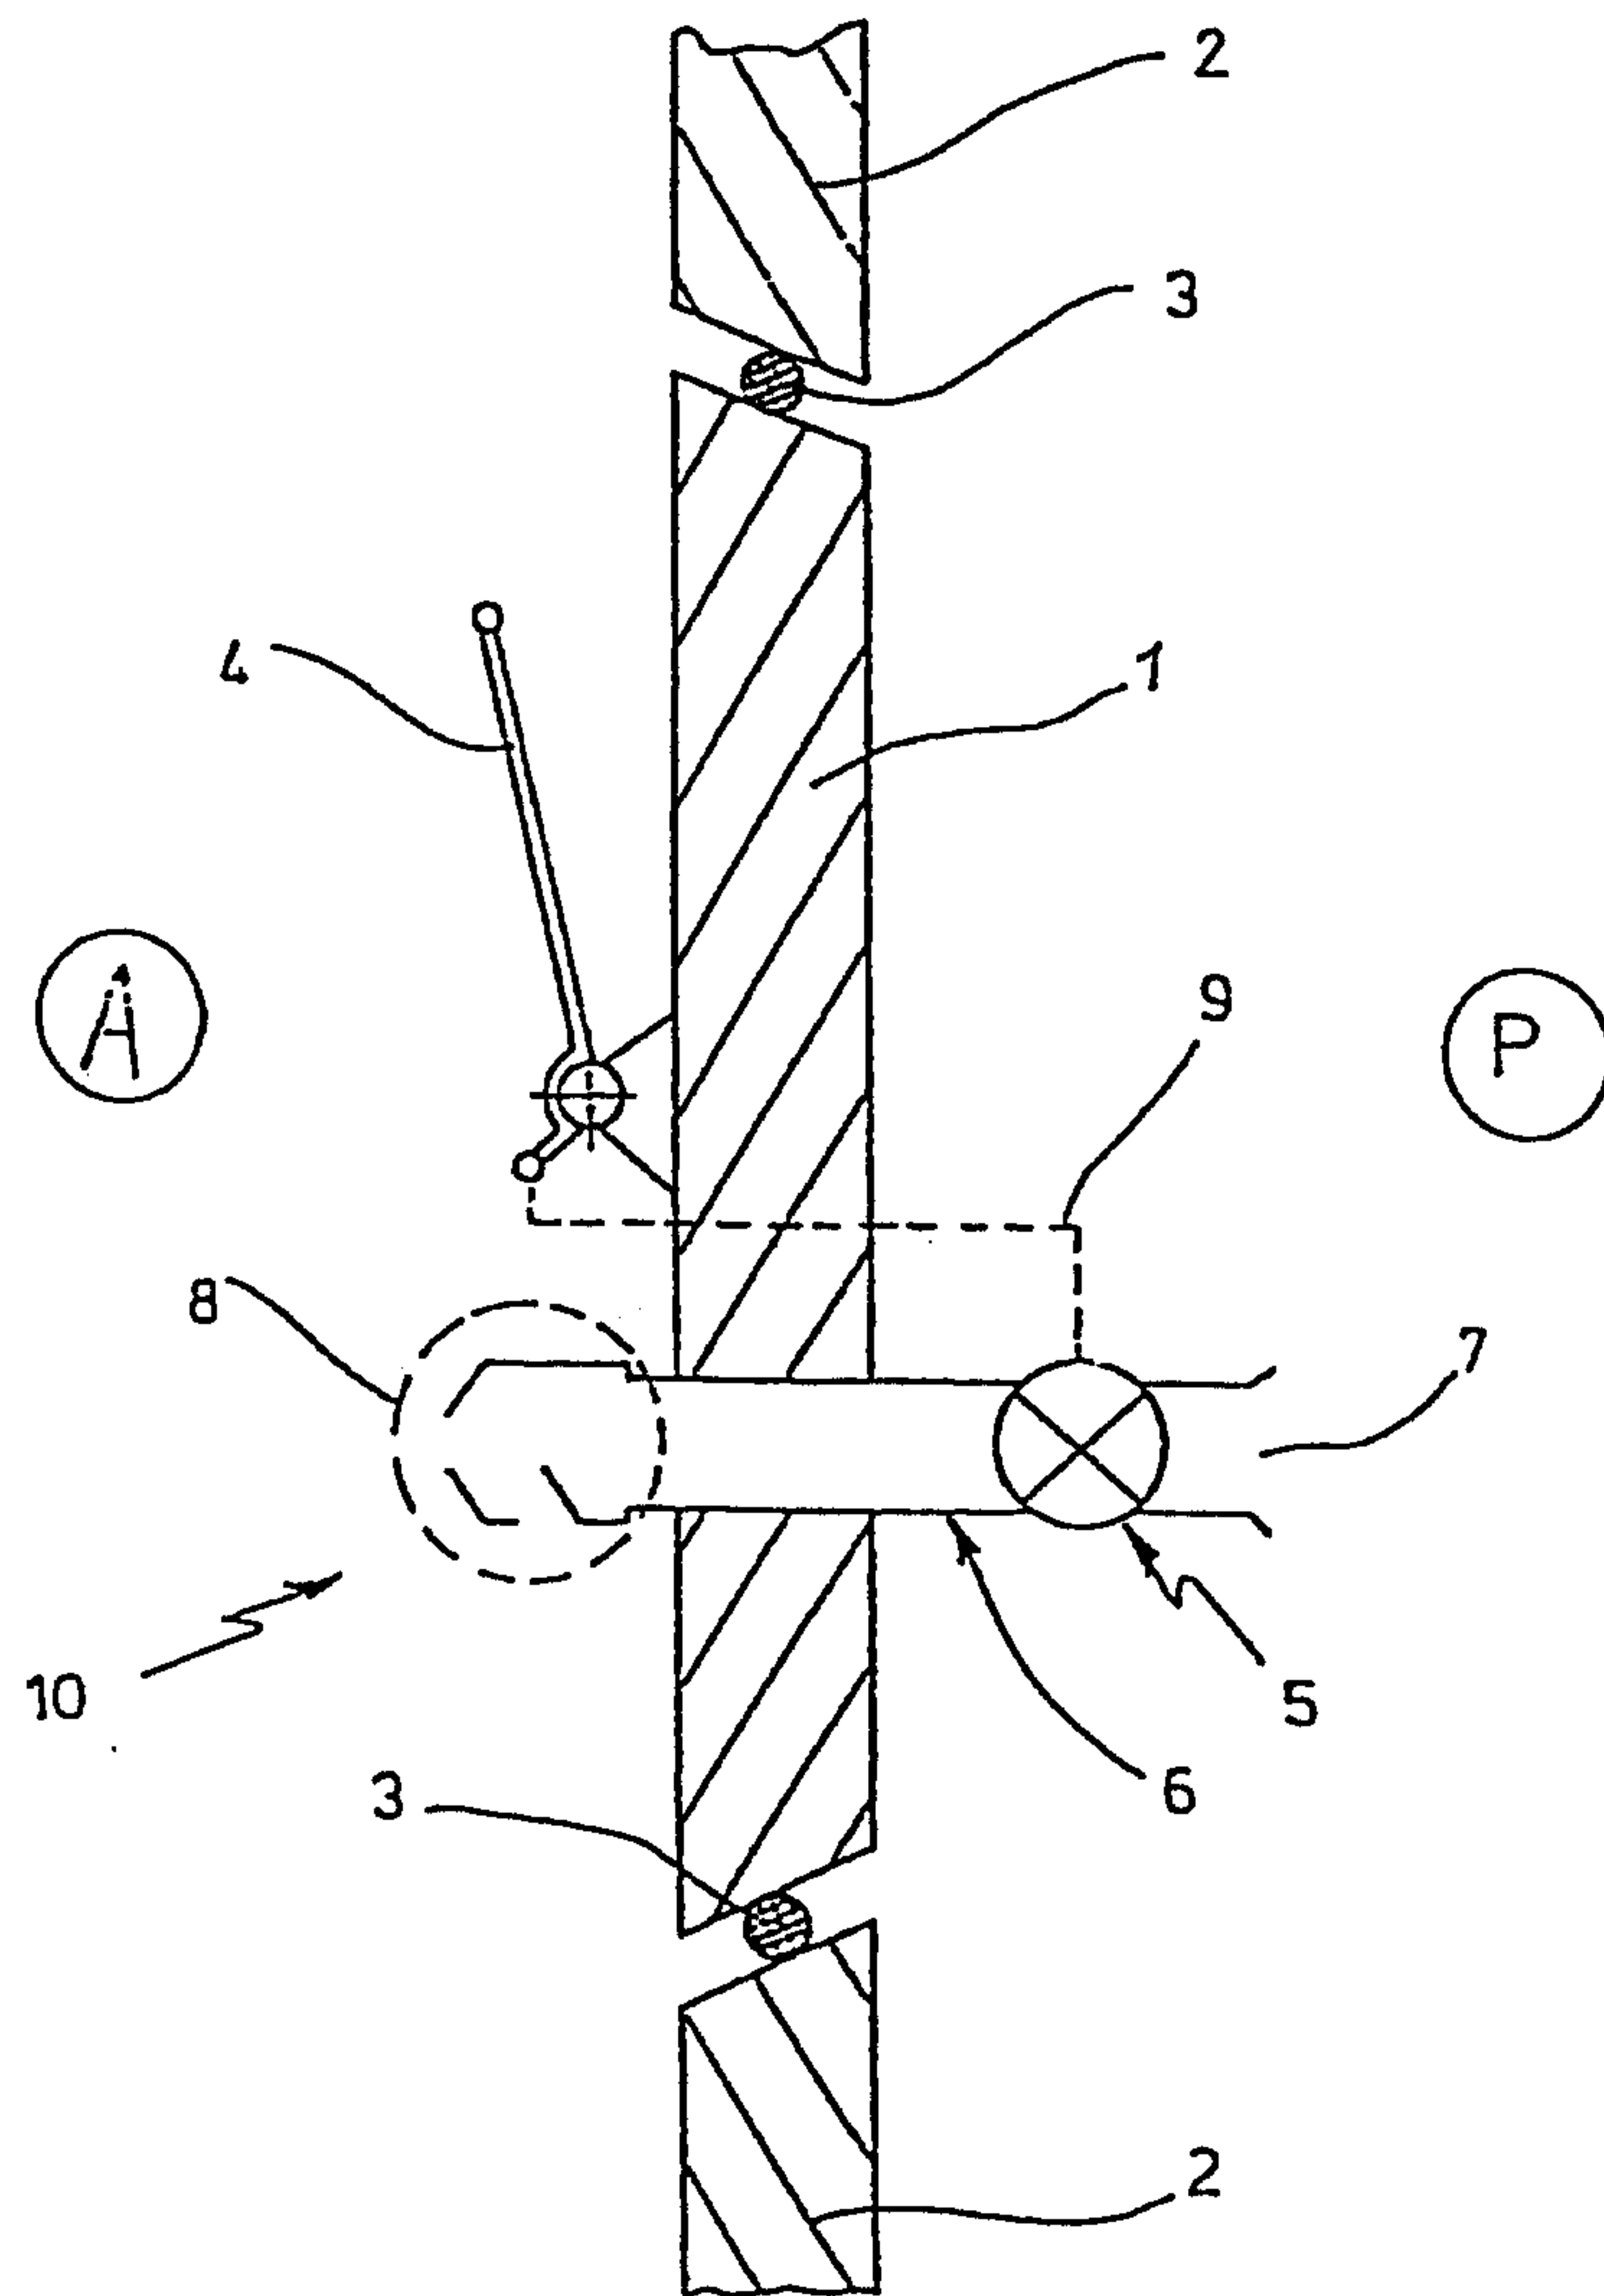


Fig. 1

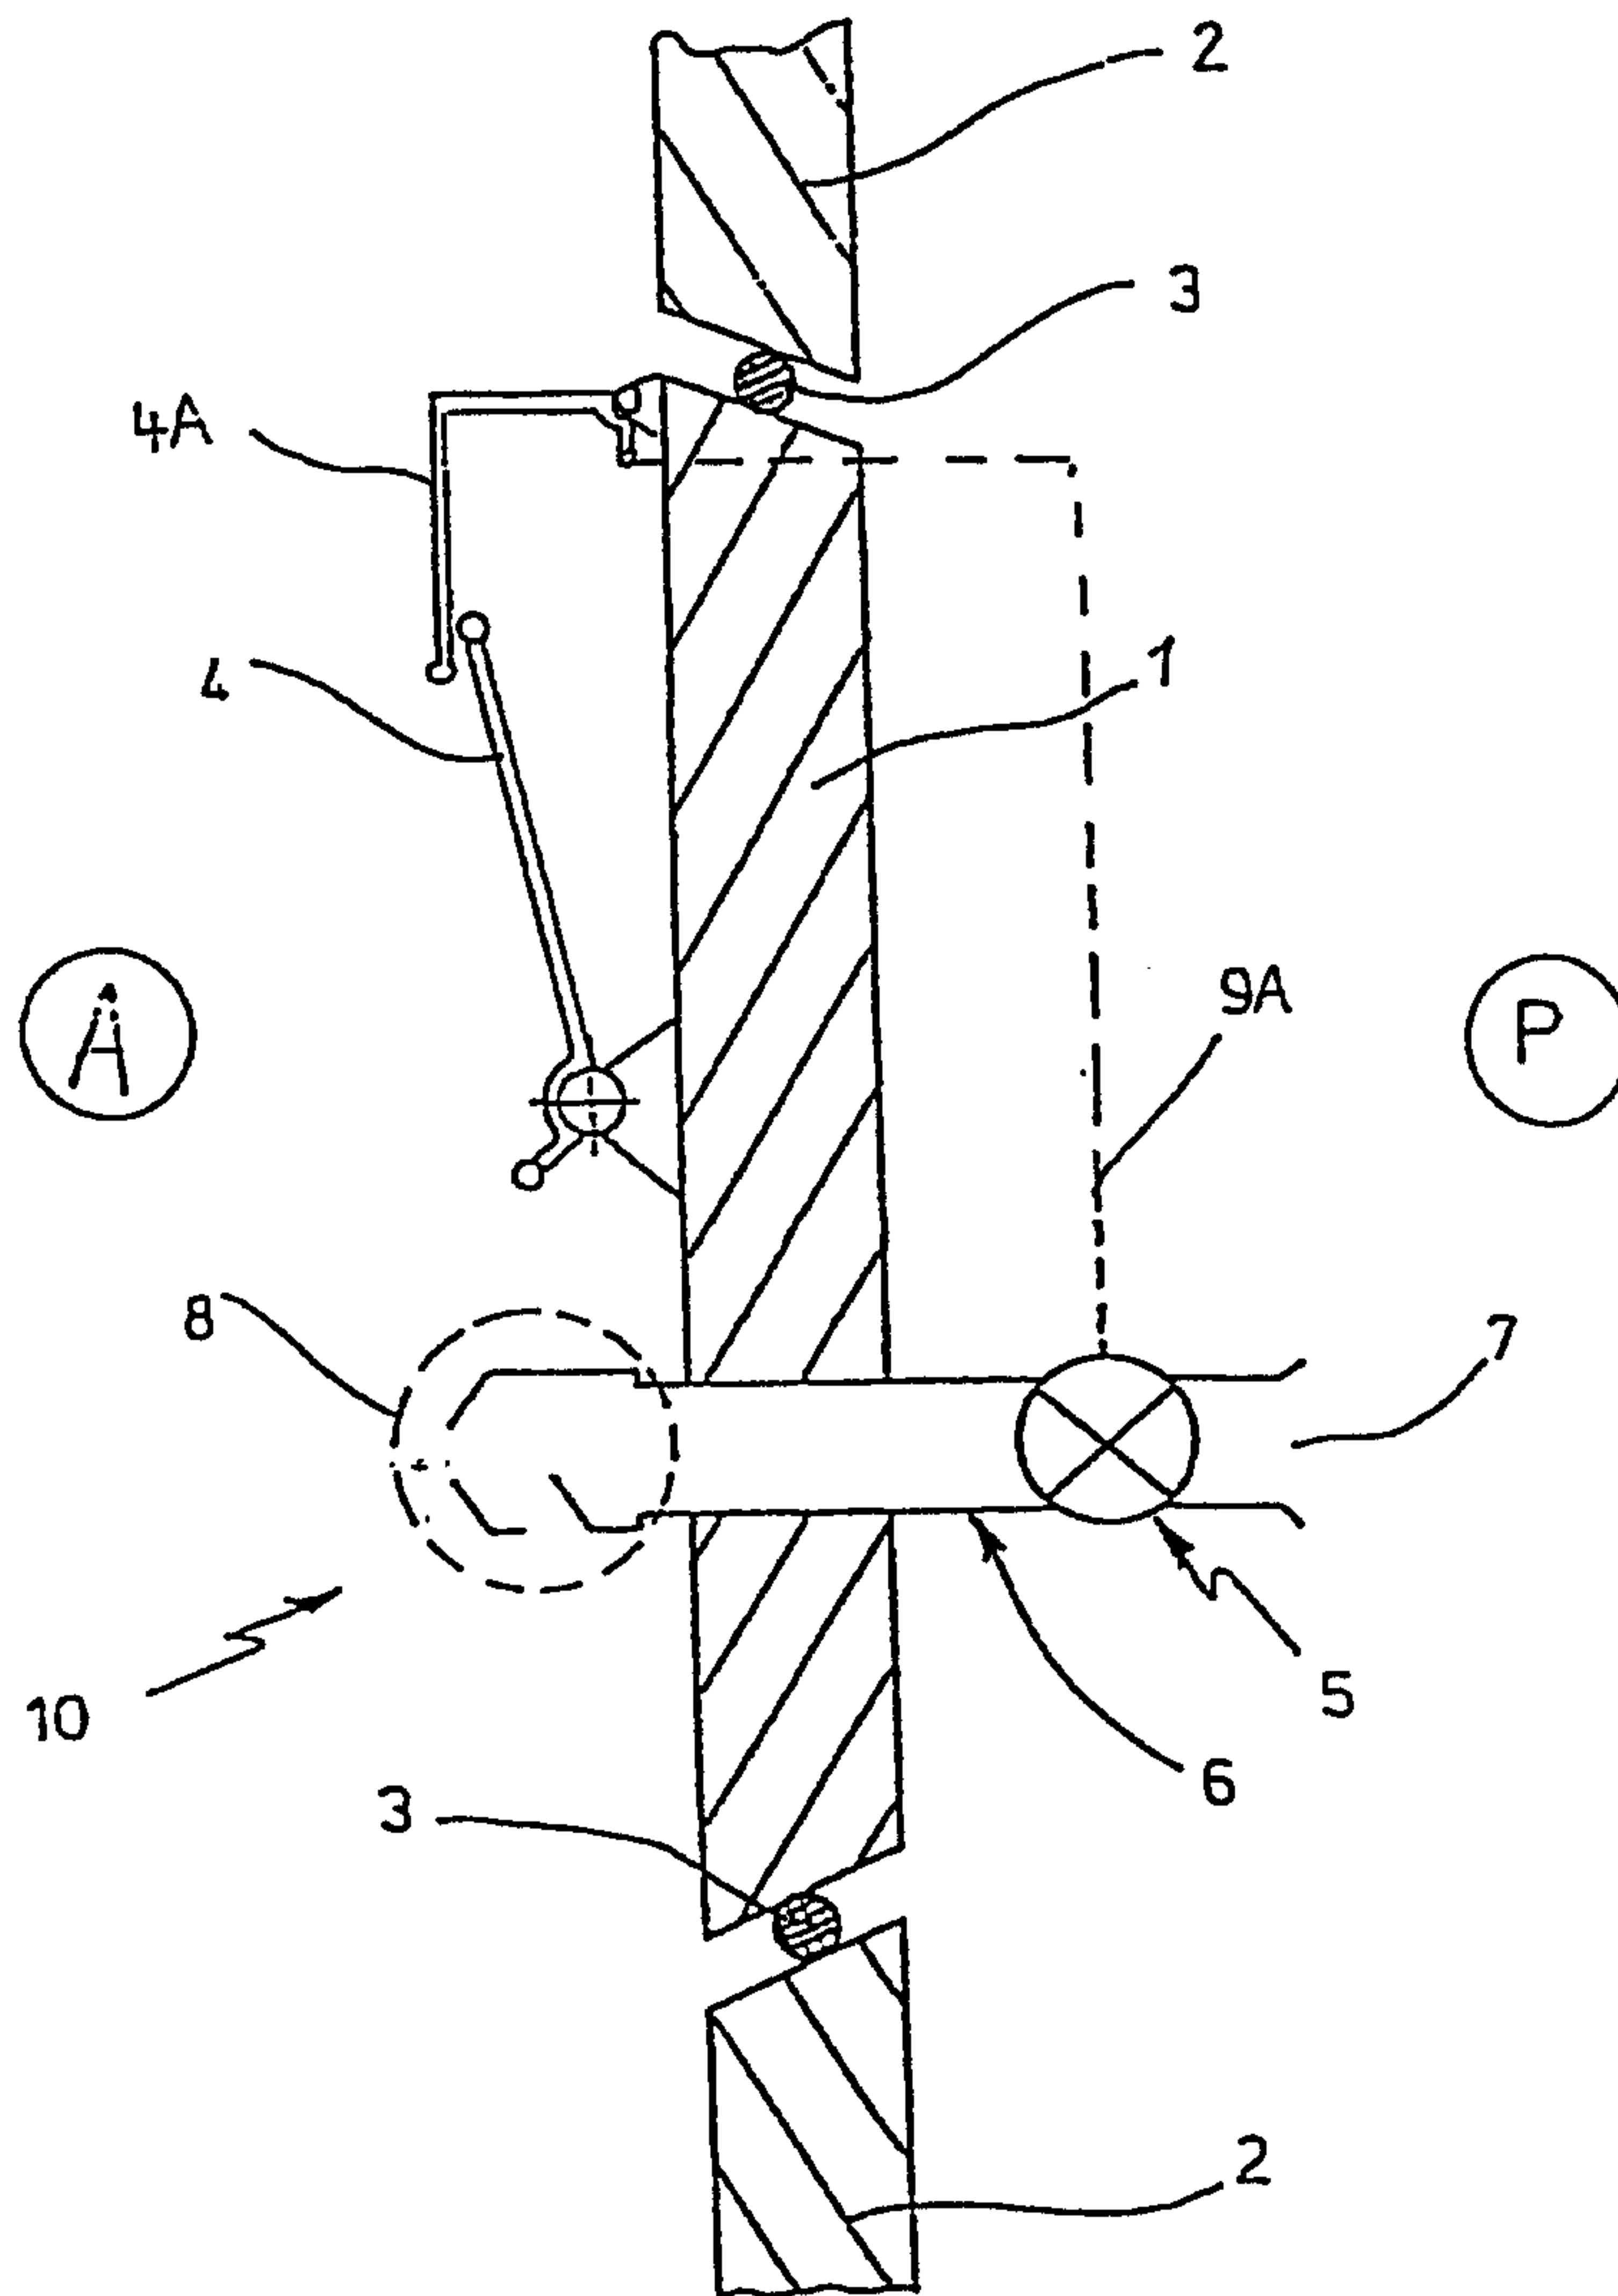


Fig. 1A

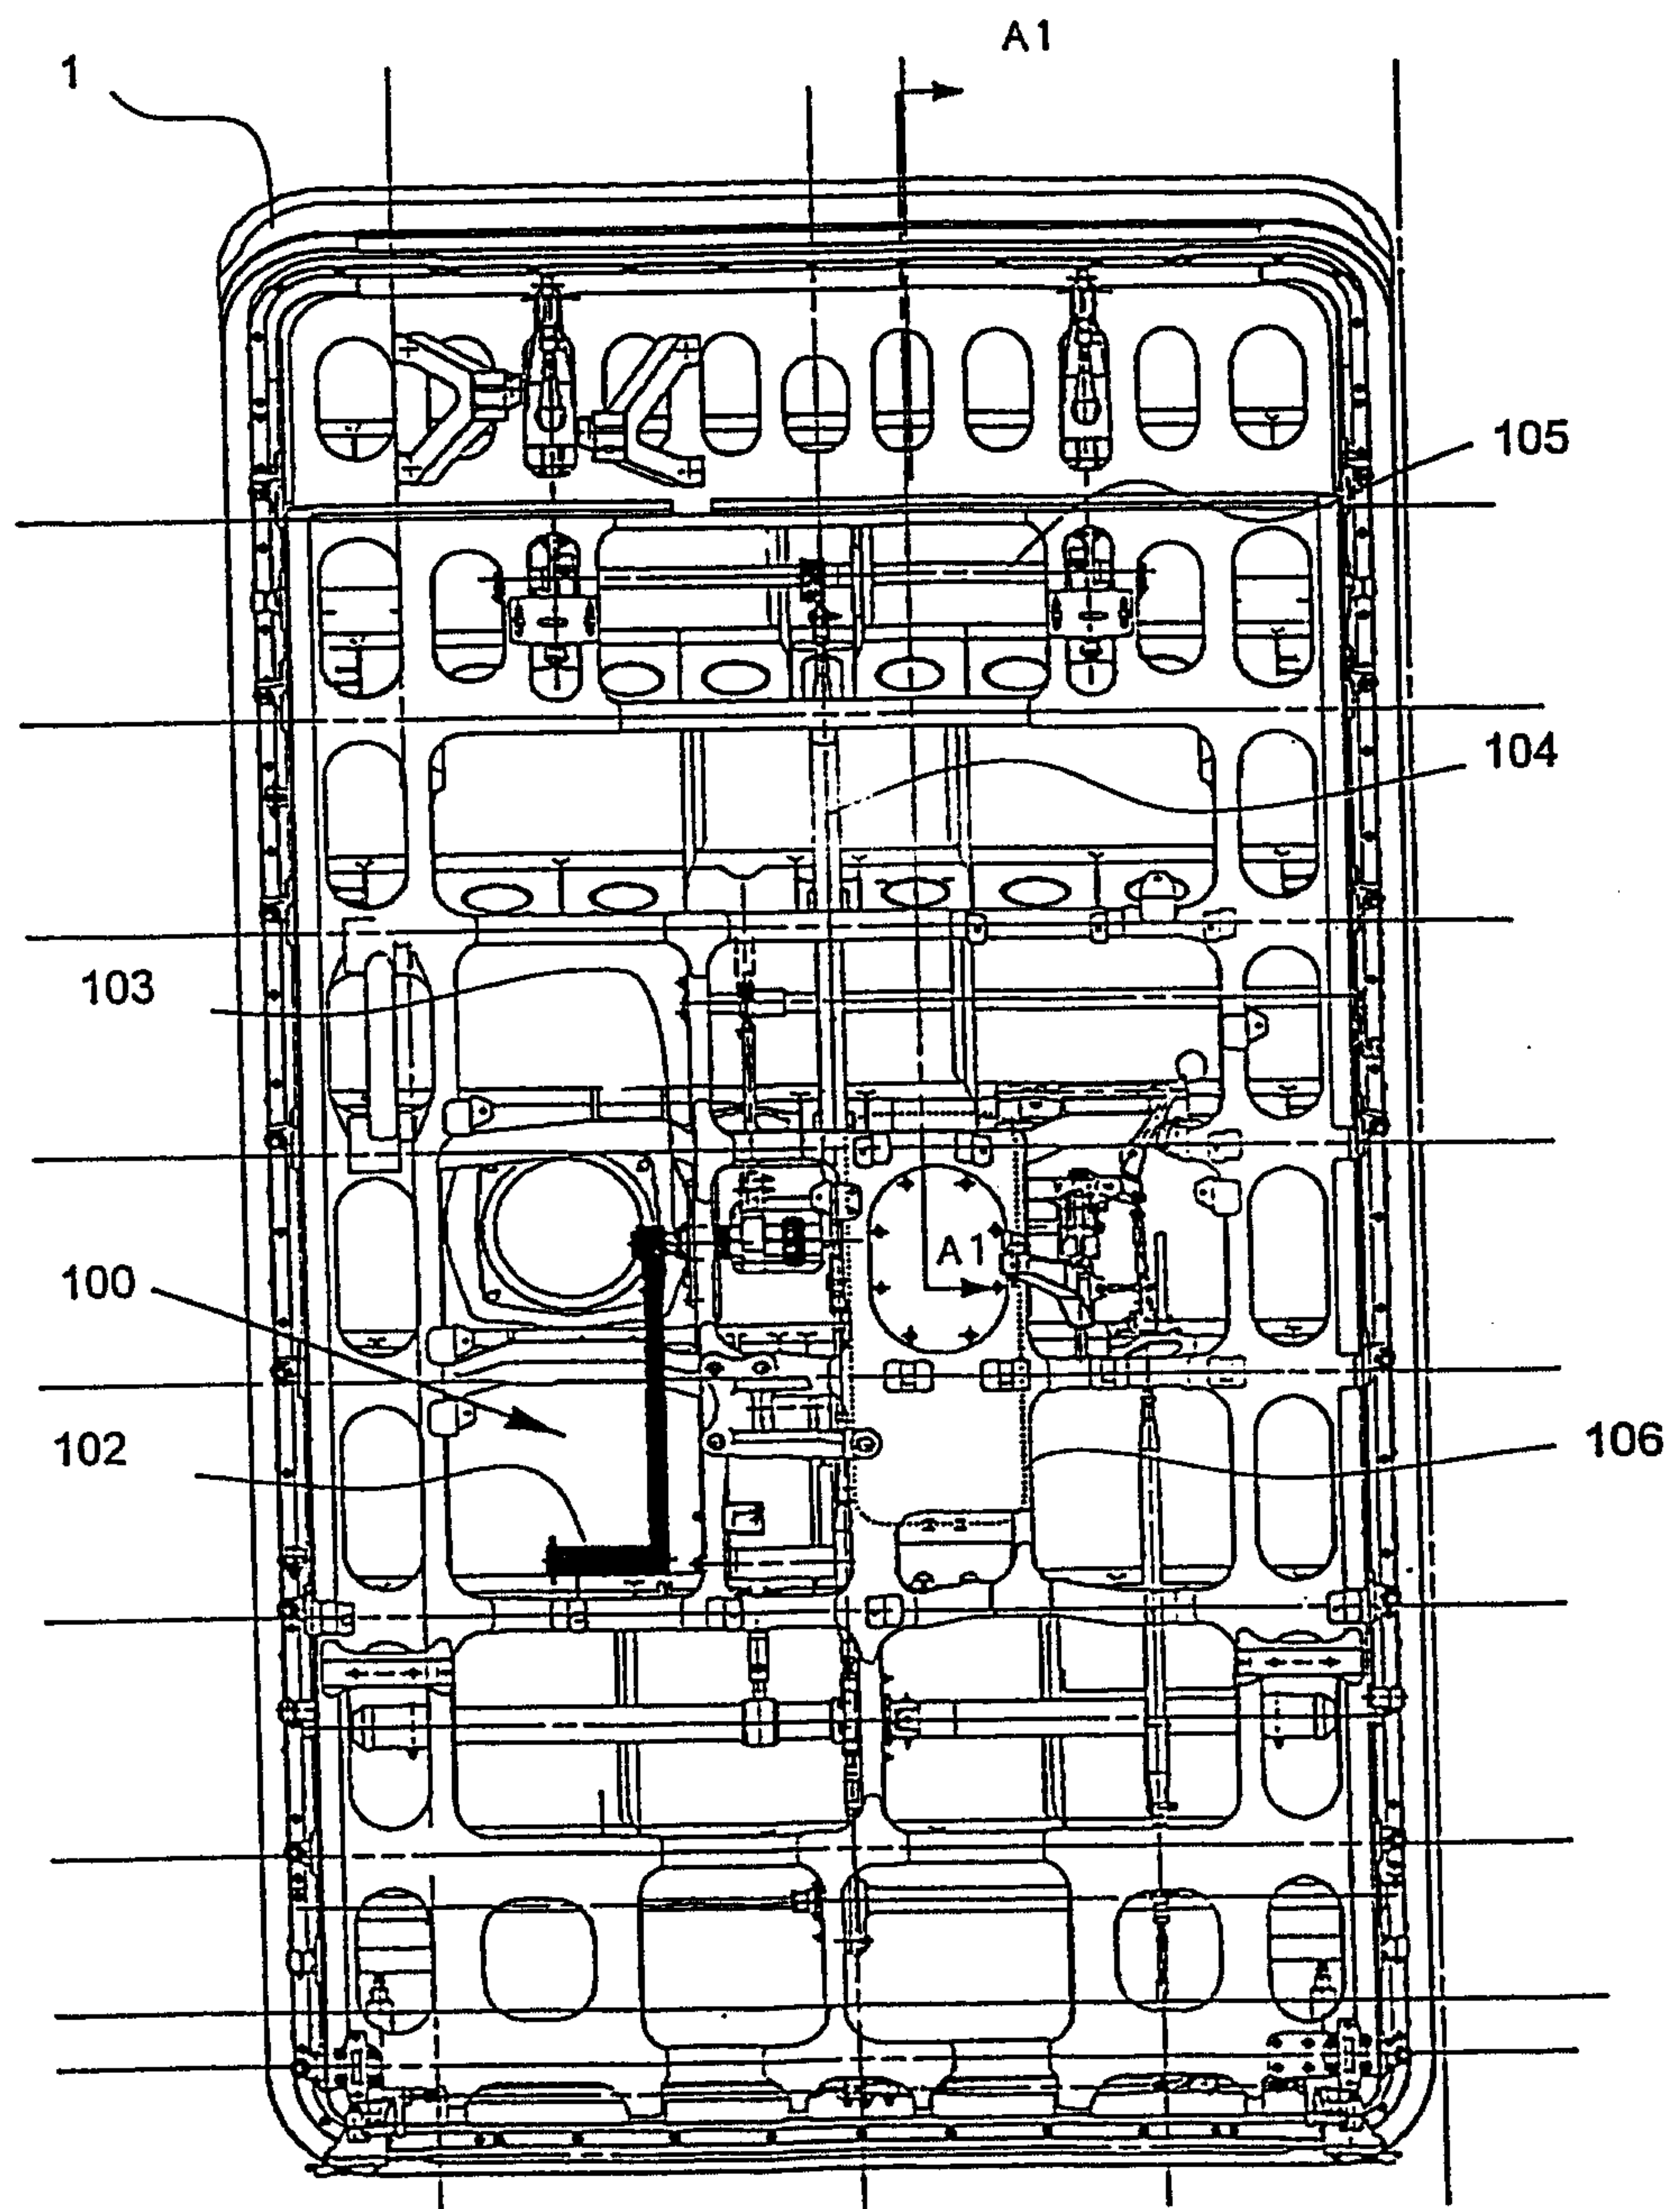


Fig. 2

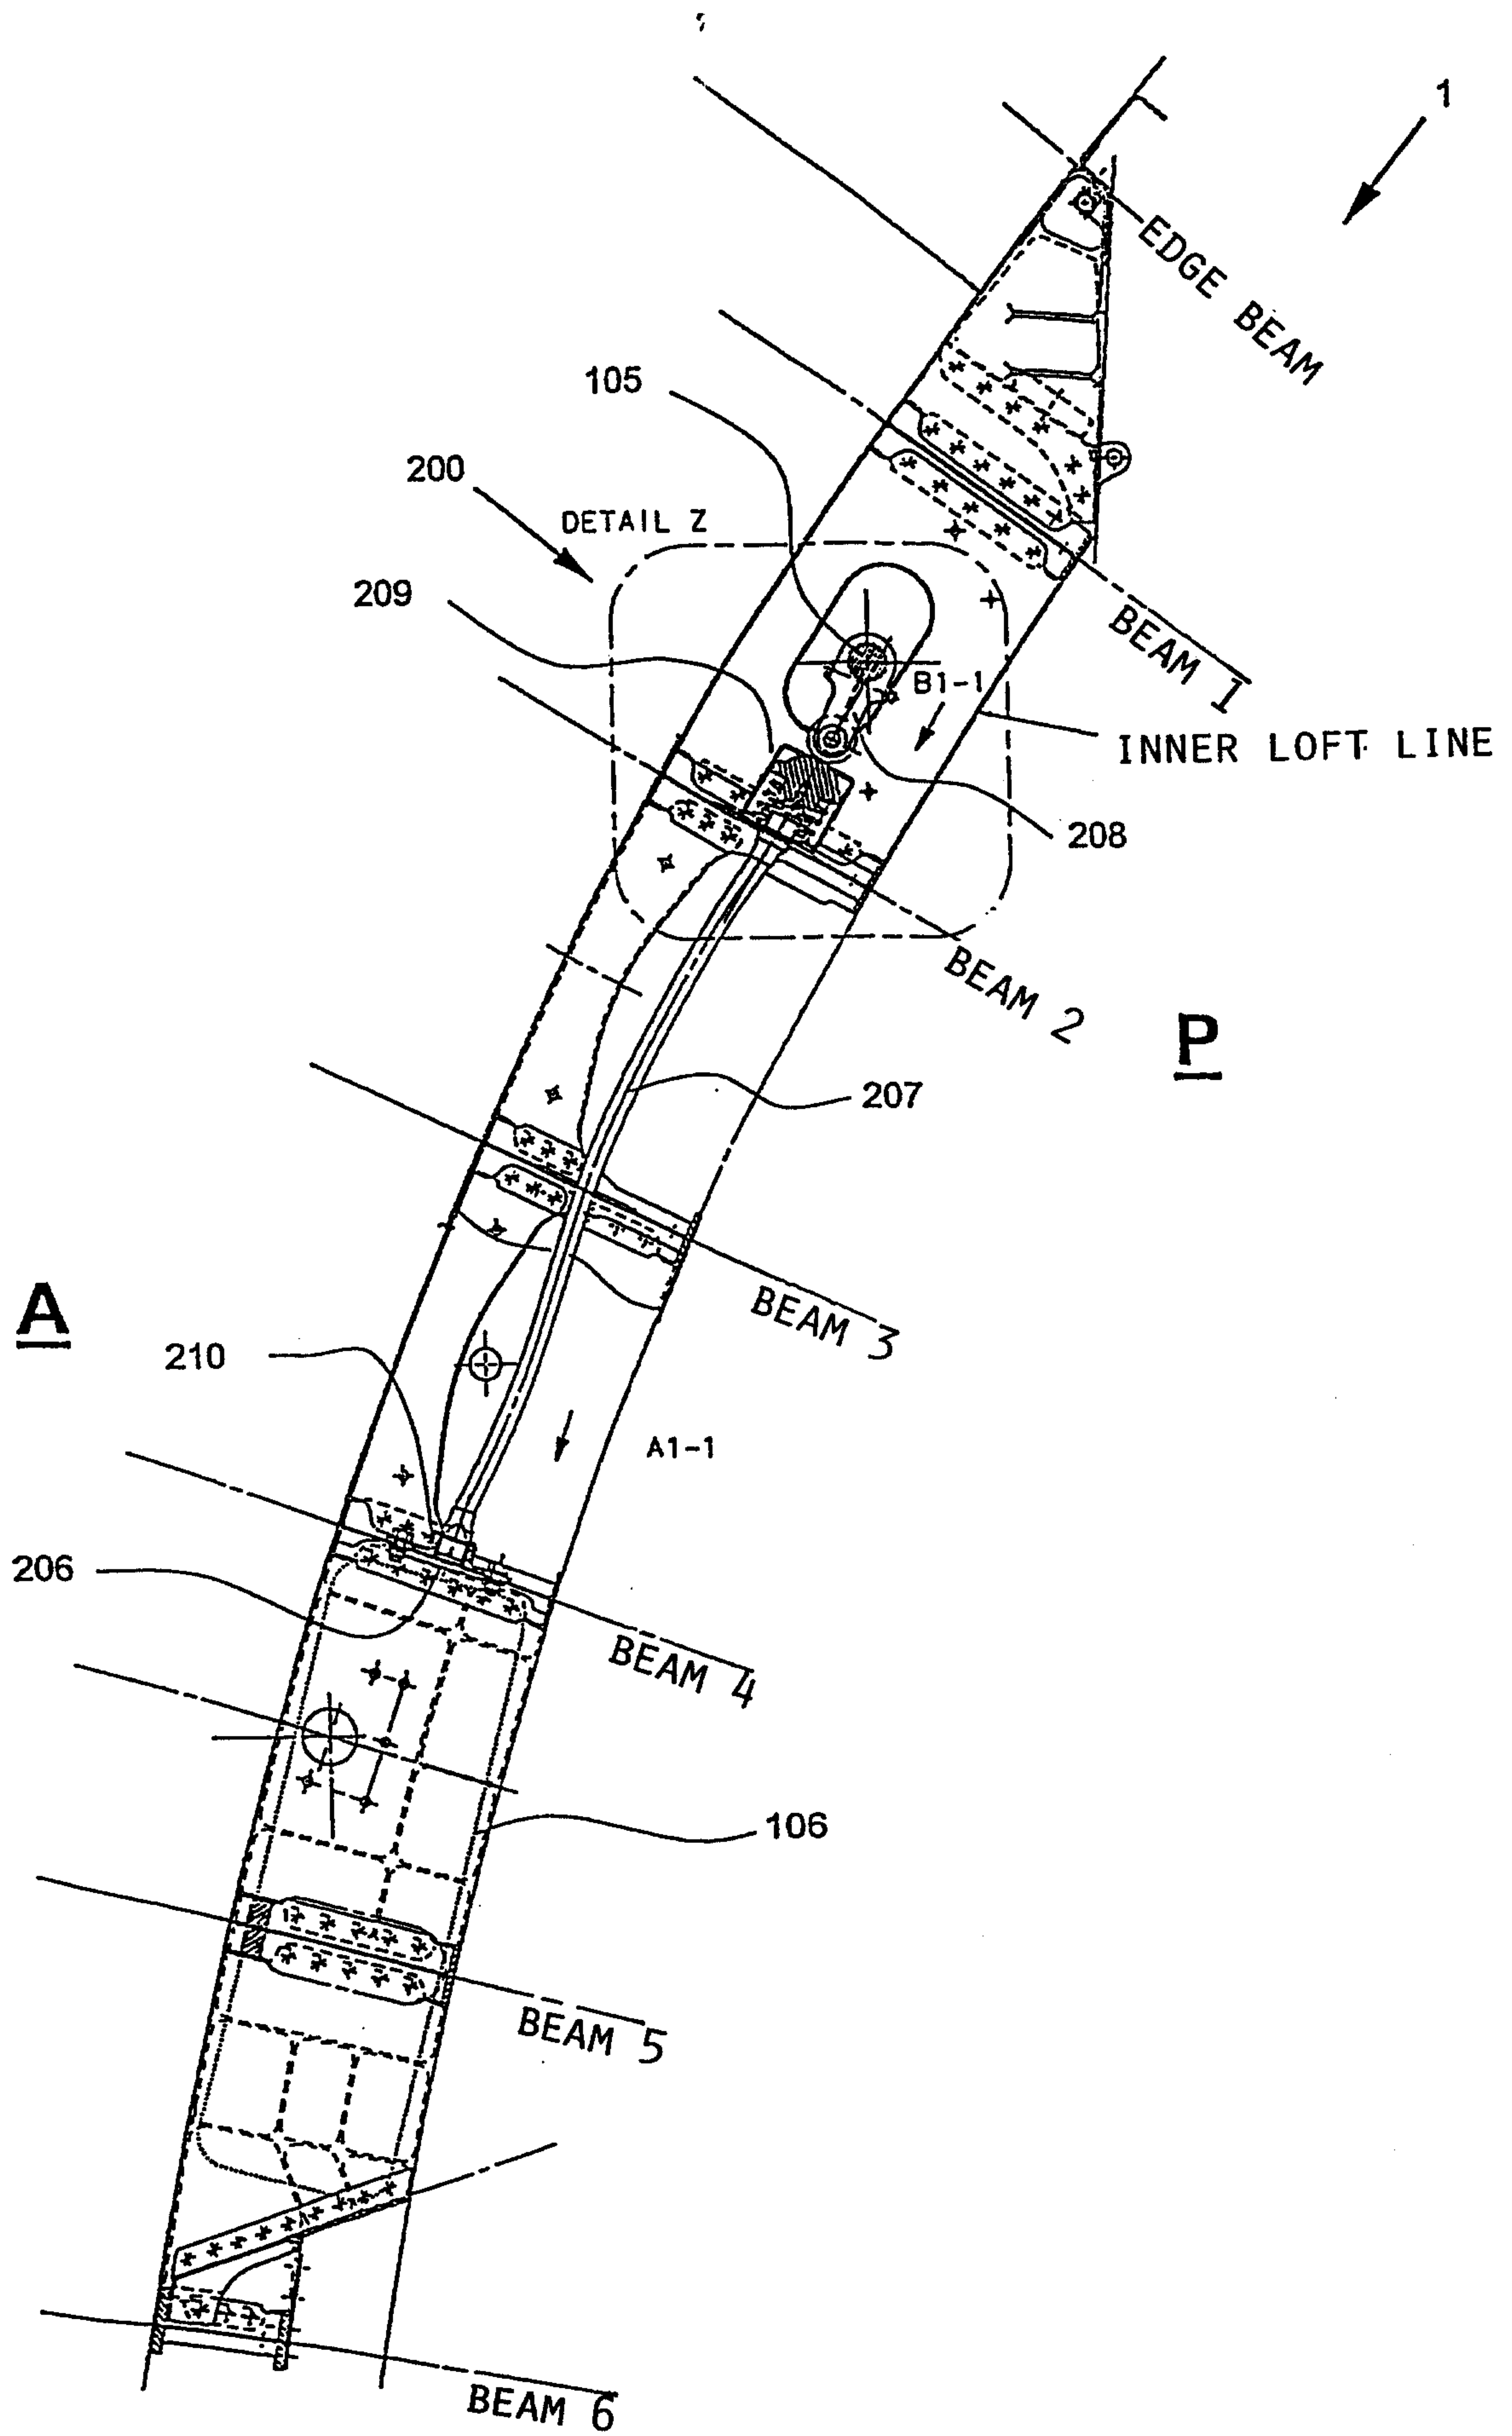


Fig. 3

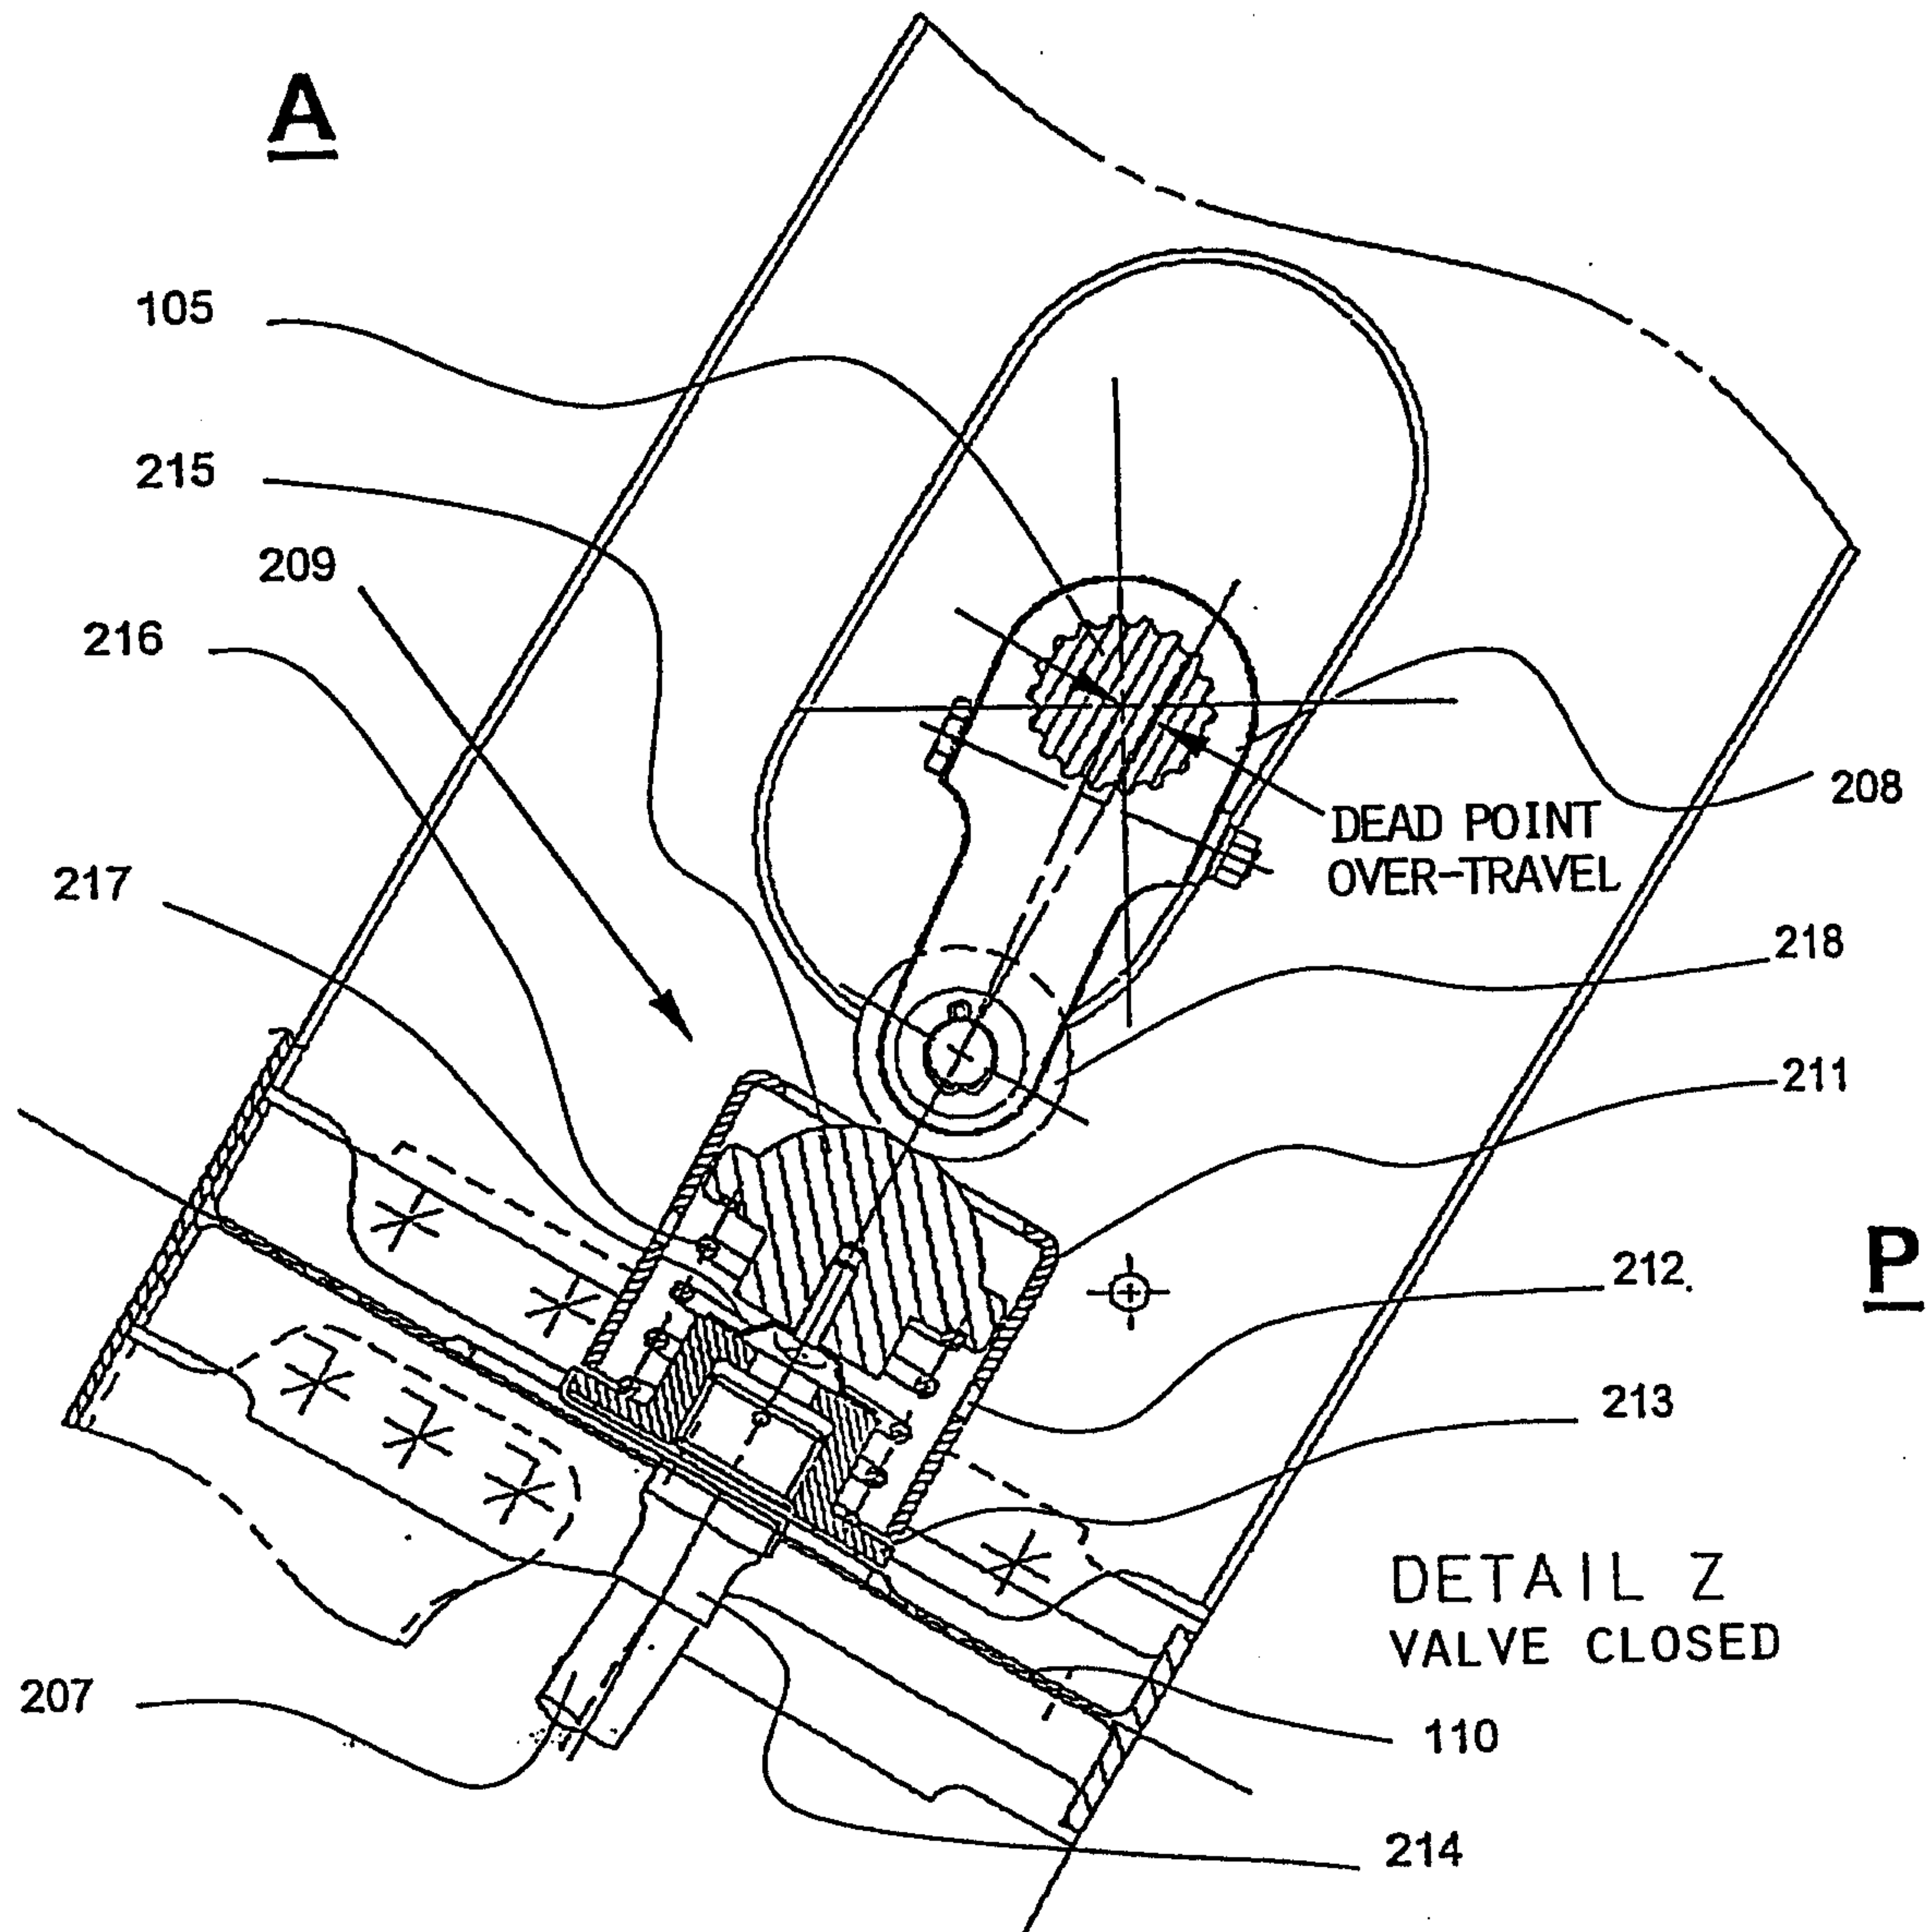


Fig. 4

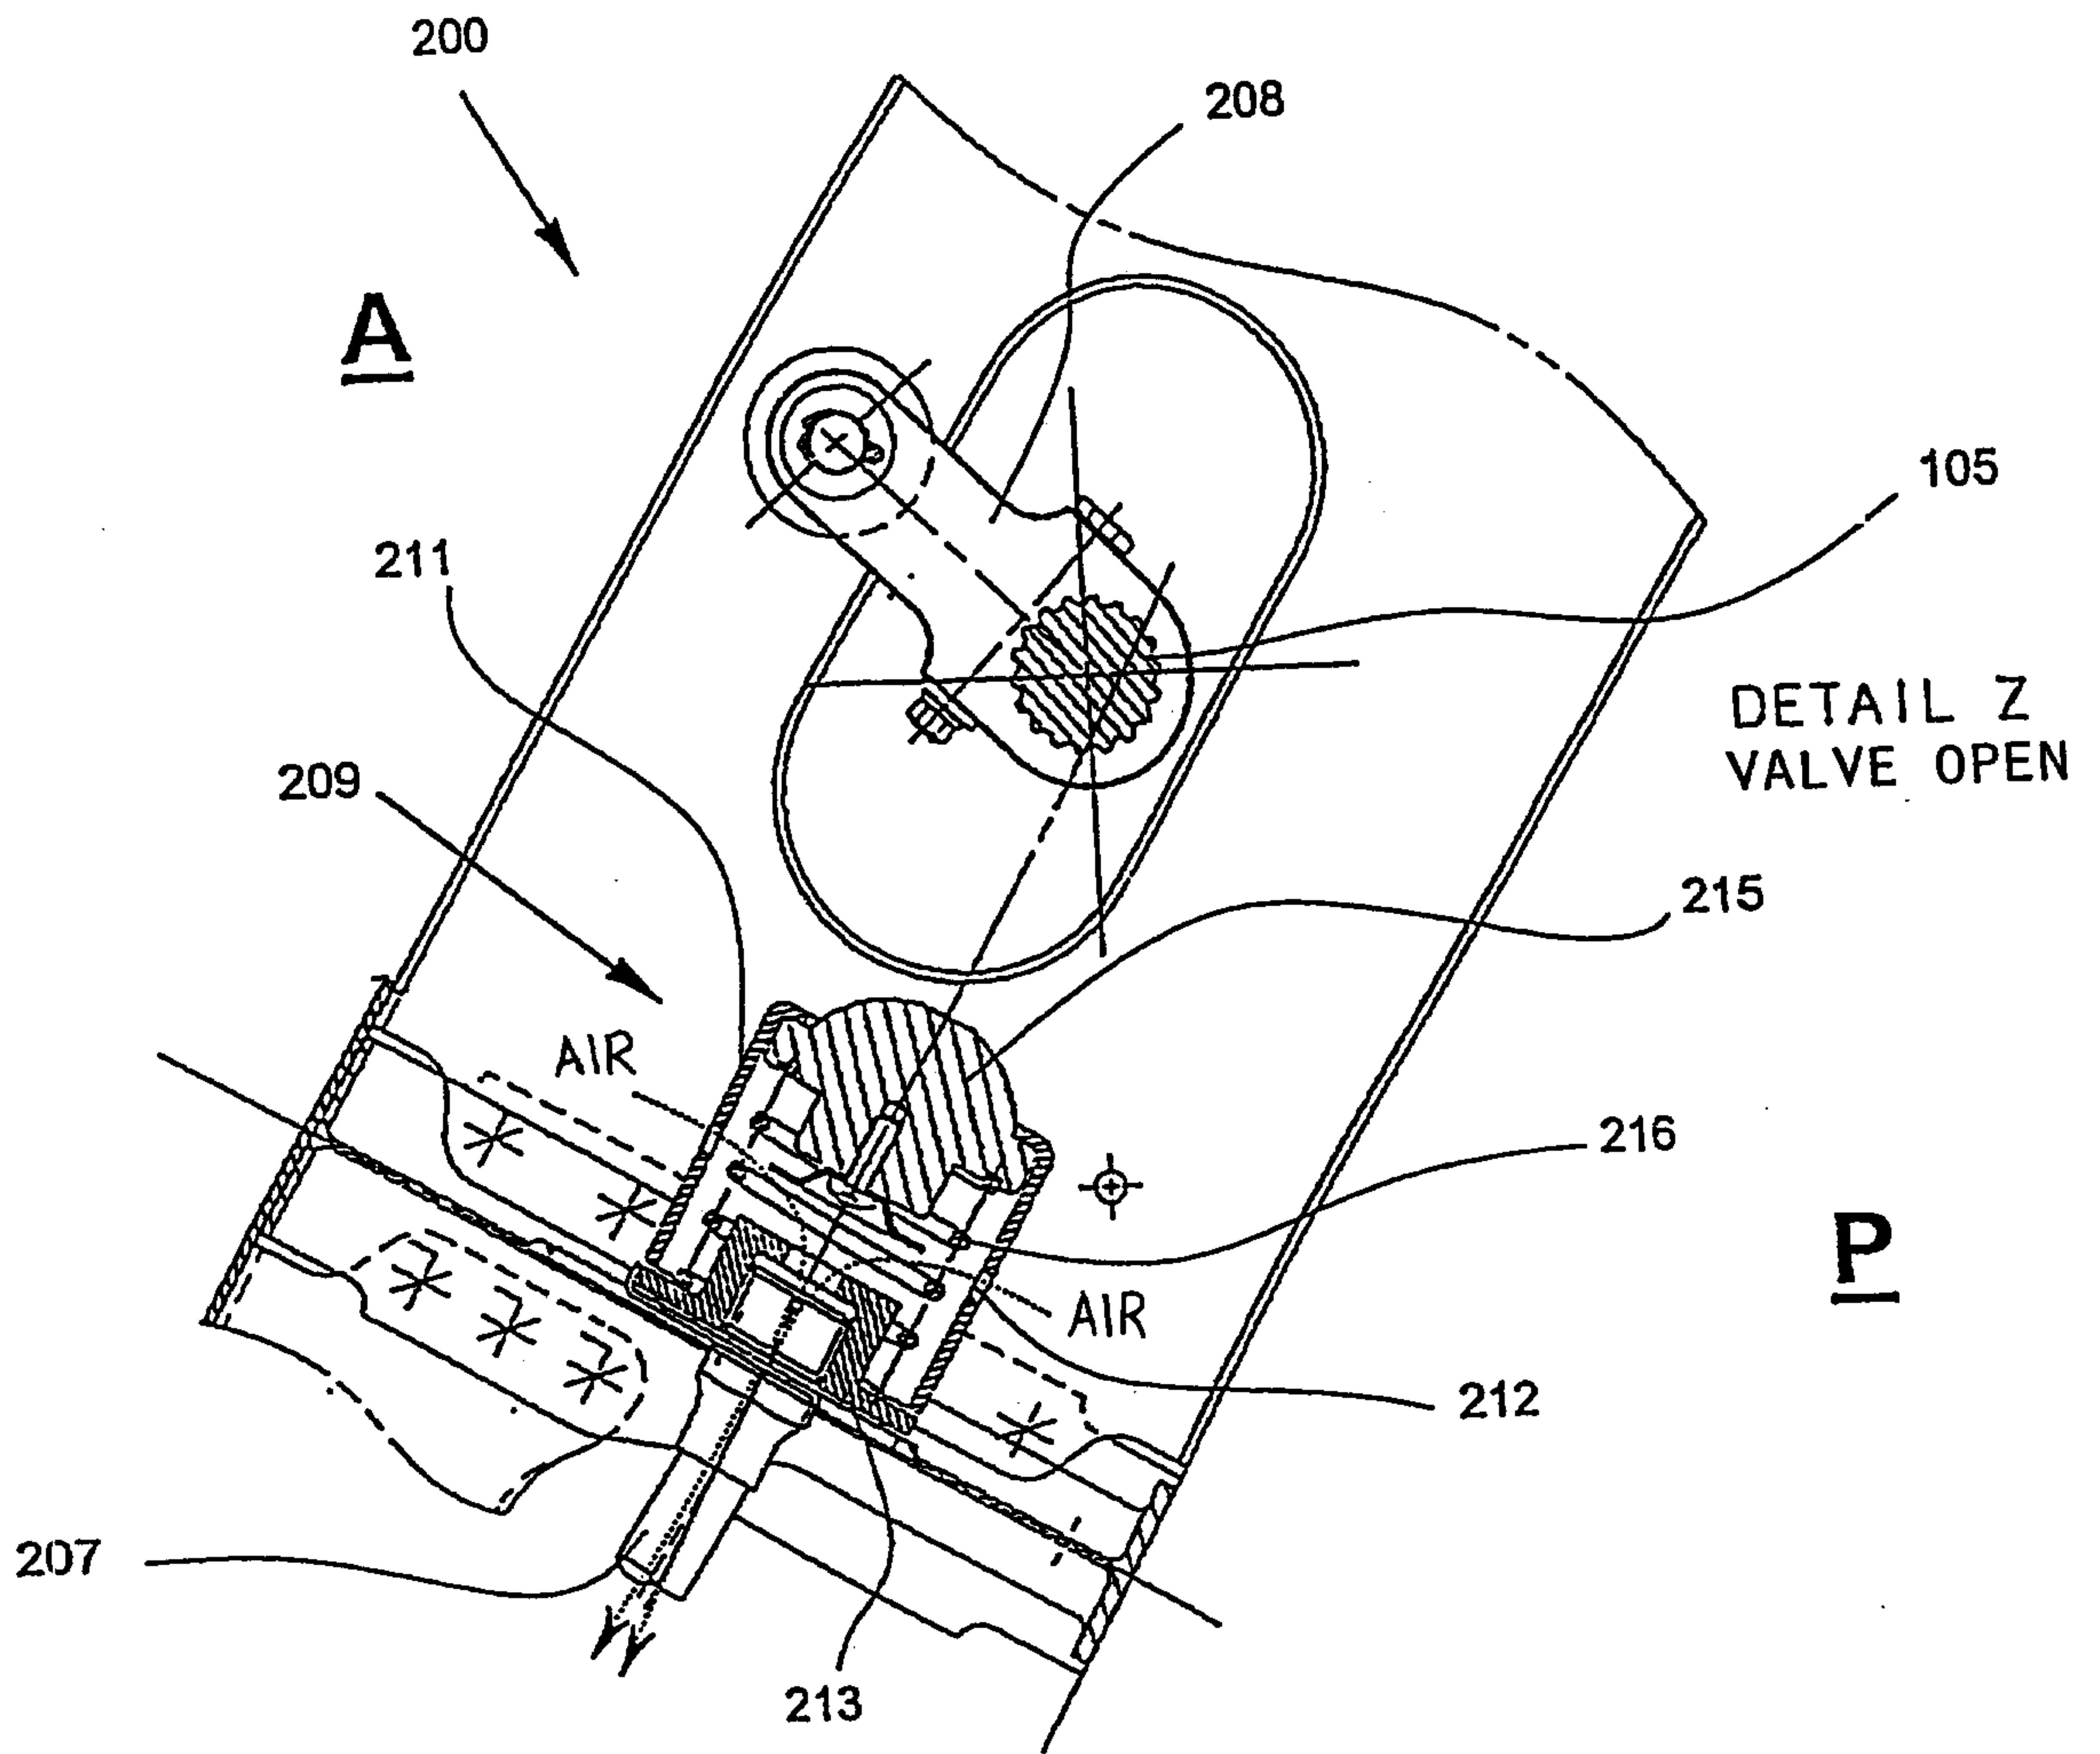


Fig. 5

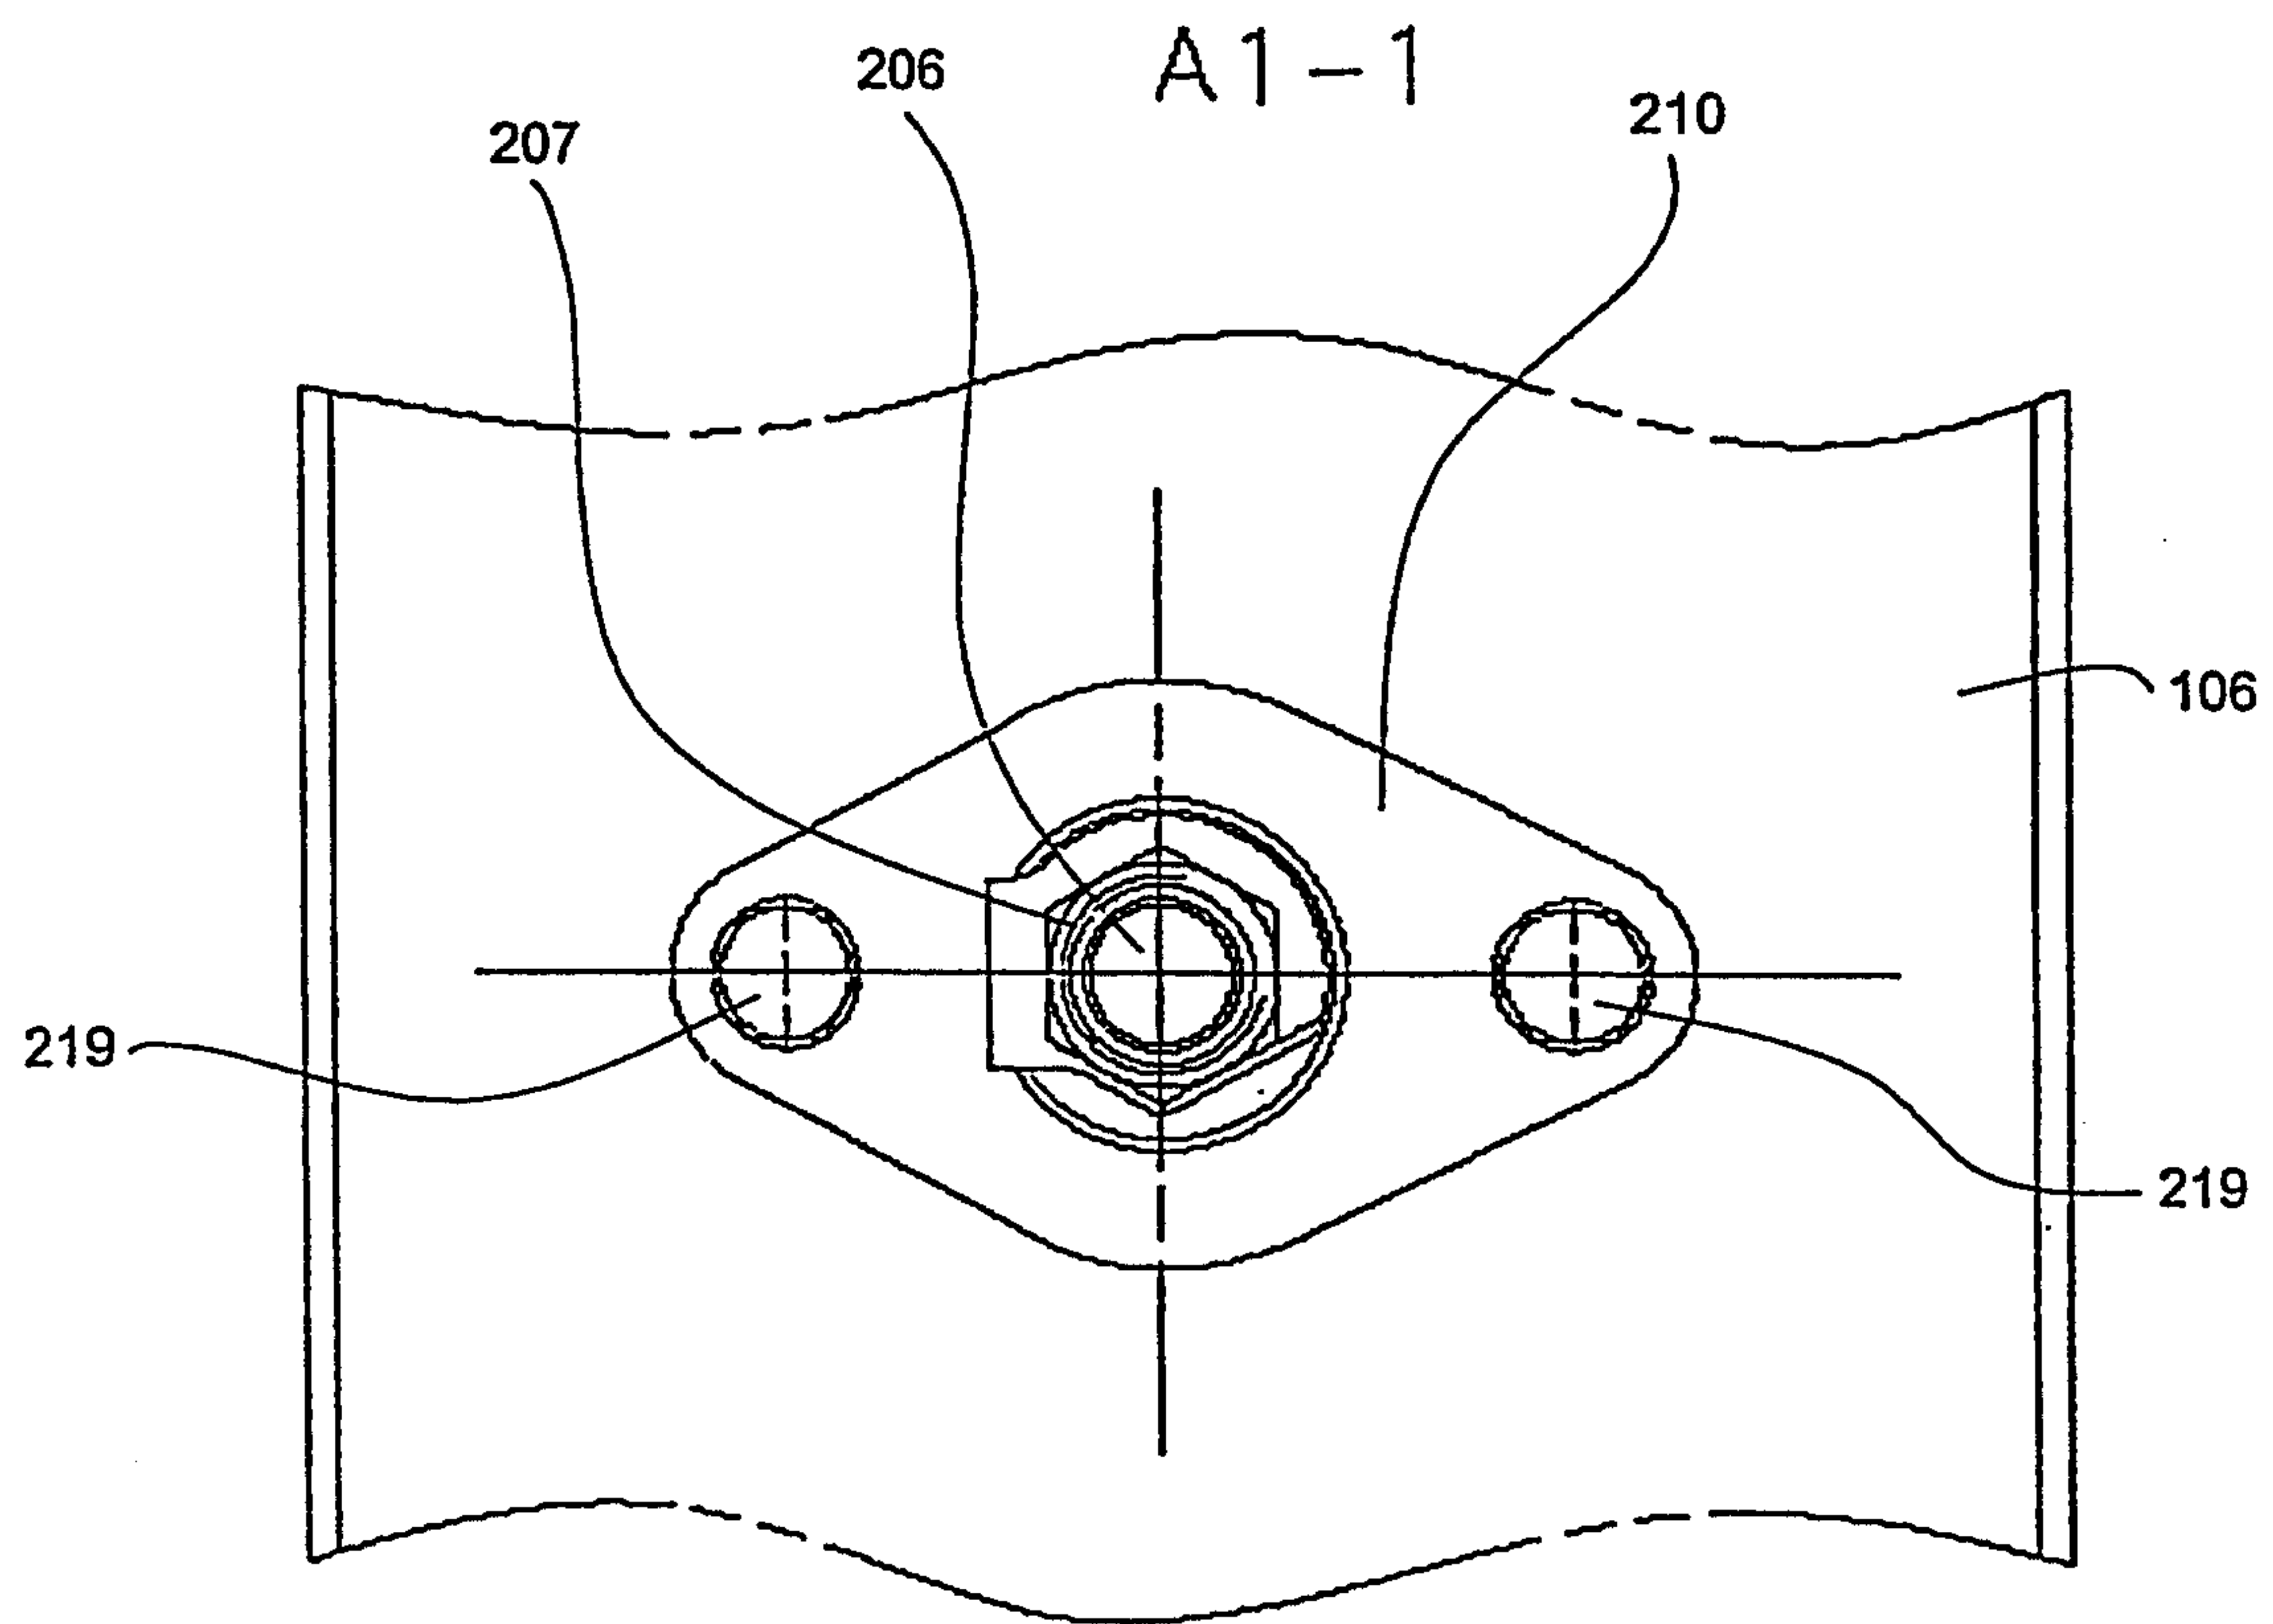


Fig. 6

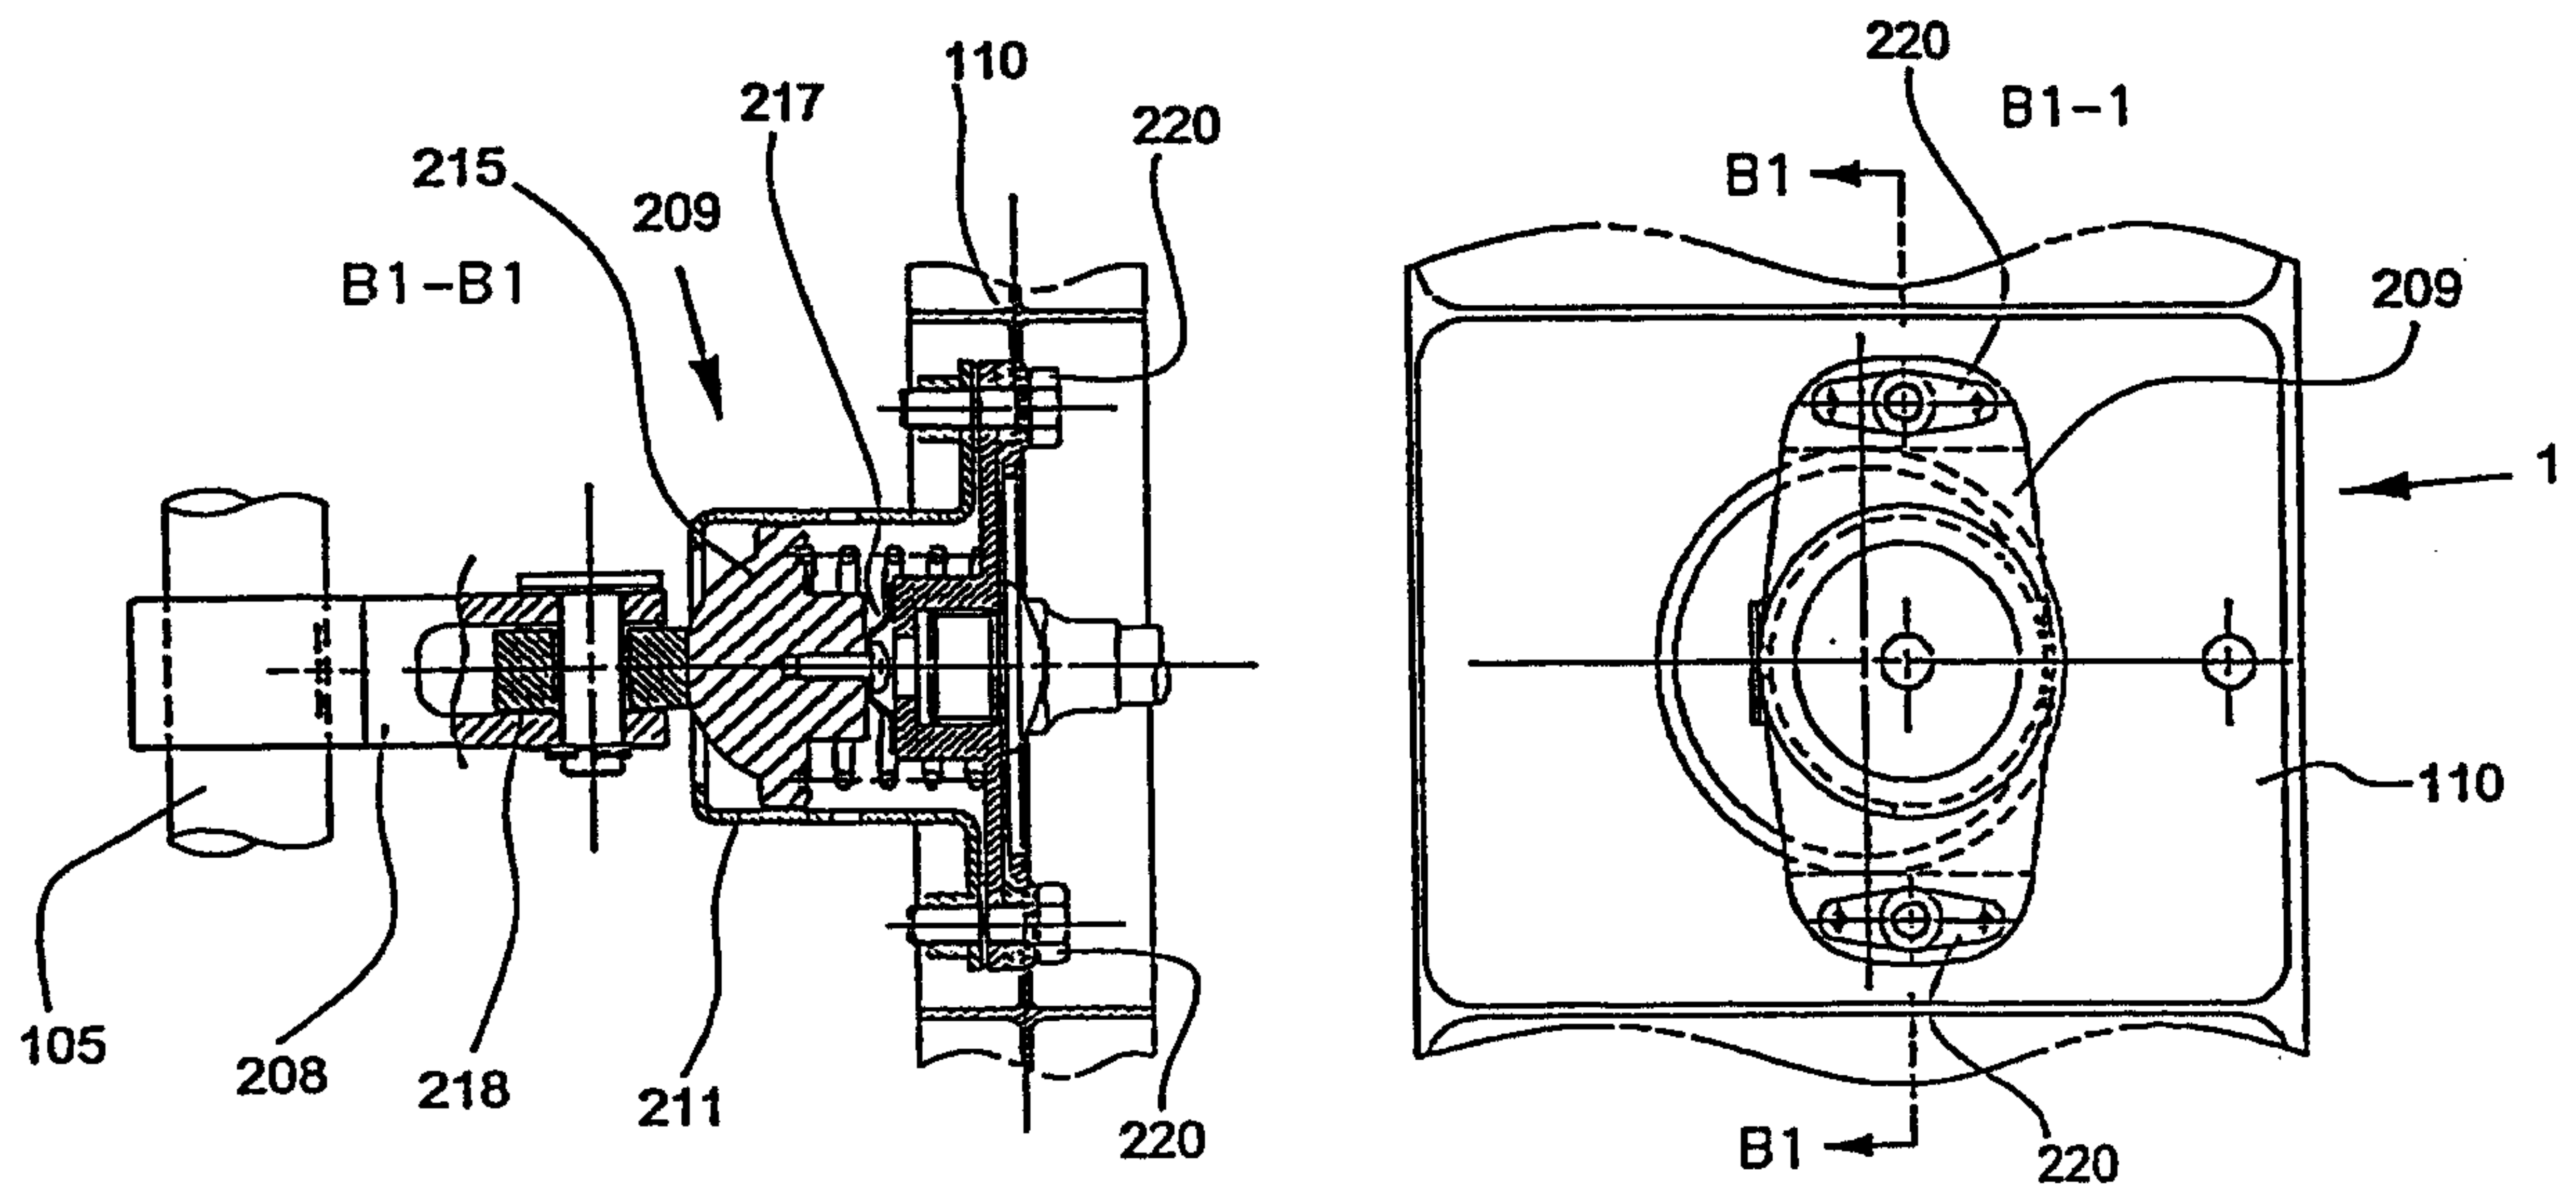


Fig. 7

