

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/073770 A1

(51) International Patent Classification⁷: **G02B 6/42**

(21) International Application Number:
PCT/GB2005/000093

(22) International Filing Date: 11 January 2005 (11.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0401998.0 30 January 2004 (30.01.2004) GB

(71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): **TYCO ELECTRONICS RAYCHEM NV** [BE/BE]; Diestsesteenweg 692, B-3010 Kessel-Lo (BE).

(71) Applicant (for MG only): **TYCO ELECTRONICS UK LTD** [GB/GB]; Faraday Road, Dorcan, Swindon Wiltshire SN3 5HH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FRANCKX, Joris** [BE/BE]; Halmenhoek 7, B-2820 Bonheiden (BE). **LEEMAN, Sam** [BE/BE]; Diestsesteenweg 353, B-3010 Kessel-Lo (BE).

(74) Agent: **JAY, Anthony William**; Tyco Electronics UK Ltd, European Patent Department, Faraday Road, Dorcan, Swindon Wiltshire SN3 5HH (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OPTICAL DEVICE

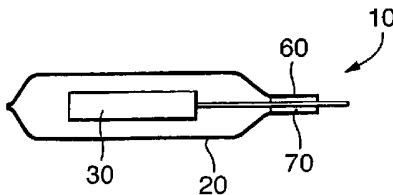

(57) Abstract: An optical device (10) comprising an enclosure (20) having a wall member defining a cavity and a sealable fibre entry portion, an optical component (30) located within the cavity and at least two optical fibres (40, 50) connected to the optical component and extending, substantially adjacent one another, through the entry portion. The invention also concerns a kit-of-parts for forming such a device, and a method of sealably enclosing an optical component.

OPTICAL DEVICE

The present invention relates to an optical device for containing an optical component, and particularly an optical device for containing a butt ended optical component. The present invention also relates to a method of sealably enclosing an optical component, and in particular a butt ended optical component.

It is well known that moisture has adverse effects on the properties of optical components. The split ratio of optical splitters, for example, may be influenced by the presence of moisture, and in optical connectors moisture may lead to increased losses. In order to overcome this problem, it is well known to provide optical components in sealed packages in order to protect the optical components against the damaging effects of moisture and other environmental influences.

However, provision of optical components in sealed packages often results in compromised optical performance caused by stress in the optical fibres due to temperature variations which cause expansion and contraction of the packaging material and/or variations in the pressure of the atmosphere within the sealed package. In prior art packages, such as the one described in the Applicant's earlier International Patent Application No. PCT/GB03/0059, or the one shown in cross-section in figure 1, the fibres 40, 50 are arranged such that the optical component 30 is held in a fixed position within the enclosure 20 with the consequence that, for example, any expansion or contraction of the optical fibres 40, 50 under variations in environmental conditions, such as extreme temperature variations, will result in stress through the fibres 40, 50 thereby causing a loss of optical performance.

There is therefore a requirement for an optical device which addresses the problems of the prior art by avoiding stress through the optical fibres and the consequential loss in optical performance under variations in environmental conditions such as, for example, variations in temperature or humidity.

Accordingly, a first aspect of the present invention provides an optical device comprising an enclosure having a wall member defining a cavity and a sealable fibre entry portion, an optical

component located within the cavity, and at least two optical fibres connected to the optical component and extending, substantially adjacent one another, through the entry portion.

5 As the optical fibres extend through the entry portion substantially adjacent one another, the optical component is held inside the enclosure in a sealed environment, thereby protected from the effects of variations in environmental conditions such as humidity. As the optical component is held in position relative to the enclosure at only one side of the component, the component is effectively free to move within the enclosure in the event that environmental conditions such as variations in temperature, cause the expansion or contraction of the optical
10 fibres and/or other packaging elements. Thus, expansion or contraction of the fibres and/or other packaging elements is possible without stress to the fibres, as would be experienced using prior art devices. By avoiding stress in the optical fibres, the loss in optical performance that is experienced using prior art devices, is avoided.

15 This invention is particularly, but not exclusively directed to optical devices comprising one or more butt ended optical components. A butt ended optical component is an optical component in which the optical fibre connections are located on one side of the component.

The optical component may comprise any passive component, such as, for example, a planar
20 splitter, filter wavelength division multiplexer (FWM), arrayed wavelength grating (AWG), isolator, filter and the like. It will be appreciated by the skilled person that these are merely examples of suitable passive components and that any other suitable passive component known to the skilled person may be located within the cavity. It will also be readily understood by the skilled person that the optical component may be any suitable active component available to the
25 skilled person and may be used as an alternative or in addition to a passive component within the cavity of the optical device.

Preferably, the optical fibres provide incoming and outgoing fibres for the optical device.

30 Preferably, the fibre entry portion is arranged to receive the fibres substantially side by side as they extend through the entry portion. This allows for a better seal of the enclosure around the optical fibres if the fibres are arranged side by side, rather than being arranged such, for example, they cross over one another. More preferably, the fibres are arranged substantially

parallel to one another as they extend through the fibre entry portion.

5 The enclosure is preferably substantially flexible, although it may alternatively be substantially rigid or at least a portion of the enclosure may be flexible while another portion of the enclosure may be rigid.

10 Preferably, the optical device further comprises temperature control means. By providing temperature control means, a reduction in the possibility of condensation within the device may be achieved, while in addition, excessively high and/or low temperatures may also be avoided.

The temperature control means is preferably provided in any suitable location such as within the wall member of the enclosure, or within the cavity of the enclosure.

15 The temperature control means may comprise a heat sink or heat pipe, and/or an active temperature controller such as a heater, for example an electrical heater and/or an active cooling element.

20 Alternatively, or in addition, humidity control means, such as a desiccant, may be provided to further reduce the possibility of condensation within the enclosure.

The enclosure may comprise an insulating layer. Preferably such an insulating layer is located on an interior surface of the wall member.

25 In a preferred embodiment, the enclosure comprises a laminar material. More preferably, the laminar material comprises a moisture resistant layer. The moisture resistant layer provides a substantially moisture resistant enclosure for surrounding the optical component. Preferably, the moisture resistant layer comprises a layer of aluminium or any other suitable metal.

30 Preferably, the optical component is arranged on a support, possibly with other optical components, and the optical fibres routed in accordance with a predetermined circuit configuration with the optical fibre ends fed through the entry portion for optical connection with other components. This allows for prefabrication of the optical component and optical fibres, thereby allowing for automation of the circuit assembly, and quick and simple

installation of the optical component and optical fibres within the enclosure to provide an optical device according to the present invention.

5 The optical device may contain a single optical component located within the cavity defined by the wall member or alternatively, more than one optical component may be located within the cavity, with at least two optical fibres connected to each optical component and extending, substantially adjacent one another, through the entry portion.

10 A further aspect of the present invention provides a method of sealingly enclosing an optical component, the method comprising the steps of:

- providing an enclosure having a wall member defining a cavity and a sealable fibre entry portion;
- arranging an optical component connected to at least two optical fibres within the cavity such that the two optical fibres extend, substantially adjacent one another, through the entry portion; and
- 15 - sealing the fibre entry portion so as to sealably retain the optical component within the cavity.

20 This provides an optical device in which the optical component or components are held in a 'free floating' arrangement within the cavity such that, under variations in environmental conditions, such as extreme temperature variations where expansion/contraction of the fibres and/or other packaging elements may occur, stress through the optical fibres and consequential optical loss is avoided.

25 Preferably, the method further comprises the step of providing a polymer strip adjacent the optical fibres at the entry portion prior to sealing the entry portion. On sealing of the fibre entry portion, the polymer strip then seals around the optical fibres, thereby sealing any gaps between the fibres and the wall member and providing an improved seal at the fibre entry portion.

30 The fibre entry portion may be sealed using heat and/or pressure applied at the fibre entry portion until the desired seal is achieved.

The present invention further provides a kit-of-parts for forming a device as defined above.

An embodiment of the present invention will now be described, by way of example only, and with reference to the following figures 2 to 4, in which:

Figure 2 is a perspective view of a butt ended optical component;

5 Figure 3 is a perspective view of an enclosure according to an embodiment of the present invention; and

Figure 4 is a cross sectional view of the embodiment of figure 3.

10 Figure 2 shows a butt ended optical component 30 with an incoming optical fibre 40 and an outgoing optical fibre 50, the incoming optical fibre 40 and the outgoing optical fibre 50 both arranged on the same side of the optical component 30, in a so-called butt ended arrangement. Such an optical component is shown in figures 2 and 3 as part of an embodiment of an optical device according to the present invention.

15 Figures 3 and 4 show an optical device 10 according to the present invention comprising an enclosure 20 defining a sealable fibre entry portion in which an optical component 30 is contained. The enclosure 20 is sealed around the incoming and outgoing optical fibres 40 and 50 of optical component 30 such that the optical component 30 is held in a 'free floating' arrangement within the enclosure 20. In other words, and as is clearly shown in the cross
20 sectional view of figure 4, the incoming and outgoing optical fibres 40 and 50 are held substantially adjacent one another at the entry portion 60 when the entry portion 60 is sealed, thereby holding the optical component within the enclosure 20 such that the optical component is anchored at one side only relative to the enclosure. A sealing strip 70 is provided between the fibres 40, 50 and the wall member of the enclosure 20 at the fibre entry portion 60.

25

Thus, in the sealed optical device 10, the optical component 30 is free to move within the enclosure 20 in the event of contraction and/or expansion of the optical fibres 40, 50 and/or other packaging elements, due to variations in environmental conditions such as temperature variations. Therefore, on expansion and/or contraction of the optical fibres 40, 50 and/or other
30 packaging elements, the optical component 30 is free to move within the enclosure 20, thereby avoiding stress on the fibres 40, 50 as would occur if the optical component 30 was not free to move, but instead was rigidly held within the enclosure 20, as is the case in prior art optical devices. By preventing stress on the optical fibres, optical quality is maintained and optical

losses avoided.

Although aspects of the invention have been described with reference to the embodiment shown in the accompanying drawings, it is to be understood that the invention is not limited to the precise embodiment shown and that various changes and modifications may be effected without further inventive skill and effort. For example, the enclosure may accommodate more than one optical component, and may define one or more sealable fibre entry portions, provided each optical component is held in a 'free-floating' arrangement relative to the enclosure, as described above.

CLAIMS

1. An optical device comprising an enclosure having a wall member defining a cavity and a sealable fibre entry portion, an optical component located within the cavity and at least two optical fibres connected to the optical component and extending, substantially adjacent one another, through the entry portion.
5
2. An optical device according to Claim 1 wherein the optical fibres provide an incoming and outgoing fibre for the optical component.
10
3. An optical device according to Claim 1 or Claim 2 wherein the fibre entry portion is arranged to receive the at least two fibres substantially side-by-side as they extend through the entry portion.
- 15 4. An optical device according to Claim 3 wherein the optical fibres are arranged substantially parallel to one another as they extend through the entry portion.
5. An optical device according to any preceding Claim wherein at least a portion of the enclosure is flexible.
20
6. An optical device according to any preceding Claim further comprising temperature control means.
7. An optical device according to any preceding Claim wherein the enclosure comprises a laminate.
25
8. An optical device according to Claim 7 wherein the laminate comprises a moisture resistant layer.
- 30 9. An optical device according to Claim 8 wherein the moisture resistant layer comprises aluminium.
10. An optical device according to any preceding Claim wherein the enclosure comprises an

insulating layer.

11. An optical device according to any preceding Claim in which the optical device comprises a plurality of optical components located within the cavity, and at least two optical
5 fibres connected to each optical component and extending, substantially adjacent one another, through the entry portion.

12. An optical device according to Claim 11 in which the wall member defines a plurality of fibre entry portions, such that each optical component is associated with a separate fibre entry
10 portion through which the optical fibres to which each individual optical component is connected extend through a separate fibre entry portion to the optical fibres connected to other optical components.

13. An optical device according to any preceding Claim wherein the enclosure is of a size
15 and shape for fitting into an optical fibre organiser tray.

14. A fibre optic organiser tray having an enclosure according to Claim 13 fitted therein.

15. A method of sealingly enclosing an optical component, the method comprising the steps
20 of:

- providing an enclosure having a wall member defining a cavity and a sealable fibre entry portion;
- arranging an optical component connected to at least two optical fibres within the cavity such that the two optical fibres extend, substantially adjacent one another, through
25 the entry portion; and
- sealing the fibre entry portion so as to sealably retain the optical component within the cavity.

16. A method according to Claim 17 further comprising the step of providing a polymer strip
30 adjacent the optical fibres at the entry portion prior to sealing the entry portion.

17. A method according to Claim 17 or Claim 18 wherein the fibre entry portion is sealed using heat and/or pressure

18. Kit of parts for forming an optical device according to any one of Claims 1 to 13.

19. An optical device as hereinbefore described with reference to the accompanying
5 drawings.

20. A method substantially as hereinbefore described and with reference to the accompanying drawings.

Fig.1.

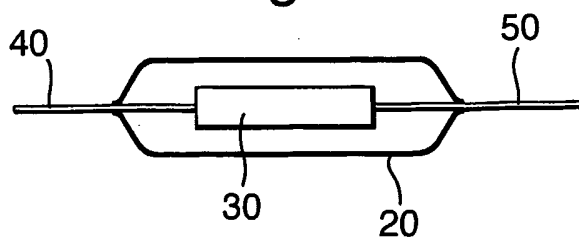


Fig.2.

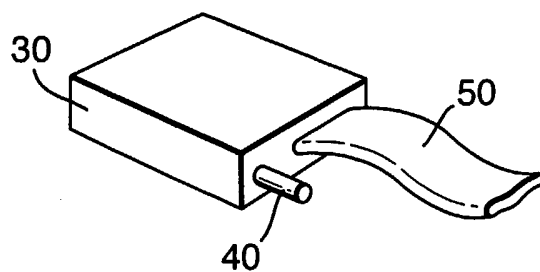


Fig.3.


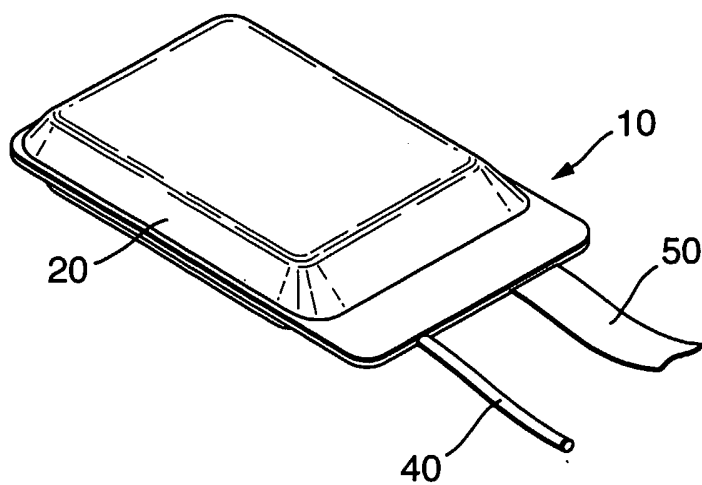


Fig.4.

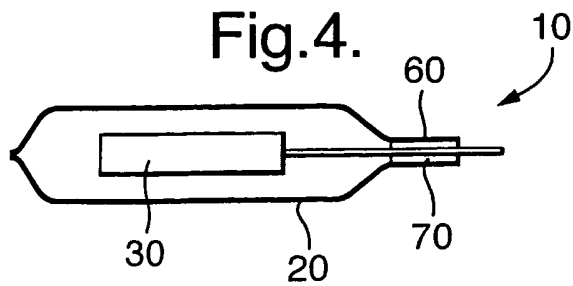

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB2005/000093

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B6/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/098306 A (TYCO ELECTRONICS RAYCHEM NV; TYCO ELECTRONICS UK LTD; BELLEKENS, KATHL) 27 November 2003 (2003-11-27) page 4 - page 9; figures 1-5 -----	1-5, 7-9, 11-20
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 21, 3 August 2001 (2001-08-03) -& JP 2001 116950 A (NIPPON TELEGR & TELEPH CORP <NTT>), 27 April 2001 (2001-04-27) the whole document -----	1-4, 7-9, 15, 17
X	US 5 999 684 A (BLOOM ET AL) 7 December 1999 (1999-12-07) column 4, line 1 - column 5, line 36; figure 2b ----- -/--	1-4, 15, 17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

17 March 2005

Date of mailing of the international search report

24/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Andreassen, J

INTERNATIONAL SEARCH REPORT

Intern application No
PCT/GB2005/000093

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/48751 A (SRI INTERNATIONAL) 20 June 2002 (2002-06-20) paragraph '0041! - paragraph '0043!; figures 2a-b -----	1-4, 6, 11-13, 15, 17
X	WO 03/098303 A (TYCO ELECTRONICS RAYCHEM NV; TYCO ELECTRONICS UK LTD; WATTE, JAN; BELL) 27 November 2003 (2003-11-27) the whole document -----	1-4, 11, 13, 15, 17
X	WO 02/088813 A (TYCO ELECTRONICS RAYCHEM NV; TYCO ELECTRONICS UK LTD; LEEMAN, SAM; WAT) 7 November 2002 (2002-11-07) the whole document -----	1, 3-5, 7-9, 13, 15-18
X	WO 03/062894 A (TYCO ELECTRONICS RAYCHEM NV; TYCO ELECTRONICS UK LTD; LEEMAN, SAM; FRA) 31 July 2003 (2003-07-31) the whole document figure 1 -----	1-10, 13, 15-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2005/000093

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03098306	A	27-11-2003	AU 2003233880 A1 EP 1506444 A1 WO 03098306 A1	02-12-2003 16-02-2005 27-11-2003
JP 2001116950	A	27-04-2001	NONE	
US 5999684	A	07-12-1999	US 5805757 A AU 3725197 A AU 3725297 A WO 9802768 A1 WO 9802766 A1 US 6244756 B1 US 5971629 A US 6000858 A	08-09-1998 09-02-1998 09-02-1998 22-01-1998 22-01-1998 12-06-2001 26-10-1999 14-12-1999
WO 0248751	A	20-06-2002	AU 3960002 A WO 0248751 A2 US 2003020981 A1	24-06-2002 20-06-2002 30-01-2003
WO 03098303	A	27-11-2003	AU 2003233882 A1 WO 03098303 A1	02-12-2003 27-11-2003
WO 02088813	A	07-11-2002	BR 0209189 A CA 2443720 A1 CZ 20032605 A3 EP 1381898 A1 WO 02088813 A1 MX PA03009526 A NO 20034791 A US 2004136678 A1 ZA 200307417 A	03-08-2004 07-11-2002 14-01-2004 21-01-2004 07-11-2002 12-02-2004 24-10-2003 15-07-2004 23-09-2004
WO 03062894	A	31-07-2003	BR 0306825 A CA 2472441 A1 EP 1466203 A1 WO 03062894 A1 US 2005031272 A1	21-12-2004 31-07-2003 13-10-2004 31-07-2003 10-02-2005