



- (51) **International Patent Classification:**
H04N 7/00 (2011.01) *H04N 13/00* (2006.01)
- (21) **International Application Number:**
PCT/CN2016/070823
- (22) **International Filing Date:**
13 January 2016 (13.01.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
PCT/CN2016/070712
12 January 2016 (12.01.2016) CN
- (71) **Applicant:** SHANGHAITECH UNIVERSITY [CN/CN];
Room 404, Administration Building, 100 Haik Road,
Pudong New District, Shanghai 201210 (CN).
- (72) **Inventors:** YU, Jingyi; Room 404, Administration Building,
100 Haik Road, Pudong New District, Shanghai
201210 (CN). MA, Yi; Room 404, Administration Building,
100 Haik Road, Pudong New District, Shanghai
201210 (CN).
- (74) **Agent:** SHANGHAI SAVVY INTELLECTUAL PROP-
ERTY AGENCY; Room 341, Building 1, 789 West Tian-
shan Road, Changning District, Shanghai 200335 (CN).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** STITCHING METHOD AND APPARATUS FOR PANORAMIC STEREO VIDEO SYSTEM

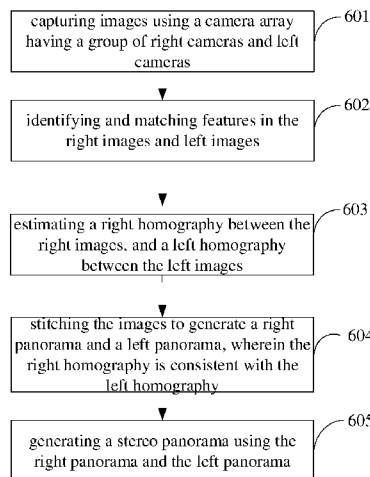


Figure 6

(57) **Abstract:** A method of generating a stereoscopic panorama is provided, the method comprising: processing a first right image, a second right image, a first left image, and a second left image to derive a right homography between the first right image and the second right image and a left homography between the first left image and the second left image; stitching the first right image with the second right image to generate a right panorama, the first left image with the second left image to generate a left panorama wherein the right homography is consistent with the left homography; and generating a stereo panorama using the right panorama and the left panorama. The method further comprises capturing the first right image, the second right image, the first left image, and the second left image using a camera array comprising a first right camera, a second right camera, a first left camera, and a second left camera, wherein a relative position between the first right camera and the second right camera is substantially the same as a relative position between the first left camera and the second left camera, and the first right camera and the second right camera comprise parallel optical axes.



Stitching Method and Apparatus for Panoramic Stereo Video System

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit and priority of International Patent Application No. PCT/CN2016/070712, entitled “Calibration Method and Apparatus for Panoramic Stereo Video System” filed on January 12, 2016. The entire disclosures of the above application are incorporated herein by reference.

TECHNICAL FIELD

The present invention relates to panoramic stereo video systems for capturing, processing, compressing, and displaying 3D panoramic stereo videos, and more particularly, to methods and apparatus for stitching images to generate 3D panoramic stereo videos in the panoramic stereo video systems.

BACKGROUND

In panoramic stereo video systems, a multi-camera array with certain geometric configuration is often used to capture images. For example, the camera array may have 8 pairs of cameras installed on a mounting frame in the shape of a regular octagon, with each pair of cameras placed on each side of the octagon and having parallel optical axes. Such camera array can capture eight pairs of video data, with each pair capturing two videos to generate a stereo video. Two panoramic videos can be generated by stitching the videos captured by all the left cameras and all the right cameras in the eight pairs respectively. The two panoramic videos can then be sent to a display system to display a panoramic stereo video.

As compared with traditional single panorama stitching, stereo stitching faces more constraints. In particular, since the camera array often has a particular geometric configuration, the video data captured by the various cameras in the camera array will often have certain relationship among themselves that must be taken into consideration. Therefore, there is a need for a new method of stitching images to generate a stereo panoramic video that optimizes performance while satisfying certain constraints.

SUMMARY OF THE INVENTION

To address issues in the prior art, embodiments of the present invention provide a method and apparatus for stitching images to generate a stereo panoramic video that optimizes performance while satisfying certain constraints.

In accordance with an embodiment of the present invention, an image acquisition and processing apparatus for capturing images to generate a stereoscopic panorama is provided, the image acquisition and processing apparatus comprising: a camera array comprising a first right camera, a second right camera, a first left camera, and a second left camera, wherein a relative position between the first right camera and the second right camera is substantially the same as a relative position between the first left camera and the second left camera; and an image processing unit configured to stitch a first right image captured by the first right camera with a second right image captured by the second right camera to generate a right panorama, and to stitch a first left image captured by the first left camera with a second left image captured by the second left camera to generate a left panorama, wherein the image processing unit is configured to derive a right homography between the first right image and the second right image consistent with left a homography between the first left image and the second left image.

Preferably, the image processing unit is configured to identify and match a feature in the first right image and the second right image.

Preferably, the image processing unit is configured to estimate the right homography using a random sample consensus (RANSAC) algorithm.

Preferably, the first right camera and the second right camera comprise parallel optical axes.

Preferably, the first right camera, the second right camera, the first left camera, and the second left camera are situated substantially on a plane.

Preferably, the first right camera and the second right camera are situated on a first side of a regular polygon, and the first left camera and the second left camera are situated on a second side of the regular polygon adjacent to the first side.

In accordance with another embodiment of the present invention, a method of generating a stereoscopic panorama is provided, the method comprising: processing a first right image, a second right image, a first left image, and a second left image to derive a right homography between the first right image and the second right image and a

homography between the first left image and the second left image; stitching the first right image with the second right image to generate a right panorama, the first left image with the second left image to generate a left panorama wherein the right homography is consistent with the left homography; and generating a stereo panorama using the right panorama and the left panorama.

Preferably, the method further comprises identifying and matching a feature in the first right image and the second right image.

Preferably, the method further comprises estimating the right homography using a random sample consensus (RANSAC) algorithm.

Preferably, the method further comprises capturing the first right image, the second right image, the first left image, and the second left image using a camera array comprising a first right camera, a second right camera, a first left camera, and a second left camera, wherein a relative position between the first right camera and the second right camera is substantially the same as a relative position between the first left camera and the second left camera, and the first right camera and the second right camera comprise parallel optical axes.

Preferably, the first right camera, the second right camera, the first left camera, and the second left camera are situated substantially on a plane.

Preferably, the first right camera and the second right camera are situated on a first side of a regular polygon, and the first left camera and the second left camera are situated on a second side of the regular polygon adjacent to the first side.

In accordance with embodiments of the present invention, images are captured using a camera array having certain geometric configuration, and images captured by the camera array are stitched to generate a stereo panoramic video using a method that optimizes performance while satisfying certain constraints.

BRIEF DESCRIPTION OF THE DRAWINGS

To better illustrate the technical features of the embodiments of the present invention, various embodiments of the present invention will be briefly described in conjunction with the accompanying drawings.

Figure 1 is an exemplary schematic diagram for a panoramic stereo video system in accordance with an embodiment of the present invention.

Figure 2 is an exemplary schematic diagram for a camera array in the panoramic stereo video system in accordance with an embodiment of the present invention.

Figure 3 is an exemplary schematic diagram for a data processing unit in a panoramic stereo video system in accordance with an embodiment of the present invention.

Figure 4 is an exemplary flowchart for a method of stitching a panoramic stereo video in accordance with an embodiment of the present invention.

Figure 5 is an exemplary flowchart for a method of displaying a panoramic stereo video in accordance with an embodiment of the present invention.

Figure 6 is an exemplary flowchart for a method of generating a stereoscopic panorama in accordance with an embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

To better illustrate the purpose, technical feature, and advantages of the embodiments of the present invention, various embodiments of the present invention will be further described in conjunction with the accompanying drawings. It is obvious that the drawings are but for exemplary embodiments of the present invention, and that a person of ordinary skill in the art may derive additional drawings without deviating from the principles of the present invention.

In accordance with embodiments of the present invention, a panoramic stereo video system including multi-camera video capturing, data processing, stereo video coding, transmission, and 3D displaying is provided. The panoramic stereo video system employs real-time multi-view videos capturing, image rectification and pre-processing, and region of interest (ROI) based stereo video compression. After the transmission and decoding process, a head-mounted display (HMD) headset is used to display the left and right views.

1. System overview

Figure 1 is an exemplary schematic diagram for a panoramic stereo video system in accordance with an embodiment of the present invention. The panoramic stereo video system 100 uses a camera array to capture 3D panoramic video, and displays the captured 3D panoramic video on either a 3D TV or a head-mounted virtual reality display device. As shown in Figure 1, the panoramic stereo video system 100 includes a data capturing unit 200, a data processing unit 300, and a data display unit 400. The data capturing unit 200 includes a plurality of cameras in a camera array 210, and a camera calibration unit 220. The data processing unit 300 includes a data pre-processing unit 310 and an advanced stereo video

transcoding unit 320. The data display unit 400 includes a decoding unit 410, and a display headset 420.

2. Data Capturing Unit

As shown in Figure 1, the data capturing unit 200 includes a plurality of cameras in a camera array 210, and a camera calibration unit 220 for calibrating the camera array 210.

2.1.Camera Array

Figure 2 is an exemplary schematic diagram for a camera array in the panoramic stereo video system in accordance with an embodiment of the present invention.

As shown in Figure 2, the camera array 210 has 16 high-definition cameras c1-c16 installed on a mounting frame in the shape of a regular octagon, with a pair of cameras placed on each side of the octagon. The two cameras on each side, such as c1 and c2, have parallel optical axes, and are separated by a distance d. The raw video data captured by the camera array 210 is transmitted through cable to a computer for further processing. The parameters for the camera are listed in Table 1 below.

Sensor	OV2710
Sensor Size	1/2.7 inch
Pixel Size	3 * 3
Image Area	5856 * 3276
Resolution	FULL HD 1920(H) * 1080(V)
Frame	MJPEG@30fps
USB protocol	USB2.0 HS/FS
AEC	Support
AEB	Support
AGC	Support
Lens Parameter	Standard 2.1 mm, optional/2.5/2.8/3.6/6mm/FOV(D)170 Degree/187 Degree

Table 1

It should be noted that while the camera array is depicted as a regular octagon in Figure 2, the camera array can be configured in other shapes in accordance with other embodiments of the present invention. Specifically, in one embodiment of the present invention, the cameras are installed on a rigid frame, so that the relative positions among the plurality of cameras are substantially constant. In another embodiment of the present

invention, the cameras are located substantially on the same plane, such as on the sides of a polygon.

2.2. Camera Calibration

To stitch images captured by the cameras together and generate 3D effects, it is necessary to obtain both the internal and parameters of the cameras. The extrinsic parameters include the rotation and translation among the cameras, so that the images captured by different cameras can be rectified and aligned in the horizontal direction. Also, there may be distortions in the images captured by the cameras, and to obtain images free of the distortions, it is necessary to know the camera distortion parameters. These parameters are obtained during the camera calibration process.

2.2.1. Calibration of Internal and Distortion Parameters

The internal and distortion parameters of the cameras can be obtained using a variety of methods, such as the calibration method proposed by Zhengyou Zhang, and tools like MatLab can be employed to obtain these parameters.

2.2.2. Calibration of Extrinsic Parameters

After obtaining the internal parameters of the cameras, a method based on structure from motion is employed to obtain the rotations and translations among the cameras. This method has the following advantages.

Efficiency: there is no need to calibrate the cameras pair by pair. Rather, all cameras capture videos of a scene simultaneously during calibration, and the extrinsic parameters for all the cameras can be obtained at the same time.

Accuracy: in pattern-based calibration methods, the pattern needs to be captured by two adjacent cameras, which often results in lower resolution for the pattern and reduces the accuracy of the calibration. In our structure from motion based method, the movement of each camera will be estimated independently to obtain the parameters, and there is no need for adjacent cameras to have an overlapping field of view. Thus, we can place the cameras closer to the scene to be captured to achieve better accuracy.

Extensibility: since our method does not require an overlapping field of view for adjacent cameras, it is even applicable to cameras placed in back-to-back positions.

2.3. Data Capturing Method

Data from the 16 cameras are captured and stored using software, and then provided to the data processing unit. Image data for each frame captured by the cameras can be

collected using software such as FFmpeg and DirectShow (or DShow). The frames captured by each camera are compressed and then stored as video files. Since there are a number of cameras, the frames captured by the cameras need to be synchronized, such as using time stamps. For example, each frame captured by the cameras can be affixed with a time stamp, and placed in a queue so that it is synchronized with other frames with the same time stamp. The synchronized frames are coded into video streams, and stored locally or transmitted through the network together.

3. Data Processing Unit

As shown in Figure 1, the data processing unit 300 includes data pre-processing unit 310 and an advanced stereo video transcoding unit 320.

Figure 3 is an exemplary schematic diagram for a data processing unit in a panoramic stereo video system in accordance with an embodiment of the present invention. As shown in Figure 3, the data pre-processing unit 310 includes a timeline synchronization 311 for synchronizing the images captured by the cameras, a number of decoders 312 for decoding streams of raw video, a number of rectifiers 313 for rectifying the raw video, an encoder 314 for video processing, including noise reducing and editing, a stitching unit for stitching videos to generate panoramic video. The data pre-processing unit 310 outputs a left view video and a right view video to the advanced stereo video transcoding unit 320. The advanced stereo video transcoding unit 320 generates a motion map 321 and a texture map 322 for the video, and a hybrid region of interest (ROI) generating unit 323 identifies regions of interests in the videos based on the motion map and 321 the texture map 322. A bits allocation unit 324 allocates bits based on the identified region of interests, and a HEVC encoding unit 325 encodes the videos. A H.265 packetizer 326 packs the encoded videos for transmission.

Figure 4 is an exemplary flowchart for a method of stitching a panoramic stereo video in accordance with an embodiment of the present invention.

3.1 Distortion Correction and Preprocessing

The frames captured by the cameras are warped in accordance with the distortion parameters obtained during the calibration process to obtain frames free of distortions. In order to enhance the accuracy of image alignment and stitching, the frames are filtered first to reduce noises.

3.2. Image Alignment

Image alignment is performed on each pair of cameras located on each side of the

octagon, and the images captured by each pairs of cameras are aligned in the horizontal direction. In accordance with an embodiment of the present invention, each frame captured by the pairs of cameras is warped to a plane that is parallel to the optical axes of the fair of cameras.

4. Panoramic Video Stitching

The camera array has 8 pairs of cameras. The frames captured by all the left cameras are projected onto a cylinder, and then stitched into a panoramic image. A panoramic video can be obtained by repeating the above steps for all the frames captured by the left cameras. Another panoramic video can be obtained by processing the frames captured by the right cameras in the same fashion. These two panoramic videos form a panoramic stereo video.

5. Data Display Unit

As shown in Figure 1, the data display unit 400 includes a decoding unit 410, and a display headset 420. After going through an encoding and decoding system, the panoramic stereo video is played on display headset 420, which can be a wearable virtual reality (VR) equipment, such as one provided by Oculus VR. The panoramic stereo video is rendered respectively to the left display and the right display of the Oculus device. The display area of the panoramic stereo video can be adjusted in accordance with the movement of the detection device to simulate the change in perspective in the virtual reality.

Figure 5 is an exemplary flowchart for a method of displaying a panoramic stereo video in accordance with an embodiment of the present invention. As shown in Figure 5, in step 501, the encoded video stream is first decoded to YUV. In step 502, position calculation and view selection are made in accordance with the Oculus sensors data. In step 503, the images for the left eye and the right eye are respectively rendered. In step 504, the rendered images are displayed on the Oculus display headset.

6. Stereo Stitching Method

Stereo stitching is different from traditional single panorama stitching. Several specific problems for stereo stitching are listed as follows:

- 1) each pair of stereo images should be rectified.
- 2) disparity of different stereo images are different so that disparity preservation should be considered.
- 3) homography of two overlapping images captured by each left cameras in figure

1 is related to homography of their corresponding stereo images captured by each right cameras.

Figure 6 is an exemplary flowchart for a method of generating a stereoscopic panorama in accordance with an embodiment of the present invention. As shown in Figure 6, the method includes the following steps.

6. 1. Image Capturing and Preprocessing

Step 601: capturing a first right image, a second right image, a first left image, and a second left image using a camera array comprising a first right camera, a second right camera, a first left camera, and a second left camera. Here, the camera array may have the configuration in Figure 2, and have eight pairs of cameras on the sides of a regular octagon. Each pair of cameras have parallel optical axes. Specifically, the relative position among the right cameras is substantially the same as the relative position among the left cameras. As a result, the images captured by the right cameras are related to the images captured by the left cameras in a specific way.

Although the cameras on the camera array are located in a small range, the light condition of different frames can be very different, as some of the cameras are facing opposite directions as other cameras. To enhance robustness in the estimation and calibration of camera parameters, exposure compensation is performed. To speed up processing, resizing of the images is also performed in preprocessing.

6. 2. Image Matching

Step 602: identifying and matching a feature in the first right image and the second right image.

Feature detection and matching are the basic steps in the stitching method. In one embodiment, SURF features are used to find matching images. Since only a small number of matching features need to be found in the adjacent images, image matching can be performed efficiently.

6. 3. Homography Estimation

Step 603: processing the first right image, the second right image, the first left image, and the second left image to derive a right homography between the first right image and the second right image and a left homography between the first left image and the second left image.

As discussed above, stereo stitching faces more constraints than traditional single

panorama stitching. A new optimization method is used to provide a solution while satisfying certain constraints.

Suppose x_l, x_r are two frames captured by one pair of cameras (one left camera and one right camera as shown in Figure 2), y_l, y_r are two frames captured by the adjacent pair of cameras. Moreover, x_l overlaps with y_l , and x_r overlaps with y_r . To generate panoramas, it is needed to stitch x_l with y_l , and x_r with y_r . In one embodiment, the homography H_l between x_l and y_l is kept consistent with the homography H_r between x_r and y_r . In a preferred embodiment, H_l and H_r are the same, denoted as H . Equation (1) below shows the re-projection error from x_l to y_l , where Ω indicates the set of matching features between x_l and y_l . Similarly, the re-projection error between x_r and y_r is calculated as in equation (2).

$$E_l = \sum_{(\tilde{x}_l, \tilde{y}_l) \in \Omega} \|H\tilde{x}_l - \tilde{y}_l\|^2 \quad (1)$$

$$E_r = \sum_{(\tilde{x}_r, \tilde{y}_r) \in \Omega} \|H\tilde{x}_r - \tilde{y}_r\|^2 \quad (2)$$

In one embodiment, one more constraint is used to ensure the consistence of the homography. Since the purpose of stereo stitching is to generate two stereo panoramas, horizontal disparity should be considered when calculating homography. As indicated by Equation (3) below, to obtain the ideal homography, only horizontal disparity should be encouraged, while vertical disparity resulting from cumulative error and outliers in feature matching should be suppressed, where D is the set including matching feature points between one pair of frames (captured by one left-right pair of cameras), E_v is the orthogonal projection onto the vertical direction (denoted as y axis).

$$E_v = \sum_{(\tilde{x}_l, \tilde{x}_r) \in D} \|H\tilde{x}_l - H\tilde{x}_r\|^2 \quad (3)$$

The overall optimization problem is formalized as formula (4), where an extra parameter λ is introduced as a hyper parameter to balance the two parts.

$$\min (E_l + E_r) + \lambda E_v \quad (4)$$

In one embodiment, RANSAC is used to estimate a robust solution of homography between each two pair of overlapping images, which is a basic routine for reducing the

influence of outliers thus and enhancing robustness.

6.4 Image Composition

Step 604: stitching the first right image with the second right image to generate a right panorama, the first left image with the second left image to generate a left panorama wherein the right homography is consistent with the left homography. Preferably, the right homography is the same as the left homography.

Once the homography is estimated, two pairs of images can be warped and blended. In one embodiment, conventional warping-seam finding-blending routines are used with good performance. Color based graph cut algorithm for seam finding can be implemented, and multi-band blending is performed to generate the final panoramas.

Step 605: generating a stereo panorama using the right panorama and the left panorama. Finally, two panoramas are warped using cylindrical coordinate, and a stereo panorama is generated.

In accordance with embodiments of the present invention, images are captured using a camera array having certain geometric configuration, and images captured by the camera array are stitched to generate a stereo panoramic video using a method that optimizes performance while satisfying certain constraints.

The various modules, units, and components described above can be implemented as an Application Specific Integrated Circuit (ASIC); an electronic circuit; a combinational logic circuit; a field programmable gate array (FPGA); a processor (shared, dedicated, or group) that executes code; or other suitable hardware components that provide the described functionality. The processor can be a microprocessor provided by Intel, or a mainframe computer provided by IBM.

Note that one or more of the functions described above can be performed by software or firmware stored in memory and executed by a processor, or stored in program storage and executed by a processor. The software or firmware can also be stored and/or transported within any computer-readable medium for use by or in connection with an instruction execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch the instructions from the instruction execution system, apparatus, or device and execute the instructions. In the context of this document, a "computer-readable medium" can be any medium that can contain or store the program for use by or in connection with the instruction execution

system, apparatus, or device. The computer readable medium can include, but is not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus or device, a portable computer diskette (magnetic), a random access memory (RAM) (magnetic), a read-only memory (ROM) (magnetic), an erasable programmable read-only memory (EPROM) (magnetic), a portable optical disc such a CD, CD-R, CD-RW, DVD, DVD-R, or DVD-RW, or flash memory such as compact flash cards, secured digital cards, USB memory devices, memory sticks, and the like.

The various embodiments of the present invention are merely preferred embodiments, and are not intended to limit the scope of the present invention, which includes any modification, equivalent, or improvement that does not depart from the spirit and principles of the present invention.

Claims

1. An image acquisition and processing apparatus for capturing images to generate a stereoscopic panorama, the image acquisition and processing apparatus comprising:

a camera array comprising a first right camera, a second right camera, a first left camera, and a second left camera, wherein a relative position between the first right camera and the second right camera is substantially the same as a relative position between the first left camera and the second left camera; and

an image processing unit configured to stitch a first right image captured by the first right camera with a second right image captured by the second right camera to generate a right panorama, and to stitch a first left image captured by the first left camera with a second left image captured by the second left camera to generate a left panorama, wherein the image processing unit is configured to derive a right homography between the first right image and the second right image consistent with a left homography between the first left image and the second left image.

2. The image acquisition and processing apparatus of claim 1, wherein the right homography is the same as the left homography.

3. The image acquisition and processing apparatus of claim 1, wherein the image processing unit is configured to rectify the first right image and the first left image in a first direction.

4. The image acquisition and processing apparatus of claim 3, wherein the image processing unit is configured to warp the first right image and the first left image to a plane parallel to the optical axes of the first right camera and the first left camera.

5. The image acquisition and processing apparatus of claim 3, wherein the image processing unit is configured to suppress disparity in a second direction perpendicular to the first direction.

6. The image acquisition and processing apparatus of claim 1, wherein the image processing unit is configured to identify and match a feature in the first right image and the second right image.

7. The image acquisition and processing apparatus of claim 1, wherein the image processing unit is configured to estimate the right homography using a random sample consensus (RANSAC) algorithm.

8. The image acquisition and processing apparatus of claim 1, wherein the first right camera and the second right camera comprise parallel optical axes.

9. The image acquisition and processing apparatus of claim 1, wherein the first right camera, the second right camera, the first left camera, and the second left camera are situated substantially on a plane.

10. The image acquisition and processing apparatus of claim 9, wherein the first right camera and the second right camera are situated on a first side of a regular polygon, and the first left camera and the second left camera are situated on a second side of the regular polygon adjacent to the first side.

11. A method of generating a stereoscopic panorama, the method comprising processing a first right image, a second right image, a first left image, and a second left image to derive a right homography between the first right image and the second right image and a left homography between the first left image and the second left image;

stitching the first right image with the second right image to generate a right panorama, the first left image with the second left image to generate a left panorama wherein the right homography is consistent with the left homography; and

generating a stereo panorama using the right panorama and the left panorama.

12. The method of claim 11, wherein the right homography is the same as the left homography.

13. The method of claim 11, further comprising:
rectifying the first right image and the first left image in a first direction.

14. The method of claim 13, further comprising:
warping the first right image and the first left image to a plane.

15. The method of claim 13, further comprising:
suppressing disparity in a second direction perpendicular to the first direction.

16. The method of claim 13, further comprising:
identifying and matching a feature in the first right image and the second right image.

17. The method of claim 11, further comprising:
estimating the right homography using a random sample consensus (RANSAC)
algorithm.

18. The method of claim 11, further comprising:
capturing the first right image, the second right image, the first left image, and the
second left image using a camera array comprising a first right camera, a second right camera,
a first left camera, and a second left camera, wherein a relative position between the first right
camera and the second right camera is substantially the same as a relative position between
the first left camera and the second left camera, and the first right camera and the second right
camera comprise parallel optical axes.

19. The method of claim 18, wherein the first right camera, the second right camera,
the first left camera, and the second left camera are situated substantially on a plane.

20. The method of claim 19, wherein the first right camera and the second right camera are situated on a first side of a regular polygon, and the first left camera and the second left camera are situated on a second side of the regular polygon adjacent to the first side.

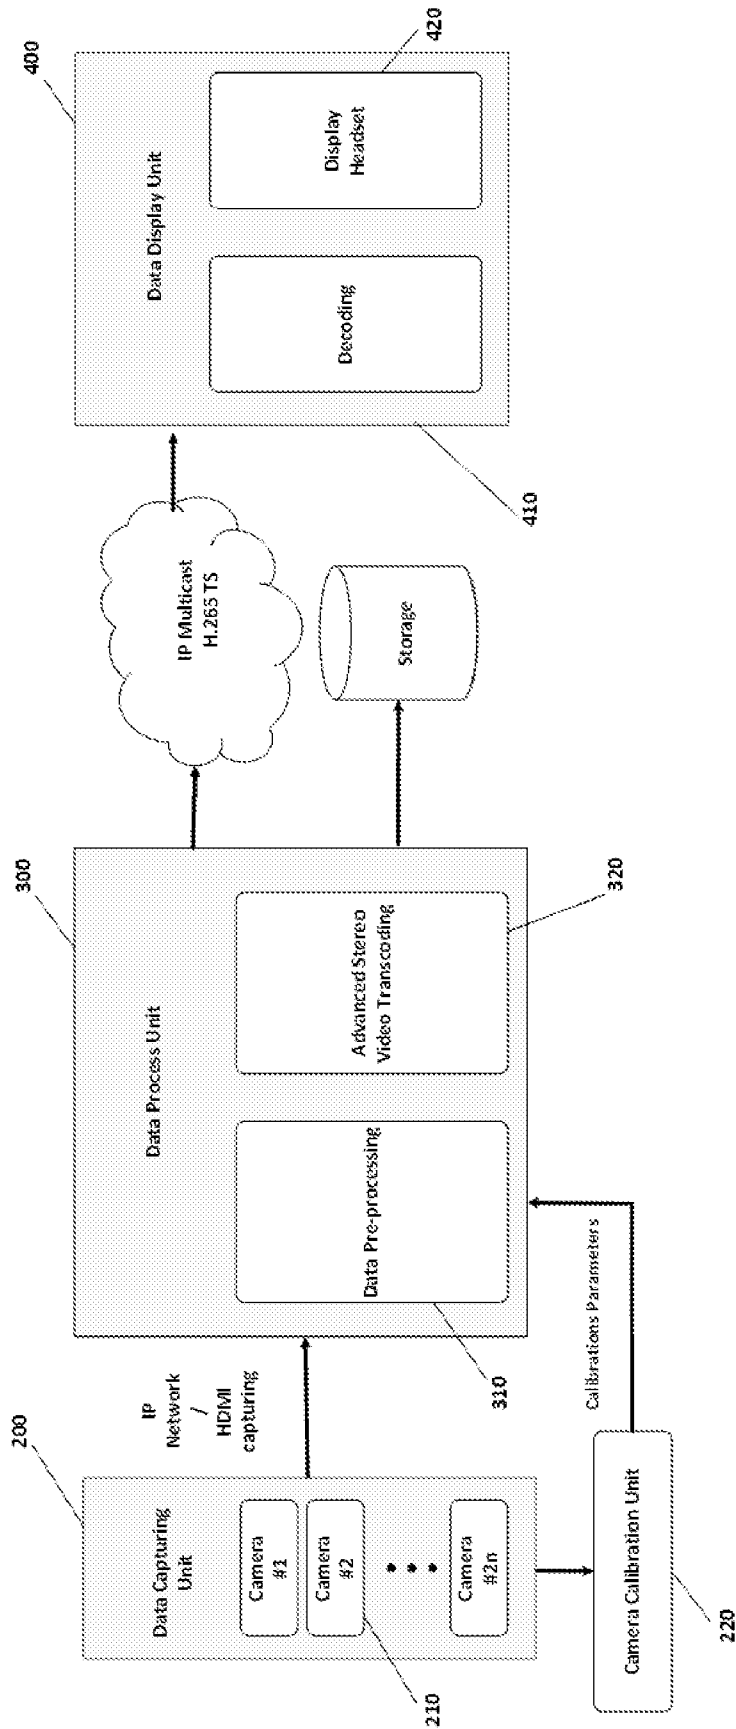


Figure 1

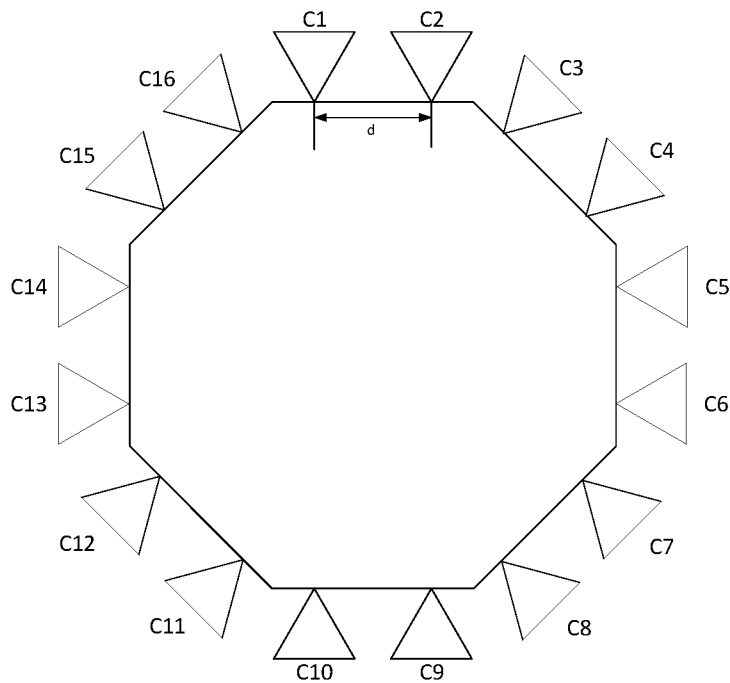


Figure 2

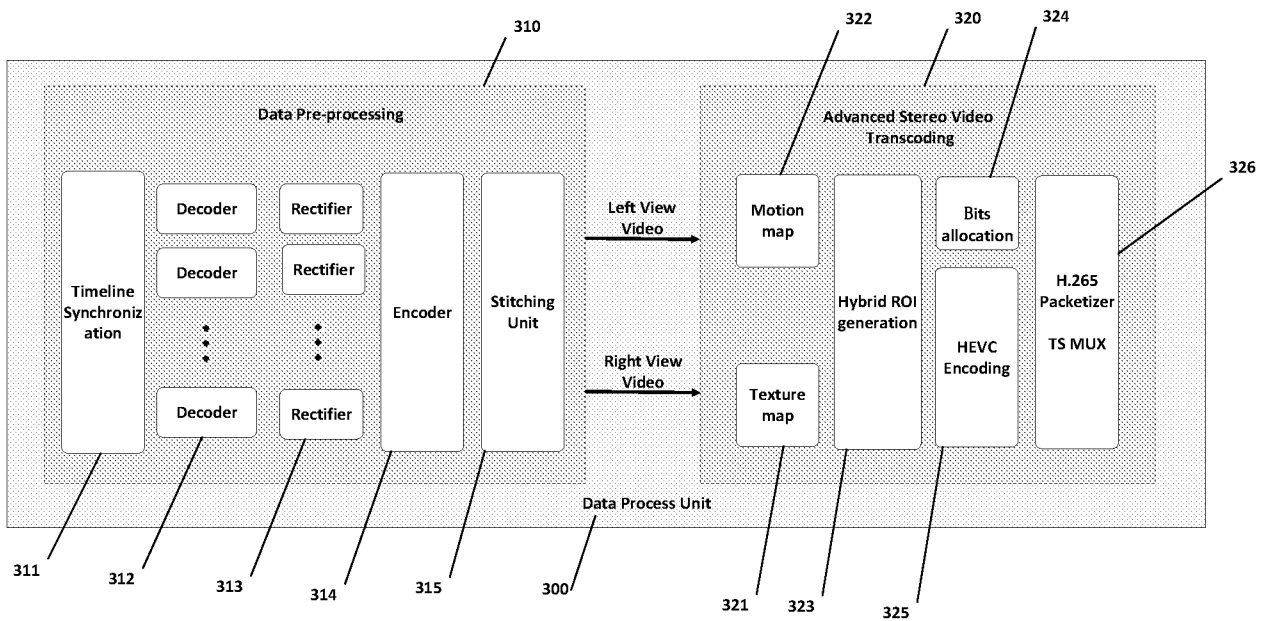


Figure 3

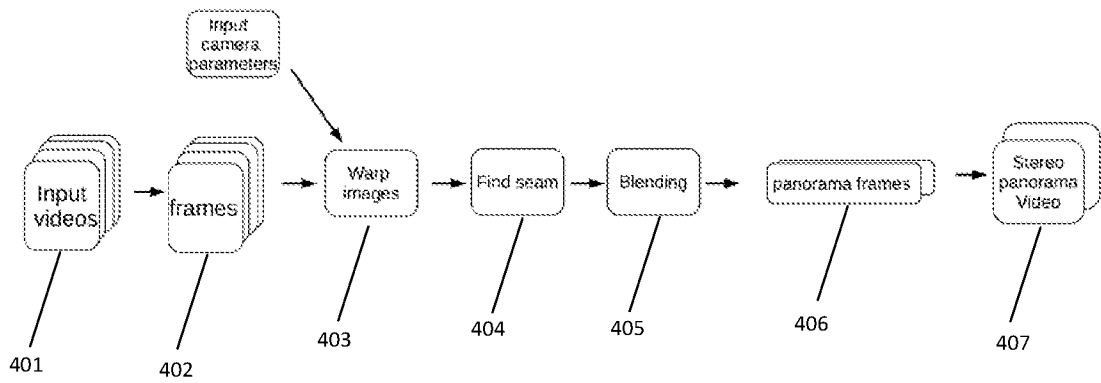


Figure 4

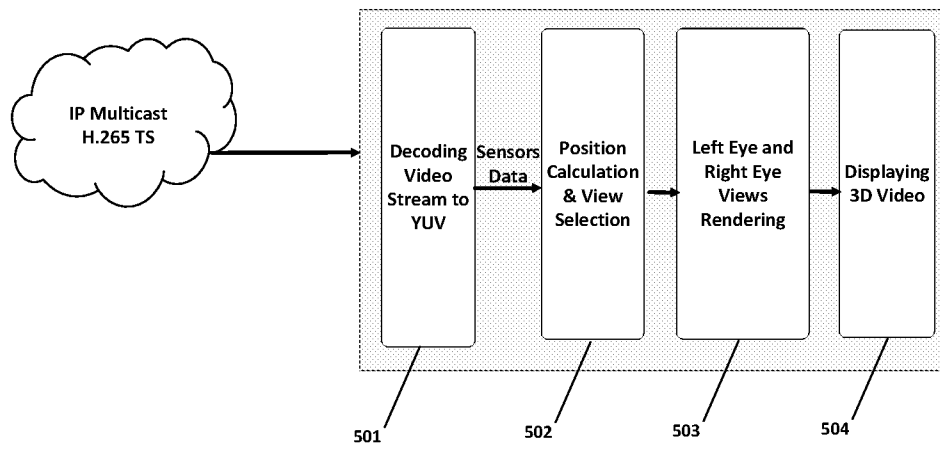


Figure 5

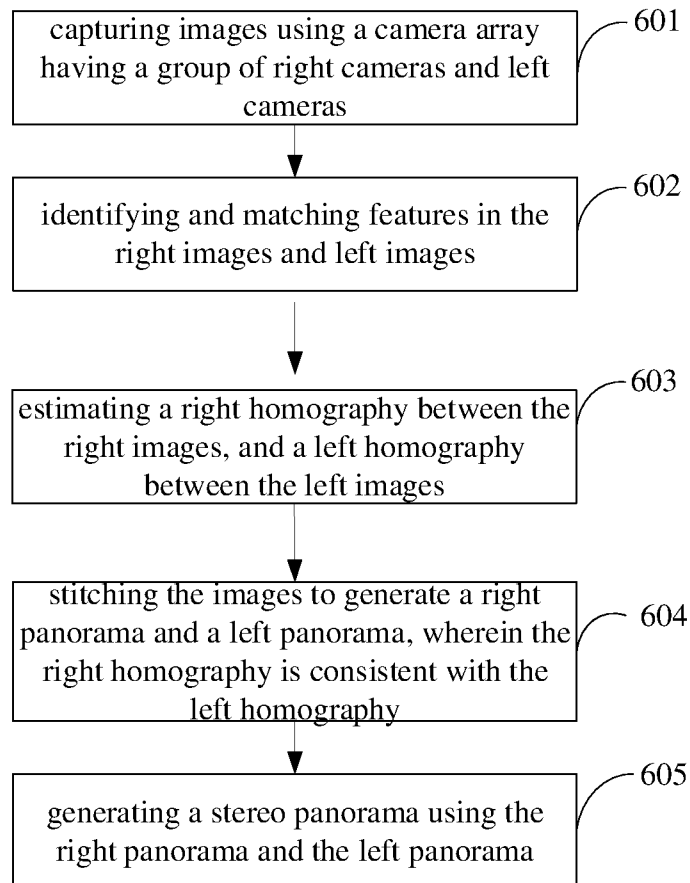


Figure 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/070823

A. CLASSIFICATION OF SUBJECT MATTER		
H04N 7/00(2011.01)i; H04N 13/00(2006.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
H04N		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
CNPAT, CNKI, WPI, EPODOC, IEEEE: image, stereo+, 3D, panorama, camera, array, right, left, stitch+, project+, homography, match+		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004001138 A1 (MOTOROLA, INC.) 01 January 2004 (2004-01-01) the abstract, claims 1, 2, description, paragraphs 0029-0034, and figures 3-4, 10, 11	1-20
A	US 2014307045 A1 (DISNEY ENTERPRISES, INC.) 16 October 2014 (2014-10-16) the whole document	1-20
A	US 2002145660 A1 (KANADE, TAKEO ET AL.) 10 October 2002 (2002-10-10) the whole document	1-20
A	US 2012249730 A1 (LEE, KENNETH KUN) 04 October 2012 (2012-10-04) the whole document	1-20
A	US 2013044186 A1 (JIN, HAILIN ET AL.) 21 February 2013 (2013-02-21) the whole document	1-20
A	US 2013063549 A1 (SCHNYDER, LARS ET AL.) 14 March 2013 (2013-03-14) the whole document	1-20
A	CN 102243432 A (ZHEJIANG UNIVERSITY OF TECHNOLOGY) 16 November 2011 (2011-11-16) the whole document	1-20
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents:		
“A”	document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“E”	earlier application or patent but published on or after the international filing date	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“L”	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“O”	document referring to an oral disclosure, use, exhibition or other means	“&” document member of the same patent family
“P”	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search		Date of mailing of the international search report
06 September 2016		22 September 2016
Name and mailing address of the ISA/CN		Authorized officer
STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088, China		YU,Lina
Facsimile No. (86-10)62019451		Telephone No. (86-10)52871176

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/070823

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2004001138	A1	01 January 2004	WO	2004004333	A1	08 January 2004
				AU	2003229063	A1	19 January 2004
US	2014307045	A1	16 October 2014	HK	1201624	A1	04 September 2015
				JP	2014212519	A	13 November 2014
				US	9398215	B2	19 July 2016
				EP	2793187	A1	22 October 2014
US	2002145660	A1	10 October 2002	US	7102666	B2	05 September 2006
				WO	02065761	A2	22 August 2002
				US	2002118969	A1	29 August 2002
				WO	02065763	A2	22 August 2002
				US	7106361	B2	12 September 2006
US	2012249730	A1	04 October 2012	US	8581961	B2	12 November 2013
US	2013044186	A1	21 February 2013	US	2013044913	A1	21 February 2013
				US	2016104286	A1	14 April 2016
				US	9202278	B2	01 December 2015
				US	9153025	B2	06 October 2015
				US	2015348265	A1	03 December 2015
US	2013063549	A1	14 March 2013	US	8928729	B2	06 January 2015
CN	102243432	A	16 November 2011	None			