


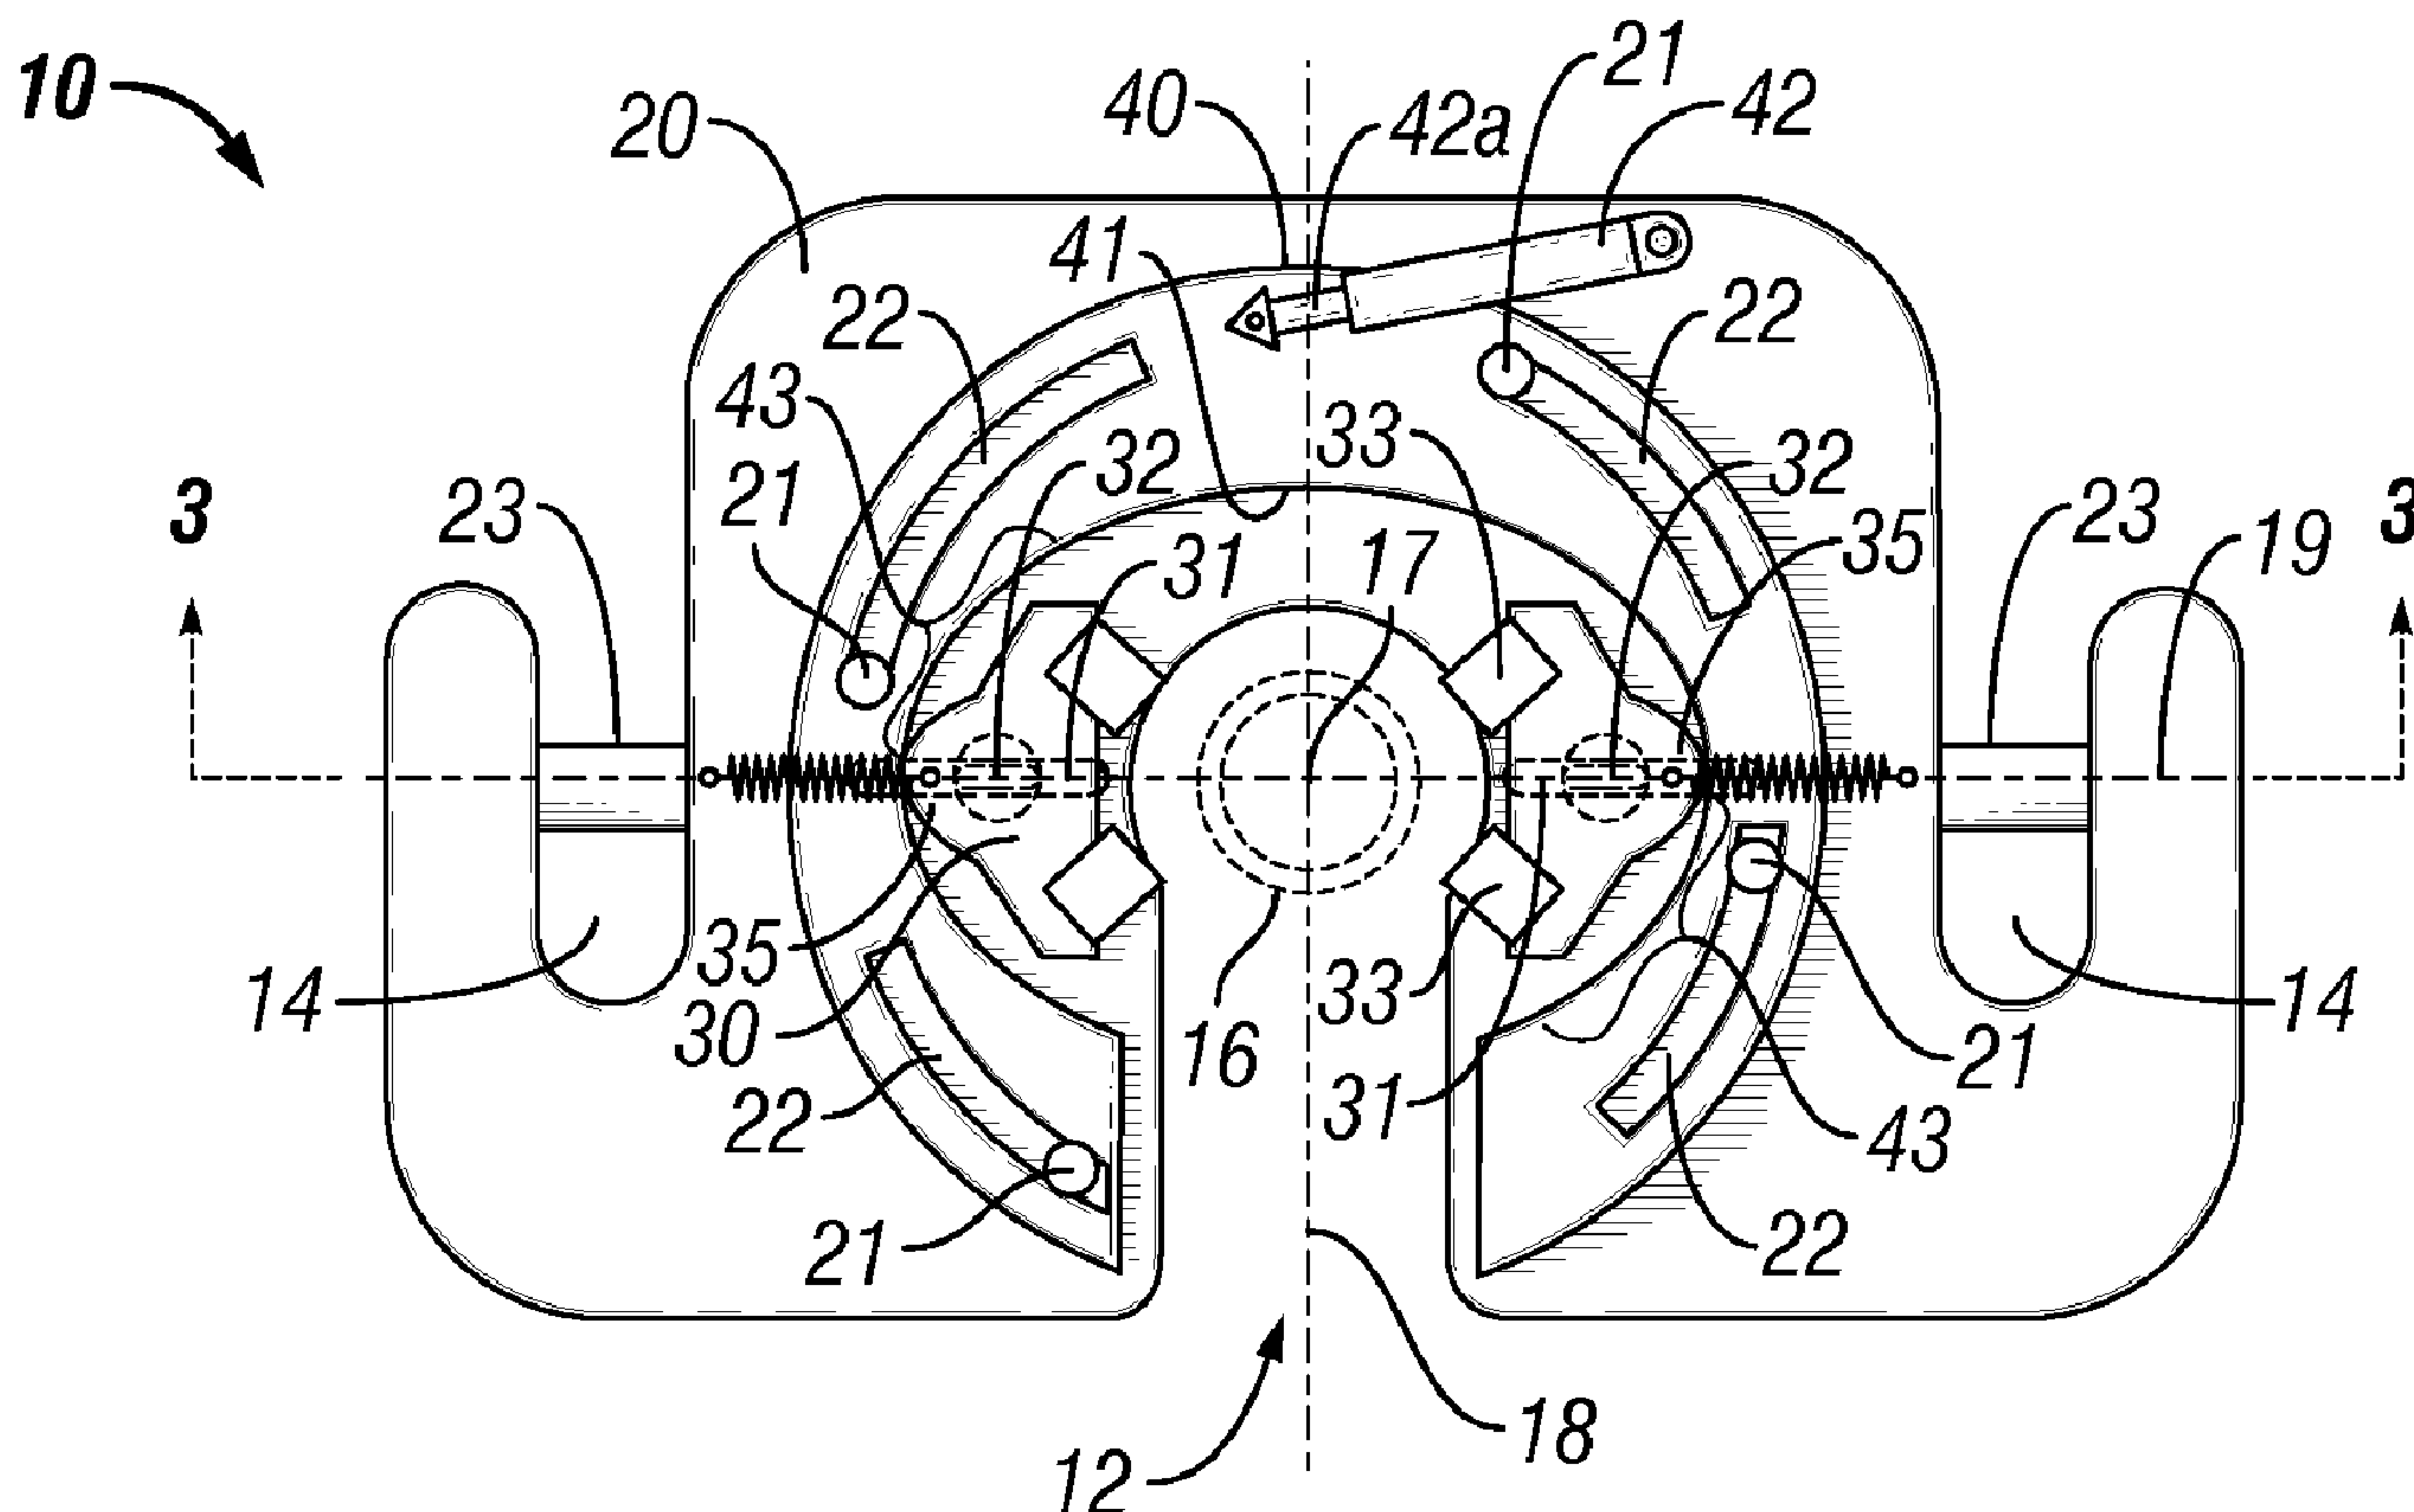

(86) Date de dépôt PCT/PCT Filing Date: 2008/05/07  
 (87) Date publication PCT/PCT Publication Date: 2008/11/20  
 (85) Entrée phase nationale/National Entry: 2009/11/09  
 (86) N° demande PCT/PCT Application No.: US 2008/062910  
 (87) N° publication PCT/PCT Publication No.: 2008/141045  
 (30) Priorité/Priority: 2007/05/09 (US11/746,123)

(51) Cl.Int./Int.Cl. *E21B 19/07* (2006.01)  
 (71) Demandeur/Applicant:  
FRANK'S INTERNATIONAL, INC., US  
 (72) Inventeurs/Inventors:  
BOULIGNY, VERNON JOSEPH, US;  
ARCENEUX, SCOTT JOSEPH, US  
 (74) Agent: KIRBY EADES GALE BAKER

(54) Titre : ELEVATEUR DE JOINT UNIQUE AVEC MACHOIRES DE PREHENSION  
 (54) Title: SINGLE JOINT ELEVATOR WITH GRIPPING JAWS



**FIG. 1**

(57) Abrégé/Abstract:

Single joint elevator (10) and method for releasably securing a tubular segment. A generally horseshoe-shaped body (20) has a slot (12) for receiving a tubular segment, and an actuator assembly that selectively moves opposing jaws (30) from a removed

(57) **Abrégé(suite)/Abstract(continued):**

position to a deployed position to grip and retain the tubular segment within the slot of the body while hoisting the body. The deployable jaws (30) are either rotatably or translatably moved from the removed position to the deployed position and may be pneumatically, hydraulically, and/or electrically actuated. The actuator assembly may include wedges (52) operatively coupled to actuators (62) for selectively biasing the wedges against the jaws (54), or a cam ring (40) rotationally coupled to the body (20) and rotated by an actuator (42) coupled between the body and the cam ring, wherein the cam ring has an inner cam surface (41) for inwardly biasing the opposing jaws (30).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
20 November 2008 (20.11.2008)

PCT

(10) International Publication Number  
**WO 2008/141045 A1**(51) International Patent Classification:  
*E21B 19/07* (2006.01)(74) Agent: STEELE, Patrick, K.; Streets & Steele, 13831  
Northwest Freeway, Suite 355, Houston, TX 77040 (US).(21) International Application Number:  
PCT/US2008/062910(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,  
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,  
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,  
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,  
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,  
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,  
ZA, ZM, ZW.

(22) International Filing Date: 7 May 2008 (07.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/746,123 9 May 2007 (09.05.2007) US(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,  
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,  
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).(71) Applicant (for all designated States except US):  
**FRANK'S INTERNATIONAL, INC.** [US/US]; 10260  
Westhelmer Road, Suite 700, Houston, TX 77042 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOULIGNY, Ver-**  
**non, Joseph** [US/US]; P.O. Box 12027, New Iberia, LA  
70562 (US). **ARCENEUX, Scott, Joseph** [US/US]; P.O.  
Box 80562, Lafayette, LA 80562 (US).**Published:**  
— with international search report

(54) Title: SINGLE JOINT ELEVATOR WITH GRIPPING JAWS

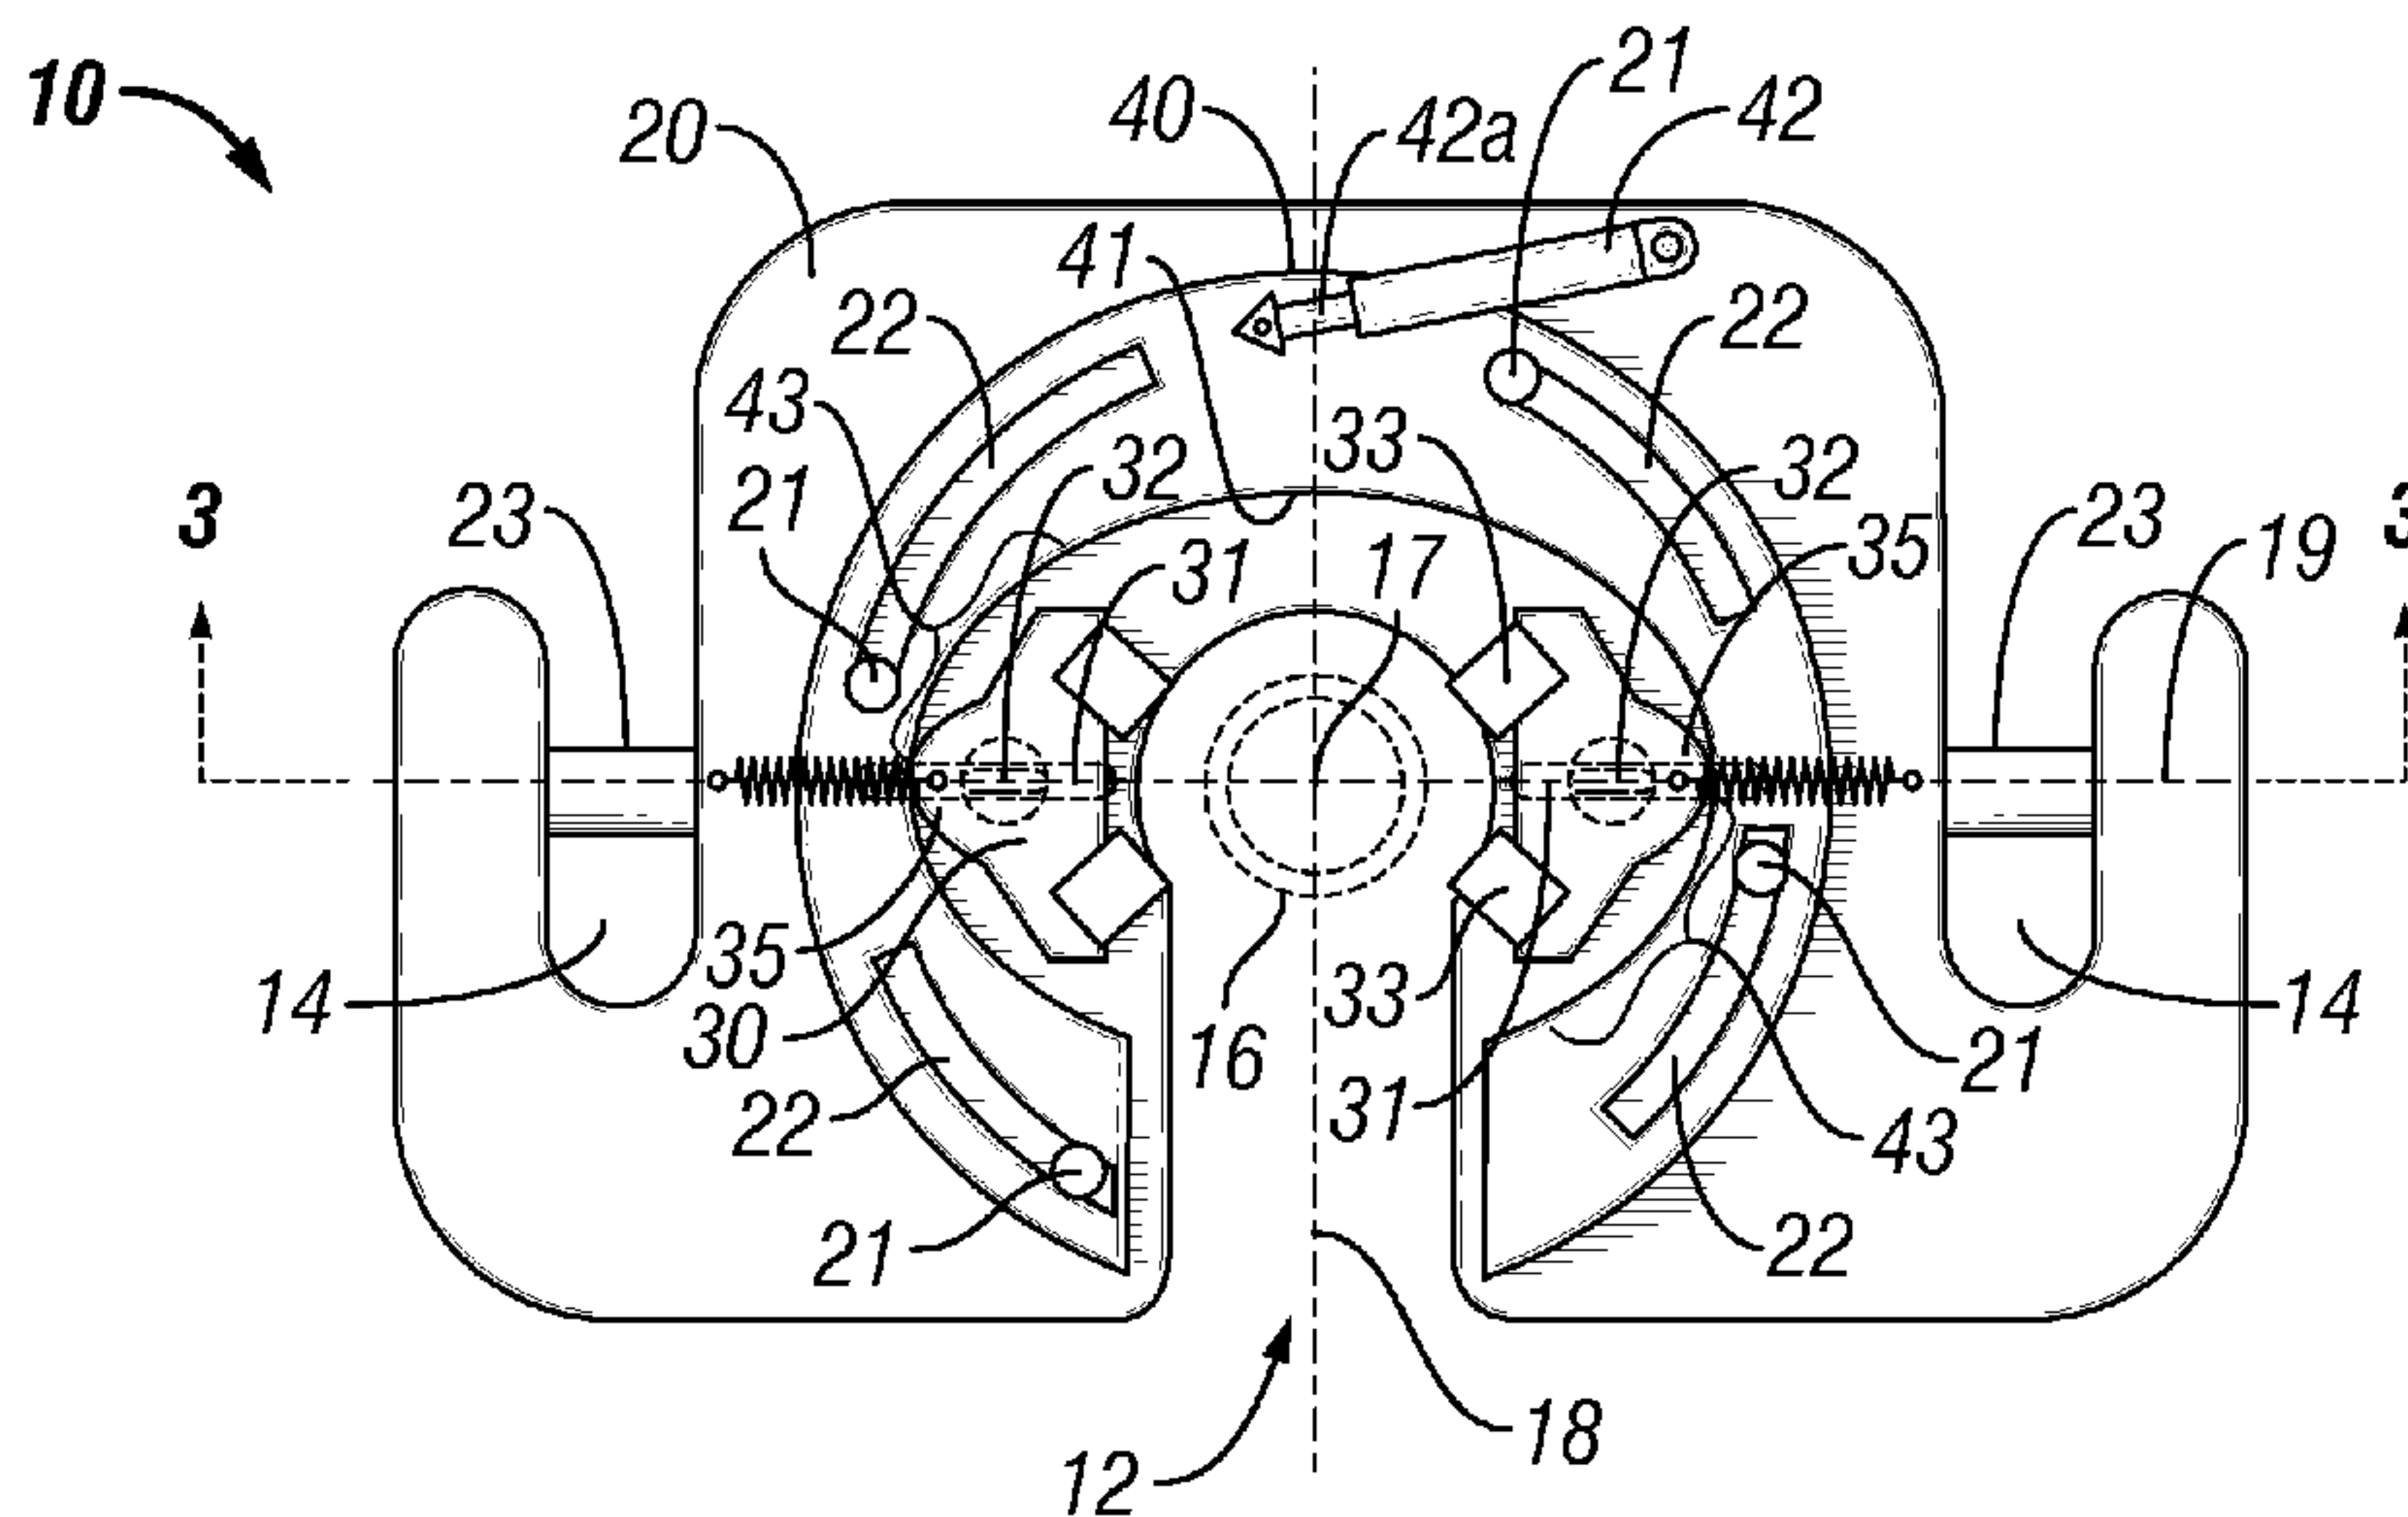


FIG. 1

(57) Abstract: Single joint elevator (10) and method for releasably securing a tubular segment. A generally horseshoe-shaped body (20) has a slot (12) for receiving a tubular segment, and an actuator assembly that selectively moves opposing jaws (30) from a removed position to a deployed position to grip and retain the tubular segment within the slot of the body while hoisting the body. The deployable jaws (30) are either rotatably or translatably moved from the removed position to the deployed position and may be pneumatically, hydraulically, and/or electrically actuated. The actuator assembly may include wedges (52) operatively coupled to actuators (62) for selectively biasing the wedges against the jaws (54), or a cam ring (40) rotationally coupled to the body (20) and rotated by an actuator (42) coupled between the body and the cam ring, wherein the cam ring has an inner cam surface (41) for inwardly biasing the opposing jaws (30).

WO 2008/141045 A1

## SINGLE JOINT ELEVATOR WITH GRIPPING JAWS

### FIELD OF THE INVENTION

[0001] The present invention is directed to an apparatus and a method for securely gripping and releasing a tubular segment or stand of tubular segments for use in drilling operations, particularly for hoisting the tubular segment into alignment with a tubular string.

### BACKGROUND OF THE RELATED ART

[0002] Wells are drilled into the earth's crust using a drilling rig. Tubular strings are lengthened by threadably coupling add-on tubular segments to the proximal end of the tubular string. The tubular string is generally suspended within the borehole using a rig floor-mounted spider as each new tubular segment or stand is coupled to the proximal end of the tubular string just above the spider. A single joint elevator is used to grip and secure the segment or stand to a hoist to lift the segment or stand into position for threadably coupling to the tubular string.

[0003] For installing a string of casing, existing single joint elevators generally comprise a pair of hinged body halves that open to receive a tubular segment and close to secure the tubular within the elevator. Elevators are specifically adapted for securing and lifting tubular members having conventional connections. A conventional connection comprises an internally threaded sleeve that receives and secures an externally threaded end from each of two tubular segments to secure the segments in a generally abutting relationship. The internally threaded sleeve is first threaded onto the end of a first tubular segment to form a "box end." The externally threaded "pin end" of the second tubular segment is threaded into the box end to complete the connection between the segments. Typical single joint elevators have a circumferential shoulder that forms a circle upon closure of the hinged body halves. The shoulder of the elevator engages the tubular segment under a shoulder formed by the end of the sleeve and the tubular segment. However, conventional single joint elevators cannot grip a tubular segment having integral connections, because there is no sleeve to form a circumferential shoulder.

[0004] Conventional elevators are also difficult to use on tubular segments that are not conveniently accessible. For example, casing segments are often moved to the rig floor from a

horizontal pipe rack and presented to the rig floor at a “V”-door. A conventional single joint elevator requires enough clearance to close the hinged body halves around the tubular segment. Depending on the length of the tubular and the proximity of the floor or other rig structures, there may be insufficient clearance around the circumference of the tubular segment for gripping with a conventional single joint elevator, often requiring repositioning of the casing segment so that the single joint elevator can grip the tubular segment. Even if repositioning of each segment takes only a few seconds, delays for repeatedly repositioning tubular segments in the V-door consume a substantial amount of rig time.

[0005] What is needed is a single joint elevator that is securable to a tubular at any position along the length of the tubular segment, and not only at the sleeve. What is needed is a single joint elevator that is adapted for securing to the tubular segment notwithstanding close proximity of the rig floor or other rig structure. What is needed is a single joint elevator that can grip and lift single tubular segments without repositioning the tubular segment. What is needed is a versatile single joint elevator that facilitates lifting both a tubular segment having integral connections and a tubular segment having conventional connections with a threaded sleeve received onto the end of a threaded tubular segment.

#### **SUMMARY OF THE PRESENT INVENTION**

[0006] The present invention is directed to a single joint elevator for gripping a tubular member. The single joint elevator comprises a body having a slot for receiving a tubular member. First and second opposing deployable jaws are movably coupled to the body within the slot and moveable between a removed position and a deployed position within the slot, where each jaw has at least one gripping surface for contacting the tubular member. An actuator assembly selectively moves the jaws from the removed position to the deployed position to grip and retain the tubular member within the slot of the body while hoisting the body. The gripping surface of the jaws may be selected from the group consisting of stationary gripping dies and slips. Optionally, the jaws may be outwardly biased, such as with a coil spring, to return to the removed position when the actuator assembly is not biasing the jaws inwardly.

[0007] In one embodiment, the actuator assembly includes a cam ring rotationally coupled to the body, and an actuator coupled between the body and the cam ring for imparting rotation of

the cam ring, wherein the cam ring has an inner cam surface for inwardly biasing the first and second opposing jaws. The actuator is preferably selected from a linear actuator and a motor coupled to the cam ring through a rotary gear. Optionally, the actuator is a cylinder powered by a pressurized fluid, such as a double-acting cylinder, for forcibly rotating the cam ring between a removed position and a deployed position. The first and second jaws that are cammed by the inner cam surface may be pivotally or slidably coupled to the body.

[0008] In a further embodiment, the actuator assembly includes a first wedge operatively coupled to a first actuator for selectively biasing the first wedge between the body and the first jaw, and a second wedge operatively coupled to a second actuator for selectively biasing the second wedge between the body and the second jaw. The first and second actuators may be cylinders powered by a pressurized fluid, such a double-acting cylinder for forcibly moving the wedges back and forth between a removed position and a deployed position. The first and second jaws that engage the wedges may be pivotally or slidably coupled to the body.

[0009] The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of a preferred embodiment of the invention, as illustrated in the accompanying drawings wherein like reference numbers represent like parts of the invention.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0010] FIGS. 1-3 are top, side and cross-sectional views of one embodiment of a single joint elevator of the present invention having a cam ring that actuates jaws to grip a tubular segment.

[0011] FIGS. 4-6 are top, side and cross-sectional views of the single joint elevator of FIGS. 1-3 with the cam ring rotated to an actuated position and the jaws gripping the tubular segment.

[0012] FIG. 7 is a top view of one embodiment of a single joint elevator of the present invention having wedges that actuate pivotable jaws toward a tubular segment.

[0013] FIG. 8 is a top view of the single joint elevator of FIG. 7 with the wedges actuated to pivot the jaws into gripping engagement of the tubular segment.

**DETAILED DESCRIPTION OF THE PRESENT INVENTION**

[0014] The present invention is directed to a single joint elevator for releasably securing a tubular segment to a cable, rope, line or other hoisting member for lifting the tubular segment into position for being threadably coupled to a pipe string suspended in a borehole. One embodiment of the invention comprises a generally horseshoe-shaped body having a slot for receiving a tubular segment, and opposing jaws that deploy to grip the tubular segment within the slot of the body. The body is adapted for supporting the jaws, and also for being lifted and for transferring the weight of the tubular segment to a cable, rope, line or other hoisting member. An actuator assembly selectively moves the jaws from a removed position to a deployed position to grip and retain the tubular segment within the slot of the body while hoisting the body. Each jaw has a removed position permitting entry of the tubular into the slot, and a deployed position to grip the tubular within the slot. The deployable jaw is either rotatably or translatably moved from its removed position to its deployed position and may be pneumatically, hydraulically, and/or electrically actuated.

[0015] The actuator assembly may include a first wedge operatively coupled to a first actuator for selectively biasing the first wedge between the body and the first jaw, and a second wedge operatively coupled to a second actuator for selectively biasing the second wedge between the body and the second jaw. Such an actuator assembly provides independent operation of the jaws. Alternatively, the actuator assembly may include a cam ring rotationally coupled to the body, and an actuator coupled between the body and the cam ring for imparting rotation of the cam ring, wherein the cam ring has an inner cam surface for inwardly biasing the first and second opposing jaws. Use of a cam surface allows for coordinated movement of the jaws using a single actuator, which may be a pressurized fluid-powered cylinder or a rotary gear coupled to a motor.

[0016] In one embodiment, an exemplary cam ring has a generally elliptical inner cam surface for symmetrically deploying the gripping jaws upon rotation of the cam ring in a first direction and releasing the jaws to retract upon rotation of the cam ring in the opposite direction. It should be recognized that a cam ring employing an elliptical cam surface can deploy the gripping jaws by rotation of the cam in either direction. The jaws are deployed when a minor axis of the cam surface ellipse is rotationally biased toward the jaw, because the jaw is restrained

from rotating with the cam and is gradually biased toward the center of the ellipse. The jaws are able to move to a fully removed position when the cam is rotated to a point where the major axis of the ellipse is aligned with the jaws. The eccentricity of the cam surface effects both the maximum distance that the jaws can be moved together (i.e., the difference in the lengths of the between the major and minor axis) and also the amount of cam rotating force that will be transferred to the jaws as a gripping force. It should also be recognized that the cam surface does not need to be a true ellipse, but may have any profile that is designed to achieve sufficient jaw travel and gripping forces. Furthermore, the cam surface may be interrupted or fragmented, since it is anticipated that the cam ring will typically not be rotated more than about 45 degrees in either direction from the major axis. Furthermore, the cam surface does not need to be “double-acting” as an elliptical surface extending in either direction from the major axis, but could be “single acting” with a gradually reducing radial distance in only one rotational direction. A single acting cam ring should include a separate single acting cam surface for each jaw and should be pitched for coordinated simultaneous deployment with a single actuator. For example, even a continuous elliptical surface that has the potential to be “double-acting” will preferably have its rotation limited so that the cam surface functions as a single-acting cam surface. Rotational limits increase the accuracy and reliability of positioning the cam ring with the jaws in the fully removed position.

[0017] Each jaw is moveably supported by the body. Preferably, the jaws are either pivotally or slidably coupled to the body. Accordingly, the actuator assembly engages and biases the jaws to pivot or to slide from a removed position to a deployed position to grip the tubular.

[0018] Each deployable jaw preferably comprises a slip or gripping die. In one embodiment, gripping dies are pivotally secured to the jaw and rotating toward the tubular to tighten the grip. The jaws may have sloped-back inserts that are spring offset upward. Once the jaws have been energized against the tubular segment, the weight of the tubular segment will force the inserts downward and into the tubular wall. In another embodiment, each jaw comprise one or more grooves for slidably receiving tabs, keys, or guides for imposing a predetermined path for movement of a slip within the jaw. Each slip may comprises a contact surface, such as a removable insert or gripping die, which may comprise a textured surface adapted for gripping contact with the external wall of the tubular segment received into the slot.

[0019] As used herein, the term “single joint elevator” is intended to distinguish the elevator from a string elevator that is used to support the weight of the entire pipe string. Rather, a “single joint elevator” is used to grip and lift a tubular segment as is necessary to add or remove the tubular segment to or from a tubular string. Furthermore, a pipe or tubular “segment”, as that term is used herein, is inclusive of either a single pipe or tubular joint or a stand made up of multiple joints of a pipe or other tubular that will be lifted as a unit. In the context of the present disclosure, a tubular segment does not include a tubular string that extends into the well.

[0020] FIG. 1 is a top view of one embodiment of a single joint elevator having a cam ring that actuates opposing jaws to grip a tubular segment. The single joint elevator **10** has a generally horseshoe-shaped body **20** that is securable to one or more cables, ropes, lines or other hoisting members (not shown) at a pair of generally opposed lugs **23** to facilitate lifting and positioning of the single joint elevator **10** and any tubular segment **16** secured therein. The lugs **23** may be removable and replaceable to facilitate securing the single joint elevator **10** to a loop formed in the end of a cable.

[0021] The body **20** has a slot **12** in one side for receiving the tubular segment **16** and supports a cam ring **40** for selective rotation generally about an axis **17** of the cam ring. The central axis of the cam ring **40** is preferably positioned to substantially intersect a centerline **18** of the slot **12** in order to receive the tubular segment generally centered within the cam ring **40**. It is also preferable for the axis **17** of the cam ring **40** to be positioned to substantially intersect a line **19** extending between the lugs **23** so that once the concentrically received tubular segment has been gripped and lifted, the tubular segment will hang straight downward.

[0022] The cam ring **40** includes a plurality of slots **22**, each slot having a constant radius of curvature about the axis of rotation **17**. Each slot **22** slidably receives a post **21** that is fixedly secured to the body **20** and positioned to allow the cam ring **40** to rotate relative to the body **20**, while preventing translation of the cam ring **40** relative to the body. It is preferable to limit the arc of the slot **22** to about 30 to 45 degrees in order to limit the extent to which the cam ring **40** will rotate relative to the body **20** and avoid weakening of the cam ring **40**. One reason to limit rotation of the cam ring **40** is to prevent the possibility that over-rotation of the cam ring **40** will cause an unintended re-deployment of the jaws **30**. Accordingly, it should be recognized that the

slots **22** and posts **21** cooperate to allow only portions **43** of the inner cam surface **41** to operate and cam the jaws **30**.

[0023] A cylinder **42** has a first end pivotally secured to the body **20** and a second end pivotally secured to the cam ring **40**. Applying fluid pressure within the cylinder **42** causes the cylinder rod **42a** to extend. Because the cam ring **40** is rotationally secured, the extension of the cylinder **42**, as configured in FIG. 1 and viewed from the top, causes the cam ring **40** to rotate in a counter-clockwise direction about the axis of rotation **17** and move the jaws **30** to a deployed position (see FIG. 4). Subsequent retraction of the cylinder **42** causes the cam ring to rotate in the opposite, or clockwise direction back to the removed position shown in Fig. 1.

[0024] First and second jaws **30** are each slidably secured to the body **20** using a pin, tongue, or blade **32** that extends into a slot, groove, or track **31** in the body. The tracks **31** are directed toward the axis of rotation **17** to allow the jaw **30** to deploy between a removed position (as shown in FIG. 1) and a deployed position (with jaws **30** displaced one toward the other) to grip the pipe **16** (as shown in FIG. 4). Each jaw **30** includes one or more slips or other gripping members **33** secured to an inwardly facing surface of the jaw **30** for contacting and gripping the tubular segment. The outwardly facing side of each jaw **30** forms a cam follower **35** that slidably engages the inner cam surface **41** of the cam ring **40**.

[0025] FIG. 2 is a front elevation view of the single joint elevator **10** having a cam ring **40** that rotates to actuate jaws **30** (See FIG. 1) to grip a tubular segment **16**. The slotted body **20** and slotted cam ring **40** are shown in alignment to provide an open slot **12** for receiving a tubular segment **16**.

[0026] FIG. 3 is a front cross-sectional view of the single joint elevator **10** taken along line 3-3 in FIG. 1. This view highlights the lugs **23** for supporting the body **20** and the tubular gripped therein, and the slots or track **31** within the body **20** that slidably secure the jaws **30**. Each jaw **30** includes a blade, tongue, or post **32** that is received in a slot, groove or track **31** and, in Fig. 3 is secured vertically by a head **30a** that is larger than the width of the slot. This configuration allows the jaw **30** of Fig. 3 to slide along the path of the track **31** (left and right as shown in FIG. 3). While the jaw **30** is preferably prevented from any large degree of rotation about its post **32** to avoid mis-engagement of the slips **33** against the tubular segment **16**, a few degrees of permitted rotation may be desirable to allow the jaws to self-align with the tubular

segment 16. A post 32 having a circular cross-section will enable rotation of the jaw 30 about the post, but this must be otherwise limited such as by the outward face of the jaw 30 being configured to engage the cam surface 41. Furthermore, the rotation of the jaw 30 can be limited by replacing post 32 with a blade that is longer than width of the track 31 so that the blade 32 can rotate only a few degrees within the track 31.

[0027] FIG. 4 is a top view of the single joint elevator 10 with the cam ring 40 rotated to a deployed position and the jaws 30 gripping the tubular segment 16. The cylinder 42 has been extended under fluid pressure to bias the cam ring 40 to rotate counter-clockwise relative to the body 20 about 35 degrees, wherein the rotation of the cam ring 40 is guided by the slots 22 slidably secured about the posts 21. This rotation of the cam ring 40 causes the inner cam surface 41 to push the jaws 30 along the tracks 31 inwardly toward the axis 17 until the slips 33 engage and grip the tubular segment 16. Continued application of fluid pressure to the cylinder 42 maintains this grip on the tubular segment 16 during handling of the tubular segment.

[0028] When the handling of the tubular segment has been completed, the single joint elevator 10 is released from the tubular segment 16 by retracting the cylinder 42 to the position of FIG. 1. Since the jaws 30 are then no longer biased inwardly by the cam surface 41, the jaws move away from the tubular segment to a removed position under the action of springs 34. The jaw 30 may be biased away from engagement with the tubular segment in other manners, such as by slidably coupling a "T"-shaped bar attached to the jaw 30 within a "T"-shaped receiving groove formed in the inner cam surface 41.

[0029] FIG. 5 is a side view of the single joint elevator 10 with the cam ring 40 rotated to an actuated position and the jaws 30 gripping the tubular segment 16. The slot in the cam ring 40 is now shown radially offset from the slot 12 in the body 20, such that the single joint elevator 10 is closed.

[0030] FIG. 6 is a cross-sectional view of the single joint elevator 10, taken along line 6-6 in FIG. 4. Counter-clockwise rotation of the cam ring 40 has caused the inner cam surface 41 to push the cam follower 35 of the jaws 30 inwardly toward to tubular segment 16. The post 32 has traveled inwardly along the track 31 with the cam rotated to an actuated position and the jaws 30 gripping the tubular segment.

[0031] FIG. 7 is a top view of a second embodiment of a single joint elevator 50 having translatably deployable wedges 52 that engage and actuate pivotable jaws 54 toward a tubular segment 16 received within the slots 12 of body 20. The body 20 pivotally secures first and second jaws 54 at pivots 56, which preferably include a coil spring 58 for biasing the jaws 54 toward the removed position (as shown in Fig. 7). With the jaws 54 in the removed position, the slot 12 may receive a tubular segment 16 without the jaws 54 either blocking the slot or being in a position to be hit as the tubular segment 16 is received. The wedges 52 are slidably secured between the back of the jaws 54 and backing stops 60. Cylinders 62 secured to the body 20 at pins 62a may be used to selectively bias the wedges 52 between retracted and extended positions to move the wedges 52 between removed (see FIG. 7) and deployed (see FIG. 8) positions, respectively. While the cylinders 62 may be independently controlled with fluid pressure, the cylinders are preferably actuated simultaneously by providing them on the same fluid power line.

[0032] FIG. 8 is a top view of the single joint elevator 50 of FIG. 7 with the wedges 52 extended to pivot the jaws 54 about the pivots 56 and bias the jaws 54 into gripping engagement of the tubular segment 16. The slips 33 on the jaws 54 are arranged to contact and grip the outer surface of the tubular segment. Continued application of fluid pressure to the cylinders 62 maintains this grip on the tubular segment 16 during handling of the tubular segment. Alternately, the cylinder rods 62b or the wedges 52 may be mechanically locked into the deployed condition using a latch to maintain the grip on the tubular segment 16 even if the hydraulic pressure is lost or reduced.

[0033] When the handling of the tubular segment has been completed, the single joint elevator 50 is released from the tubular segment 16 by retracting the cylinder 62 to the position of FIG. 7. Since the jaws 54 are then no longer biased inwardly by the wedges 52, the jaws move away from the tubular segment to a removed position under the action of springs 34. The jaw may be biased away from the tubular segment in various ways, but a coil spring 56 is easily implemented.

[0034] The terms “comprising,” “including,” and “having,” as used in the claims and specification herein, indicate an open group that includes other elements or features not specified. The term “consisting essentially of,” as used in the claims and specification herein, indicates a partially open group that includes other elements not specified, so long as those other

elements or features do not materially alter the basic and novel characteristics of the claimed invention. The terms “a,” “an” and the singular forms of words include the plural form of the same words, and the terms mean that one or more of something is provided. The terms “at least one” and “one or more” are used interchangeably.

[0035] The term “one” or “single” shall be used to indicate that one and only one of something is intended. Similarly, other specific integer values, such as “two,” are used when a specific number of things is intended. The terms “preferably,” “preferred,” “prefer,” “optionally,” “may,” and similar terms are used to indicate that an item, condition or step being referred to is an optional (not required) feature of the invention.

[0036] It should be understood from the foregoing description that various modifications and changes may be made in the preferred embodiments of the present invention without departing from its true spirit. The foregoing description is provided for the purpose of illustration only and should not be construed in a limiting sense. Only the language of the following claims should limit the scope of this invention.

**CLAIMS**

What is claimed is:

1. A single joint elevator for gripping a tubular member, comprising:
  - a body having a slot for receiving a tubular member;
  - first and second opposing deployable jaws coupled to the body within the slot and moveable between a removed position and a deployed position within the slot, each jaw having at least one gripping surface for contacting the tubular member; and
  - an actuator assembly for selectively moving the jaws between the removed position and the deployed position to selectively grip and retain the tubular member within the slot of the body while hoisting the body.
2. The single joint elevator of claim 1, wherein the actuator assembly includes a cam ring rotationally coupled to the body, and an actuator coupled between the body and the cam ring for imparting rotation of the cam ring, wherein the cam ring has an inner cam surface for inwardly biasing the first and second opposing jaws.
3. The single joint elevator of claim 2, wherein the actuator is selected from a linear actuator and a motor coupled to the cam ring through a rotary gear.
4. The single joint elevator of claim 2, wherein the actuator is a cylinder powered by a pressurized fluid.
5. The single joint elevator of claim 4, wherein the cylinder is double acting for forcibly rotating the cam ring back and forth between a removed position and a deployed position.
6. The single joint elevator of claim 2, wherein the first and second jaws are pivotally coupled to the body.

7. The single joint elevator of claim 2, wherein the first and second jaws are slidably coupled to the body.
8. The single joint elevator of claim 1, wherein the actuator assembly includes a first wedge operatively coupled to a first actuator for selectively biasing the first wedge between the body and the first jaw, and a second wedge operatively coupled to a second actuator for selectively biasing the second wedge between the body and the second jaw.
9. The single joint elevator of claim 8, wherein the first and second actuators are cylinders powered by a pressurized fluid.
10. The single joint elevator of claim 9, wherein the cylinders are double acting for forcibly moving the wedges back and forth between a removed position and a deployed position.
11. The single joint elevator of claim 8, wherein the first and second jaws are pivotally coupled to the body.
12. The single joint elevator of claim 8, wherein the first and second jaws are slidably coupled to the body.
13. The single joint elevator of claim 1, wherein the at least one gripping surface is selected from the group consisting of stationary gripping dies and slips.
14. The single joint elevator of claim 1, wherein the jaws are outwardly biased to return to the removed position when the actuator assembly is not biasing the jaws inwardly.
15. A single joint elevator for gripping a tubular member, comprising:
  - a body having a slot for receiving a tubular member;
  - a deployable jaw coupled to the body within the slot and moveable between a removed position and a deployed position within the slot, the jaw having at least one gripping surface for contacting the tubular member; and

an actuator assembly for selectively moving the jaw between its removed position and the deployed position to selectively grip and retain the tubular member within the slot of the body while hoisting the body.

1/3

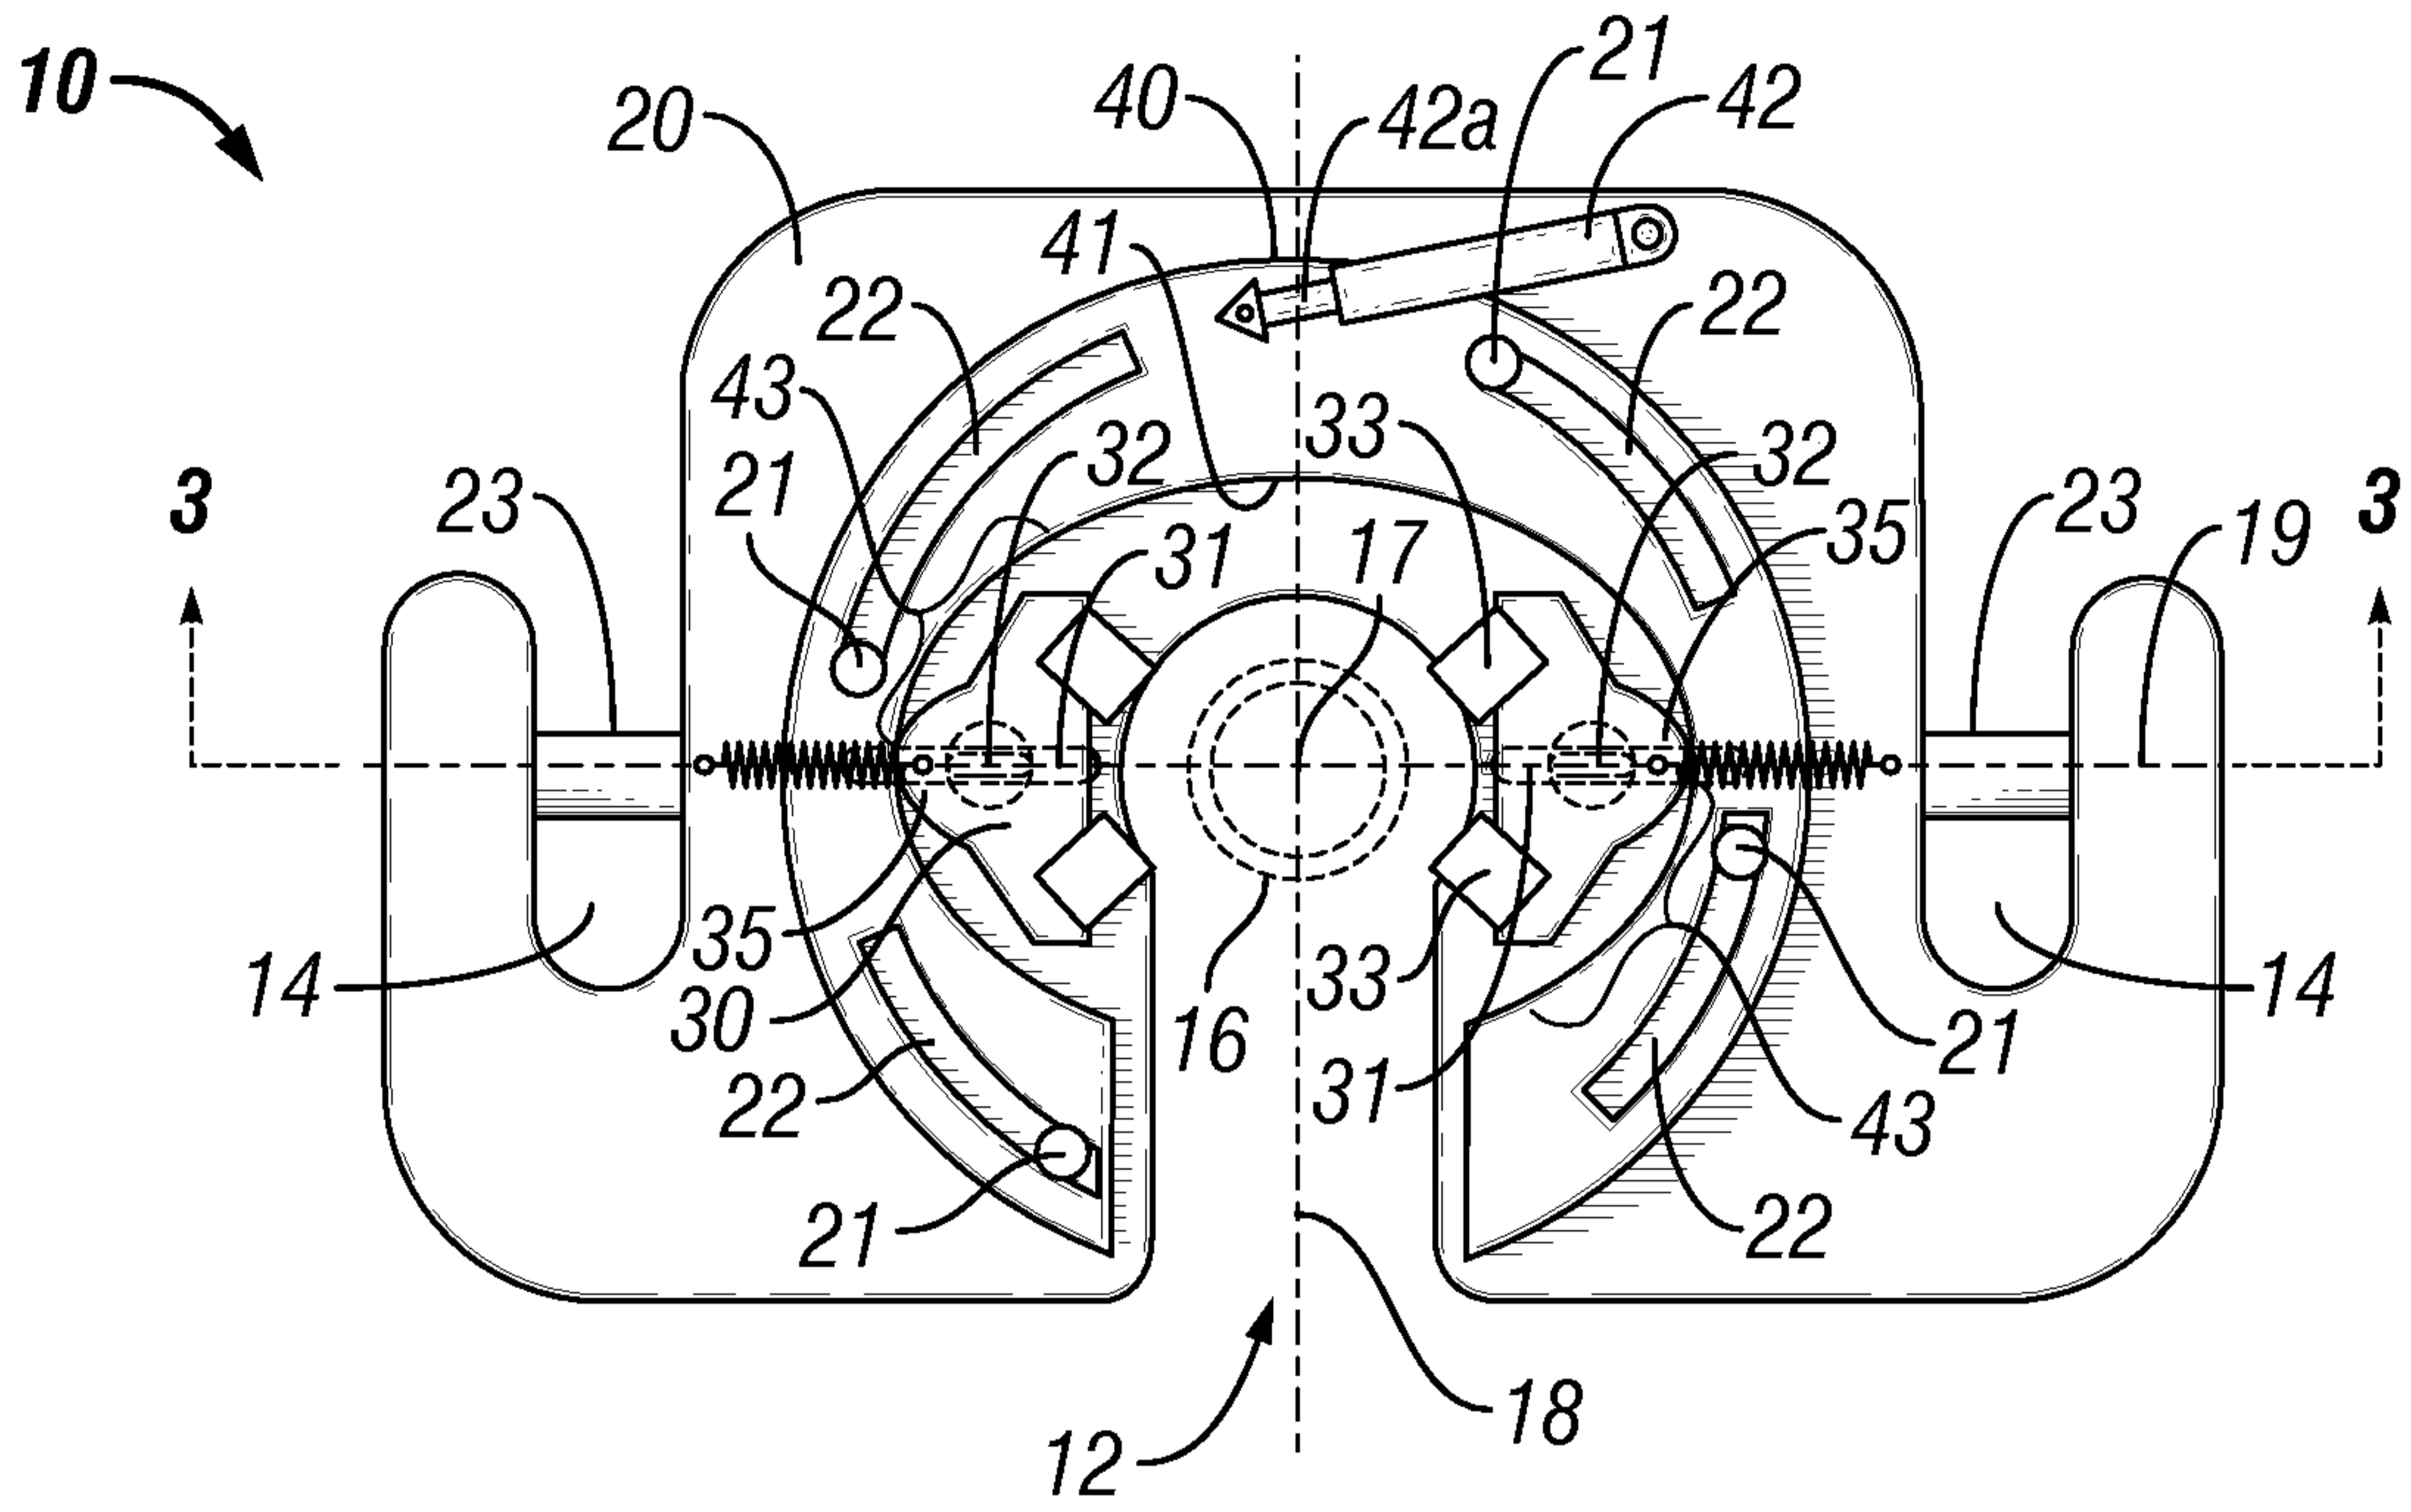


FIG. 1

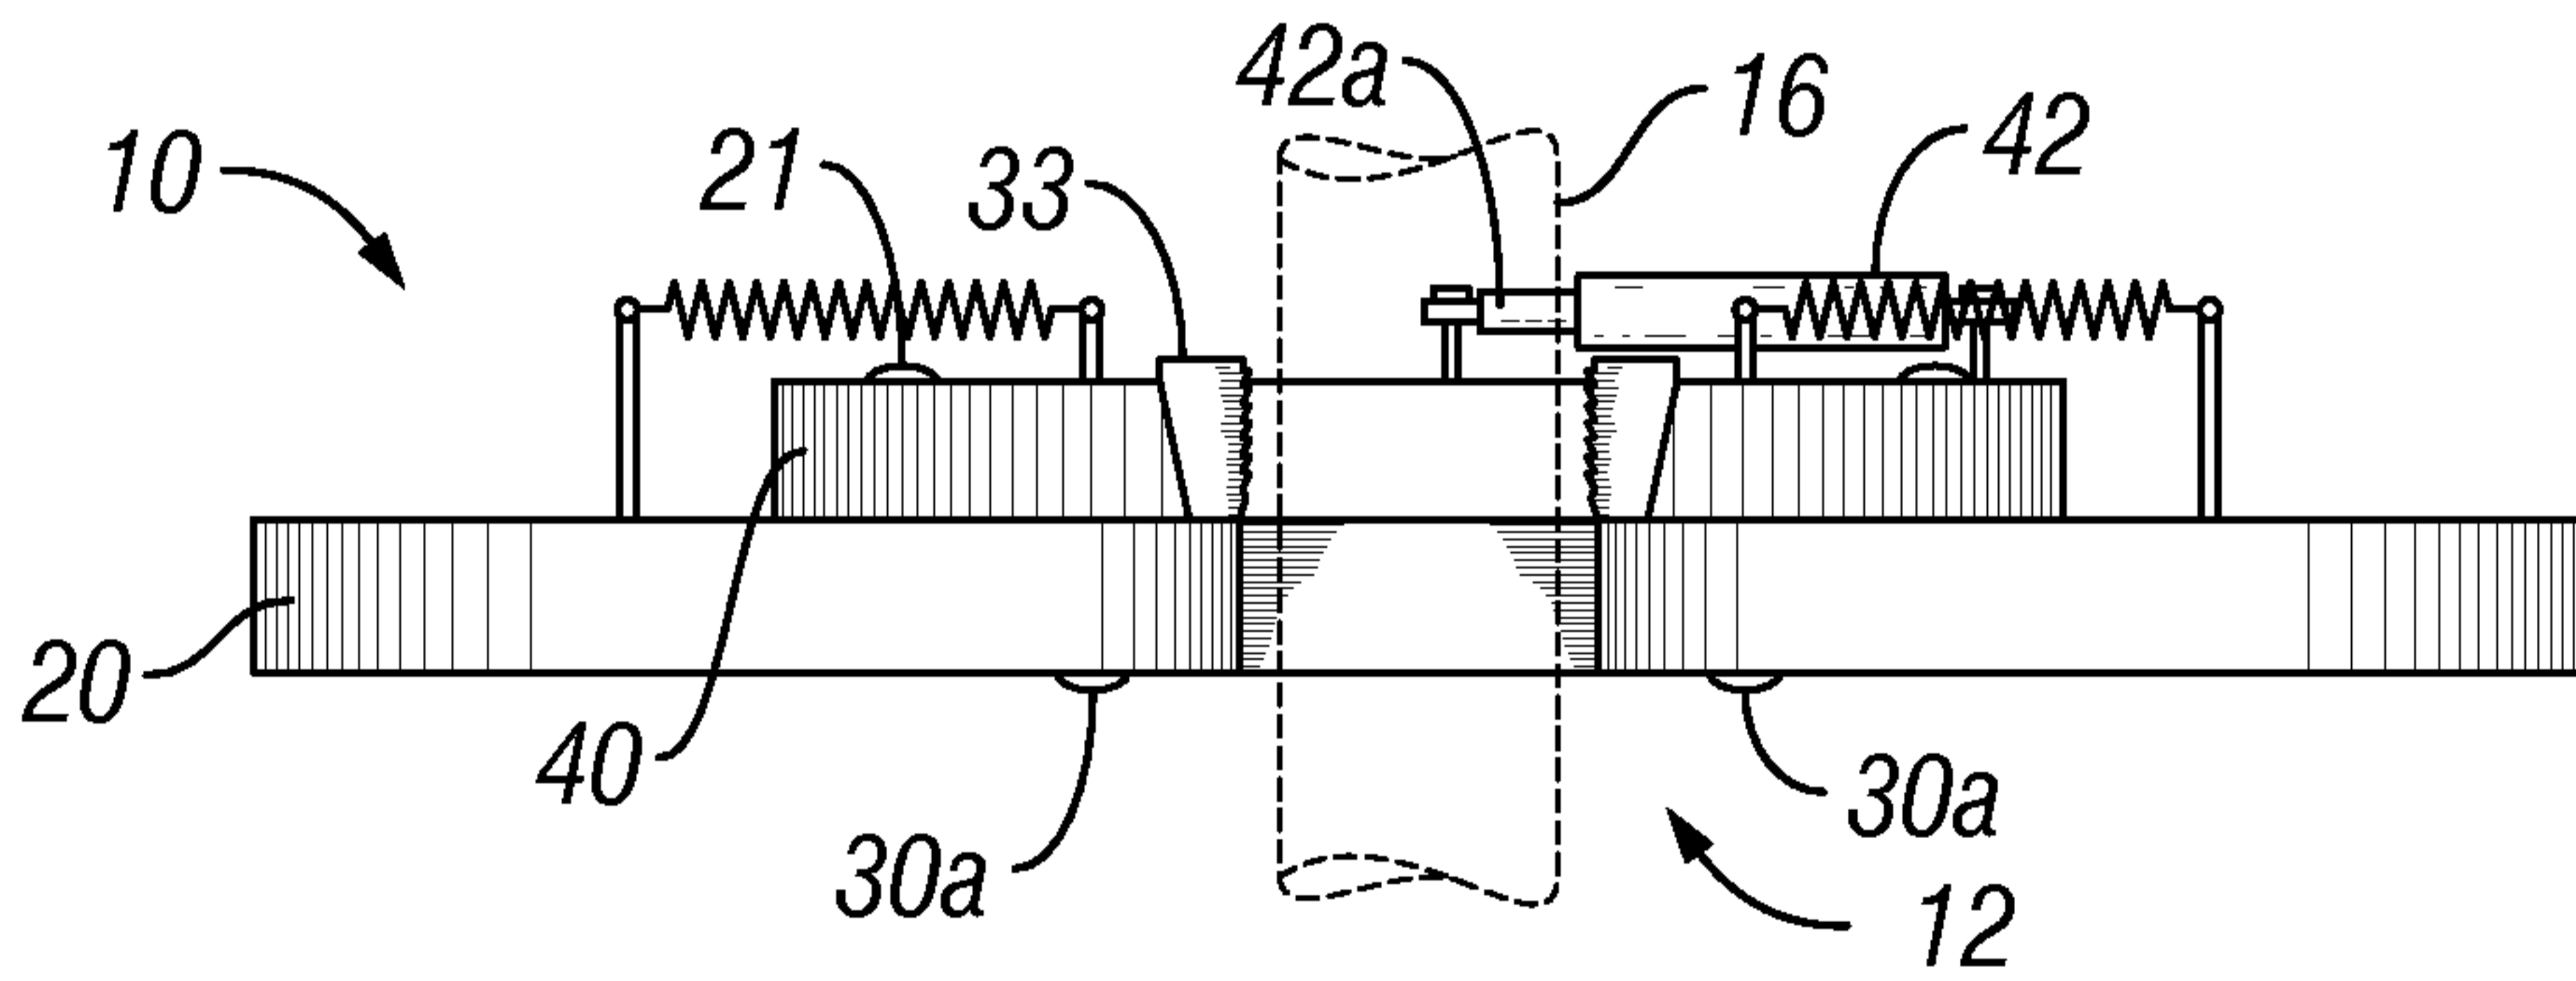


FIG. 2

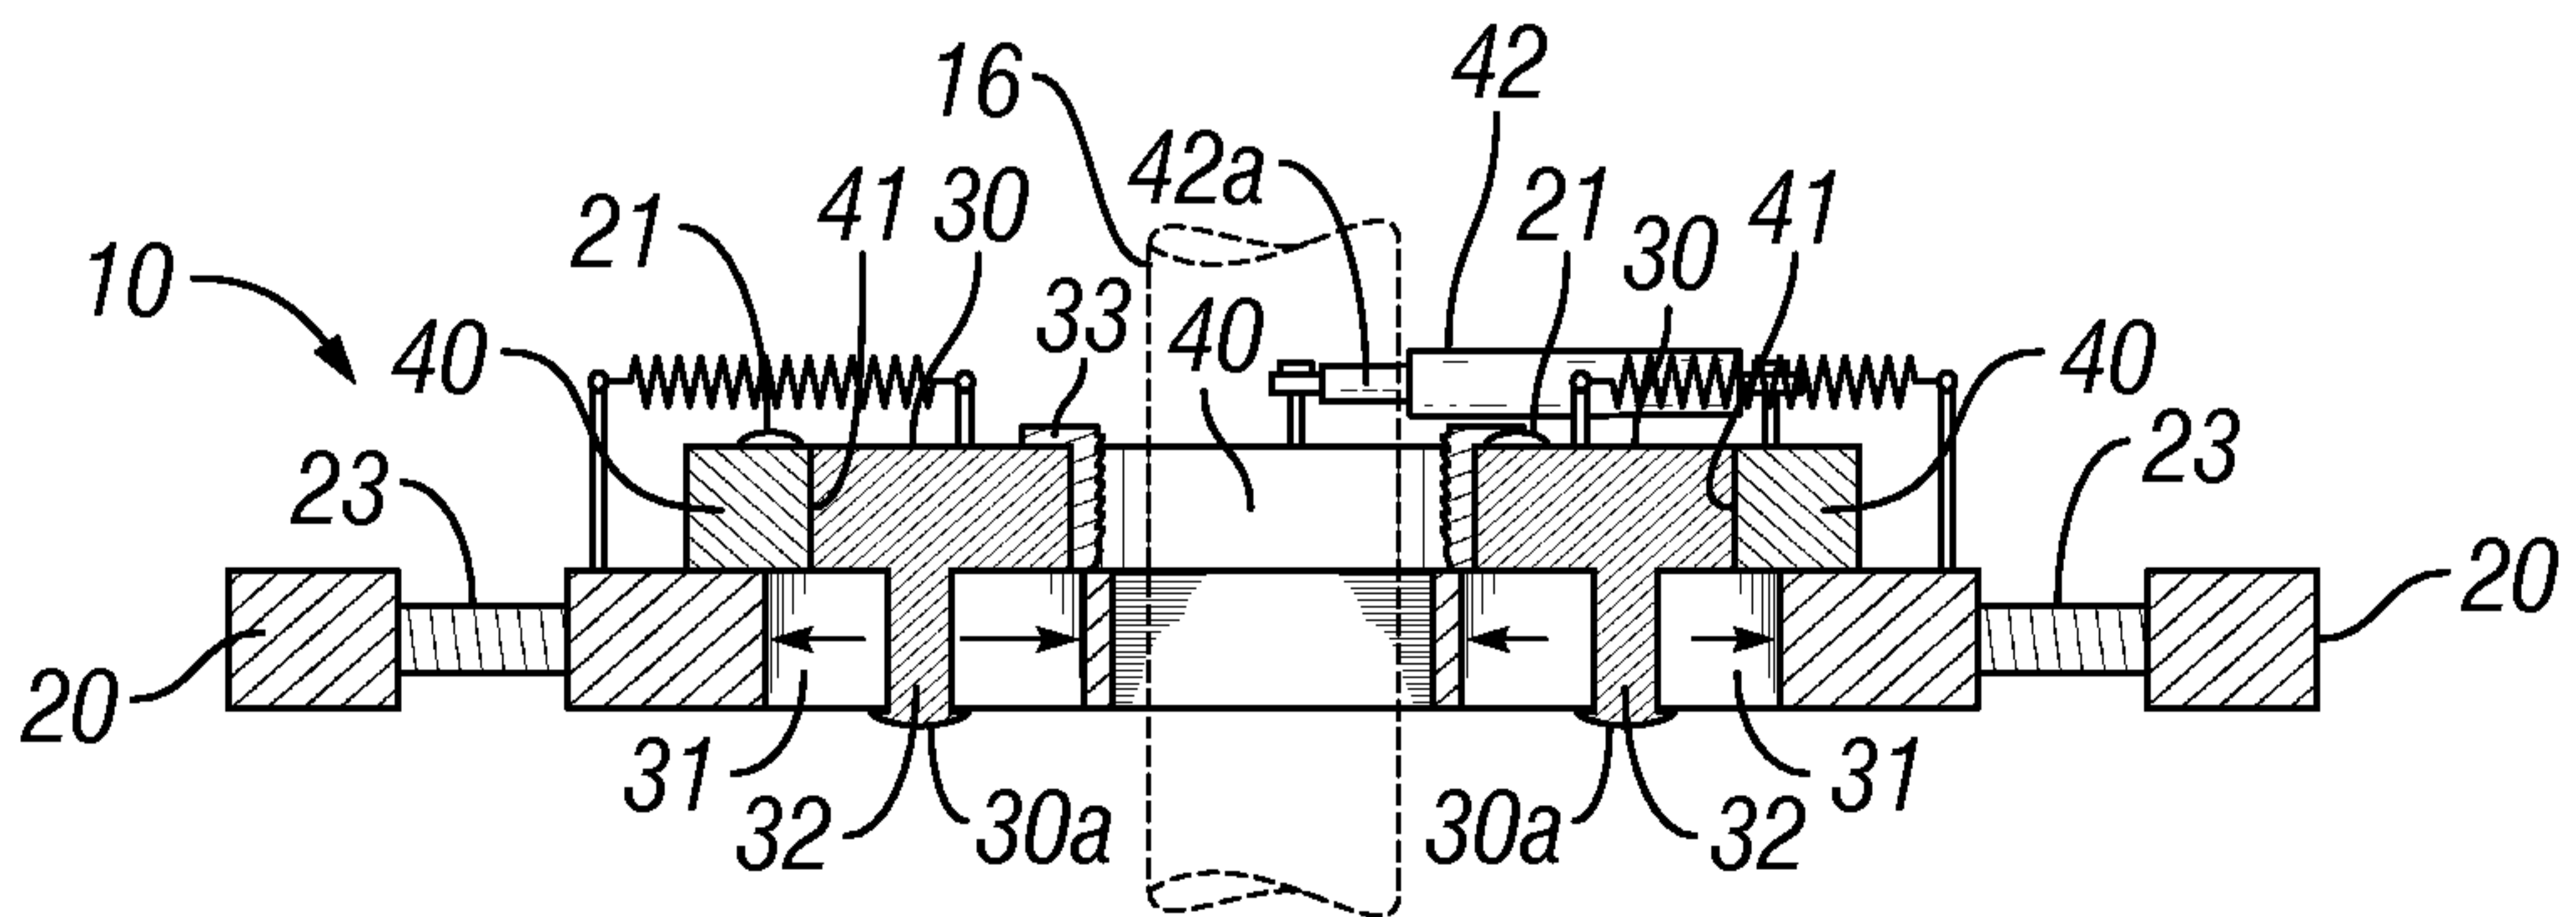


FIG. 3

2/3

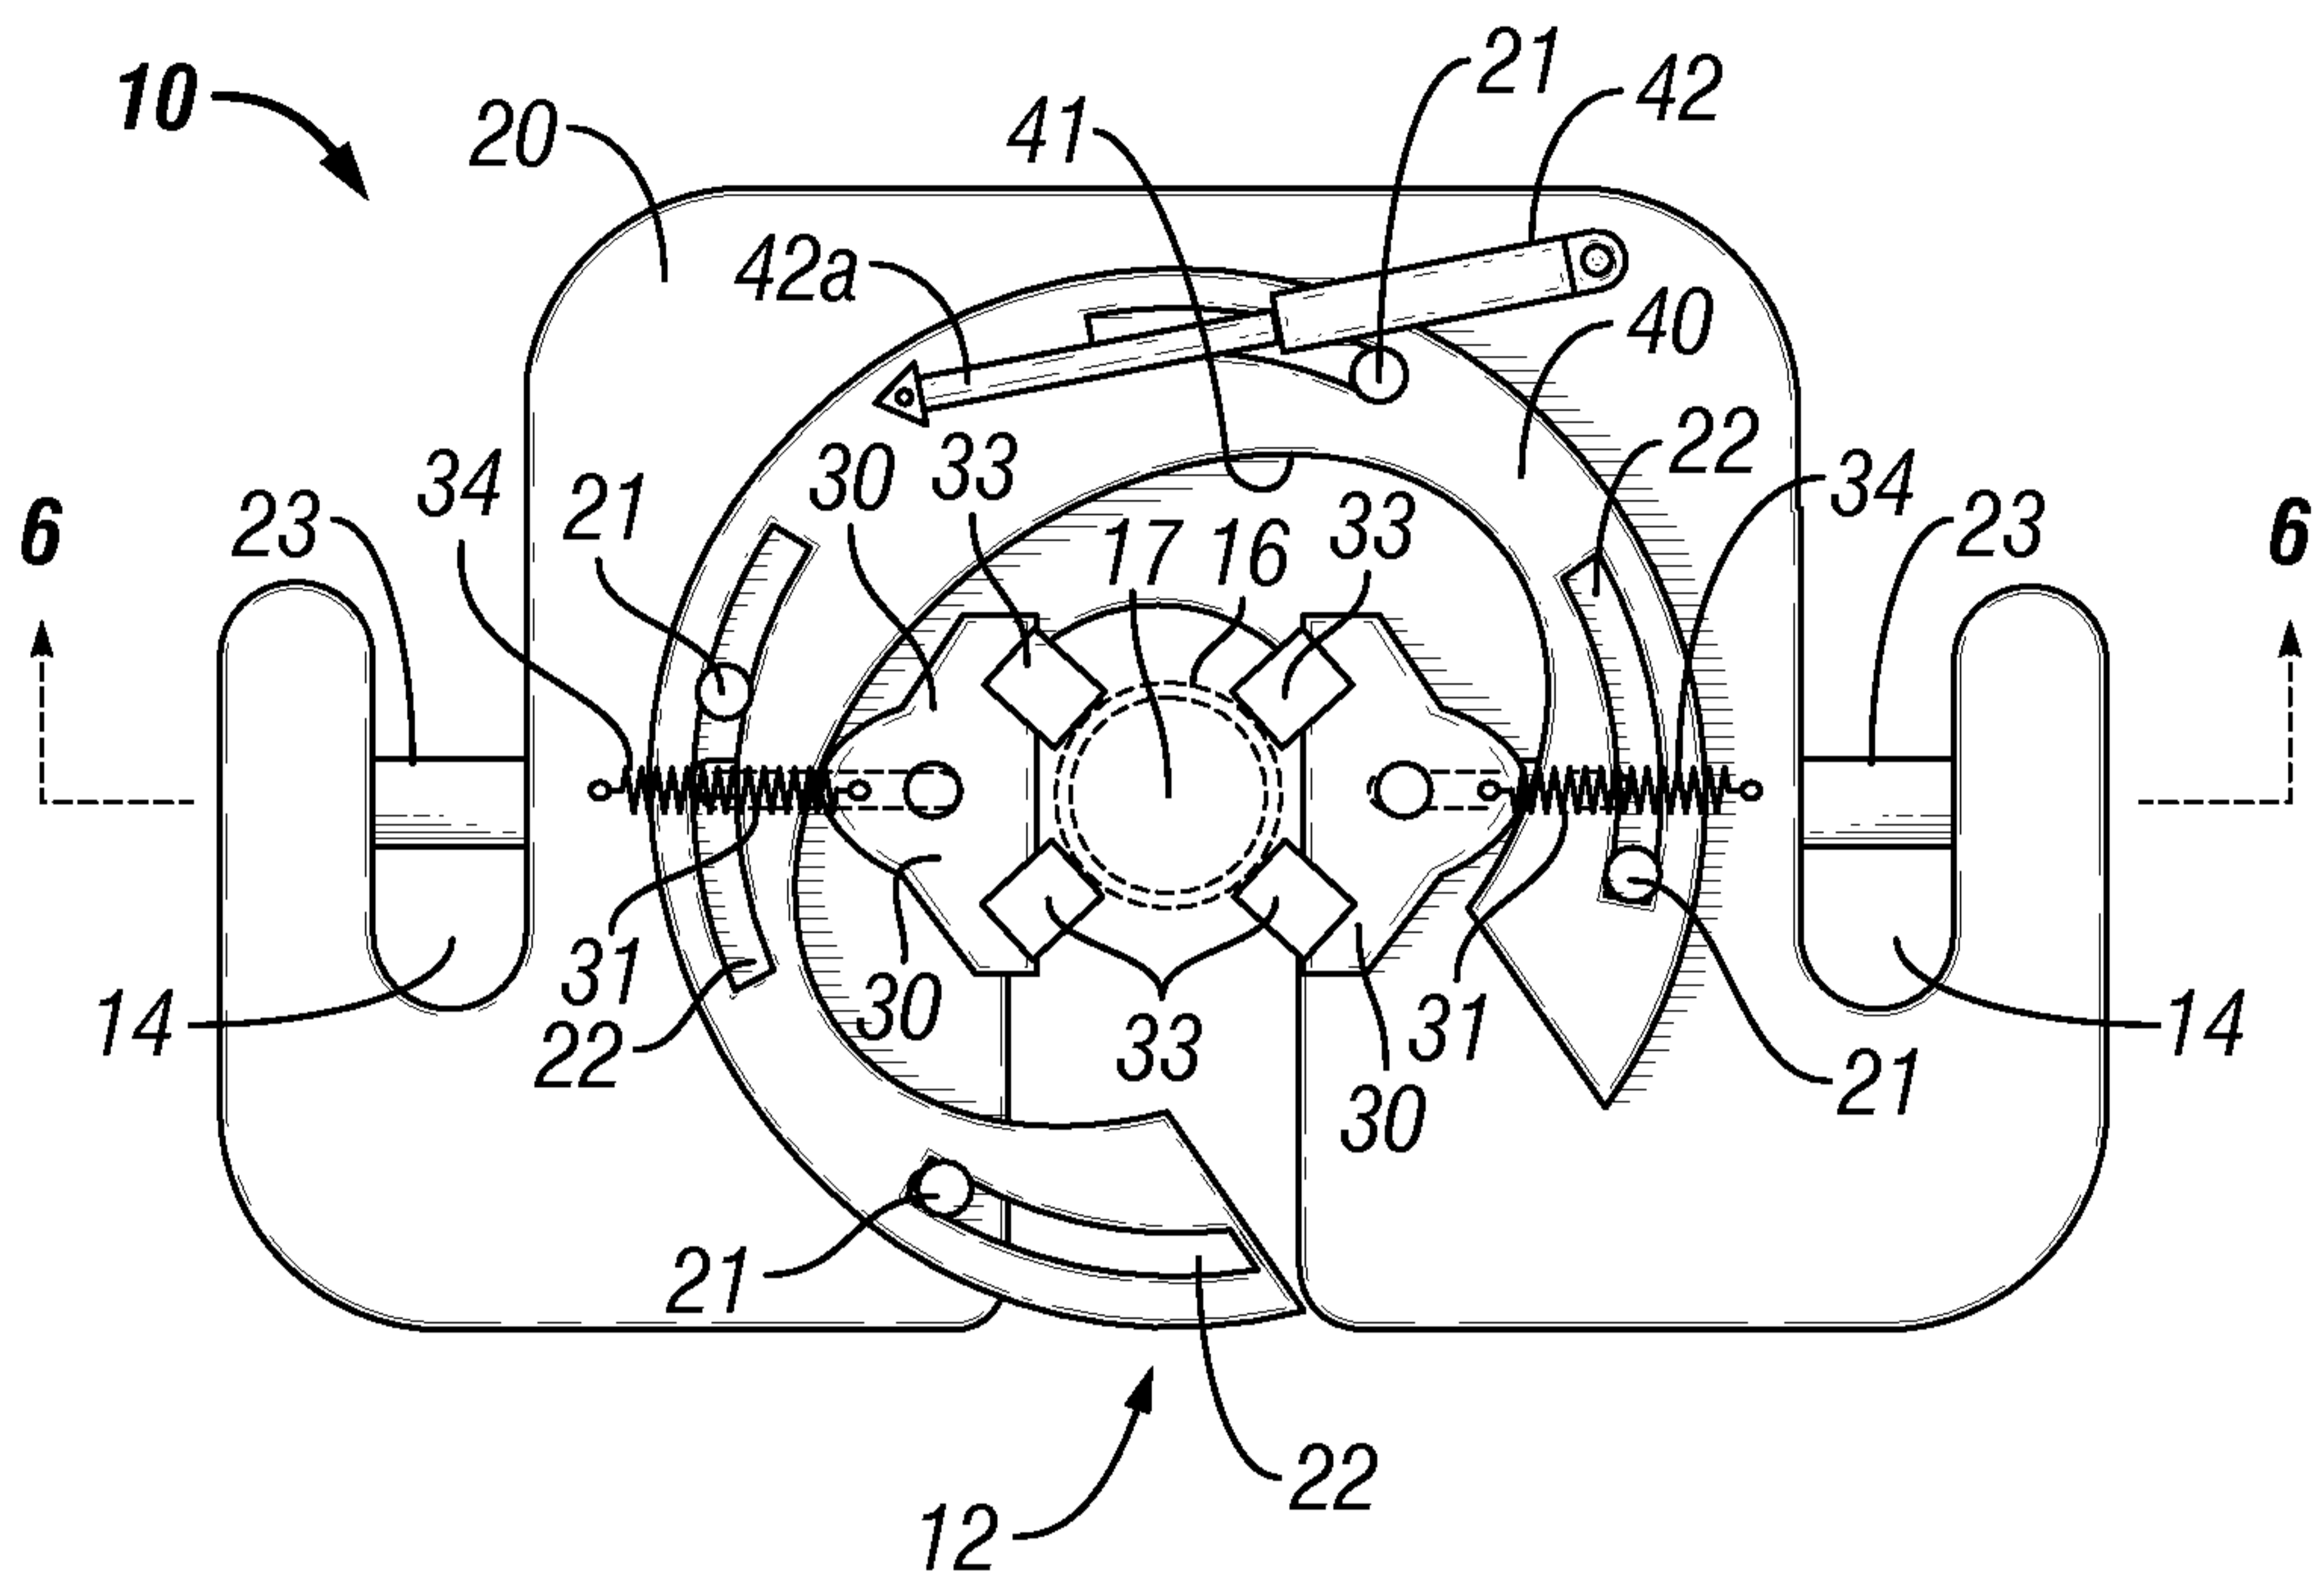


FIG. 4

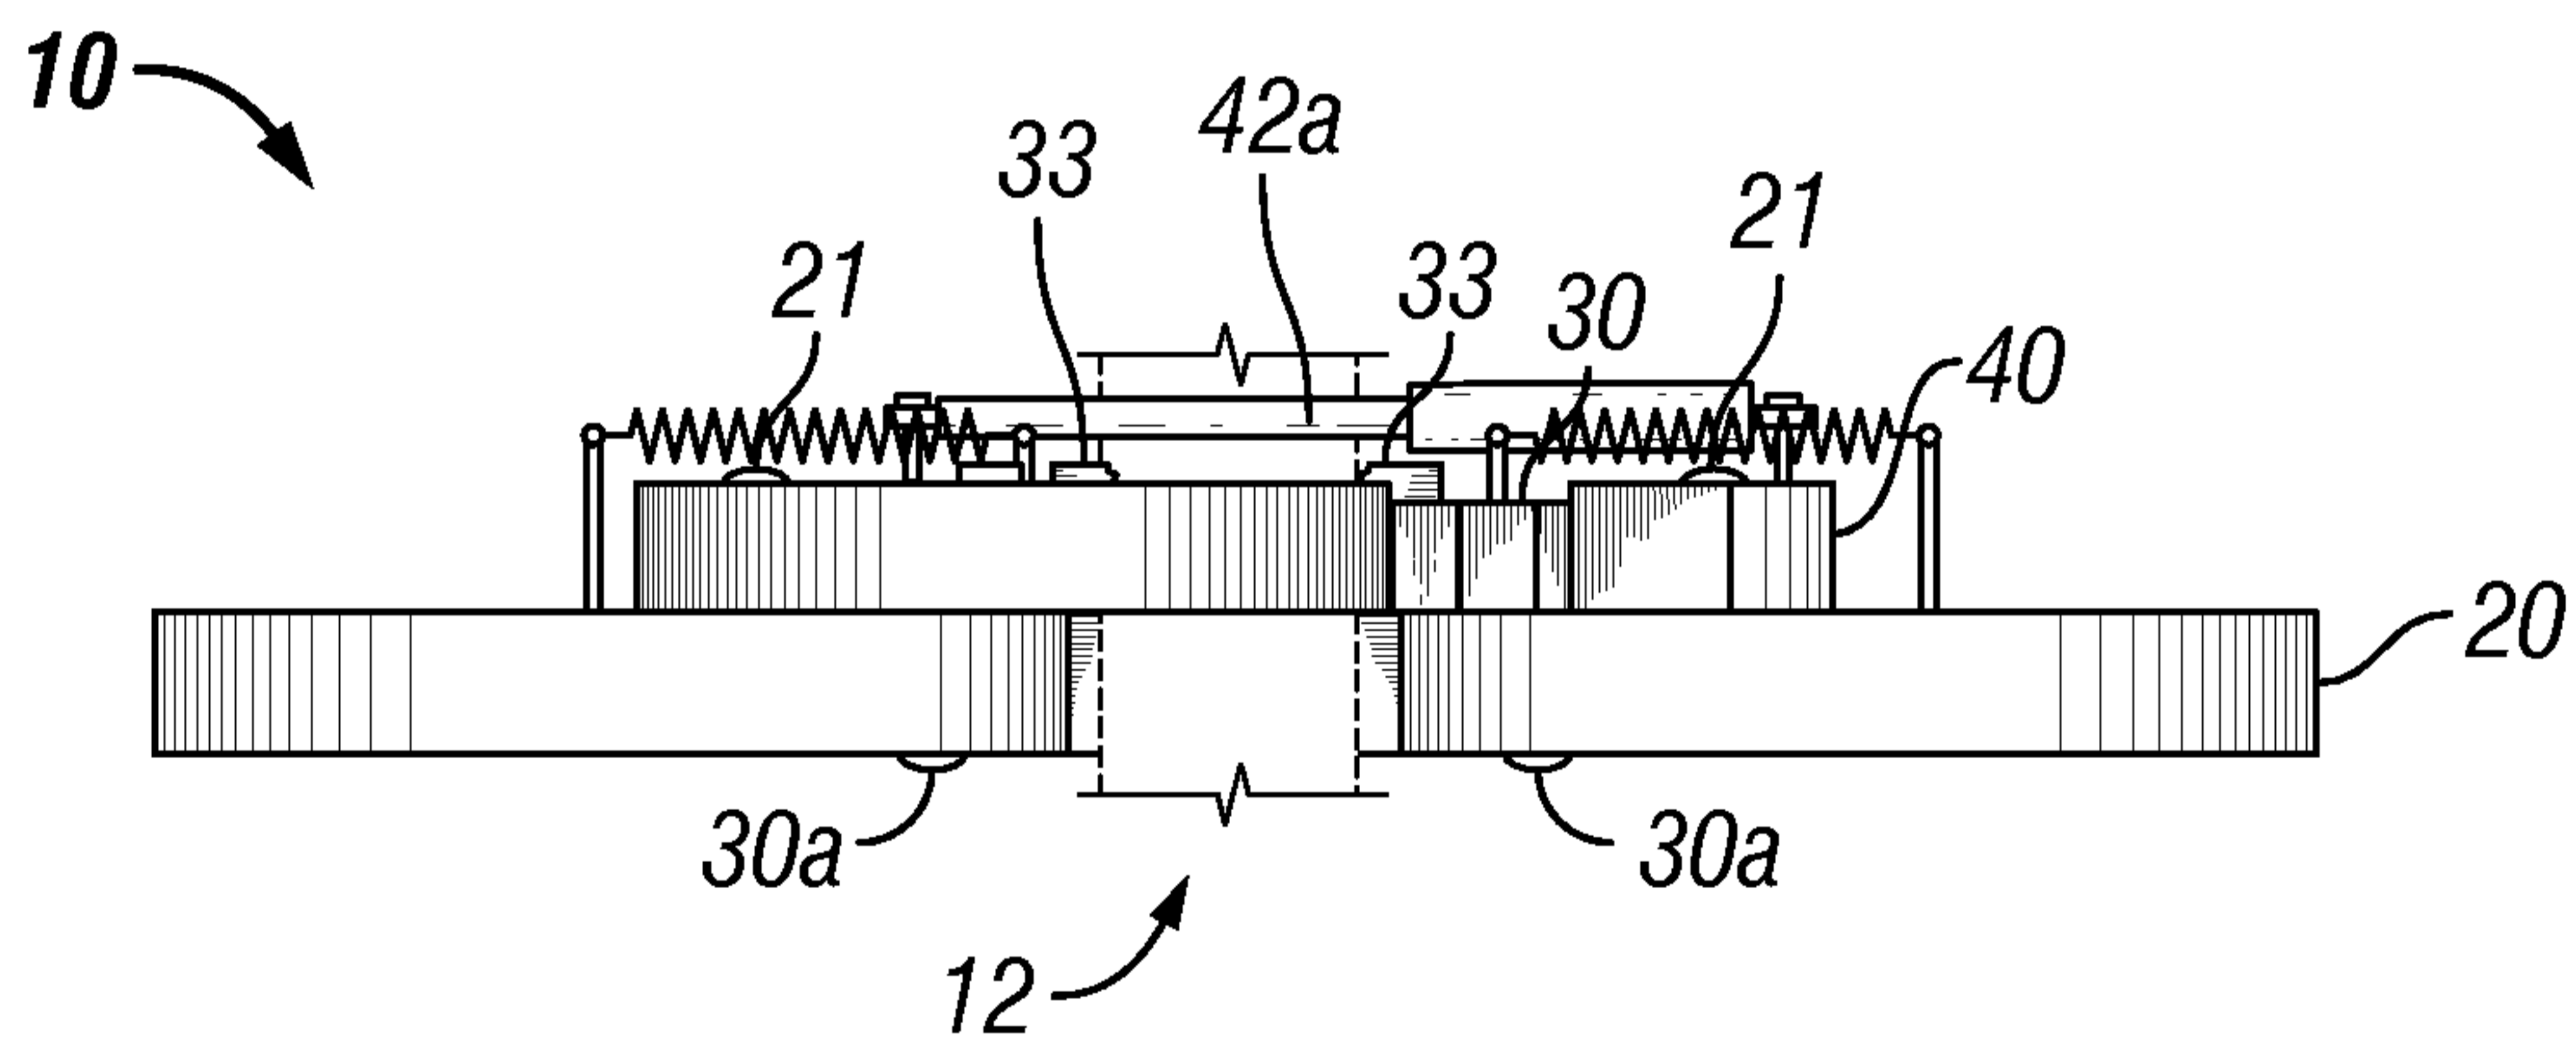


FIG. 5

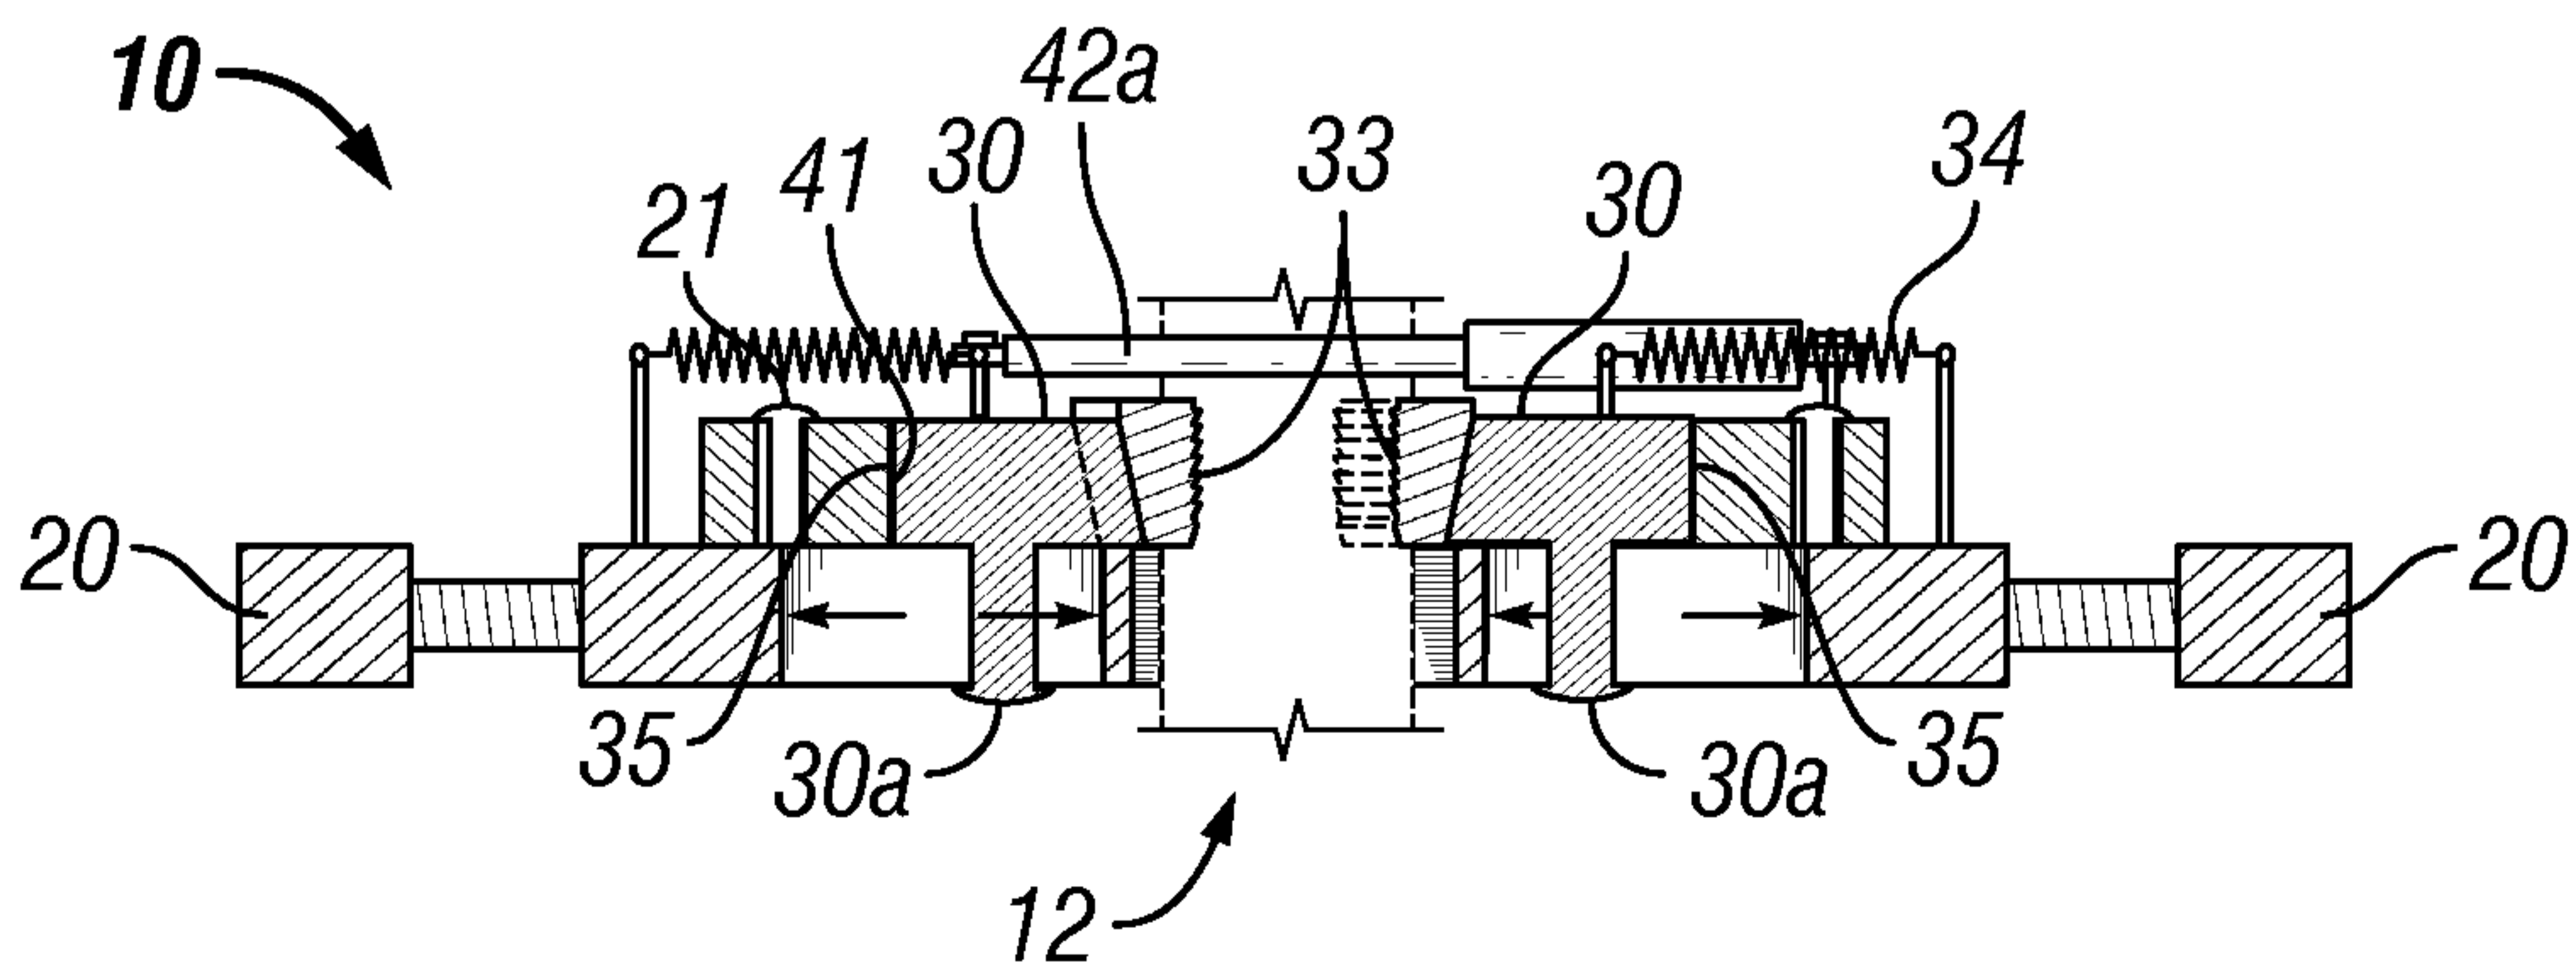


FIG. 6

3/3

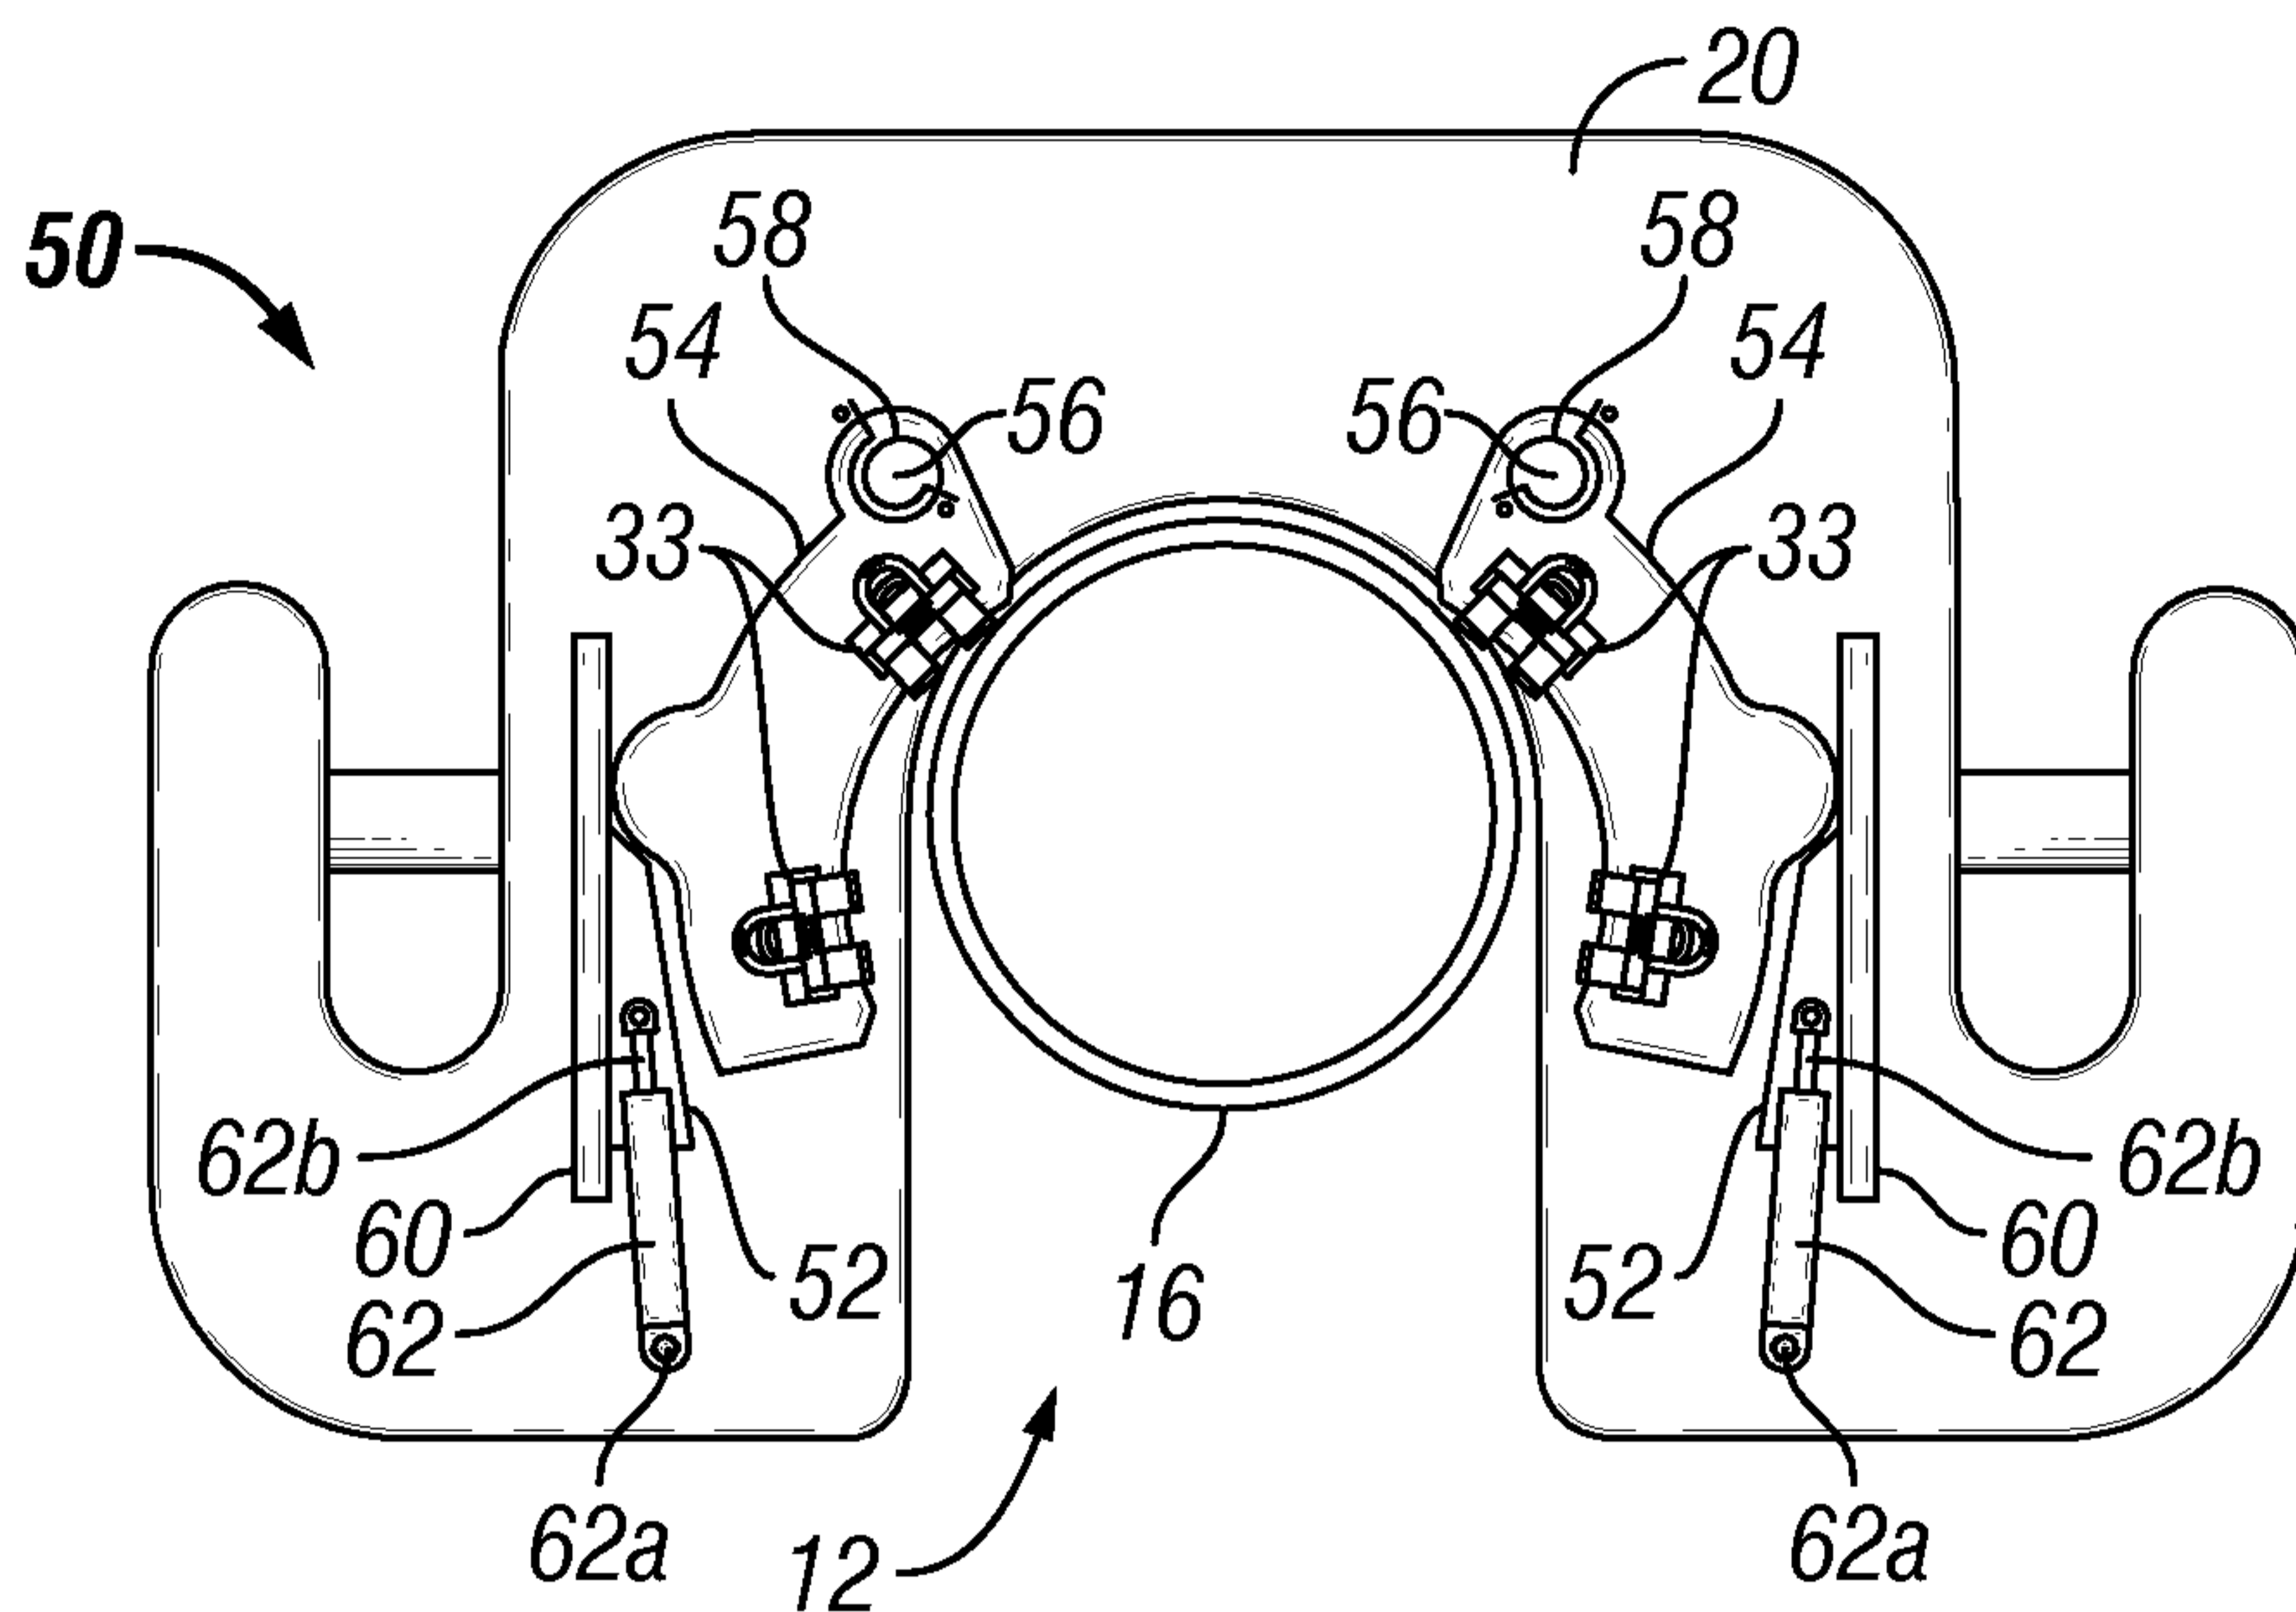


FIG. 7

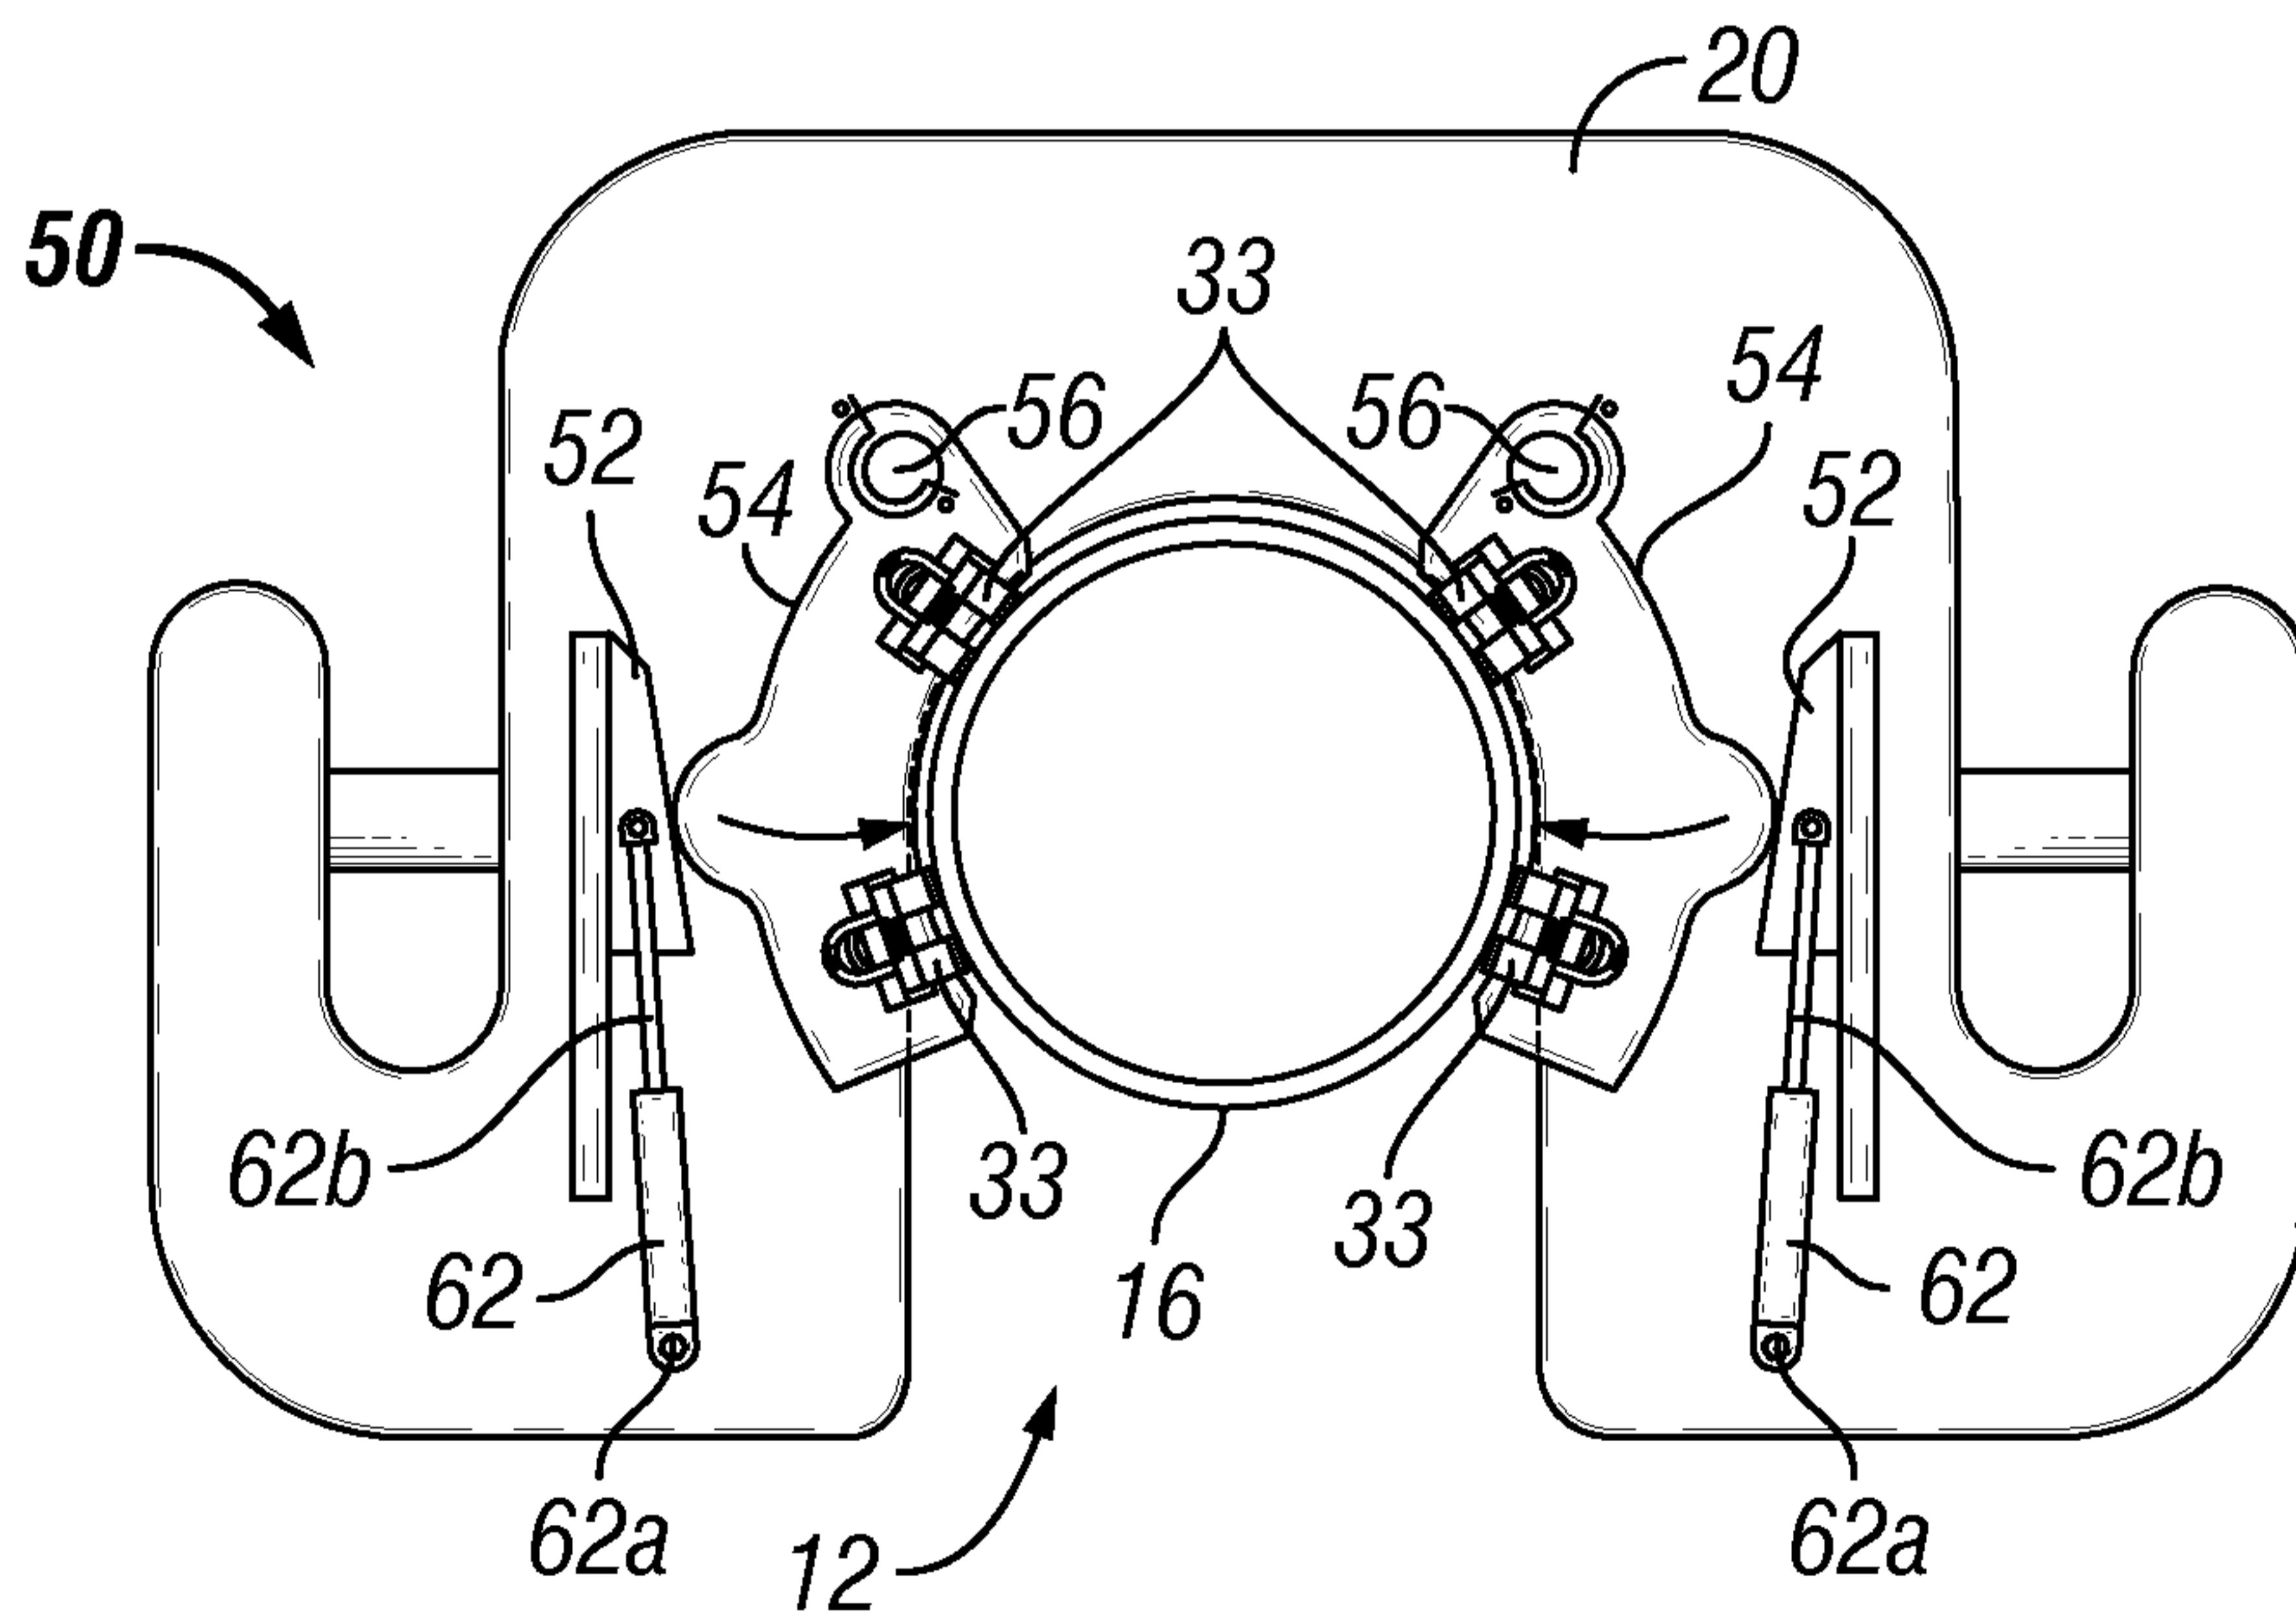
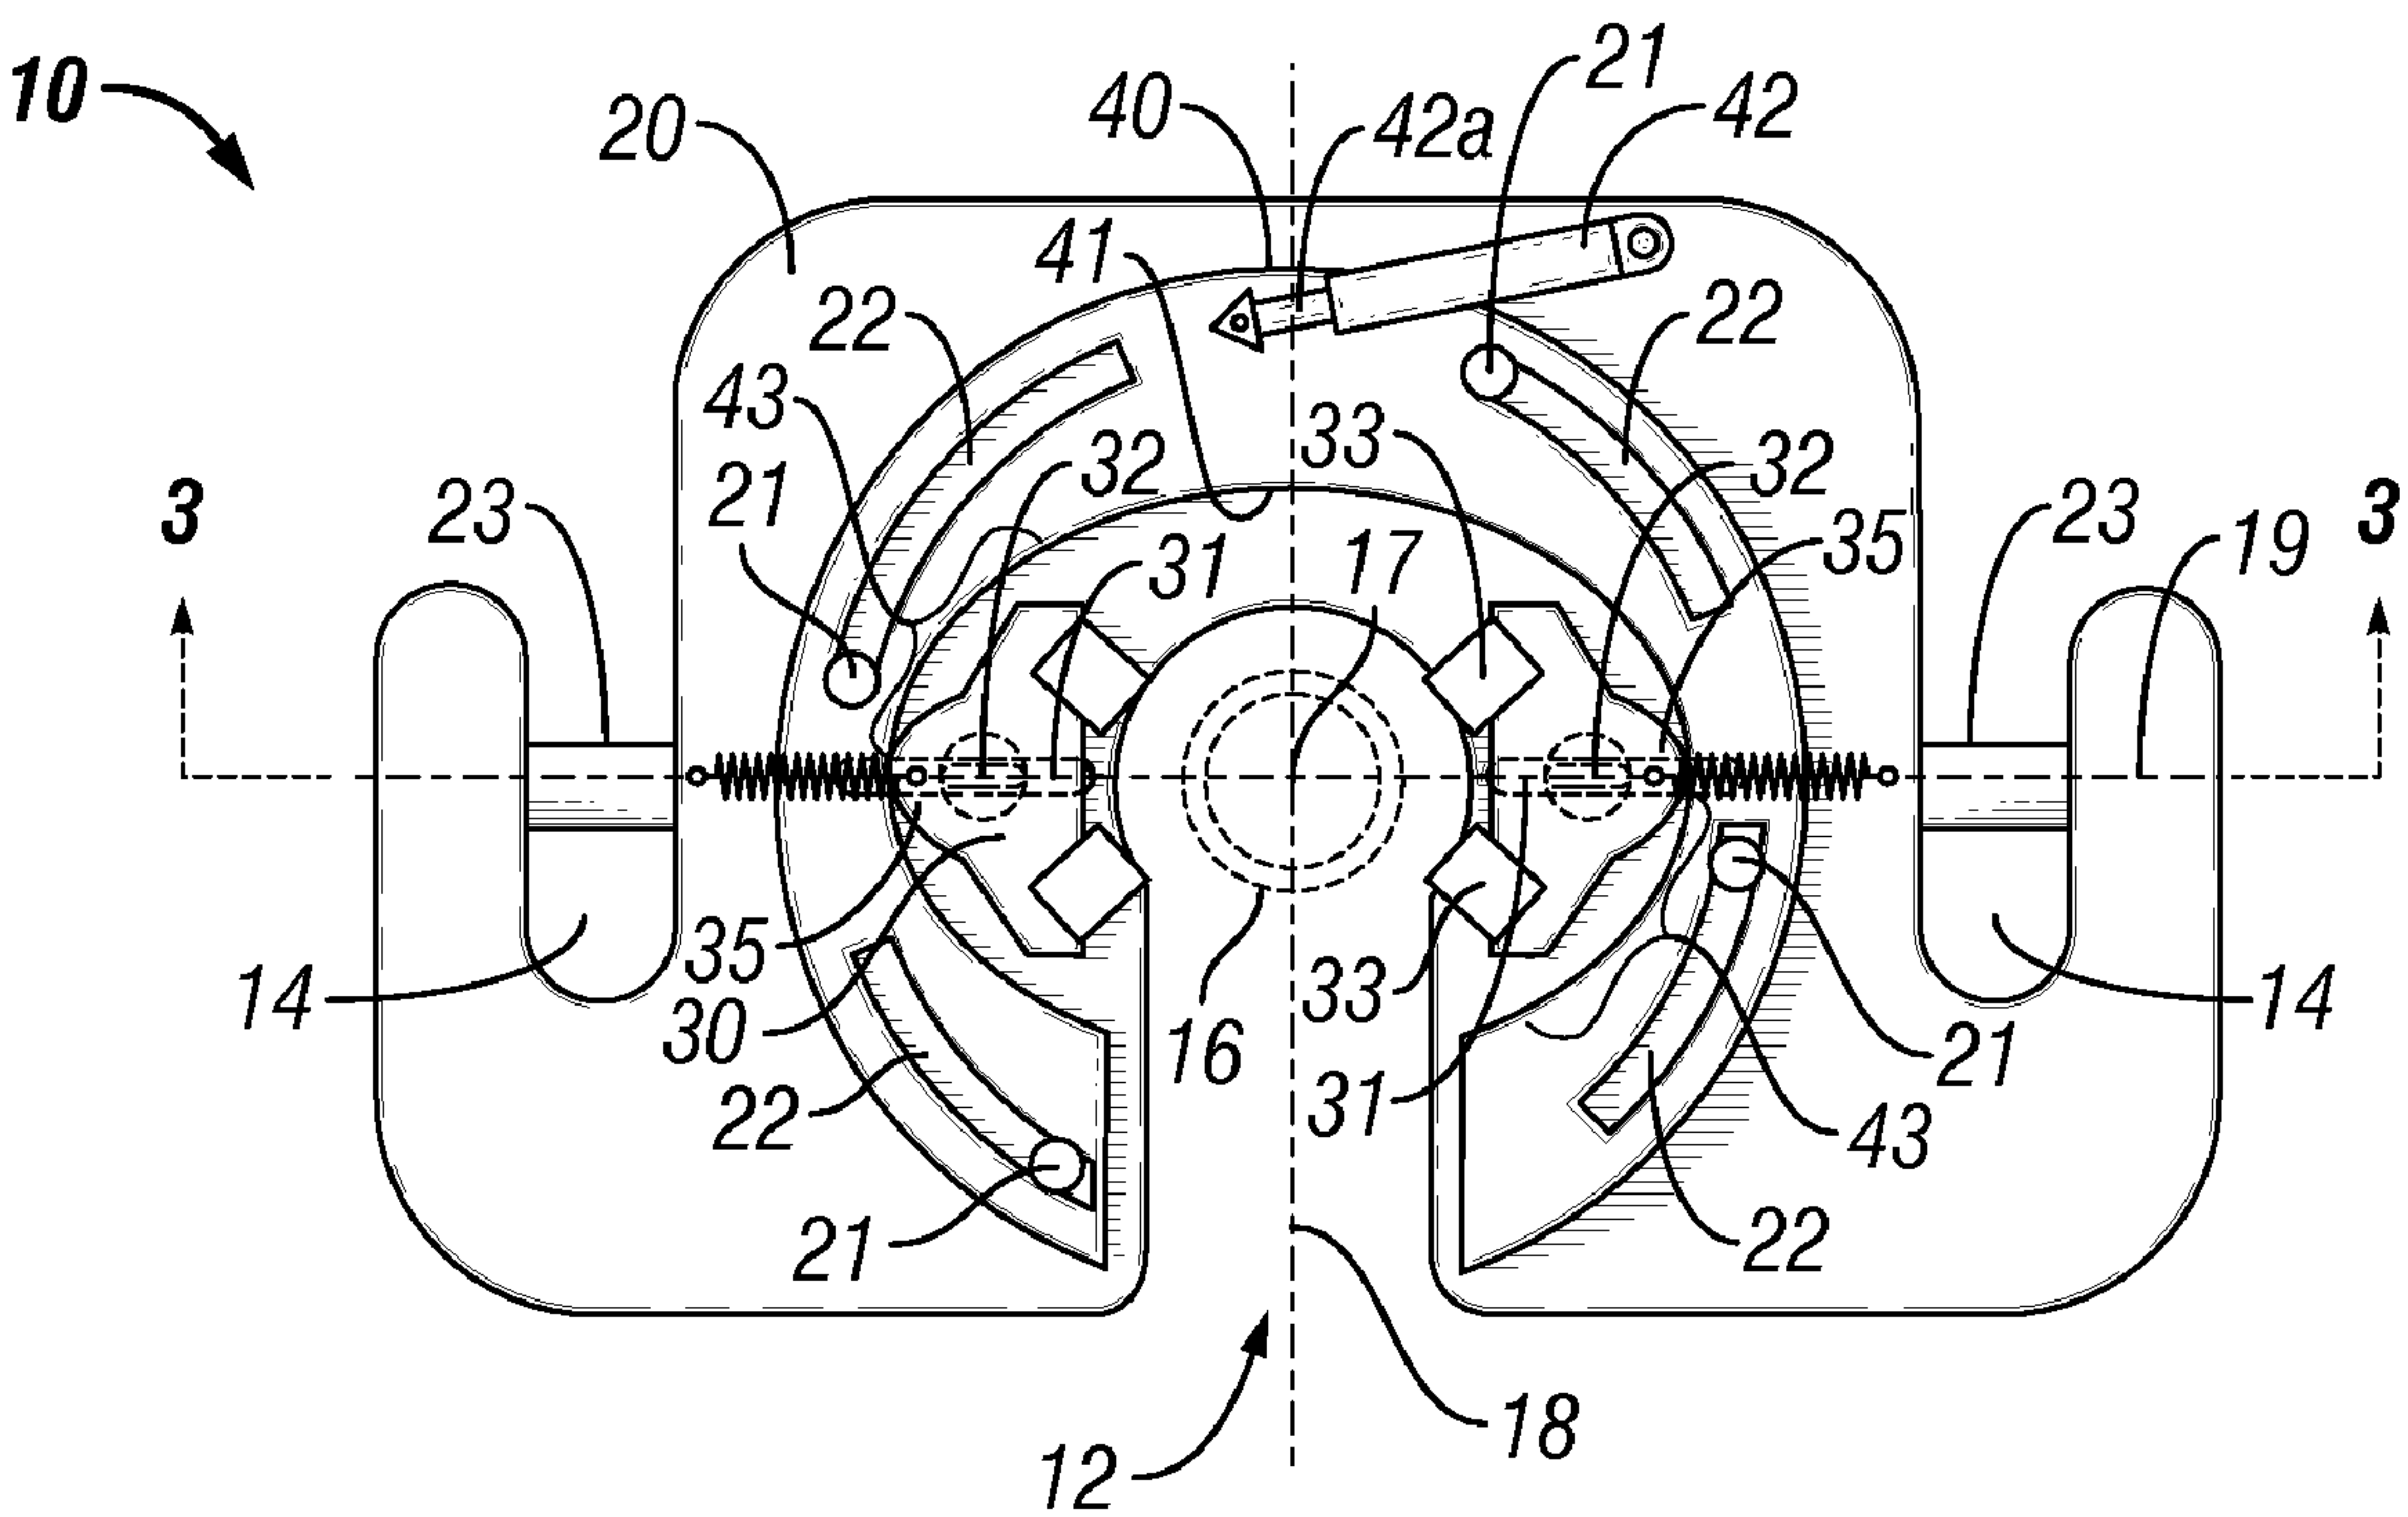


FIG. 8



**FIG. 1**