June 2, 1931. F. BOSANAC 1,807,724

SHAVING KIT

Filed May 31, 1930

Fig. 1.

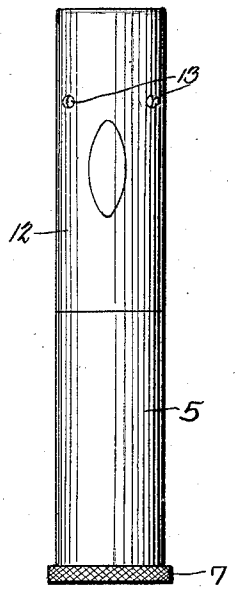


Fig. 2.

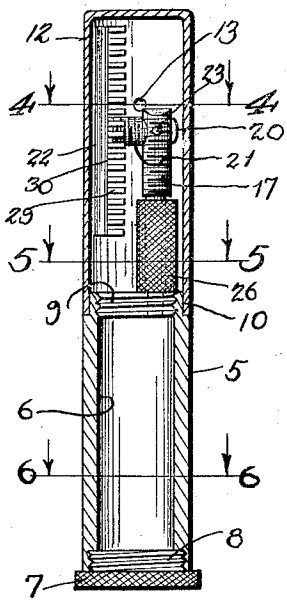


Fig. 3.

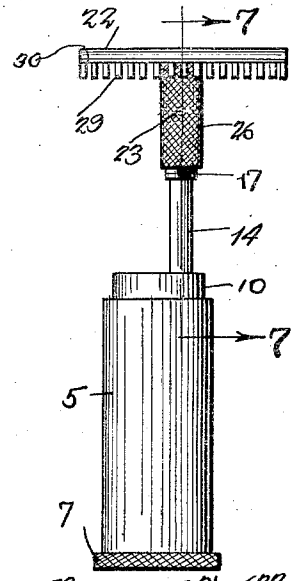


Fig. 4.

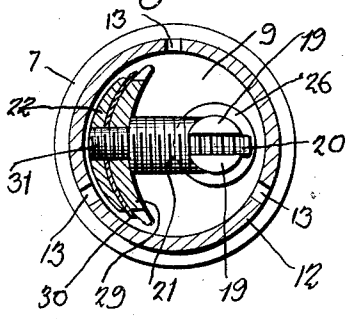


Fig. 6.




Fig. 5.





Fig. 7.

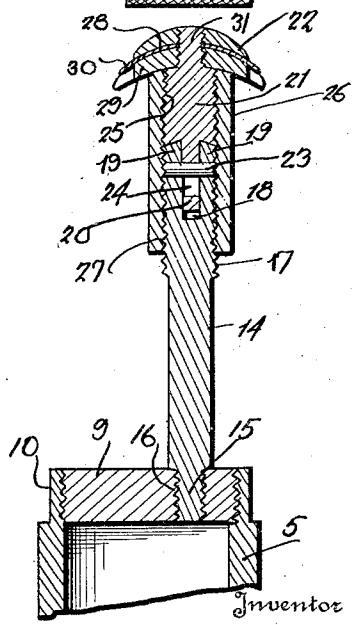

Inventor

Frank Bosanac

By Bryant & Lowry

Attorneys

Patented June 2, 1931

1,807,724

UNITED STATES PATENT OFFICE

FRANK BOSANAC, OF SCHUMACHER, ONTARIO, CANADA

SHAVING KIT

Application filed May 31, 1930. Serial No. 458,599.

This invention relates to improvements in shaving kits of the type employing what is commonly known as a safety razor.

The primary object of this invention, is to provide a shaving kit of the above mentioned character comprising a casing adapted to carry a safety razor in such a manner as to be folded when not in use so that the same may be received in a carrying case.

A still further object of this invention, is to provide a safety razor of the above mentioned character having a tubular hollow handle adapted to be used as a container for shaving cream or preparations.

A still further object of the invention, is to provide a safety razor kit having a foldable handle which is held in place by a sleeve whereby when such sleeve is in operative position, the same will act in a capacity to hold the razor blade holding means against rotation.

Other objects and advantages of the invention, may become apparent during the course of the following description forming a part of this specification and in which,

Figure 1 is a vertical side elevational view of a shaving kit showing the same in assembled relation;

Figure 2 is a vertical cross-sectional view showing the shaving kit and the safety razor in a folded position;

Figure 3 is a vertical side elevational view of the invention showing the safety hazor handle in its operative position and the cover removed from the kit;

Figure 4 is a transverse cross-sectional view taken on line 4—4 of Figure 2 illustrating in detail the joint in the safety razor handle portion;

Figure 5 is a transverse cross-sectional view taken on line 5—5 of Figure 2 showing the safety razor handle attached to the shaving lotion container in an offcenter fashion;

Figure 6 is a transverse cross-sectional view taken on line 6—6 of Figure 2 illustrating the inner contour of the shaving lotion container; and

Figure 7 is a vertical cross-sectional view showing the razor handle and holder in detail and enlarged.

In the drawings wherein like reference characters are employed to designate like parts throughout the several views the reference character 5 will generally be employed to designate a cylindrical container open at both ends and formed with opposite flat internal walls 6.

One end of the container 5 is provided with internal screw threads for receiving a closure cap 7 having corresponding screw threads 8. The opposite end of the container 5 is also internally screw threaded for receiving a screw threaded plug 9 illustrated in detail in Figures 2 and 7. It will be noted, that at the same end in which the screw plug 9 is threaded, the casing 5 is reduced as at 10 for receiving a metallic cap 12 as illustrated in Figure 2 and the cap 12 is provided with air vents 13 for allowing free circulation of air within the cap.

The foldable safety razor comprises a stem 14 having one end screw threaded as at 15 for being received in the eccentric screw threaded opening 16 in the plug 9. It will be noted that the screw threaded opening 16 is smaller than the main portion of the stem 14 and that the screw threaded end 15 thereof is reduced for limiting the inward movement of the stem 14 relative to the plug 9. The opposite end of the stem 14 is provided with screw threads 17 and a central slotted area 18 forming the furcations 19. Pivotally attached to the bifurcated end of the stem 14 as by means of the reduced or flat portion 20 of an extension 21 is a razor blade holder of a conventional type which is designated by the references character 22. Pivotal motion between the extension 21 and

the stem 14 is accomplished by a pin 23 passing through the furcations 19 and extending through a slot 24 in the reduced portion 20 whereby relative movement of the parts 14 and 21 is accomplished both in a pivotal and longitudinal direction. The extension 21 is provided with screw threads 25 which are a continuation in part of the screw threads 17 of the stem 14 whereby an internally screw threaded sleeve 26 having screw threads 27 may be threaded or screwed over the parts 17 and 25 for holding the stem 14 and extension 21 in the extended position illustrated in Figure 7. The sleeve 26 has threaded engagement with the members 14 and 21 to provide a more rigid connection when the parts are alined for use. Also, the slot 24 in the portion 20 of the member 21, permits movement of the latter relative to the stem 14 so to position the threads 17 and 25 to take the internal threads 27 in the sleeve 26. When it is desired to fold the pivoted parts 14 and 21, the screw threaded sleeve 26 is unscrewed from the threaded portions 17 and 25 and is allowed to drop upon the lower portion of the stem 14 whereby it is rested upon the screw threaded plug 9. The extension 21 may then be folded over as illustrated in Figures 2 and 4 in order that the cap 12 may be placed in position on the container 5.

The type of safety razor 22 comprises the clamping members 28 and 29 between which is sandwiched the conventional form of razor blade 30. The parts 28 and 29 are provided with the usual screw threaded openings which are in alignment and are adapted to be received upon the screw threaded reduced portions 31 of the extension 21. It is to be understood that any form of safety razor may be substituted or employed in place of the razor illustrated at 22 in the drawing, such for instance as what is known in the art as the Gem or Eveready type of safety razors.

It is also to be understood that various changes in the shape, size and arrangement of parts of the device may be resorted to without departing from the spirit of the invention or the scope of the sub-joined claim.

Having thus described the invention, what is claimed is:—

A safety razor shaving kit of the character described, comprising a tubular handle, a screw plug closure for one end thereof, a screw threaded plug in the opposite end of the handle, a stem having one of its ends eccentrically connected to the screw threaded plug, the opposite end of the stem having screw threads and being bifurcated, an extension having a slotted reduced flat portion adapted to be received between the bifurcated end of the stem, a pivot pin passing through the bifurcated end of the stem and through the slot of the flattened reduced portion of the extension, screw threads formed on the extension corresponding to the screw threads on the stem, an internally screw threaded sleeve adapted to be screwed upon the screw threads of the stem and the extension whereby the same may be held in an extended position, and a razor blade holder carried by the outer end of the extension.

In testimony whereof I affix my signature.

FRANK BOSANAC.