



- (51) International Patent Classification:
H04N 13/02 (2006.01) *H04N 13/04* (2006.01)
- (21) International Application Number:
PCT/US2015/060351
- (22) International Filing Date:
12 November 2015 (12.11.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/079,086 13 November 2014 (13.11.2014) US
14/664,475 20 March 2015 (20.03.2015) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 14/664,475 (CON)
Filed on 20 March 2015 (20.03.2015)
- (71) Applicant: INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, California 95054 (US).
- (72) Inventors: GRAUMANN, David L.; 4559 NW Silverleaf Dr., Portland, Oregon 97229 (US). GHOSH, Rahuldeva; 15095 NW Blakely Ln, Portland, Oregon 97229 (US). PFURSICH, Scott; 2111 NE 25th Ave, Hillsboro, Oregon 97124 (US).
- (74) Agents: BLACK, David W. et al.; Schwegman Lundberg & Woessner, P.A., c/o CPA Global P.O. Box 52050, Minneapolis, Minnesota 55402 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: 3D ENHANCED IMAGE CORRECTION

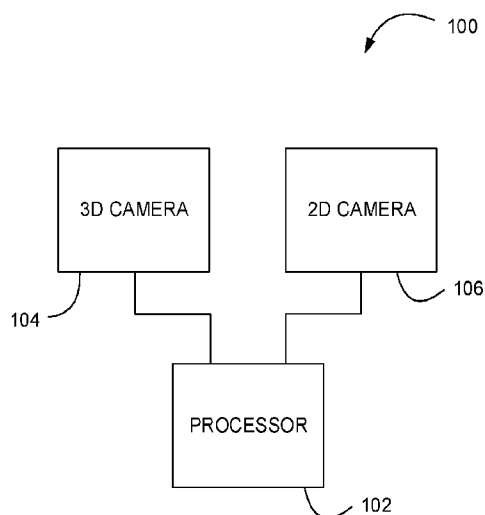


FIG. 1

(57) Abstract: A user authentication system and method. A two-dimensional image of a scene is obtained and range information obtained from the scene is aligned with the two-dimensional image. One or more depth regions is identified and image segments corresponding to the one or more depth regions are selected within the two-dimensional image. Brightness operations are performed on one or more of the selected image segments to form a corrected image.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

3D ENHANCED IMAGE CORRECTION

5 RELATED APPLICATIONS

[0001] This application claims the benefit of priority to U.S. Application Serial No. 14/664,475, filed March 20, 2015, which claims the benefit of priority to U.S. Provisional Application Serial No. 62/079,086, filed November 13, 2014, all of which are incorporated herein by reference in their entirety.

10

BACKGROUND

[0002] Identification of human faces using either near infrared or visible light is becoming common place for augmented reality applications, biometric identification, surveillance, and more. One major limitation to using camera
15 images for identification is the need for homogenous and ample lighting conditions. When the lighting of the face is coming from a single direction (such as a side lamp), however, the ability to see the geometric and biometric features is compromised and renders identification less effective. A common method to manage this case is to alter the camera's gain, exposure, or gamma levels to
20 brighten or sharpen the dimly lit sections of the image or darken the washed out sections of the image. These methods do not work when half the face is bright and the other half is dark. In that case, a face is often not detected at all rendering the identification process useless.

25 BRIEF DESCRIPTION OF THE DRAWINGS

[0003] Embodiments are illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings in which like reference numerals refer to similar elements.

[0004] Fig. 1 illustrates a system for identifying human faces;

30 [0005] Fig. 2 illustrates a method of 3D lighting compensation;

[0006] Fig. 3 illustrates an example of regions of interest;

[0007] Fig. 4 illustrates a method for generating a corrected image; and

[0008] Fig. 5 is a block diagram illustrating an example machine upon which
any one or more of the techniques (e.g., methodologies) discussed herein may
35 perform, according to an example embodiment.

DETAILED DESCRIPTION

[0009] As noted above, one major limitation to using camera images for identification is the need for homogenous and ample lighting conditions. When
5 the lighting of the face is coming from a single direction (such as via a side lamp), however, the ability to see the geometric and biometric features is compromised, making the identification process less effective.

[0010] A system for identifying human faces is shown in Fig. 1. In the example embodiment shown in Fig. 1, a processor 102 is connected to a 3D
10 camera 104 and a 2D camera 106. In the embodiment shown in Fig. 1, 3D camera 104 captures range information in a scene while 2D camera 106 (infrared, visible or other light) captures image data. Processor 102 receives the range information from the 3D camera 104 and the image data from the 2D 106 camera and uses the range information to determine regions of interest in the
15 image.

[0011] In an embodiment, 3D camera 104 isolates all regions of interest in the camera scene that require independent gain/exposure control using a depth surface analysis. This is performed prior to the search for a face in the scene. By doing so, a single camera image can provide a better face image to the face
20 recognizer and face identifier in those lighting conditions. This allows for cameras 104 and 106 to find poorly lit faces under a broader range of real world conditions.

[0012] In some such embodiments, the analysis to isolate regions of interest in the camera scene is performed by processor 102. In other embodiments, some or
25 all of the analysis is performed by a processor in 3D camera 104. In other embodiments, other processors, such as across a network or in the cloud, perform some or all of the analysis.

[0013] An example embodiment of a method for 3D lighting compensation is shown in Fig. 2. In the example embodiment of Fig. 2, at 205, a scene is
30 captured by 3D camera 104 and 2D camera 106 at approximately the same time. In one example embodiment, range information is captured by 3D camera 104 and a visible light image (e.g. RGB) is captured by 2D camera 106. The range information is aligned at 210 to the visible light image. In some embodiments,

the range information is converted to a real-world Cartesian coordinate system before being aligned to the 2D image at 210.

[0014] At 215, the method identifies regions of interest in the scene captured by 3D camera 104. In some embodiments, unique depth regions of interest are segmented based on world coordinate contours. In one such approach, a contour is a region with a consistently ascending or descending slope and with less than 5mm variation in slope over a 1cm x 1cm x 1cm kernel region (e.g. adaptive thresholding).

[0015] In an embodiment, these regions of interest are projected at 220 on the 2D image (as shown, for example, in Fig. 3). In some such embodiments, an x,y pixel polygon descriptor is generated on the visible light image for each unique segmentation area projected on the 2D image. Brightness operations or other image compensation operations are applied to one or more of the regions of interest projected on the image scene at 225. In some embodiments, independent pixel integration times and amplification values are applied to each region of interest projected on the image scene at 225. In an embodiment, for example, operations are performed on each region of interest as necessary to achieve a region-specific pixel brightness of 128 in the hue saturation brightness (HSB) space. The corrected image is then be used for face detection at 230.

[0016] The polygon-based image compensation can be in the hardware/firmware of the image capture device (e.g., camera 104 or 106) or in software and implemented after image capture on a general CPU. Thus, in various embodiments, the functionality described above is implemented in software on a host computer or as hardware or firmware within 3D camera 104.

[0017] In some embodiments, camera 104 includes HW/FW features which isolate all regions of interest in the camera scene that require independent gain/exposure control using a depth surface analysis. In some such embodiments, this is performed prior to searching for a face in the scene. By doing so, a single corrected camera image can provide an enhanced face image to the face recognizer and face identifier in those lighting conditions. This allows for cameras 104 and 106 to find poorly lit faces under a broader range of real world conditions.

[0018] This functionality may be incorporated in any camera employing depth technology. Example uses include, but are not limited to, facial recognition, ease-of-access, rich video conferencing, and content creation.

[0019] An example of regions of interest is shown in Fig. 3. In an image 300, region 302 illustrates a background. Region 302 illustrates areas that do not need image compensation, while regions 306 and 308 illustrate the regions the method described in Fig. 2 is directed to. As noted above, regions 306 and 308 are identified, for example, as a function of changes in slope.

[0020] FIG. 4 is a flow diagram illustrating a method for generating a corrected image, according to an embodiment. At 405, an image of an object is acquired from an imaging device. The imaging device may include a visible light sensor and a depth sensor. In various embodiments, the imaging device may be include one or more depth sensing 3D technologies (e.g. multiple cameras (IR or visible), structured light, time of flight, etc.). A depth range and a visible light image are received at 405.

[0021] At 410, the depth range information is aligned with the visible light image of the object. In an example embodiment, the depth range information may be converted to a coordinate system. Coordinates of the depth range information may be matched to the coordinates of the visible light image so the depth range matches the corresponding area of the visible light image. In another embodiment, the depth range information is used to generate a three-dimensional image and the three-dimensional image is projected on the visible light image.

[0022] At 415, a depth region is created based on a slope variation in the object as measured by the depth range information. The depth region describes an area that may be considered similarly affected by light variation throughout the depth region. In an embodiment, each unique depth region is created based on world coordinate contours by detecting regions of the 3D image that have contours having a consistently ascending or descending slope. In one such embodiment, these depth regions are limited to contours having a slope variation of less than 5mm of the slope over a 1cm x 1cm x 1cm kernel region (e.g. adaptive thresholding).

[0023] At 420, an image segment corresponding to each unique depth region is identified on the visible light image. In an embodiment, the depth regions are transferred to the aligned visible light image for individual processing to allow

each segment to be processed independent of the rest of the visible light image. In an embodiment, each unique depth region created using world coordinates is projected on the visible light image.

[0024] At 425, a descriptor is generated for each image segment. The
5 descriptor is a unique identifier for an area of the visible light image that should be processed uniformly as the area is considered to be similarly affected by light variations in the visible light image. A unique descriptor is issued for each image segment of an image so that each segment may be processed independent from the other image segments and the visible light image as a whole. In an
10 embodiment, the descriptor is an x,y pixel polygon descriptor.

[0025] At 430, a brightness operation is performed on one or more image segments. In an embodiment, the brightness operation brightens dim image segments and darkens washed out image segments to bring the segments to a uniform brightness. In an embodiment, independent pixel integration times and
15 amplification values are applied to selected image segments to achieve a pixel brightness of 128 in the HSB space for each selected image segment.

[0026] At 435, a corrected image is generated. The corrected image includes the brightness adjustment for selected image segments, providing a more useable image (e.g. one that can be passed to another application, stored for later use,
20 displayed to a user, etc.). In an embodiment, the corrected image includes is used for face detection and authentication.

[0027] What has been defined is a system of regional exposure control that relies on segmentation of the image to correct sections of the image. The image can then be used for facial recognition and authentication. Depth information is
25 used to define exposer gain regions and to recognize image segments requiring correction in the image. In some embodiments, a rich polygon-based region of interest descriptor is used to define complex shapes and to reduce the problem of image blurring from user movement while seeking the optimal sensor settings.

[0028] In an embodiment, definition and labeling of regions of interest occurs
30 in 3D camera 104. In some such embodiments, a processor in 3D camera 104 determines the corrections as well.

Hardware Platform

[0029] Embodiments may be implemented in one or a combination of hardware, firmware, and software. In an embodiment, a camera attached to a computer captures both 3D range information and 2D image data and processes the image within the camera in one of the manners described above before
5 providing the image to the computer for face detection and authentication. In another embodiment, a camera attached to a computer captures both 3D range information and 2D image data and transmits the 3D range information and 2D image data to the computer for processing in one of the manners described above before the improved image is used by the computer for face detection and
10 authentication. In some embodiments, the 3D camera uses structured light to capture the 3D range information.

[0030] Embodiments may also be implemented as instructions stored on a machine-readable storage device, which may be read and executed by at least one processor to perform the operations described herein. A machine -readable
15 storage device may include any non-transitory mechanism for storing information in a form readable by a machine (e.g., a computer). For example, a machine -readable storage device may include read-only memory (ROM), random-access memory (RAM), magnetic disk storage media, optical storage media, flash-memory devices, and other storage devices and media.

[0031] Examples, as described herein, can include, or can operate on, logic or a number of components, modules, or mechanisms. Modules are tangible entities (e.g., hardware) capable of performing specified operations and can be configured or arranged in a certain manner. In an example, circuits can be arranged (e.g., internally or with respect to external entities such as other
20 circuits) in a specified manner as a module. In an example, the whole or part of one or more computer systems (e.g., a standalone, client or server computer system) or one or more hardware processors can be configured by firmware or software (e.g., instructions, an application portion, or an application) as a module that operates to perform specified operations. In an example, the software can
25 reside on a machine-readable medium. In an example, the software, when executed by the underlying hardware of the module, causes the hardware to perform the specified operations.

[0032] Accordingly, the term “module” is understood to encompass a tangible entity, be that an entity that is physically constructed, specifically configured

(e.g., hardwired), or temporarily (e.g., transitorily) configured (e.g., programmed) to operate in a specified manner or to perform part or all of any operation described herein. Considering examples in which modules are temporarily configured, each of the modules need not be instantiated at any one moment in time. For example, where the modules comprise a general-purpose hardware processor configured using software, the general-purpose hardware processor can be configured as respective different modules at different times. Software can accordingly configure a hardware processor, for example, to constitute a particular module at one instance of time and to constitute a different module at a different instance of time.

[0033] FIG. 5 is a block diagram illustrating a machine in the example form of a computer system 500, within which a set or sequence of instructions may be executed to cause the machine to perform any one of the methodologies discussed herein, according to an example embodiment. In alternative embodiments, the machine operates as a standalone device or may be connected (e.g., networked) to other machines. In a networked deployment, the machine may operate in the capacity of either a server or a client machine in server-client network environments, or it may act as a peer machine in peer-to-peer (or distributed) network environments. The machine may be a personal computer (PC), a tablet PC, a set-top box (STB), a personal digital assistant (PDA), a mobile telephone, a web appliance, a network router, switch or bridge, or any machine capable of executing instructions (sequential or otherwise) that specify actions to be taken by that machine. Further, while only a single machine is illustrated, the term “machine” shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein.

[0034] Examples, as described herein, may include, or may operate by, logic or a number of components, or mechanisms. Circuit-sets are a collection of circuits implemented in tangible entities that include hardware (e.g., simple circuits, gates, logic, etc.). Circuit-set membership may be flexible over time and underlying hardware variability. Circuit-sets include members that may, alone or in combination, perform specified operations when operating. In an example, hardware of the circuit-set may be immutably designed to carry out a specific operation (e.g., hardwired). In an example, the hardware of the circuit-

set may include variably connected physical components (e.g., execution units, transistors, simple circuits, etc.) including a computer readable medium physically modified (e.g., magnetically, electrically, moveable placement of invariant massed particles, etc.) to encode instructions of the specific operation.

- 5 In connecting the physical components, the underlying electrical properties of a hardware constituent are changed, for example, from an insulator to a conductor or vice versa. The instructions enable embedded hardware (e.g., the execution units or a loading mechanism) to create members of the circuit-set in hardware via the variable connections to carry out portions of the specific operation when
- 10 in operation. Accordingly, the computer readable medium is communicatively coupled to the other components of the circuit-set member when the device is operating. In an example, any of the physical components may be used in more than one member of more than one circuit-set. For example, under operation, execution units may be used in a first circuit of a first circuit-set at one point in
- 15 time and reused by a second circuit in the first circuit-set, or by a third circuit in a second circuit-set at a different time.

[0035] Example computer system 500 includes at least one processor 502 (e.g., a central processing unit (CPU), a graphics processing unit (GPU) or both, processor cores, compute nodes, etc.), a main memory 504 and a static memory

20 506, which communicate with each other via a link 508 (e.g., bus). The computer system 500 may further include a video display unit 510, an alphanumeric input device 512 (e.g., a keyboard), and a user interface (UI) navigation device 514 (e.g., a mouse). In an embodiment, the video display unit 510, input device 512 and UI navigation device 514 are incorporated into a touch

25 screen display. The computer system 500 may additionally include a storage device 516 (e.g., a drive unit), a signal generation device 518 (e.g., a speaker), a network interface device 520, and one or more sensors (not shown), such as a global positioning system (GPS) sensor, compass, accelerometer, or other sensor.

30 **[0036]** The storage device 516 includes a machine-readable medium 522 on which is stored one or more sets of data structures and instructions 524 (e.g., software) embodying or utilized by any one or more of the methodologies or functions described herein. The instructions 524 may also reside, completely or at least partially, within the main memory 504, static memory 506, and/or within

the processor 502 during execution thereof by the computer system 500, with the main memory 504, static memory 506, and the processor 502 also constituting machine-readable media.

[0037] While the machine-readable medium 522 is illustrated in an example embodiment to be a single medium, the term “machine-readable medium” may include a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more instructions 524. The term “machine-readable medium” shall also be taken to include any tangible medium that is capable of storing, encoding or carrying instructions for execution by the machine and that cause the machine to perform any one or more of the methodologies of the present disclosure or that is capable of storing, encoding or carrying data structures utilized by or associated with such instructions. The term “machine-readable medium” shall accordingly be taken to include, but not be limited to, solid-state memories, and optical and magnetic media. Specific examples of machine-readable media include non-volatile memory, including, by way of example, semiconductor memory devices (e.g., electrically programmable read-only memory (EPROM), electrically erasable programmable read-only memory (EEPROM)) and flash memory devices; magnetic disks such as internal hard disks and removable disks; magneto-optical disks; and CD-ROM and DVD-ROM disks.

[0038] The instructions 524 may further be transmitted or received over a communications network 526 using a transmission medium via the network interface device 520 utilizing any one of a number of well-known transfer protocols (e.g., HTTP). Examples of communication networks include a local area network (LAN), a wide area network (WAN), the Internet, mobile telephone networks, plain old telephone (POTS) networks, and wireless data networks (e.g., Wi-Fi, 3G, and 4G LTE/LTE-A or WiMAX networks). The term “transmission medium” shall be taken to include any intangible medium that is capable of storing, encoding, or carrying instructions for execution by the machine, and includes digital or analog communications signals or other intangible medium to facilitate communication of such software.

Additional Notes & Examples:

- [0039] Example 1 includes subject matter (such as a device, apparatus, or machine) for enhanced image correction comprising: a 2D camera; a 3D camera; and a processor to: receive a two-dimensional image from the 2D camera; receive range information from the 3D camera; align the range information with the two-dimensional image; identify one or more depth regions; select, within the two-dimensional image, image segments corresponding to the one or more depth regions; perform brightness operations on one or more of the image segments to form a corrected image; and authenticate a user based on a user feature in the corrected image.
- 5 [0040] In Example 2, the subject matter of Example 1 may include, wherein the two-dimensional image is a video frame.
- [0041] In Example 3, the subject matter of any one of Examples 1 to 2 may include, wherein to select image segments, the processor is to generate a pixel polygon descriptor for each image segment.
- 15 [0042] In Example 4, the subject matter of any one of Examples 1 to 3 may include, wherein to align the range information with the two-dimensional image, the processor is to convert the range information to a coordinate system.
- [0043] In Example 5, the subject matter of any one of Examples 1 to 4 may include, wherein the range information is segmented based on world coordinate contours.
- 20 [0044] In Example 6, the subject matter of any one of Examples 1 to 5 may include, wherein to select the image segment, the processor is to project the depth region on the two-dimensional image.
- [0045] In Example 7, the subject matter of any one of Examples 1 to 6 may include, wherein the processor is to determine, for each selected image segment, a desired pixel brightness in the hue saturation brightness space and modifies 2D camera controls as necessary to achieve the desired pixel brightness in the hue saturation brightness space.
- 25 [0046] In Example 8, the subject matter of any one of Examples 1 to 7 may include, wherein the desired pixel brightness is approximately 128.
- [0047] In Example 9, the subject matter of any one of Examples 1 to 8 may include, wherein the processor is to modify 2D camera controls to apply to each selected image segment, independent pixel integration times based on the desired pixel brightness.
- 30

- [0048] In Example 10, the subject matter of any one of Examples 1 to 9 may include, wherein the processor is to modify 2D camera controls to apply to each selected image segment, amplification values based on the desired pixel brightness.
- 5 [0049] In Example 11, the subject matter of any one of Examples 1 to 10 may include, wherein the processor is to search for a user's feature in the corrected image and authenticates the user based on the user feature.
- [0050] In Example 12, the subject matter of any one of Examples 1 to 11 may include, wherein the processor is to search for a face in the corrected image and
- 10 authenticates a user based on facial features in the image.
- [0051] In Example 13, the subject matter of any one of Examples 1 to 12 may include, wherein the processor is to authenticate a user by executing a cloud-based authentication routine.
- [0052] In Example 14, the subject matter of any one of Examples 1 to 13 may
- 15 include, wherein the processor determines, for each selected image segment, a desired pixel brightness in the hue saturation brightness space and applies independent pixel integration times and amplification values as necessary to achieve the desired pixel brightness in the hue saturation brightness space.
- [0053] In Example 15, the subject matter of any one of Examples 1 to 14 may
- 20 include, wherein the desired pixel brightness is approximately 128.
- [0054] In Example 16, the subject matter of any one of Examples 1 to 15 may include, wherein the processor is to search for a user's feature in the corrected image and authenticate the user based on the user feature.
- [0055] In Example 17, the subject matter of any one of Examples 1 to 16 may
- 25 include, wherein the processor is to search for a face in the corrected image and authenticate a user based on facial features in the image.
- [0056] In Example 18, the subject matter of any one of Examples 1 to 17 may include, wherein to authenticate the user, the processor is to execute a cloud-based authentication routine.
- 30 [0057] In Example 19, the subject matter of any one of Examples 1 to 18 may include, wherein to select, within the two-dimensional image, image segments corresponding to the one or more depth regions, the processor is to identify contours in the image.

[0058] In Example 20, the subject matter of any one of Examples 1 to 19 may include, wherein a contour is a consistently ascending or descending slope with less than a threshold level of variation in slope over a predefined kernel region.

5 [0059] In Example 21, the subject matter of any one of Examples 1 to 20 may include, wherein a contour is a consistently ascending or descending slope with less than 5mm variation in slope over a 1cm x 1cm x 1cm kernel region.

[0060] In Example 22, the subject matter of any one of Examples 1 to 21 may include, wherein to perform the brightness operation, the processor is to distribute the brightness operation for each image segment to a separate
10 processor.

[0061] In Example 23, the subject matter of any one of Examples 1 to 22 may include, wherein the 2D and 3D cameras are separate from the processor.

[0062] In Example 24, the subject matter of any one of Examples 1 to 23 may include, wherein the processor is in a computing device and wherein the 2D and
15 3D cameras are integrated into the computing device.

[0063] Example 25 includes subject matter (such as a method, means for performing acts, machine readable medium including instructions that when performed by a machine cause the machine to performs acts, or an apparatus to perform) for enhanced image correction comprising: obtaining a two-
20 dimensional image of a scene; aligning range information obtained from the scene with the two-dimensional image; identifying one or more depth regions; selecting, within the two-dimensional image, image segments corresponding to the one or more depth regions; and performing brightness operations on one or more of the selected image segments to form a corrected image.

25 [0064] In Example 26, the subject matter of Example 25 may include, wherein aligning range information obtained from a scene with a two-dimensional image of the scene includes extracting the image from video.

[0065] In Example 27, the subject matter of any one of Examples 25 to 26 may include, wherein selecting image segments includes generating a pixel polygon
30 descriptor for each image segment.

[0066] In Example 28, the subject matter of any one of Examples 25 to 27 may include, wherein aligning the range information with the two-dimensional image includes converting the range information to a coordinate system.

[0067] In Example 29, the subject matter of any one of Examples 25 to 28 may include, wherein aligning the range information with the two-dimensional image includes segmenting the range information based on world coordinate contours.

5 [0068] In Example 30, the subject matter of any one of Examples 25 to 29 may include, wherein selecting image segments includes projecting the depth region on the two-dimensional image.

[0069] In Example 31, the subject matter of any one of Examples 25 to 30 may include, wherein performing the brightness operation comprises: determining, for each selected image segment, a desired pixel brightness in the hue saturation
10 brightness space; and modifying 2D camera controls as necessary to achieve the desired pixel brightness in the hue saturation brightness space.

[0070] In Example 32, the subject matter of any one of Examples 25 to 31 may include, wherein the desired pixel brightness is approximately 128.

[0071] In Example 33, the subject matter of any one of Examples 25 to 32 may
15 include, wherein modifying 2D camera controls includes applying to each selected image segment, independent pixel integration times based on the desired pixel brightness.

[0072] In Example 34, the subject matter of any one of Examples 25 to 33 may include, wherein modifying 2D camera controls includes applying to each
20 selected image segment, amplification values based on the desired pixel brightness.

[0073] In Example 35, the subject matter of any one of Examples 25 to 34 may include, wherein the method further comprises searching for a user's feature in the corrected image and authenticating the user based on the user feature.

25 [0074] In Example 36, the subject matter of any one of Examples 25 to 35 may include, wherein the method further comprises searching for a face in the corrected image and authenticating a user based on facial features in the image.

[0075] In Example 37, the subject matter of any one of Examples 25 to 36 may include, wherein authenticating the user includes executing a cloud-based
30 authentication routine.

[0076] In Example 38, the subject matter of any one of Examples 25 to 37 may include, wherein performing the brightness operation comprises: determining, for each selected image segment, a desired pixel brightness in the hue saturation brightness space; and applying independent pixel integration times and

amplification values as necessary to achieve the desired pixel brightness in the hue saturation brightness space.

[0077] In Example 39, the subject matter of any one of Examples 25 to 38 may include, wherein the desired pixel brightness is approximately 128.

5 [0078] In Example 40, the subject matter of any one of Examples 25 to 39 may include, wherein the method further comprises searching for a user's feature in the corrected image and authenticating the user based on the user feature.

[0079] In Example 41, the subject matter of any one of Examples 25 to 40 may include, wherein the method further comprises searching for a face in the
10 corrected image and authenticating a user based on facial features in the image.

[0080] In Example 42, the subject matter of any one of Examples 25 to 41 may include, wherein authenticating includes executing a cloud-based authentication routine.

[0081] In Example 43, the subject matter of any one of Examples 25 to 42 may include, wherein selecting, within the two-dimensional image, image segments
15 corresponding to the one or more depth regions includes identifying contours in the image.

[0082] In Example 44, the subject matter of any one of Examples 25 to 43 may include, wherein a contour is a consistently ascending or descending slope with
20 less than a threshold level of variation in slope over a predefined kernel region.

[0083] In Example 45, the subject matter of any one of Examples 25 to 44 may include, wherein a contour is a consistently ascending or descending slope with less than 5mm variation in slope over a 1cm x 1cm x 1cm kernel region.

[0084] In Example 46, the subject matter of any one of Examples 25 to 45 may include, wherein performing the brightness operation comprises distributing the
25 brightness operation for each image segment to a separate processor.

[0085] Example 47 includes at least one machine-readable medium including instructions that, when performed by a machine, cause the machine to perform any of the Examples 25-46.

30 [0086] Example 48 includes an apparatus comprising means for performing any of the Examples 25-46.

[0087] Example 49 includes subject matter (such as a device, apparatus, or machine) for enhanced image correction comprising; a 2D camera; a 3D camera; means for receiving a two-dimensional image from the 2D camera; means for

receiving range information from the 3D camera; means for aligning the range information with the two-dimensional image; means for identifying one or more depth regions; means for selecting, within the two-dimensional image, image segments corresponding to the one or more depth regions; means for performing
5 brightness operations on one or more of the image segments to form a corrected image; and means for authenticating a user based on a user feature in the corrected image.

[0088] In Example 50, the subject matter of Example 49 may include, wherein the two-dimensional image is a video frame.

10 **[0089]** In Example 51, the subject matter of any one of Examples 49 to 50 may include, wherein the means for selecting image segments includes means for generating a pixel polygon descriptor for each image segment.

[0090] In Example 52, the subject matter of any one of Examples 49 to 51 may include, wherein the means for aligning the range information with the two-
15 dimensional image includes means for converting the range information to a coordinate system.

[0091] In Example 53, the subject matter of any one of Examples 49 to 52 may include, wherein the range information is segmented based on world coordinate contours.

20 **[0092]** In Example 54, the subject matter of any one of Examples 49 to 53 may include, wherein the means for selecting the image segment includes means for projecting the depth region on the two-dimensional image.

[0093] In Example 55, the subject matter of any one of Examples 49 to 54 may include, wherein the apparatus includes a processor and wherein the processor
25 determines, for each selected image segment, a desired pixel brightness in the hue saturation brightness space and modifies 2D camera controls as necessary to achieve the desired pixel brightness in the hue saturation brightness space.

[0094] In Example 56, the subject matter of any one of Examples 49 to 55 may include, wherein the desired pixel brightness is approximately 128.

30 **[0095]** In Example 57, the subject matter of any one of Examples 49 to 56 may include, wherein the processor modifies 2D camera controls to apply to each selected image segment, independent pixel integration times based on the desired pixel brightness.

- [0096] In Example 58, the subject matter of any one of Examples 49 to 57 may include, wherein the processor modifies 2D camera controls to apply to each selected image segment, amplification values based on the desired pixel brightness.
- 5 [0097] In Example 59, the subject matter of any one of Examples 49 to 58 may include, wherein the processor searches for a user's feature in the corrected image and authenticates the user based on the user feature.
- [0098] In Example 60, the subject matter of any one of Examples 49 to 59 may include, wherein the processor searches for a face in the corrected image and
- 10 authenticates a user based on facial features in the image.
- [0099] In Example 61, the subject matter of any one of Examples 49 to 60 may include, wherein the processor authenticates a user by executing a cloud-based authentication routine.
- [00100] In Example 62, the subject matter of any one of Examples 49 to 61 may
- 15 include, wherein the apparatus includes a processor and wherein the processor determines, for each selected image segment, a desired pixel brightness in the hue saturation brightness space and applies independent pixel integration times and amplification values as necessary to achieve the desired pixel brightness in the hue saturation brightness space.
- 20 [00101] In Example 63, the subject matter of any one of Examples 49 to 62 may include, wherein the desired pixel brightness is approximately 128.
- [00102] In Example 64, the subject matter of any one of Examples 49 to 63 may include, wherein the apparatus further comprises means for searching for a user's feature in the corrected image and means for authenticating the user based
- 25 on the user feature.
- [00103] In Example 65, the subject matter of any one of Examples 49 to 64 may include, wherein the apparatus further comprises means for searching for a face in the corrected image and means for authenticating a user based on facial features in the image.
- 30 [00104] In Example 66, the subject matter of any one of Examples 49 to 65 may include, wherein the means for authenticating includes means for executing a cloud-based authentication routine.
- [00105] In Example 67, the subject matter of any one of Examples 49 to 66 may include, wherein the means for selecting, within the two-dimensional image,

image segments corresponding to the one or more depth regions includes means for identifying contours in the image.

[00106] In Example 68, the subject matter of any one of Examples 49 to 67 may include, wherein a contour is a consistently ascending or descending slope with
5 less than a threshold level of variation in slope over a predefined kernel region.

[00107] In Example 69, the subject matter of any one of Examples 49 to 68 may include, wherein a contour is a consistently ascending or descending slope with less than 5mm variation in slope over a 1cm x 1cm x 1cm kernel region.

[00108] In Example 70, the subject matter of any one of Examples 49 to 69 may
10 include, wherein the means for performing the brightness operation comprises means for distributing the brightness operation for each image segment to a separate processor.

[00109] The above detailed description includes references to the accompanying drawings, which form a part of the detailed description. The
15 drawings show, by way of illustration, specific embodiments that may be practiced. These embodiments are also referred to herein as “examples.” Such examples may include elements in addition to those shown or described. However, also contemplated are examples that include the elements shown or described. Moreover, also contemplate are examples using any combination or
20 permutation of those elements shown or described (or one or more aspects thereof), either with respect to a particular example (or one or more aspects thereof), or with respect to other examples (or one or more aspects thereof) shown or described herein.

[00110] Publications, patents, and patent documents referred to in this
25 document are incorporated by reference herein in their entirety, as though individually incorporated by reference. In the event of inconsistent usages between this document and those documents so incorporated by reference, the usage in the incorporated reference(s) are supplementary to that of this document; for irreconcilable inconsistencies, the usage in this document
30 controls.

[00111] In this document, the terms “a” or “an” are used, as is common in patent documents, to include one or more than one, independent of any other instances or usages of “at least one” or “one or more.” In this document, the term “or” is used to refer to a nonexclusive or, such that “A or B” includes “A

but not B,” “B but not A,” and “A and B,” unless otherwise indicated. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.” Also, in the following claims, the terms “including” and “comprising” are open-ended, that is, a system, device, article, or process that includes elements in addition to those listed after such a term in a claim are still deemed to fall within the scope of that claim. Moreover, in the following claims, the terms “first,” “second,” and “third,” etc. are used merely as labels, and are not intended to suggest a numerical order for their objects.

5

10 **[00112]** The above description is intended to be illustrative, and not restrictive. For example, the above-described examples (or one or more aspects thereof) may be used in combination with others. Other embodiments may be used, such as by one of ordinary skill in the art upon reviewing the above description. The Abstract is to allow the reader to quickly ascertain the nature of the technical

15 disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. Also, in the above Detailed Description, various features may be grouped together to streamline the disclosure. However, the claims may not set forth every feature disclosed herein as embodiments may feature a subset of said features. Further, embodiments

20 may include fewer features than those disclosed in a particular example. Thus, the following claims are hereby incorporated into the Detailed Description, with a claim standing on its own as a separate embodiment. The scope of the embodiments disclosed herein is to be determined with reference to the appended claims, along with the full scope of equivalents to which such claims

25 are entitled.

CLAIMS

What is claimed is:

1. A system for enhanced image correction, comprising:
5 a 2D camera;
a 3D camera; and
a processor to:
receive a two-dimensional image from the 2D camera;
receive range information from the 3D camera;
10 align the range information with the two-dimensional image;
identify one or more depth regions;
select, within the two-dimensional image, image segments
corresponding to the one or more depth regions;
perform brightness operations on one or more of the image
15 segments to form a corrected image; and
authenticate a user based on a user feature in the corrected image.
2. The system of claim 1, wherein the two-dimensional image is a video
frame.
20
3. The system of claim 1, wherein to select image segments, the processor
is to generate a pixel polygon descriptor for each image segment.
4. The system of claim 1, wherein to align the range information with the
25 two-dimensional image, the processor is to convert the range information to a
coordinate system.
5. The system of claim 1, wherein the range information is segmented based
on world coordinate contours.
30
6. The system of claim 1, wherein to select the image segment, the
processor is to project the depth region on the two-dimensional image.

7. The system of claim 1, wherein the processor is to determine, for each selected image segment, a desired pixel brightness in the hue saturation brightness space and modifies 2D camera controls as necessary to achieve the desired pixel brightness in the hue saturation brightness space.
- 5
8. The system of claim 7, wherein the desired pixel brightness is approximately 128.
9. The system of claim 7, wherein the processor is to modify 2D camera controls to apply to each selected image segment, independent pixel integration times based on the desired pixel brightness.
- 10
10. The system of claim 7, wherein the processor is to modify 2D camera controls to apply to each selected image segment, amplification values based on the desired pixel brightness.
- 15
11. The system of claim 7, wherein the processor is to search for a user's feature in the corrected image and authenticates the user based on the user feature.
- 20
12. The system of claim 7, wherein the processor is to search for a face in the corrected image and authenticates a user based on facial features in the image.
13. The system of claim 12, wherein the processor is to authenticate a user by executing a cloud-based authentication routine.
- 25
14. A method of enhanced image correction, comprising:
obtaining a two-dimensional image of a scene;
aligning range information obtained from the scene with the two-dimensional image;
30 identifying one or more depth regions;
selecting, within the two-dimensional image, image segments corresponding to the one or more depth regions; and

performing brightness operations on one or more of the selected image segments to form a corrected image.

15. The method of claim 14, wherein aligning range information obtained
5 from a scene with a two-dimensional image of the scene includes extracting the image from video.

16. The method of claim 14, wherein selecting image segments includes
generating a pixel polygon descriptor for each image segment.
10

17. The method of claim 14, wherein performing the brightness operation
comprises :
determining, for each selected image segment, a desired pixel brightness
in the hue saturation brightness space; and
15 applying independent pixel integration times and amplification values as
necessary to achieve the desired pixel brightness in the hue saturation brightness
space.

18. The method of claim 17, wherein the desired pixel brightness is
20 approximately 128.

19. The method of claim 17, wherein the method further comprises searching
for a user's feature in the corrected image and authenticating the user based on
the user feature.
25


20. The method of claim 17, wherein the method further comprises searching
for a face in the corrected image and authenticating a user based on facial
features in the image.

30 21. The method of claim 14, wherein selecting, within the two-dimensional
image, image segments corresponding to the one or more depth regions includes
identifying contours in the image.


22. The method of claim 21, wherein a contour is a consistently ascending or descending slope with less than a threshold level of variation in slope over a predefined kernel region.
- 5 23. The method of claim 21, wherein a contour is a consistently ascending or descending slope with less than 5mm variation in slope over a 1cm x 1cm x 1cm kernel region.
24. At least one machine-readable medium including instructions that, when
10 performed by a machine, cause the machine to perform any of the methods of claims 14-23.
25. An apparatus comprising means for performing any of the methods of claims 14-23.

15

1/5

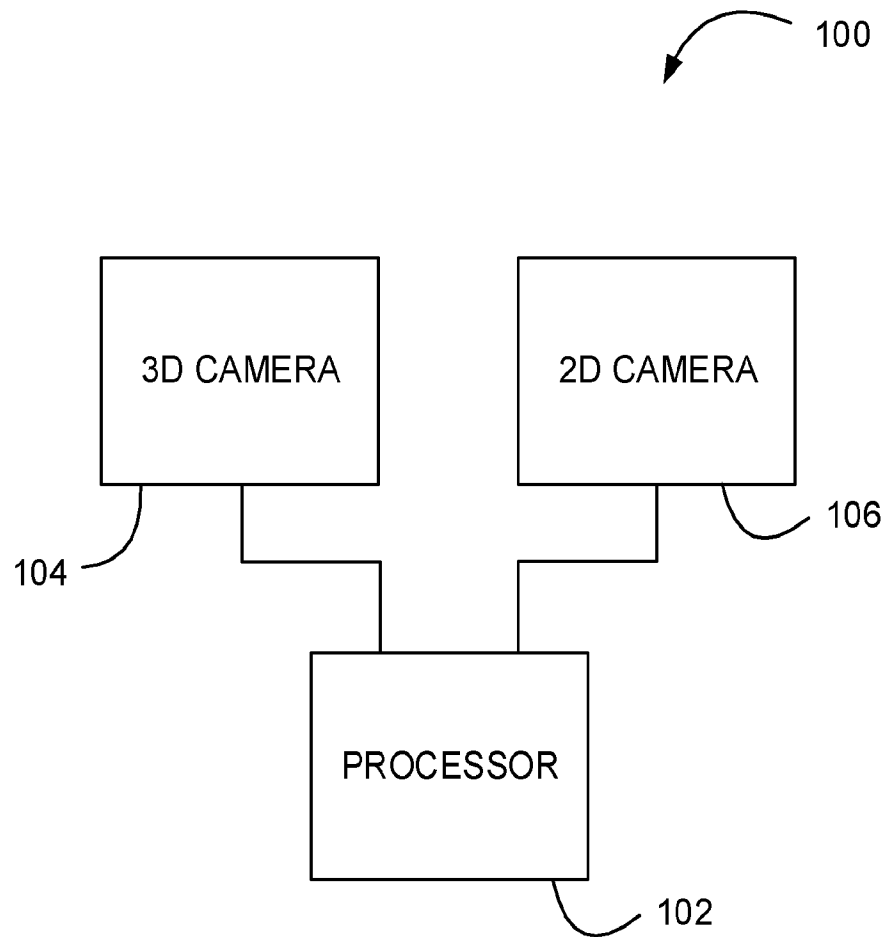***FIG. 1***

2/5

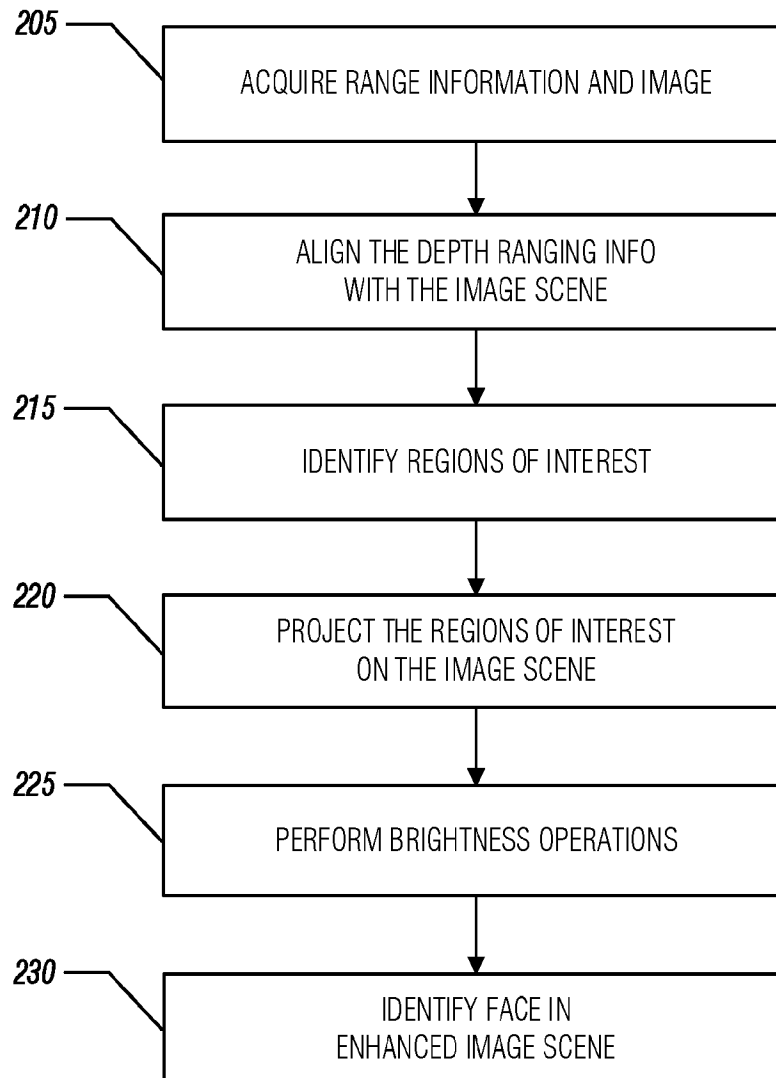**FIG. 2**

3/5

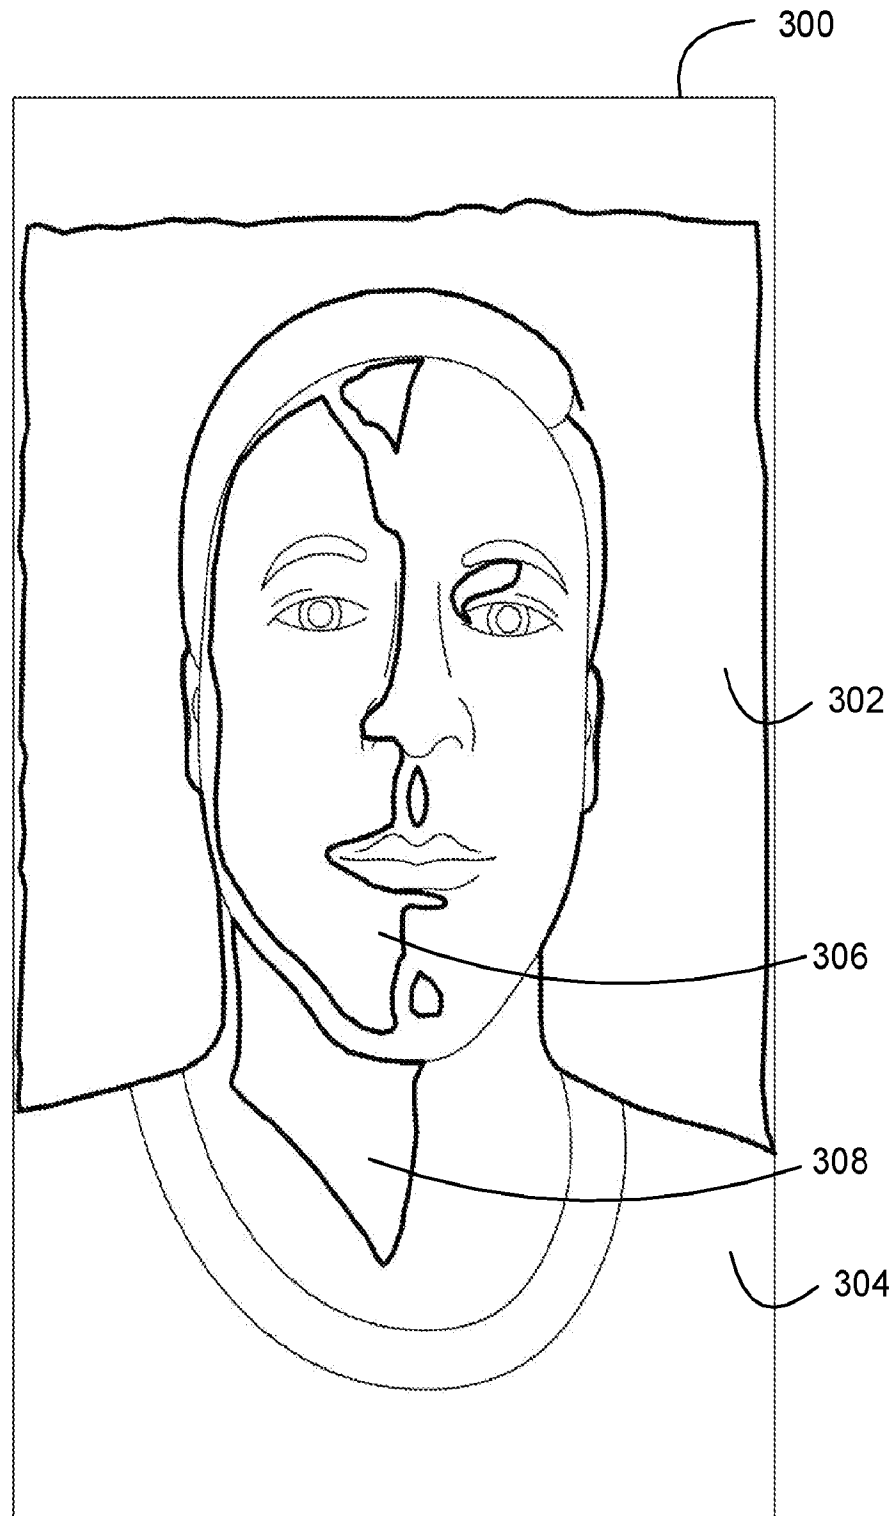
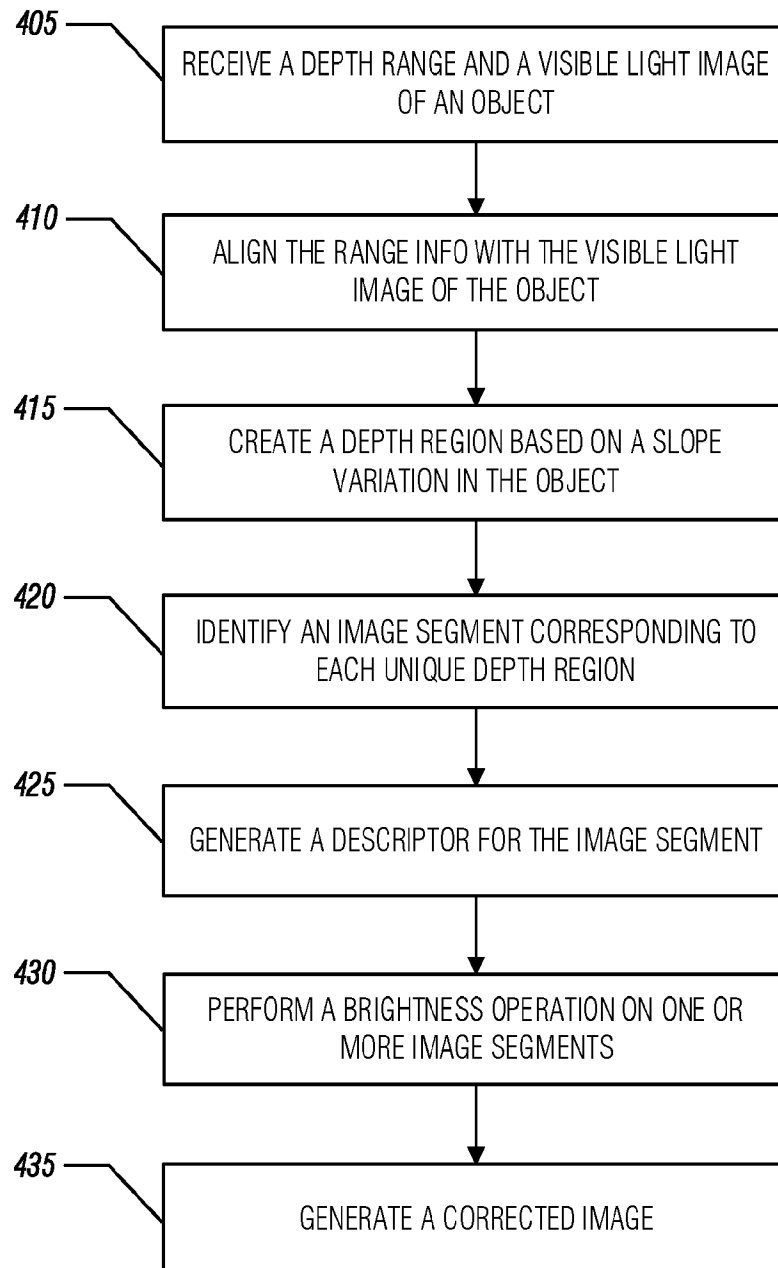
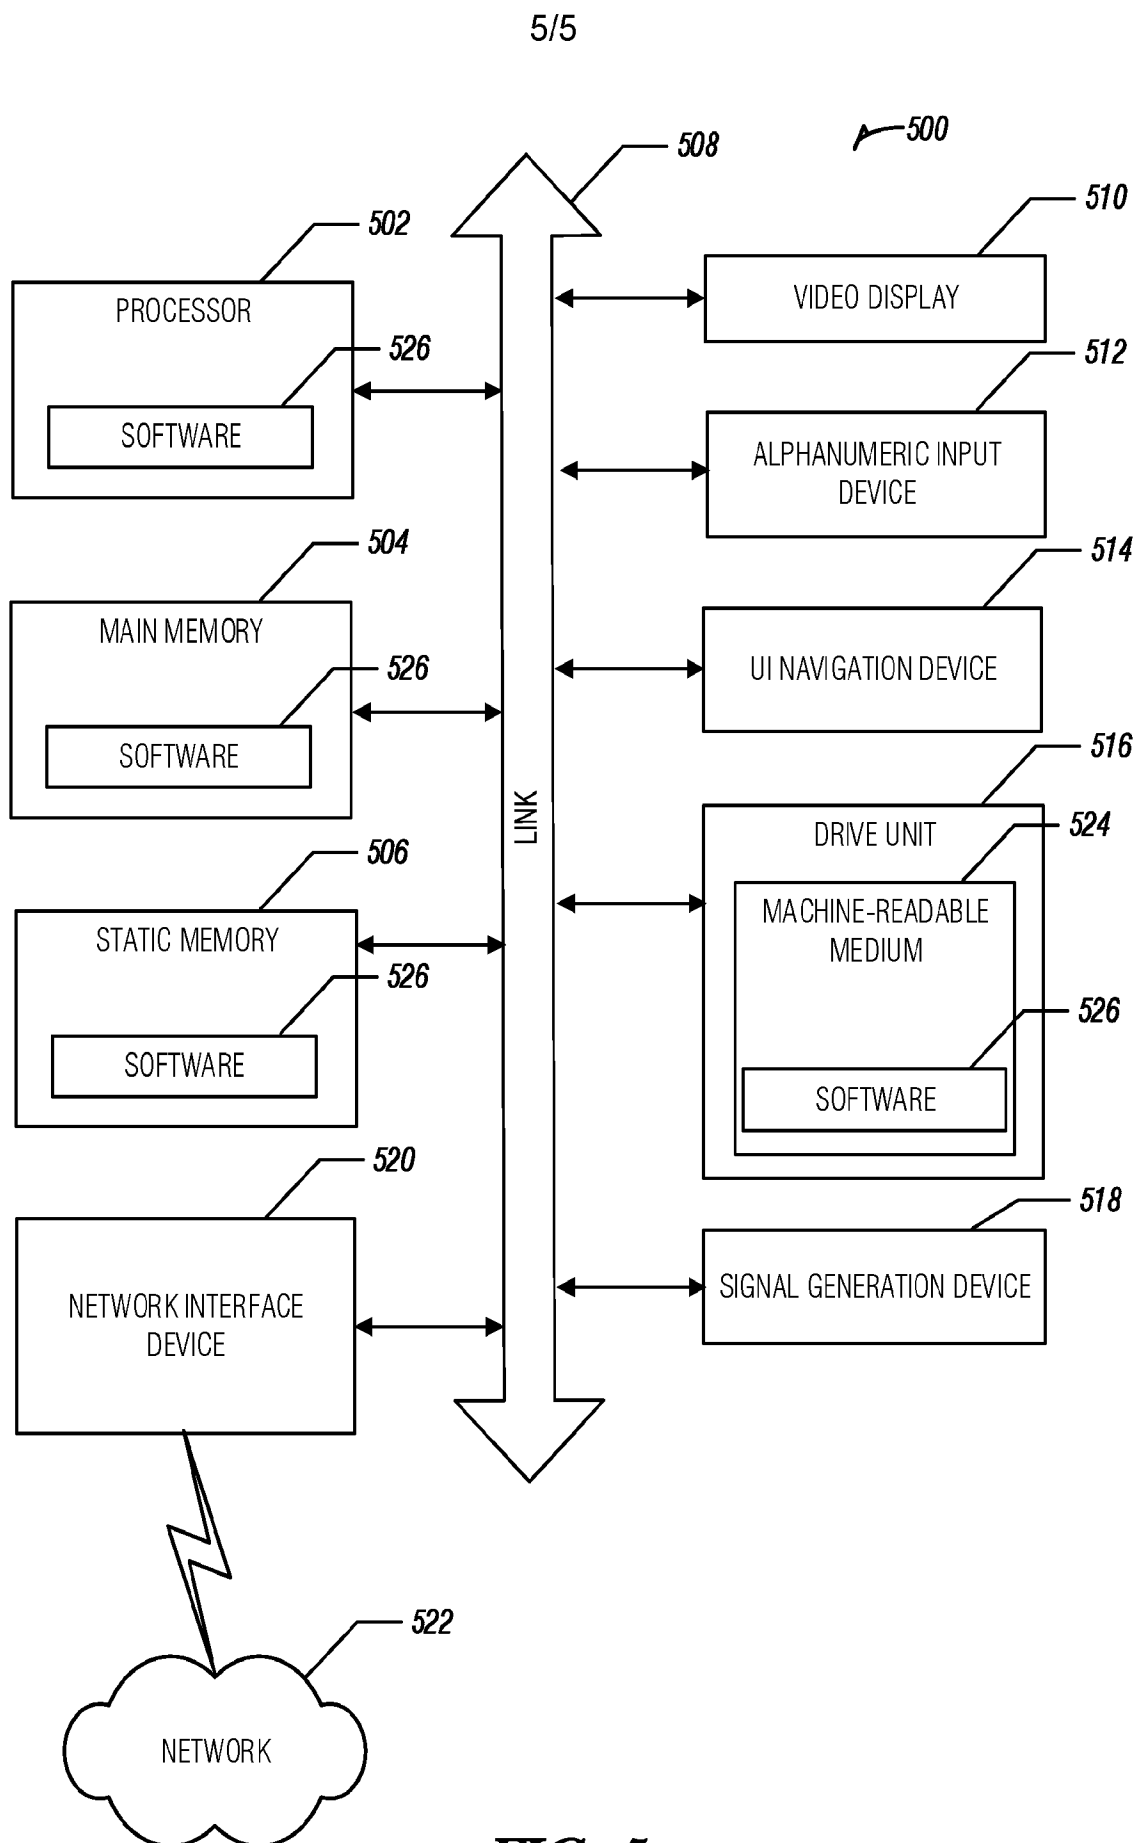


FIG. 3

4/5

**FIG. 4**

**FIG. 5**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/060351**A. CLASSIFICATION OF SUBJECT MATTER****H04N 13/02(2006.01)i, H04N 13/04(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N 13/02; G06T 17/00; H04L 9/32; G06K 9/00; G06T 1/00; H04N 13/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: 2D, 3D, camera, depth, match, bright, authenticate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012-0050483 A1 (CHRIS BOROSS et al.) 01 March 2012 See paragraphs [0039]-[0042], [0051]; claims 1, 11; and figures 1-5.	1-25
A	US 2013-0086674 A1 (ERIC HORVITZ et al.) 04 April 2013 See paragraphs [0026], [0049]; claims 1-5; and figures 4, 6-7.	1-25
A	JP 2014-016792 A (SONY CORP.) 30 January 2014 See paragraphs [0023]-[0026], [0044], [0065]; claims 1-3; and figure 7.	1-25
A	US 2011-0043610 A1 (HAIBING REN et al.) 24 February 2011 See paragraphs [0026]-[0037]; and figure 1.	1-25
A	US 2007-0091085 A1 (QIANG WANG et al.) 26 April 2007 See paragraphs [0067]-[0069]; and figures 1-5, 8.	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 March 2016 (11.03.2016)

Date of mailing of the international search report

11 March 2016 (11.03.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Jin Ick

Telephone No. +82-42-481-5770



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/060351

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0050483 A1	01/03/2012	EP 2541945 A2 EP 2541945 A3 US 2012-0050482 A1 US 2012-0050484 A1 US 9013552 B2 US 9100640 B2	02/01/2013 21/08/2013 01/03/2012 01/03/2012 21/04/2015 04/08/2015
US 2013-0086674 A1	04/04/2013	US 8966613 B2	24/02/2015
JP 2014-016792 A	30/01/2014	None	
US 2011-0043610 A1	24/02/2011	CN 101996416 A CN 101996416 B KR 10-2011-0020720 A US 8803950 B2	30/03/2011 20/05/2015 03/03/2011 12/08/2014
US 2007-0091085 A1	26/04/2007	US 7755619 B2	13/07/2010