



US00RE46206E

(19) **United States**  
(12) **Reissued Patent**  
**Jorgensen**

(10) **Patent Number: US RE46,206 E**  
(45) **Date of Reissued Patent: \*Nov. 15, 2016**

(54) **METHOD AND COMPUTER PROGRAM PRODUCT FOR INTERNET PROTOCOL (IP)—FLOW CLASSIFICATION IN A WIRELESS POINT TO MULTI-POINT (PTMP) TRANSMISSION SYSTEM**

USPC ..... 709/232-235; 370/231, 235  
See application file for complete search history.

(75) Inventor: **Jacob W. Jorgensen**, Folsom, CA (US)  
(73) Assignee: **Intellectual Ventures I LLC**,  
Wilmington, DE (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,472,801 A 9/1984 Huang  
4,742,512 A 5/1988 Akashi et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2064975 7/1999  
EP 0658021 6/1995

(Continued)

(\* ) Notice: This patent is subject to a terminal disclaimer.

(21) Appl. No.: **12/943,796**

(22) Filed: **Nov. 10, 2010**

**Related U.S. Patent Documents**

Reissue of:

(64) Patent No.: **7,251,218**  
Issued: **Jul. 31, 2007**  
Appl. No.: **10/241,454**  
Filed: **Oct. 24, 2002**

U.S. Applications:

(63) Continuation of application No. 09/360,156, filed on Jul. 9, 1999, now Pat. No. 6,452,915.

(60) Provisional application No. 60/092,452, filed on Jul. 10, 1998.

(51) **Int. Cl.**  
**H04Q 11/00** (2006.01)  
**G06F 15/16** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **H04L 1/20** (2013.01); **H04L 29/06**  
(2013.01); **H04L 47/10** (2013.01); **H04L 47/14**  
(2013.01);  
(Continued)

(58) **Field of Classification Search**  
CPC ..... H04L 1/20; H04L 69/165; H04L 29/06;  
H04L 47/193; H04L 47/27; H04L 63/0272;  
H04L 65/80; H04L 69/169; H04L 69/161;  
H04L 69/163; H04Q 11/0414; H04W 28/20

OTHER PUBLICATIONS

Aziz et al., "Privacy and Authentication for Wireless Local Area Networks," IEEE Personal Communications, pp. 25-31, 1st Qtr 1994.


(Continued)

*Primary Examiner* — Ovidio Escalante  
(74) *Attorney, Agent, or Firm* — Meyertons, Hood, Kivlin, Kowert & Goetzel, P.C.

(57) **ABSTRACT**

A system and method for Internet Protocol (IP) flow classification group IP flows in a packet-centric wireless point to multi-point telecommunications system is disclosed. The method comprises analyzing an IP flow in a packet-centric manner, classifying the IP flow, scheduling the IP flow for transmission over a shared wireless bandwidth between a wireless base station and at least one subscriber customer premises equipment (CPE) station, allocating the shared wireless bandwidth to a communication of the IP flow between the wireless base station and a subscriber CPE station so as to optimize end-user quality of service (QoS) associated with the IP flow.

**145 Claims, 41 Drawing Sheets**

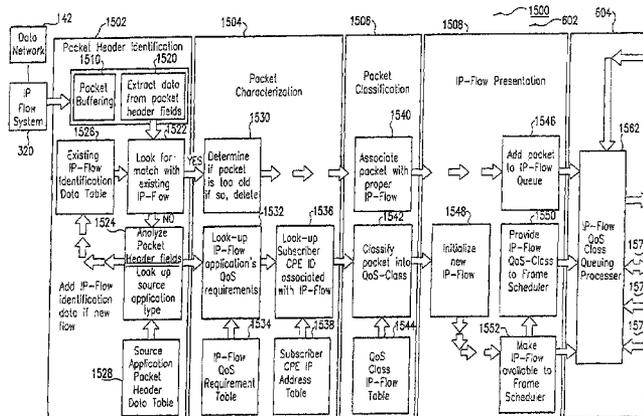

- (51) **Int. Cl.**
- |                    |           |             |         |                     |
|--------------------|-----------|-------------|---------|---------------------|
| <i>H04L 1/20</i>   | (2006.01) | 5,638,371 A | 6/1997  | Raychaudhuri et al. |
| <i>H04L 29/06</i>  | (2006.01) | 5,640,395 A | 6/1997  | Hamalainen et al.   |
| <i>H04L 12/801</i> | (2013.01) | 5,644,576 A | 7/1997  | Bauchot et al.      |
| <i>H04L 12/807</i> | (2013.01) | 5,648,969 A | 7/1997  | Pasternak et al.    |
| <i>H04Q 11/04</i>  | (2006.01) | 5,684,791 A | 11/1997 | Raychaudhuri et al. |
| <i>H04W 28/20</i>  | (2009.01) | 5,701,302 A | 12/1997 | Geiger              |
| <i>H04W 12/02</i>  | (2009.01) | 5,706,048 A | 1/1998  | Davis               |
| <i>H04W 28/24</i>  | (2009.01) | 5,717,689 A | 2/1998  | Ayanoglu            |
| <i>H04W 28/26</i>  | (2009.01) | 5,724,513 A | 3/1998  | Ben-Nun et al.      |
| <i>H04W 72/12</i>  | (2009.01) | 5,727,064 A | 3/1998  | Reeds, III          |
| <i>H04W 80/00</i>  | (2009.01) | 5,729,542 A | 3/1998  | Dupont              |
| <i>H04W 80/06</i>  | (2009.01) | 5,732,077 A | 3/1998  | Whitehead           |
| <i>H04L 12/18</i>  | (2006.01) | 5,734,833 A | 3/1998  | Chiu et al.         |
|                    |           | 5,742,847 A | 4/1998  | Knoll et al.        |
|                    |           | 5,745,480 A | 4/1998  | Behtash et al.      |
|                    |           | 5,745,551 A | 4/1998  | Strauch et al.      |
|                    |           | 5,751,708 A | 5/1998  | Eng et al.          |
|                    |           | 5,752,193 A | 5/1998  | Scholefield et al.  |
|                    |           | 5,758,281 A | 5/1998  | Emery et al.        |
|                    |           | 5,768,509 A | 6/1998  | Gunluk              |
|                    |           | 5,774,461 A | 6/1998  | Hyden et al.        |
|                    |           | 5,787,077 A | 7/1998  | Kuehnel et al.      |
|                    |           | 5,787,080 A | 7/1998  | Hulyalkar et al.    |
|                    |           | 5,790,551 A | 8/1998  | Chan                |
|                    |           | 5,790,793 A | 8/1998  | Higley              |
|                    |           | 5,793,416 A | 8/1998  | Rostoker et al.     |
|                    |           | 5,802,465 A | 9/1998  | Hamalainen et al.   |
|                    |           | 5,822,324 A | 10/1998 | Kostresti et al.    |
|                    |           | 5,826,188 A | 10/1998 | Taylor et al.       |
|                    |           | 5,828,666 A | 10/1998 | Focsaneanu et al.   |
|                    |           | 5,828,677 A | 10/1998 | Sayed et al.        |
|                    |           | 5,831,971 A | 11/1998 | Bonomi et al.       |
|                    |           | 5,831,975 A | 11/1998 | Chen et al.         |
|                    |           | 5,838,670 A | 11/1998 | Billstöm            |
|                    |           | 5,841,777 A | 11/1998 | Cohen               |
|                    |           | 5,864,540 A | 1/1999  | Bonomi et al.       |
|                    |           | 5,872,777 A | 2/1999  | Brailean et al.     |
|                    |           | 5,875,395 A | 2/1999  | Holmes              |
|                    |           | 5,889,816 A | 3/1999  | Agrawal et al.      |
|                    |           | 5,905,719 A | 5/1999  | Arnold et al.       |
|                    |           | 5,907,822 A | 5/1999  | Prieto, Jr.         |
|                    |           | 5,909,550 A | 6/1999  | Shankar et al.      |
|                    |           | 5,920,705 A | 7/1999  | Lyon et al.         |
|                    |           | 5,930,472 A | 7/1999  | Smith               |
|                    |           | 5,936,949 A | 8/1999  | Pasternak et al.    |
|                    |           | 5,953,328 A | 9/1999  | Kim et al.          |
|                    |           | 5,953,344 A | 9/1999  | Dail et al.         |
|                    |           | 5,956,330 A | 9/1999  | Kerns               |
|                    |           | 5,959,999 A | 9/1999  | An                  |
|                    |           | 5,960,000 A | 9/1999  | Ruszczzyk et al.    |
|                    |           | 5,966,378 A | 10/1999 | Hamalainen          |
|                    |           | 5,970,059 A | 10/1999 | Ahopelto et al.     |
|                    |           | 5,970,062 A | 10/1999 | Bauchot             |
|                    |           | 5,974,028 A | 10/1999 | Ramakrishnan        |
|                    |           | 5,974,085 A | 10/1999 | Smith               |
|                    |           | 5,991,292 A | 11/1999 | Focsaneanu et al.   |
|                    |           | 6,002,935 A | 12/1999 | Wang                |
|                    |           | 6,005,868 A | 12/1999 | Ito                 |
|                    |           | 6,014,377 A | 1/2000  | Gillespie           |
|                    |           | 6,016,311 A | 1/2000  | Gilbert et al.      |
|                    |           | 6,018,516 A | 1/2000  | Packer              |
|                    |           | 6,021,158 A | 2/2000  | Schurr et al.       |
|                    |           | 6,021,439 A | 2/2000  | Turek et al.        |
|                    |           | 6,028,842 A | 2/2000  | Chapman et al.      |
|                    |           | 6,031,832 A | 2/2000  | Turina              |
|                    |           | 6,031,845 A | 2/2000  | Walding             |
|                    |           | 6,038,216 A | 3/2000  | Packer              |
|                    |           | 6,038,230 A | 3/2000  | Ofek                |
|                    |           | 6,038,451 A | 3/2000  | Syed et al.         |
|                    |           | 6,038,452 A | 3/2000  | Strawczynski        |
|                    |           | 6,041,051 A | 3/2000  | Doshi et al.        |
|                    |           | 6,046,980 A | 4/2000  | Packer              |
|                    |           | 6,047,189 A | 4/2000  | Yun et al.          |
|                    |           | 6,052,594 A | 4/2000  | Chuang et al.       |
|                    |           | 6,058,114 A | 5/2000  | Sethuram et al.     |
|                    |           | 6,064,649 A | 5/2000  | Johnston            |
|                    |           | 6,072,790 A | 6/2000  | Neumiller et al.    |
|                    |           | 6,075,787 A | 6/2000  | Bobeck et al.       |
|                    |           | 6,075,792 A | 6/2000  | Ozluturk            |
- (52) **U.S. Cl.**
- CPC ..... *H04L 47/193* (2013.01); *H04L 47/27* (2013.01); *H04L 63/0272* (2013.01); *H04L 65/80* (2013.01); *H04L 69/161* (2013.01); *H04L 69/163* (2013.01); *H04L 69/165* (2013.01); *H04L 69/169* (2013.01); *H04Q 11/0414* (2013.01); *H04W 28/20* (2013.01); *H04L 12/189* (2013.01); *H04L 65/1009* (2013.01); *H04L 65/608* (2013.01); *H04L 69/16* (2013.01); *H04Q 2213/1305* (2013.01); *H04Q 2213/1322* (2013.01); *H04Q 2213/13096* (2013.01); *H04Q 2213/13097* (2013.01); *H04Q 2213/13098* (2013.01); *H04Q 2213/13141* (2013.01); *H04Q 2213/13166* (2013.01); *H04Q 2213/13176* (2013.01); *H04Q 2213/13196* (2013.01); *H04Q 2213/13204* (2013.01); *H04Q 2213/13216* (2013.01); *H04Q 2213/13292* (2013.01); *H04Q 2213/13296* (2013.01); *H04Q 2213/13348* (2013.01); *H04Q 2213/13389* (2013.01); *H04W 12/02* (2013.01); *H04W 28/24* (2013.01); *H04W 28/26* (2013.01); *H04W 72/1242* (2013.01); *H04W 80/00* (2013.01); *H04W 80/06* (2013.01)
- (56) **References Cited**
- U.S. PATENT DOCUMENTS
- |             |         |                     |
|-------------|---------|---------------------|
| 4,802,836 A | 2/1989  | Whissell            |
| 4,907,224 A | 3/1990  | Scoles et al.       |
| 5,012,469 A | 4/1991  | Sardana             |
| 5,121,391 A | 6/1992  | Paneth et al.       |
| 5,231,634 A | 7/1993  | Giles et al.        |
| 5,282,222 A | 1/1994  | Fattouche et al.    |
| 5,295,140 A | 3/1994  | Crisler et al.      |
| 5,337,313 A | 8/1994  | Buchholz et al.     |
| 5,371,794 A | 12/1994 | Diffie et al.       |
| 5,420,851 A | 5/1995  | Seshadri et al.     |
| 5,442,625 A | 8/1995  | Gitlin et al.       |
| 5,444,718 A | 8/1995  | Ejzak et al.        |
| 5,487,061 A | 1/1996  | Bray                |
| 5,493,569 A | 2/1996  | Buchholz et al.     |
| 5,497,504 A | 3/1996  | Acampora et al.     |
| 5,499,243 A | 3/1996  | Hall                |
| 5,515,363 A | 5/1996  | Ben-Nun et al.      |
| 5,526,376 A | 6/1996  | Kellenberger et al. |
| 5,539,824 A | 7/1996  | Bjorklund et al.    |
| 5,570,355 A | 10/1996 | Dail et al.         |
| 5,572,528 A | 11/1996 | Shuen               |
| 5,581,544 A | 12/1996 | Hamada et al.       |
| 5,583,914 A | 12/1996 | Chang et al.        |
| 5,594,720 A | 1/1997  | Papadopoulos et al. |
| 5,602,836 A | 2/1997  | Papadopoulos et al. |
| 5,610,910 A | 3/1997  | Focsaneanu et al.   |
| 5,613,198 A | 3/1997  | Ahmadi et al.       |
| 5,625,877 A | 4/1997  | Dunn et al.         |

(56)

References Cited

U.S. PATENT DOCUMENTS

6,081,524 A 6/2000 Chase et al.  
 6,081,536 A 6/2000 Gorsuch et al.  
 6,084,855 A 7/2000 Soirinsuo et al.  
 6,084,867 A 7/2000 Meier  
 6,091,959 A 7/2000 Souissi et al.  
 6,092,113 A 7/2000 Maeshima et al.  
 6,097,707 A 8/2000 Hodzic et al.  
 6,097,722 A 8/2000 Graham et al.  
 6,097,733 A 8/2000 Basu et al.  
 6,104,721 A 8/2000 Hsu  
 6,104,928 A 8/2000 Waugh  
 6,111,863 A 8/2000 Rostoker et al.  
 6,115,357 A 9/2000 Packer et al.  
 6,115,370 A 9/2000 Struhsaker et al.  
 6,115,390 A 9/2000 Chuah  
 6,131,012 A 10/2000 Struhsaker et al.  
 6,131,027 A 10/2000 Armbruster et al.  
 6,131,117 A 10/2000 Clark et al.  
 6,138,022 A 10/2000 Strawczynski et al.  
 6,141,533 A 10/2000 Wilson et al.  
 6,151,300 A 11/2000 Hunt et al.  
 6,151,628 A 11/2000 Xu et al.  
 6,154,643 A 11/2000 Cox  
 6,154,647 A 11/2000 Dahlin et al.  
 6,154,776 A 11/2000 Martin  
 6,160,793 A 12/2000 Ghani et al.  
 6,163,532 A 12/2000 Taguchi et al.  
 6,175,860 B1 1/2001 Gaucher  
 6,188,671 B1 2/2001 Chase et al.  
 6,192,029 B1 2/2001 Averbuch et al.  
 6,195,565 B1 2/2001 Dempsey et al.  
 6,198,728 B1 3/2001 Hulyalkar et al.  
 6,201,811 B1 3/2001 Larsson et al.  
 6,205,120 B1 3/2001 Packer et al.  
 6,208,620 B1 3/2001 Sen et al.  
 6,215,769 B1 4/2001 Ghani et al.  
 6,219,713 B1 4/2001 Ruutu et al.  
 6,236,656 B1 5/2001 Westerberg et al.  
 6,247,058 B1 6/2001 Miller et al.  
 6,252,857 B1 6/2001 Fendick et al.  
 6,256,300 B1 7/2001 Ahmed et al.  
 6,262,980 B1 7/2001 Leung et al.  
 6,263,209 B1 7/2001 Reed  
 6,272,129 B1 8/2001 Dynarski  
 6,272,333 B1 8/2001 Smith  
 6,282,208 B1 8/2001 Bowcutt et al.  
 6,295,285 B1 9/2001 Whitehead  
 6,304,564 B1 10/2001 Monin et al.  
 6,310,886 B1 10/2001 Barton  
 6,320,846 B1 11/2001 Jump et al.  
 6,324,184 B1 11/2001 Hou et al.  
 6,327,254 B1 12/2001 Chuah  
 6,330,244 B1 12/2001 Swartz et al.  
 6,330,451 B1 12/2001 Sen et al.  
 6,331,986 B1 12/2001 Mitra et al.  
 6,331,987 B1 12/2001 Beser  
 6,336,143 B1 1/2002 Diedrich et al.  
 6,353,616 B1 3/2002 Elwalid et al.  
 6,363,053 B1 3/2002 Schuster et al.  
 6,363,209 B2 3/2002 Sako et al.  
 6,377,548 B1 4/2002 Chuah  
 6,377,782 B1 4/2002 Bishop et al.  
 6,393,008 B1 5/2002 Cheng et al.  
 6,400,722 B1 6/2002 Chuah et al.  
 6,407,992 B1 6/2002 Pasternak et al.  
 6,412,006 B2 6/2002 Naudus  
 6,430,174 B1 8/2002 Jennings et al.  
 6,438,370 B1 8/2002 Einola et al.  
 6,442,158 B1 8/2002 Beser  
 6,449,251 B1 9/2002 Awadallah et al.  
 6,449,647 B1 9/2002 Colby et al.  
 6,452,915 B1 9/2002 Jorgensen  
 6,459,682 B1 10/2002 Elleson  
 6,466,651 B1 10/2002 Dailey  
 6,512,751 B1 1/2003 Struhsaker et al.

6,517,614 B1 2/2003 Klotz et al.  
 6,546,016 B1 4/2003 Gerszberg et al.  
 6,590,885 B1\* 7/2003 Jorgensen ..... 370/338  
 6,594,246 B1 7/2003 Jorgensen  
 6,608,832 B2 8/2003 Forslow  
 6,628,629 B1 9/2003 Jorgensen  
 6,640,248 B1 10/2003 Jorgensen  
 6,680,922 B1 1/2004 Jorgensen  
 6,862,622 B2\* 3/2005 Jorgensen ..... 709/226  
 6,914,965 B1 7/2005 Grob et al.  
 6,937,566 B1 8/2005 Forslow  
 7,251,218 B2 7/2007 Jorgensen  
 7,359,971 B2\* 4/2008 Jorgensen ..... 709/226  
 7,359,972 B2 4/2008 Jorgensen  
 7,409,450 B2\* 8/2008 Jorgensen ..... 709/226  
 7,412,517 B2 8/2008 Jorgensen  
 7,450,957 B2 11/2008 Ala-Luukko  
 7,496,674 B2\* 2/2009 Jorgensen ..... 709/230  
 8,078,200 B2 12/2011 Ala-Luukko  
 2002/0099854 A1\* 7/2002 Jorgensen ..... 709/249  
 2002/0099949 A1 7/2002 Fries et al.  
 2002/0163933 A1 11/2002 Benveniste  
 2003/0067903 A1\* 4/2003 Jorgensen ..... 370/338  
 2004/0240435 A1 12/2004 Boucher et al.  
 2007/0038751 A1\* 2/2007 Jorgensen ..... 709/226  
 2007/0038752 A1\* 2/2007 Jorgensen ..... 709/226  
 2007/0038753 A1 2/2007 Jorgensen  
 2007/0050492 A1 3/2007 Jorgensen  
 2007/0073805 A1\* 3/2007 Jorgensen ..... 709/203

FOREIGN PATENT DOCUMENTS

EP 702 462 A1 3/1996  
 EP 0709982 5/1996  
 EP 841 763 A1 5/1998  
 EP 848 563 A2 6/1998  
 EP 0892538 1/1999  
 EP 917 317 A1 5/1999  
 EP 926 845 A2 6/1999  
 EP 1197040 4/2002  
 EP 1775888 4/2007  
 GB 2294845 5/1996  
 JP 5-336104 12/1993  
 JP 1998-243458 11/1998  
 WO 96/10320 4/1996  
 WO 96/10320 A2 4/1996  
 WO 9715154 4/1997  
 WO 98/01988 1/1998  
 WO 98/16080 4/1998  
 WO 9826510 6/1998  
 WO 98/28877 7/1998  
 WO 9828889 7/1998  
 WO 9837703 8/1998  
 WO 98/37670 8/1998  
 WO 98/37670 A1 8/1998  
 WO 98/37706 8/1998  
 WO 98/37706 A2 8/1998  
 WO 9838753 9/1998  
 WO 9838814 9/1998  
 WO 9905828 2/1999  
 WO 9905830 2/1999  
 WO 9909762 2/1999  
 WO 9916214 4/1999  
 WO 9916266 4/1999  
 WO 99/26430 5/1999  
 WO 99/26430 A1 5/1999  
 WO 9933301 7/1999  
 WO 0072626 A1 11/2000  
 WO 00/79722 A1 12/2000  
 WO 0105099 1/2001  
 WO 0105100 1/2001  
 WO 01/005098 1/2001  
 WO 01/05098 A1 1/2001  
 WO 01/008372 2/2001  
 WO 01/008372 A3 2/2001  
 WO 0239710 5/2002

(56)

**References Cited**

## FOREIGN PATENT DOCUMENTS

WO WO 02/39710 A1 5/2002  
 WO WO 00/79722 12/2002

## OTHER PUBLICATIONS

- V. Bharghavan, "Secure Wireless LANs," Proceedings of the 2nd ACM Conference on Computer and Communications Security, pp. 10-17, 1994.
- S. Uskela, "Security in Wireless Local Area Networks," Proceedings of the Helsinki University of Technology, Seminars on Network Security, 1997.
- Park et al., "Security Protocol for IEEE 802.11 Wireless Local Area Network," Mobile Networks and Applications, pp. 237-246, 1998.
- C. E. Perkins, "Mobile Networking in the Internet," Mobile Networks and Applications, pp. 319-334, 1998.
- Sudame et al., "Transformer Tunnels: A Framework for Providing Route-Specific Adaptations," The Usenix Annual Technical Conference, Jun. 1998.
- Intel Networking—White Paper "Differential Services (DS)" May 8, 2003, 3 pages.
- RTCL—"Differentiated Services on the Internet" May 8, 2003, 3 pages.
- El-Gendy et al. "Equation-Based Packet Marking for Assured Forwarding Services" IEEE Infocom 2002.
- Cisco Data Sheet "Cisco IOS Software: Quality-of-Service—The Differentiated Services Model (DiffServ)" May 8, 2003, 3 pages.
- Blake et al., "An Architecture for Differentiated Services" IETF Standard, Internet Engineering Task Force, Dec. 1998, XP015008259, 36 pages.
- Mahadevan et al., "Quality of Service Architectures for Wireless Networks: IntServ and DiffServ Models," Parallel Architectures Algorithms, and Networks, Proceedings fourth International Symposium on Perth/Fremantle, Jun. 23-25, 1999, 6 pages; XP10341815.
- Blake, "Some Issues and Applications of Packet Marking for Differentiated Services", Internet Engineering Task Force (IETF), 41 pages; Dec. 1997.
- Nichols et al., "Definition of the Differentiated Services Field (DS Byte) in the IPv4 and IPv6 Headers", Internet Engineering Task Force (IETF), 12 pages; May 1998.
- Nichols, "Differentiated Services Operational Model and Definitions", Internet Engineering Task Force (IETF), 15 pages; Feb. 1998.
- Official Action in Chinese Application No. 200810175249.0 issued Aug. 5, 2010, 4 pages.
- Official Action in Chinese Application No. 00812510.4 issued Apr. 1, 2005, 6 pages. English Translation Available.
- Official Action in Chinese Application No. 00812510.4 issued Jul. 25, 2008, 5 pages.
- Amended claims in Chinese Application No. 00812510.4 issued Nov. 10, 2008, 27 pages. English Translation Available, 52 pages.
- Official Action in Chinese Application No. 200610075742.6 issued Nov. 20, 2009, 5 pages.
- Response to Official Action in Chinese Application No. 200610075742.6 issued Nov. 20, 2009, filed May 5, 2010, 5 pages.
- Amended claims in Chinese Application No. 200610075742.6 filed May 5, 2010, 3 pages.
- Official Action in Chinese Application No. 200610075742.6 issued Jul. 30, 2010, 7 pages.
- Response to Official Action in European Application No. 00947079.0 issued Jan. 19, 2006, mailed Jul. 25, 2006, 12 pages.
- Official Action in Japanese Application No. 2001-510192 issued Jan. 26, 2010, 2 pages.
- Response to Official Action in Japanese Application No. 2001-510192 issued Jan. 26, 2010, mailed Jul. 15, 2010, 11 pages.
- Amended claims in Japanese Application No. 2001-510192 dated Jul. 15, 2010, 3 pages.
- Official Action in Korean Application No. 10-2002-7000350 issued Nov. 23, 2006, 2 pages.
- Official Action in Korean Application No. 10-2002-7000350 issued Jun. 29, 2007, 4 pages.
- Response to Official Action in Korean Application No. 10-2002-7000350 issued Jun. 29, 2007, filed Oct. 29, 2007, 43 pages.
- Amended claims in Korean Application No. 10-2002-7000350 filed Oct. 29, 2007, 45 pages.
- Official Action in Korean Application No. 10-2002-7000350 issued Feb. 29, 2008, 2 pages.
- Response to Official Action in Korean Application No. 10-2002-7000350 issued Feb. 29, 2008, filed Apr. 30, 2008, 13 pages.
- Amended claims in Korean Application No. 10-2002-7000350 filed Apr. 30, 2008, 45 pages.
- Official Action in Korean Application No. 10-2007-7003034 filed May 7, 2007, 2 pages. English Translation Available.
- Response to Official Action in Korean Application No. 10-2007-7003034 filed May 7, 2007; pages filed Sep. 6, 2007, 14 pages.
- Official Action in Korean Application No. 10-2007-7003033 issued May 7, 2007, 2 pages. English Translation Available.
- Response to Official Action in Korean Application No. 10-2007-7003033 issued May 7, 2007, pages filed Sep. 6, 2007.
- Official Action in Korean Application No. 10-2007-7003032 dated May 7, 2007, 2 pages. English Translation Available.
- Response to Official Action in Korean Application No. 10-2007-7003032 dated May 7, 2007, pages filed Oct. 5, 2007.
- Official Action in Korean Application No. 10-2007-7003032 dated Feb. 28, 2008, 2 pages English Translation Available.
- Notice of Appeal in Korean Application No. 10-2007-7003032 dated Feb. 28, 2008, 16 pages filed Apr. 30, 2008.
- European Search Report; European Application No. 07100992.2 ; May 6, 2009; 7 pages.
- European Search Report; European Application No. 07100998.9; May 19, 2009; 4 pages.
- European Search Report; European Application No. 07101014.4; May 26, 2009; 9 pages.
- European Search Report; European Application No. 07101009.4; May 25, 2009; 7 pages.
- Official Action in Korean Application No. 10-2009-7018628 filed Dec. 23, 2009, 2 pages.
- Response to Official Action in Korean Application No. 10-2009-7018628 filed Dec. 23, 2009, filed Jun. 23, 2010, 13 pages.
- Amended claims in Korean Application No. 10-2009-7018628 filed Jun. 23, 2010, 3 pages.
- Concise Explanation of Non-English Language Documents Under 37 C.F.R. § 1.98(a)(3) for NPL References 19, 21-22, 26-27, 30-31, 33-34, and 48-49.
- European Opinion and Search Report in Application No. 07101001.1 dated Aug. 6, 2007, 9 pages.
- Official Action in Korean Application No. 10-2009-7018628 issued Nov. 25, 2010, 3 pages. English Translation Available.
- Official Action in U.S. Appl. No. 09/349,480 issued Oct. 7, 2002, 7 pages.
- Response to Official Action in U.S. Appl. No. 09/349,480 issued Oct. 7, 2002, 18 pages.
- Official Action in U.S. Appl. No. 09/349,480 issued Dec. 31, 2002, 5 pages.
- Response to Official Action in U.S. Appl. No. 09/349,480 issued Dec. 31, 2002, mailed Jan. 8, 2003, 4 pages.
- Official Action in U.S. Appl. No. 09/349,480 issued May 2, 2003, 6 pages.
- Official Action in U.S. Appl. No. 09/350,118 issued Dec. 4, 2002, 11 pages.
- Response to Official Action in U.S. Appl. No. 09/350,118 issued Dec. 4, 2002, mailed Mar. 4, 2003, 31 pages.
- Official Action in U.S. Appl. No. 09/350,118 issued Apr. 11, 2003, 8 pages.
- Official Action in U.S. Appl. No. 09/349,476 issued Oct. 23, 2002, 5 pages.
- Response to Official Action in U.S. Appl. No. 09/349,476 issued Oct. 23, 2002, mailed Dec. 6, 2002, 16 pages.
- Official Action in U.S. Appl. No. 09/349,476 issued Feb. 27, 2003, 7 pages.

(56)

## References Cited

## OTHER PUBLICATIONS

Official Action in U.S. Appl. No. 09/347,857 issued Jan. 24, 2003, 9 pages.

Response to Official Action in U.S. Appl. No. 09/347,857 issued Jan. 24, 2003, mailed Mar. 18, 2003, 18 pages.

Supplemental Amendment in U.S. Appl. No. 09/347,857 issued Mar. 21, 2003, 4 pages.

Notice of Allowance in U.S. Appl. No. 09/347,857 issued Sep. 29, 2003, 6 pages.

Official Action in U.S. Appl. No. 09/349,478 issued Mar. 26, 2003, 6 pages.

Response to Official Action in U.S. Appl. No. 09/349,478 issued Dec. 27, 2001, mailed Mar. 27, 2002, 23 pages.

Official Action in U.S. Appl. No. 09/349,478 issued May 21, 2002, 6 pages.

Response to Official Action in U.S. Appl. No. 09/349,478 issued May 21, 2002, mailed Aug. 21, 2002, 12 pages.

Official Action in U.S. Appl. No. 09/349,478 issued Dec. 27, 2001, 8 pages.

Official Action in U.S. Appl. No. 09/350,126 issued Dec. 17, 2001, 8 pages.

Response to Official Action in U.S. Appl. No. 09/350,126 issued Dec. 17, 2001, mailed Mar. 14, 2002, 13 pages.

Official Action in U.S. Appl. No. 09/350,126 issued Jun. 11, 2002, 8 pages.

Response to Official Action in U.S. Appl. No. 09/350,126 issued Jun. 11, 2002, mailed Aug. 12, 2002, 16 pages.

Official Action in U.S. Appl. No. 09/350,126 issued Dec. 18, 2002, 9 pages.

Response to Official Action in U.S. Appl. No. 09/350,126 issued Dec. 18, 2002, mailed Mar. 18, 2003, 20 pages.

Notice of Allowance in U.S. Appl. No. 09/350,126 issued Apr. 24, 2003, 3 pages.

Official Action in U.S. Appl. No. 09/350,170 issued May 29, 2003, 11 pages.

Official Action in U.S. Appl. No. 09/349,481 issued Jan. 27, 2003, 17 pages.

Official Action in U.S. Appl. No. 09/349,481 issued Feb. 26, 2002, 10 pages.

Response to Official Action in U.S. Application No. 09/349,481 issued Jan. 27, 2003, mailed Apr. 11, 2003, 14 pages.

Official Action in U.S. Appl. No. 09/349,481 issued May 6, 2003, 14 pages.

Official Action in U.S. Appl. No. 09/349,481 issued Feb. 26, 2002, mailed May 28, 2002, 15 pages.

Official Action in U.S. Appl. No. 09/349,481 issued Aug. 9, 2002, 10 pages.

Response to Official Action in U.S. Appl. No. 09/349,481 issued Aug. 9, 2002, mailed Nov. 7, 2002, 19 pages.

Official Action in U.S. Appl. No. 09/350,159 issued Dec. 4, 2002, 14 pages.

Response to Official Action in U.S. Appl. No. 09/350,159 issued Dec. 4, 2002, mailed Mar. 4, 2003, 34 pages.

Official Action in U.S. Appl. No. 09/350,159 issued Apr. 9, 2003, 8 pages.

Official Action in U.S. Appl. No. 09/349,475 issued Nov. 20, 2002, 8 pages.

Official Action in U.S. Appl. No. 12/184,902 issued Mar. 22, 2011, 24 pages.

Official Action in Chinese Application No. 610075742.6 issued Mar. 10, 2011, 5 pages. English Translation Available.

Official Action in Japanese Application No. 2001-510192 issued Apr. 5, 2011, 4 pages. English Translation Available.

Appendix L-1, Defendants' Supplemental Contentions for U.S. Pat. No. 7,496,674, *Intellectual Ventures I LLC*, (Plaintiff) V. *United States Cellular Corporation*, (Defendant), C.A. No. 13-1636-LPS, In The United States District Court For The District Of Delaware, U.S. Cellular's Second Supplemental Invalidation Contentions for the '674 Patent, (May 8, 2015), 3 pages.

Appendix L-16, Defendants' Supplemental Invalidation Contentions for Burchfiel et al., Functions and Structure of a Packet Radio Station, *Intellectual Ventures I LLC*, (Plaintiff) V. *United States Cellular Corporation*, (Defendant), C.A. No. 13-1636-LPS, In The United States District Court For The District Of Delaware, U.S. Cellular's Second Supplemental Invalidation Contentions for the '674 Patent, (May 8, 2015), 8 pages.

Appendix L-17, Defendants' Supplemental Invalidation Contentions for Cutts, DVB Conditional Access, *Intellectual Ventures I LLC*, (Plaintiff) V. *United States Cellular Corporation*, (Defendant), C.A. No. 13-1636-LPS, In The United States District Court For The District Of Delaware, U.S. Cellular's Second Supplemental Invalidation Contentions for the '674 Patent, (May 8, 2015), 9 pages.

Appendix L-18, Defendants' Supplemental Invalidation Contentions for Frankel et al., Security Issues in a CDPD Wireless Network, *Intellectual Ventures I LLC*, (Plaintiff) V. *United States Cellular Corporation*, (Defendant), C.A. No. 13-1636-LPS, In The United States District Court For The District of Delaware, U.S. Cellular's Second Supplemental Invalidation Contentions for the '674 Patent, (May 8, 2015), 14 pages.

Appendix L-19, Defendants' Supplemental Invalidation Contentions for Wilson et al., U.S. Pat. No. 6,141,533, Method and Apparatus for Mobile Repeater, *Intellectual Ventures I LLC*, (Plaintiff) V. *United States Cellular Corporation*, (Defendant), C.A. No. 13-1636-LPS, In The United States District Court For The District Of Delaware, U.S. Cellular's Second Supplemental Invalidation Contentions for the '674 Patent, (May 8, 2015), 10 pages.

Appendix L-20, *Ericsson Inc.*, (Petitioner) v. *Intellectual Ventures I LLC*, (Patent Owner), Petition for Inter Partes Review, *Intellectual Ventures I LLC*, (Plaintiff) V. *United States Cellular Corporation*, (Defendant), C.A. No. 13-1636-LPS, In The United States District Court For The District Of Delaware, U.S. Cellular's Second Supplemental Invalidation Contentions for the '674 Patent, (May 8, 2015), 67 pages.

*Intellectual Ventures I LLC*, (Plaintiff) v. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular Wireless Services, Inc.; SBC Internet Services, Inc., Wayport, Inc., and Cricket Wireless LLC*, (Defendants), C.A. No. 12-193-LPS & *Intellectual Ventures II LLC*, (Plaintiff) v. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular Wireless Services, Inc.; SBC Internet Services, Inc., and Wayport, Inc.*, (Defendants), C.A. No. 13-1631-LPS, In The United States District Court For The District of Delaware, AT&T's Third Supplemental Preliminary Invalidation Contentions (May 8, 2015), including appendices A-1, A-22, A-23, D-23, K-5, L-1, L-16-L-20, M-7, 398 pages.

Appendix L-16, Defendants' Third Supplemental Invalidation Contentions for Burchfiel et al., Functions and Structure of a Packet Radio Station, *Intellectual Ventures I LLC*, (Plaintiff) V. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular Wireless Services, Inc.; SBC Internet Services, Inc., Wayport, Inc., and Cricket Wireless LLC*, (Defendants), C.A. No. 12-193-LPS & *Intellectual Ventures II LLC*, (Plaintiff) V. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular Wireless Services, Inc.; SBC Internet Services, Inc., and Wayport, Inc.*, (Defendants), C.A. No. 13-1631-LPS, In The United States District Court For The District of Delaware, AT&T's Third Supplemental Preliminary Invalidation Contentions (May 8, 2015), 17 pages.

Appendix L-18, Defendants' Third Supplemental Invalidation Contentions for Frankel et al., Security Issues in a CDPD Wireless Network, *Intellectual Ventures I LLC*, (Plaintiff) V. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular Wireless Services, Inc.; SBC Internet Services, Inc., Wayport, Inc., and Cricket Wireless LLC*, (Defendants), C.A. No. 12-193-LPS & *Intellectual Ventures II LLC*, (Plaintiff) V. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular Wireless Services, Inc.; SBC Internet Services, Inc., and Wayport, Inc.*, (Defendants), C.A. No. 13-1631-LPS, In The United States District Court For The District of Delaware, AT&T's Third Supplemental Preliminary Invalidation Contentions (May 8, 2015), 14 pages.

Appendix L-19, Defendants' Third Supplemental Invalidation Contentions for Wilson et al., U.S. Pat. No. 6,141,533, Method and Apparatus for Mobile Repeater, *Intellectual Ventures I LLC*, (Plaintiff) V. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular*

(56)

## References Cited

## OTHER PUBLICATIONS

*Wireless Services, Inc.; SBC Internet Services, Inc., Wayport, Inc., and Cricket Wireless LLC*, (Defendants), C.A. No. 12-193-LPS & *Intellectual Ventures II LLC*, (Plaintiff) V. *AT&T Mobility LLC; AT&T Mobility II LLC; New Cingular Wireless Services, Inc.; SBC Internet Services, Inc., and Wayport, Inc.*, (Defendants), C.A. No. 13-1631-LPS, In The United States District Court For The District Of Delaware, AT&T's Third Supplemental Preliminary Invalidation Contentions (May 8, 2015), 10 pages.

*Intellectual Ventures I LLC*, (Plaintiff) V. *United States Cellular Corporation*, (Defendant), C.A. No. 13-1636-LPS, In The United States District Court For The District Of Delaware, U.S. Cellular's Second Supplemental Invalidation Contentions for the '674 Patent, (May 8, 2015), 18 pages.

Office Action in U.S. Appl. No. 12/184,902 issued Oct. 20, 2011, 21 pages.

Kim et al. "The AT&T Labs Broadband Fixed Wireless Field Experiment", IEEE Communications Magazine, Oct. 1999, pp. 56-62.

Iera et al. "Wireless Broadband Applications: The Teleservice Model and Adaptive QoS Provisioning", IEEE Communications Magazine, Oct. 1999, pp. 71-75.

Celidonio et al. "A Wideband Two-Layer Radio Access Network Using DECT Technology in the Uplink", IEEE Communications Magazine, Oct. 1999, pp. 76-81.

Yoon et al. "A Wireless Local Loop System Based on Wideband CDMA Technology", IEEE Communications Magazine, Oct. 1999, pp. 128-135.

Balakrishnan et al. "Improving Reliable Transport and Handoff Performance in Cellular Wireless Networks", <http://www.cs.berkeley.edu/~ss/papers/wunet/html/winet.html>, Computer Science Div., Dept. of Electrical Engineering and Computer Science, Univ. of California at Berkeley, Berkeley, CA 94720-1776, Nov. 1995, pp. 1-18.

Bianchi, et al. "C-PRMA: A Centralized Packet Reservation Multiple Access for Local Wireless Communications" in IEEE Transactions on Vehicular Technology, vol. 46, No. 2 pp. 422-436, May 1997.

"A Cellular Wireless Local Area Network with QoS Guarantees for Heterogeneous Traffic", Author(s): Sunghyun Choi and Kang G. Shin, Technical Report CSE-TR-300-96, Aug. 1996, pp. 1-24.

"The GSM System", Authors: Michel Mouly, Marie-Bernadette Pautet, pp. 272-277, XP-002154762.

"A Comparison of Mechanisms for Improving TCP Performance over Wireless Links" Author(s): Hari Balakrishnan, Venkata N. Padmanabhan, Srinivasan Seshan, and Randy H. Katz; XF000734405 IEEE/ACM Transactions on Networking, vol. 5, No. 6, Dec. 1997, pp. 756-769.

"Improving TCP/IP Performance Over Wireless Networks"; Author(s): Hari Balakrishnan, Srinivasan Seshan, Elan Amire and Randy H. Katz; In Proc. 1st ACM Int'l Conf. Co Mobile Computing and Networking (Mobicom), Nov. 1995, XP-002920962.

International Search Report; Date: Dec. 14, 2000; International Appl. No. PCT/US 00/18531 for (36792-164878).

International Search Report; Date: Feb. 14, 2000; International Appl. No. PCT/US 00/18584 for (36792-164879).

International Search Report; Date: Dec. 14, 2000; International Appl. No. PCT/US 00/18585 for (36792-164880).

International Search Report; Date: Dec. 22, 2000; International Appl. No. PCT/US 00/18666 for (36792-164881).

Cheng et al., "Wireless Intelligent ATM Network and Protocol Design for Future Personal Communication Systems", IEEE 1997.

Zahedi, A. et al. "Voice and Data Integration on TCP/IP Wireless Networks" Personal, Indoor and Mobile Radio Communication Sep. 1-4, 1997, vol. 2, pp. 678-682.

Madhow, U. "Dynamic Congestion Control and Error Recovery over a Heterogeneous Internet" Decision and Control, Dec. 10-12, 1997, vol. 3, pp. 2368-2374.

Kitchin, D. et al. "IEEE P802.11 Wireless LANs—Wireless Multimedia Enhancements (WME)" doc: IEEE 802.11-02/592r0, Sep. 11, 2002.

Jerry D. Gibson, "The Communications Handbook," CRC Press, Inc., first edition, p. 630-31.

IEEE 802 Committee "Draft Supplement to Standard for Telecommunications and Information Exchange Between Systems—LAN/MAN Specific Requirements—Part 11: Wireless Medium Access Control (MAC) and Physical Layer (PHY) specifications: Medium Access Control (MAC Enhancements for Duality of Service (QoS))" IEEE Std. 802.11e/D3.3, Oct. 2002, (Draft Supplement to IEEE Std. 802.11, 1999 Edition).

Cisco White Paper, Policy-Based Routing, 1996 pp. 1-7.

Broadcom Corporation, "BCM3300 Product Brief, BCM3300 QAMLink Single-Chip DOCSIS Cable Modem", [www.broadcom.com](http://www.broadcom.com), Dec. 2, 1999.

Broadcom Corporation, "Broadcom, NetSpeak, and Telogy Networks Demonstrate Voice over IP Cable Modem Reference Design with Call Agent Interface at VON Show", [www.broadcom.com](http://www.broadcom.com), Apr. 14, 1999.

Broadcom Corporation, "Cable Modems Using Broadcom's TurboQAM BCM3348 Integrated Chip Achieve DOCSIS 2.0 Certification from CableLabs", [www.broadcom.com](http://www.broadcom.com), Dec. 19, 2002.

Broadcom Corporation, "Broadcom Announces World's First Single-Chip Cable Modem Solution", [www.broadcom.com](http://www.broadcom.com), Sep. 21, 1998.

Quigley, T. and Harman, D. "Future Proofing, MCNS Data-Over-Cable Protocol", CED, Mar. 1998.

European Examination Report issued for EP 00 947 079.0, dated Jan. 19, 2006.

\* cited by examiner





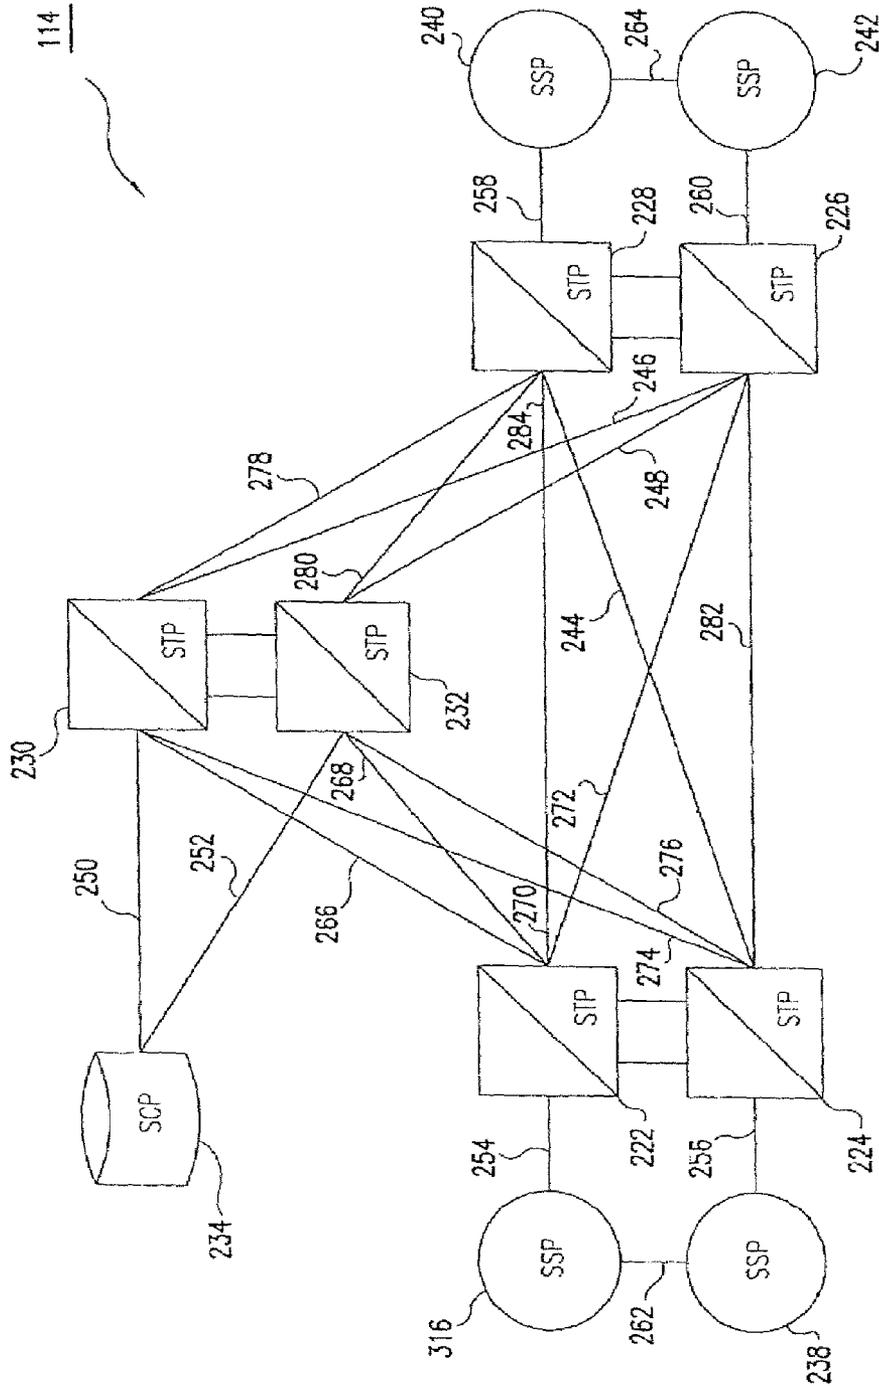


FIG.2B

114

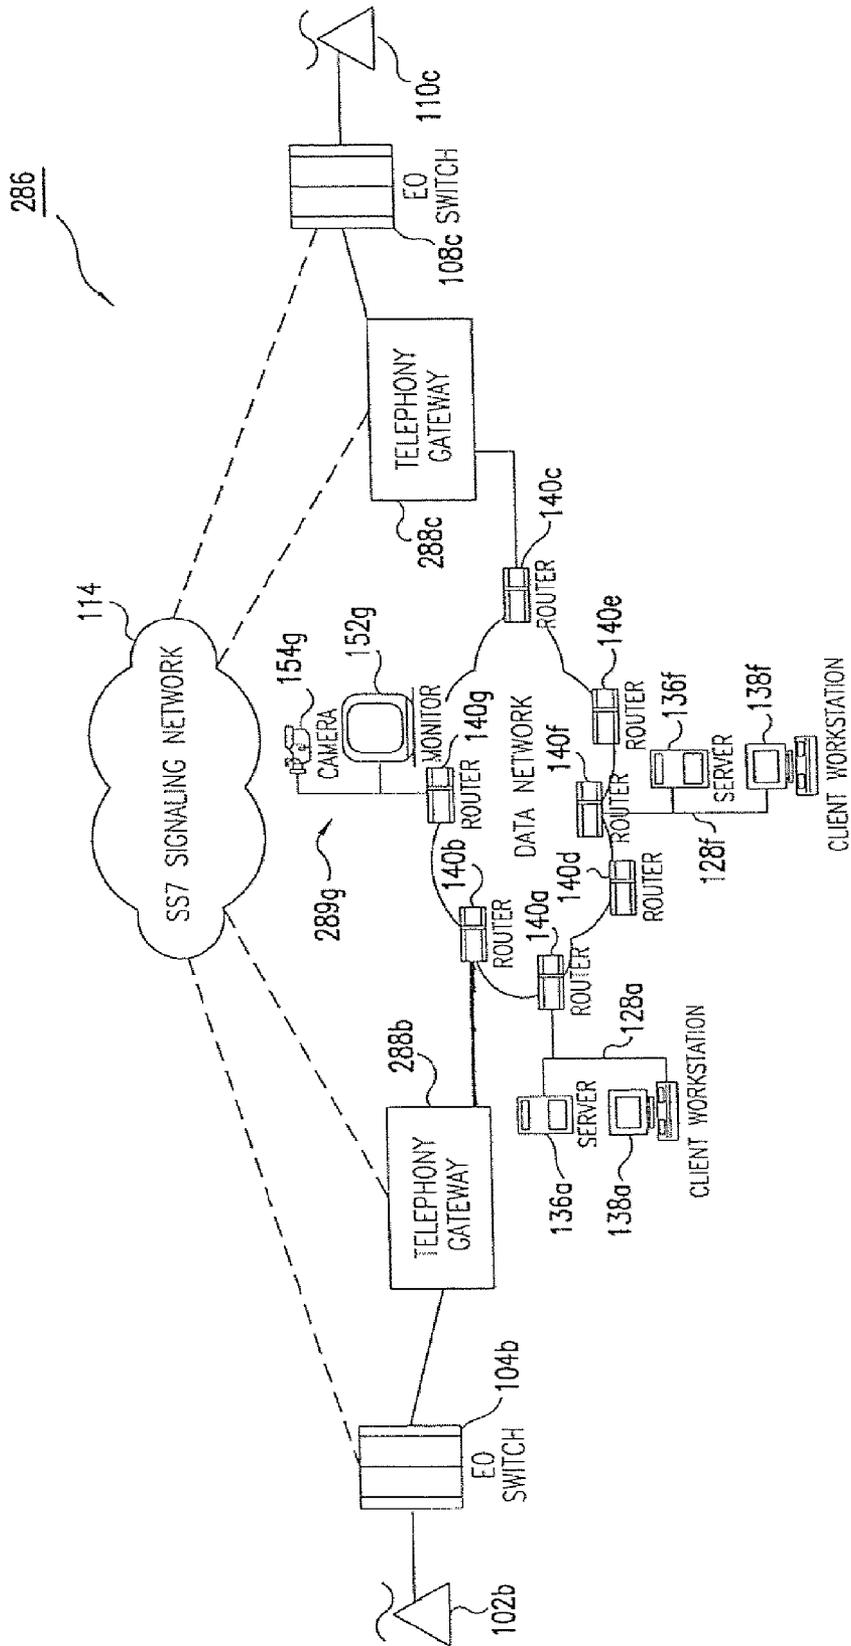


FIG.2C

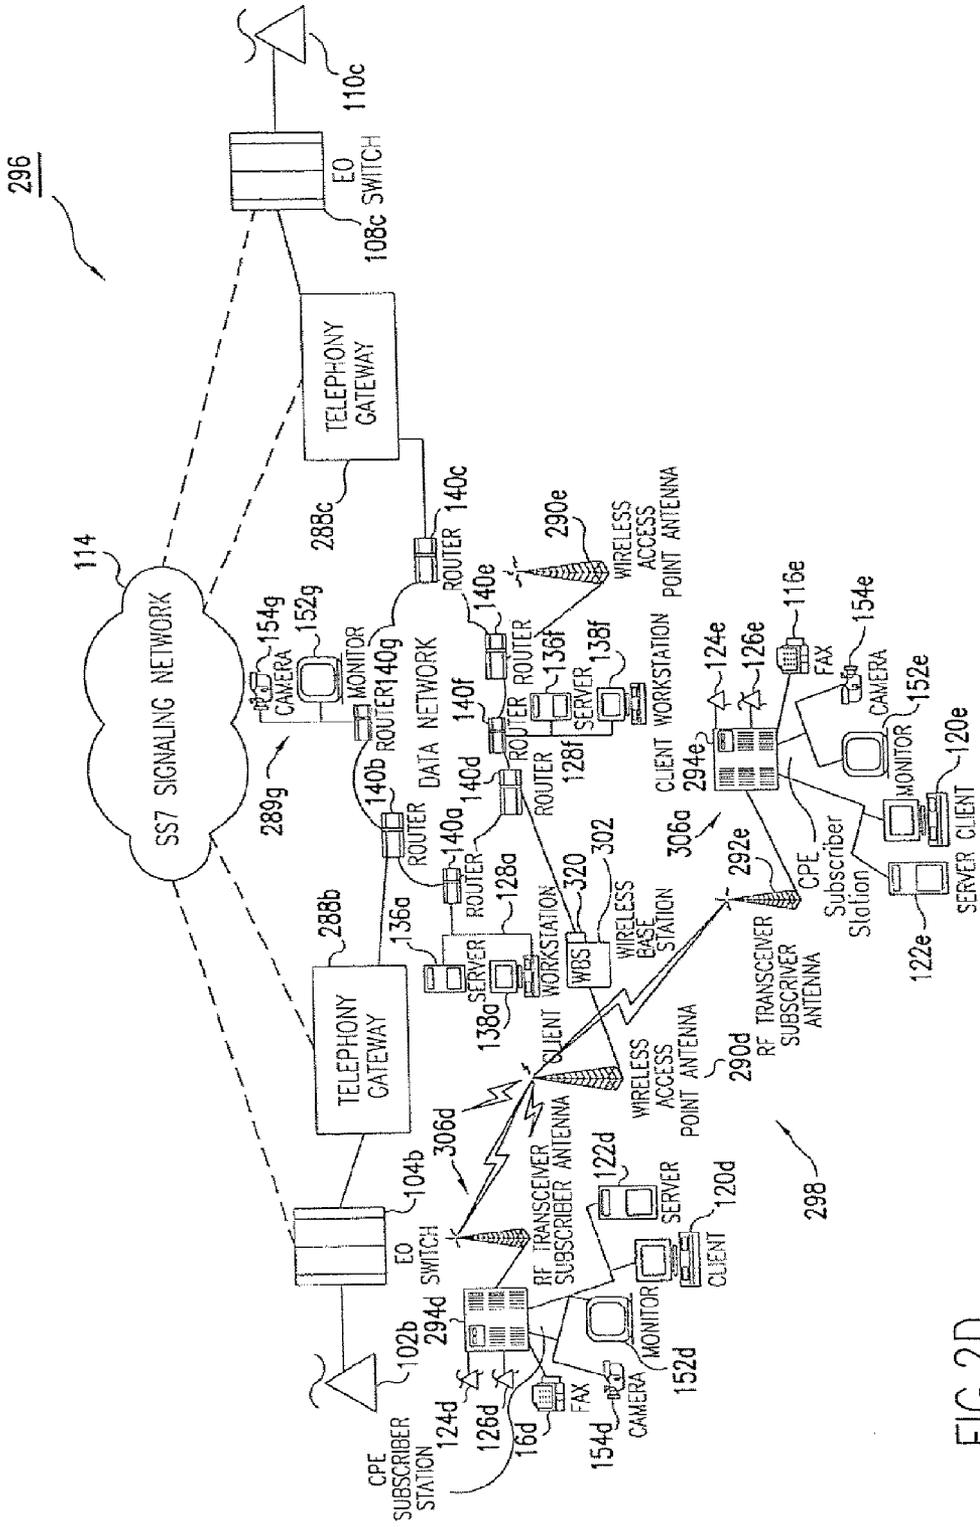


FIG.2D

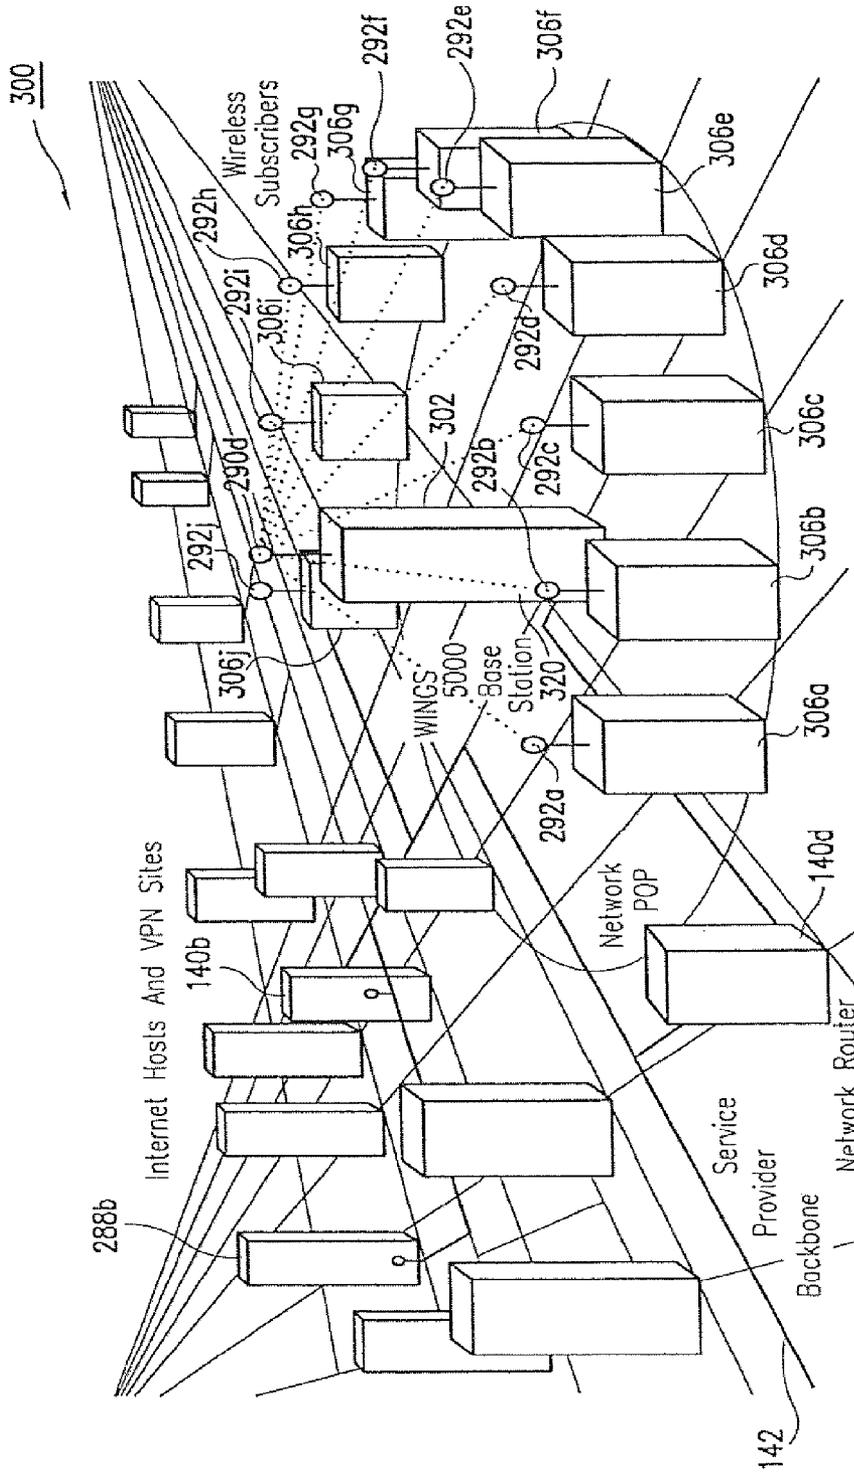


FIG.3A

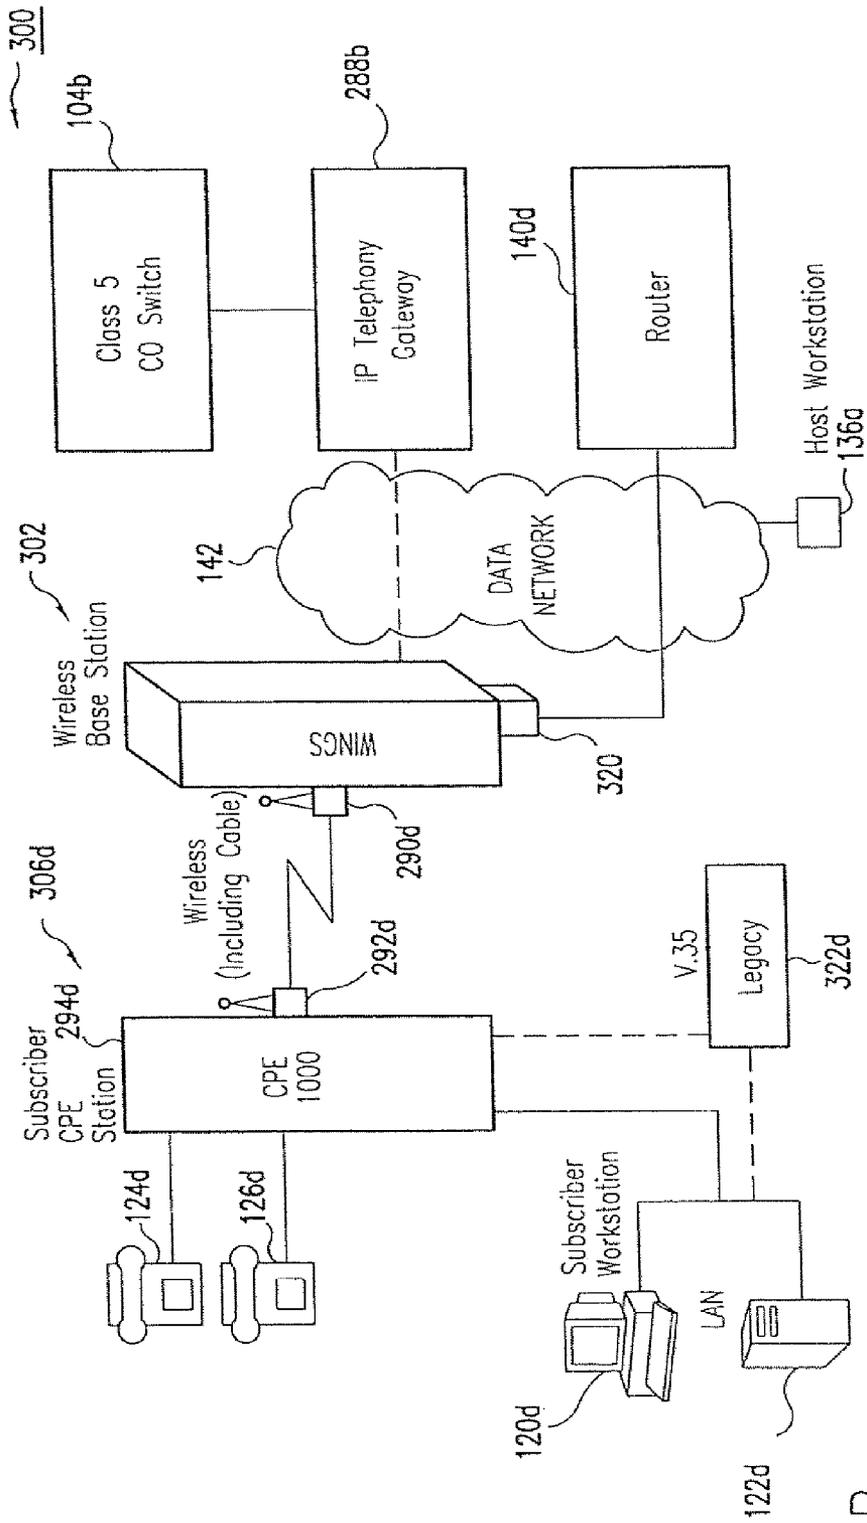


FIG.3B

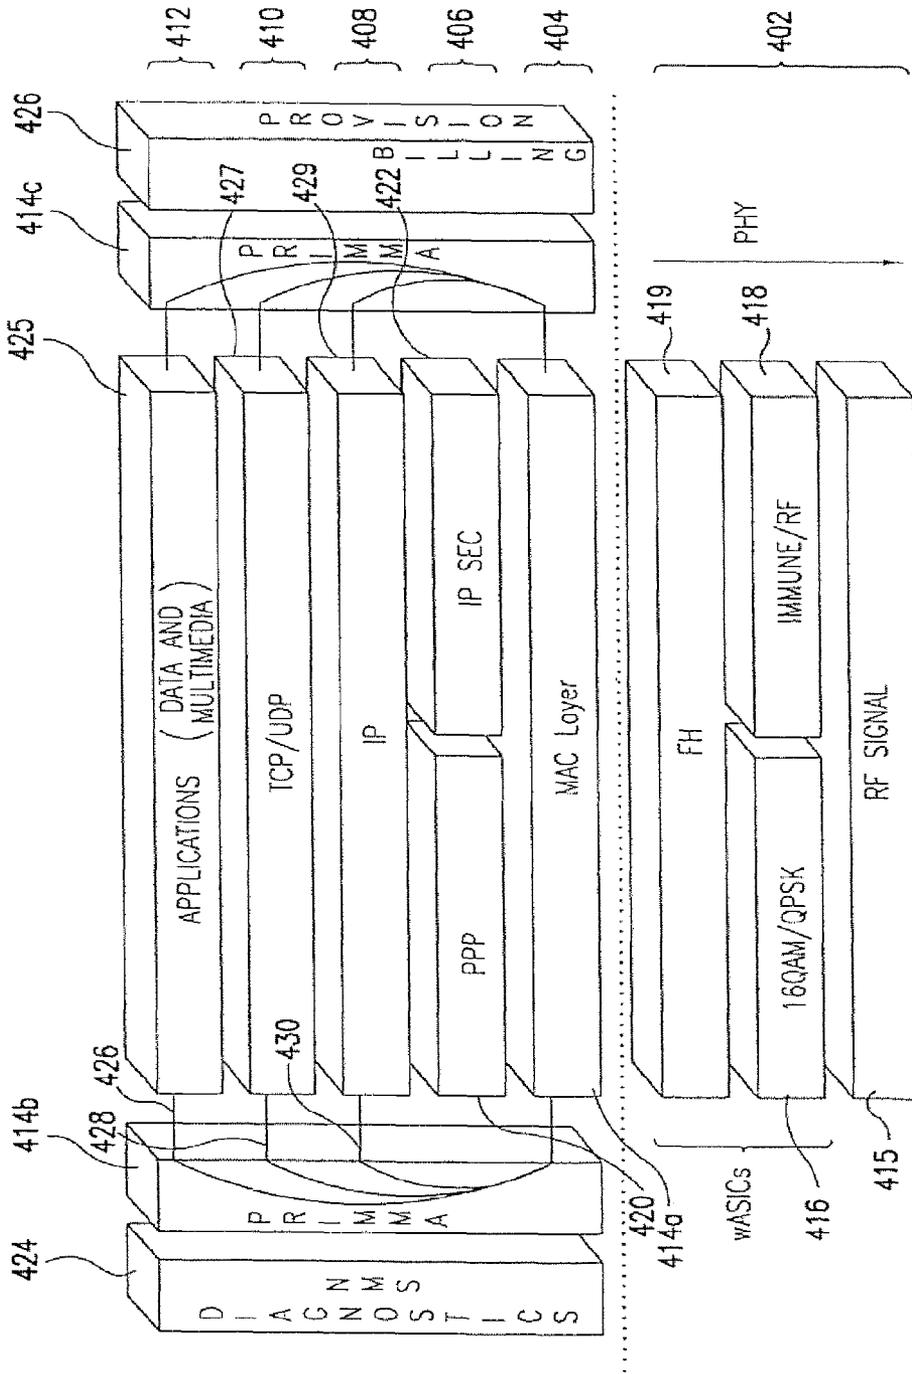


FIG. 4

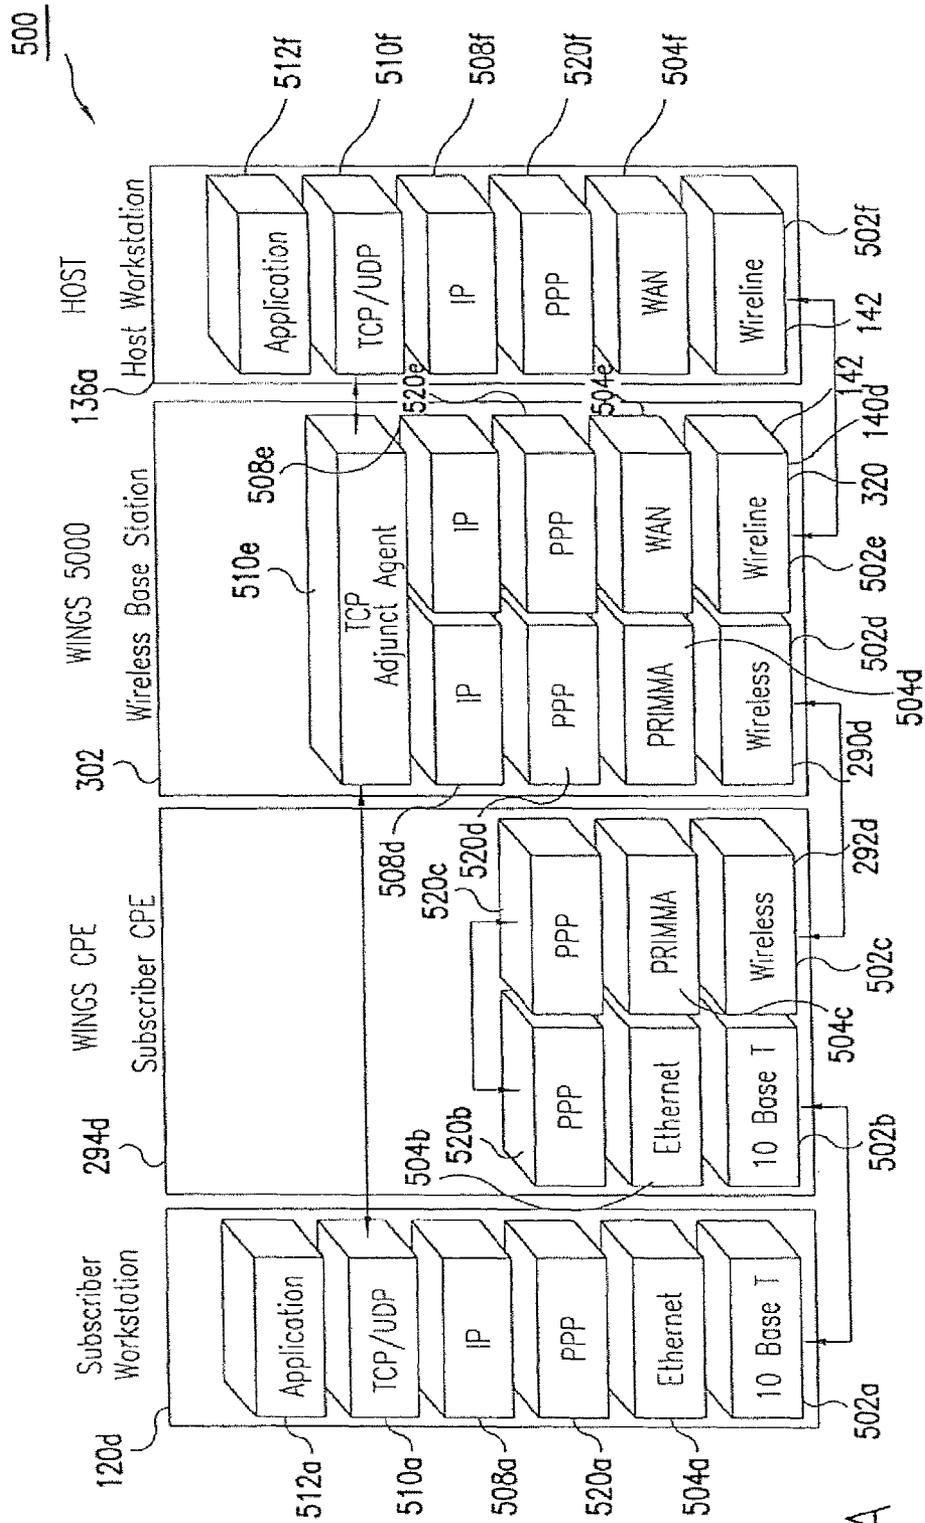


FIG. 5A

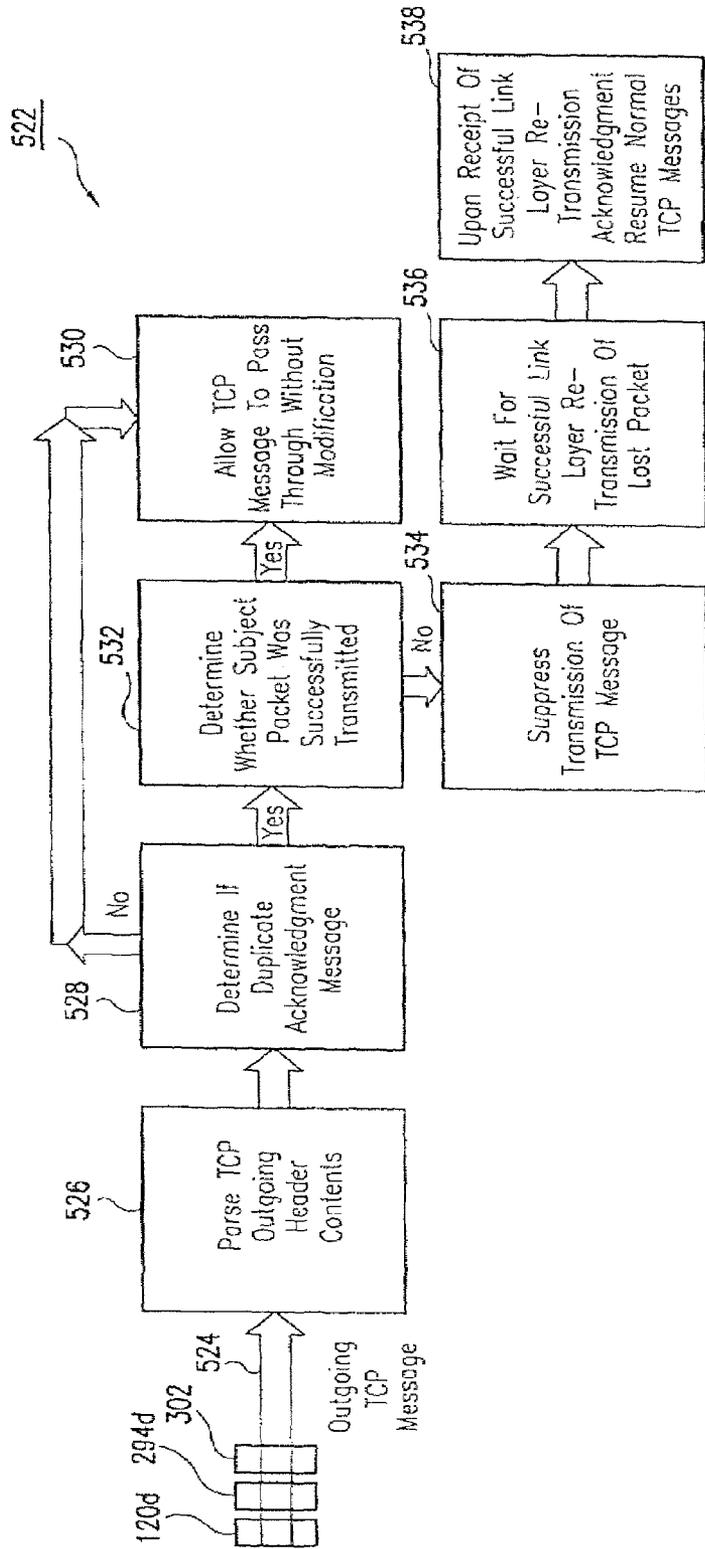


FIG.5B

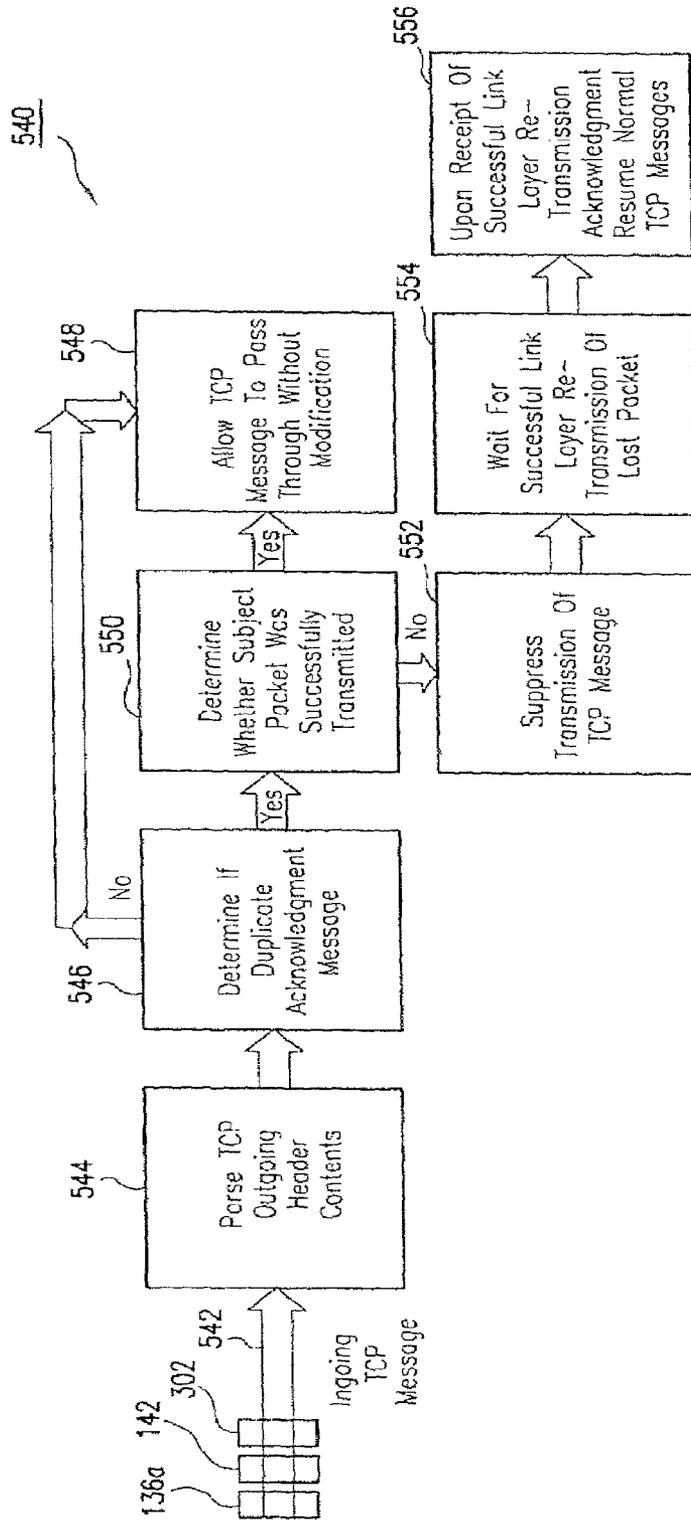


FIG.5C

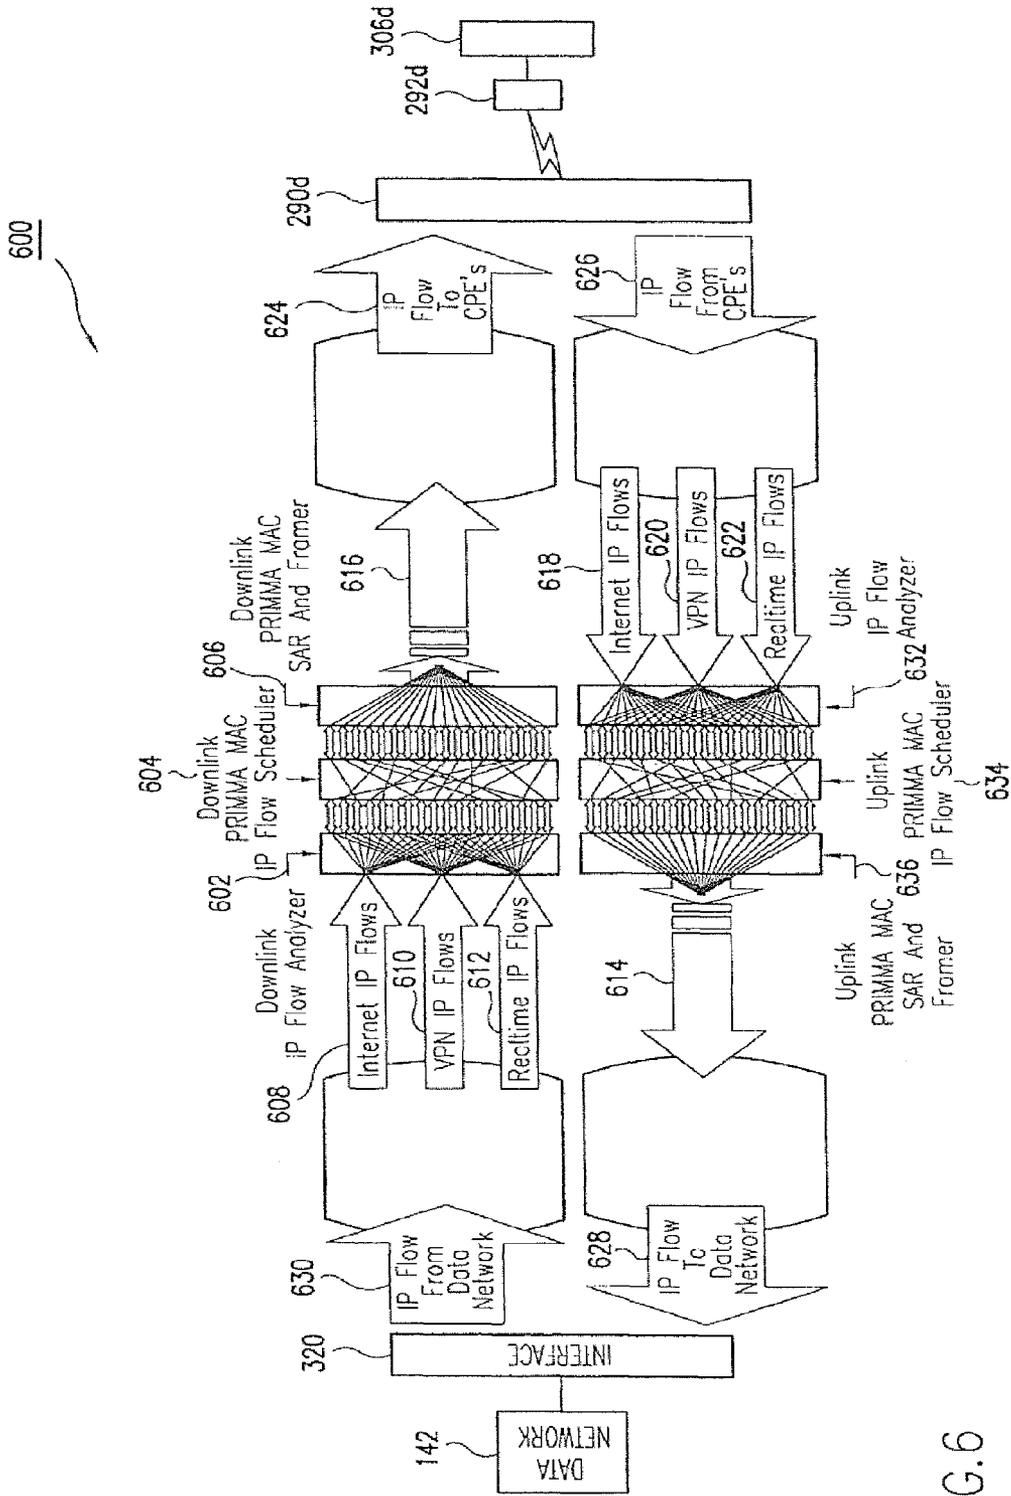


FIG.6

700

- IP Header Fields: 702
  - Source And Destination IP Addresses
  - IP TOS (Type Of Service)
  - IP TTL (Time To Live)
  - Protocol
- UDP Header Fields: 704
  - Source And Destination Port Numbers
- TCP Header Fields: 706
  - Source And Destination Port Numbers
  - Window Size
  - Urgent Pointer
  - Flags (SYN, ISN, PSH, RST, FIN)
  - MSS (Maximum Segment Size)
- RTP, RTCP Header Fields: 708

FIG.7





900

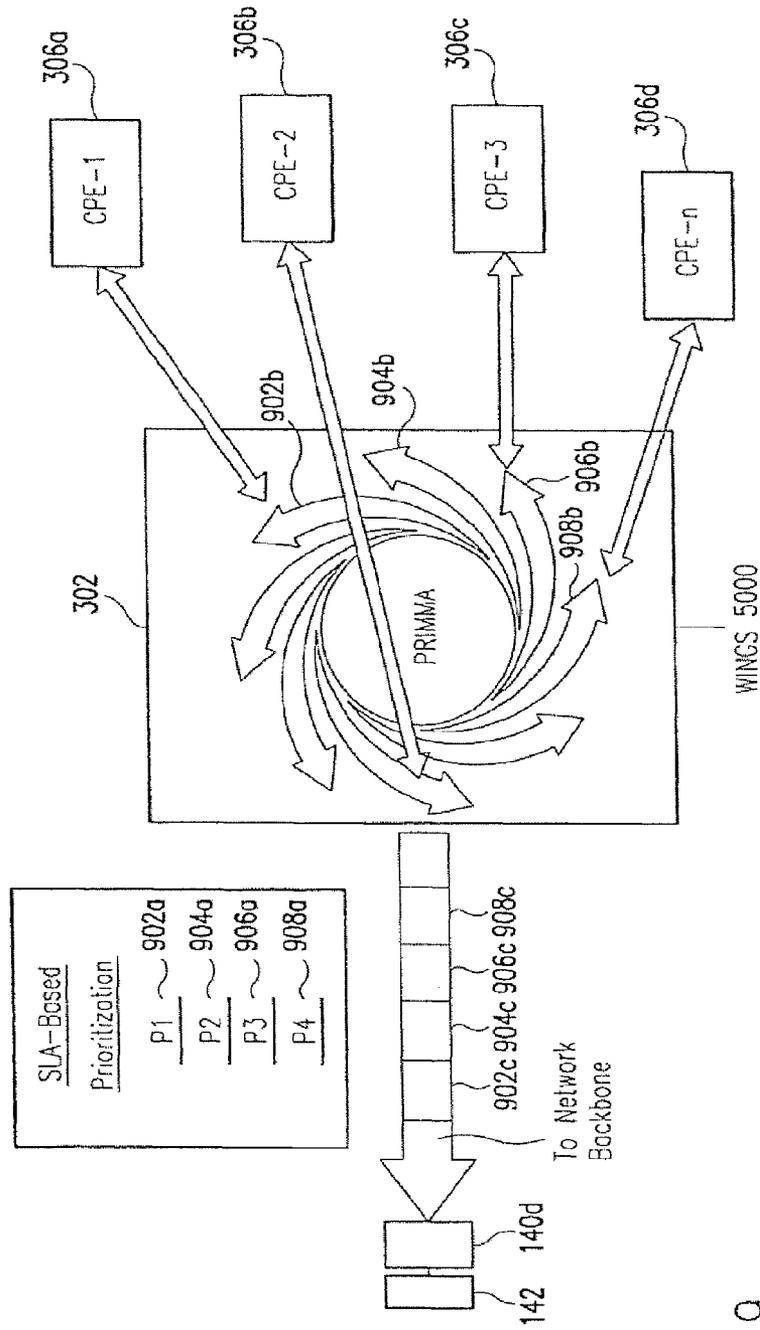


FIG. 9

1000

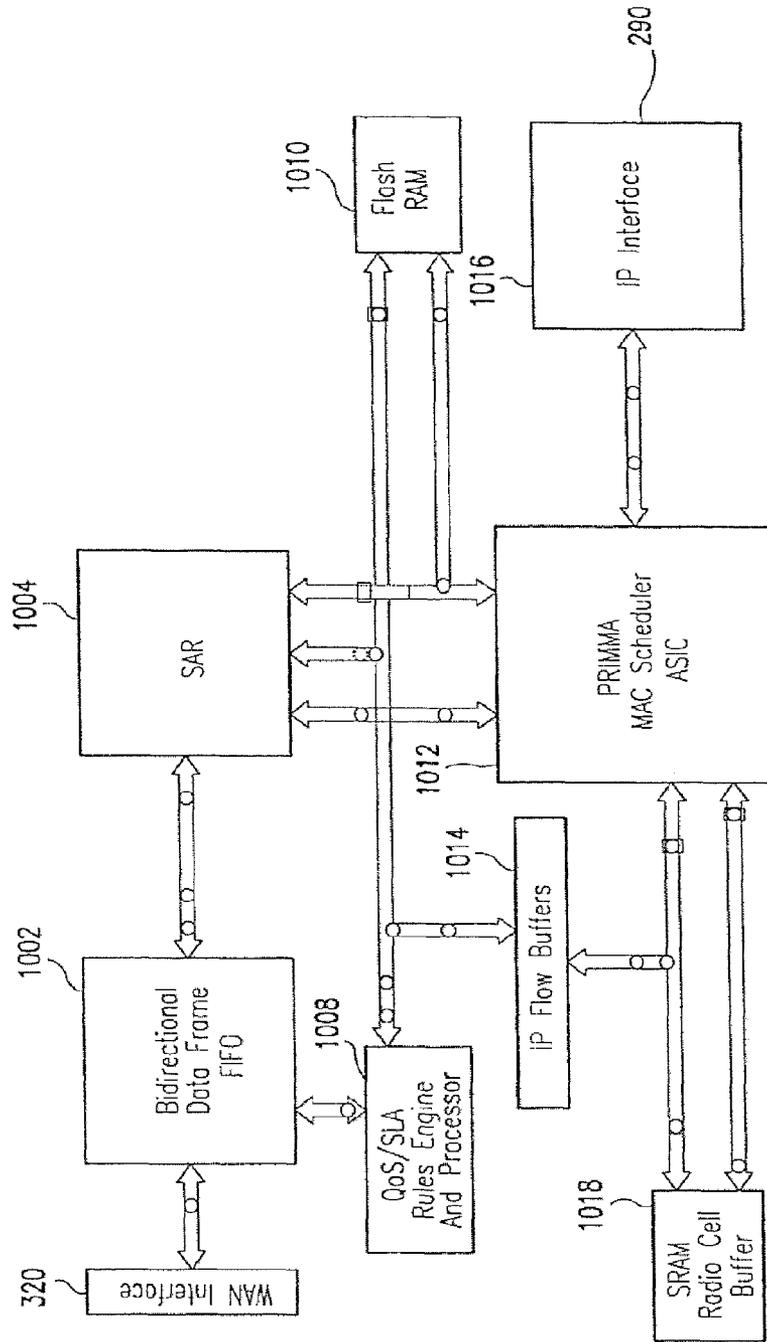


FIG.10

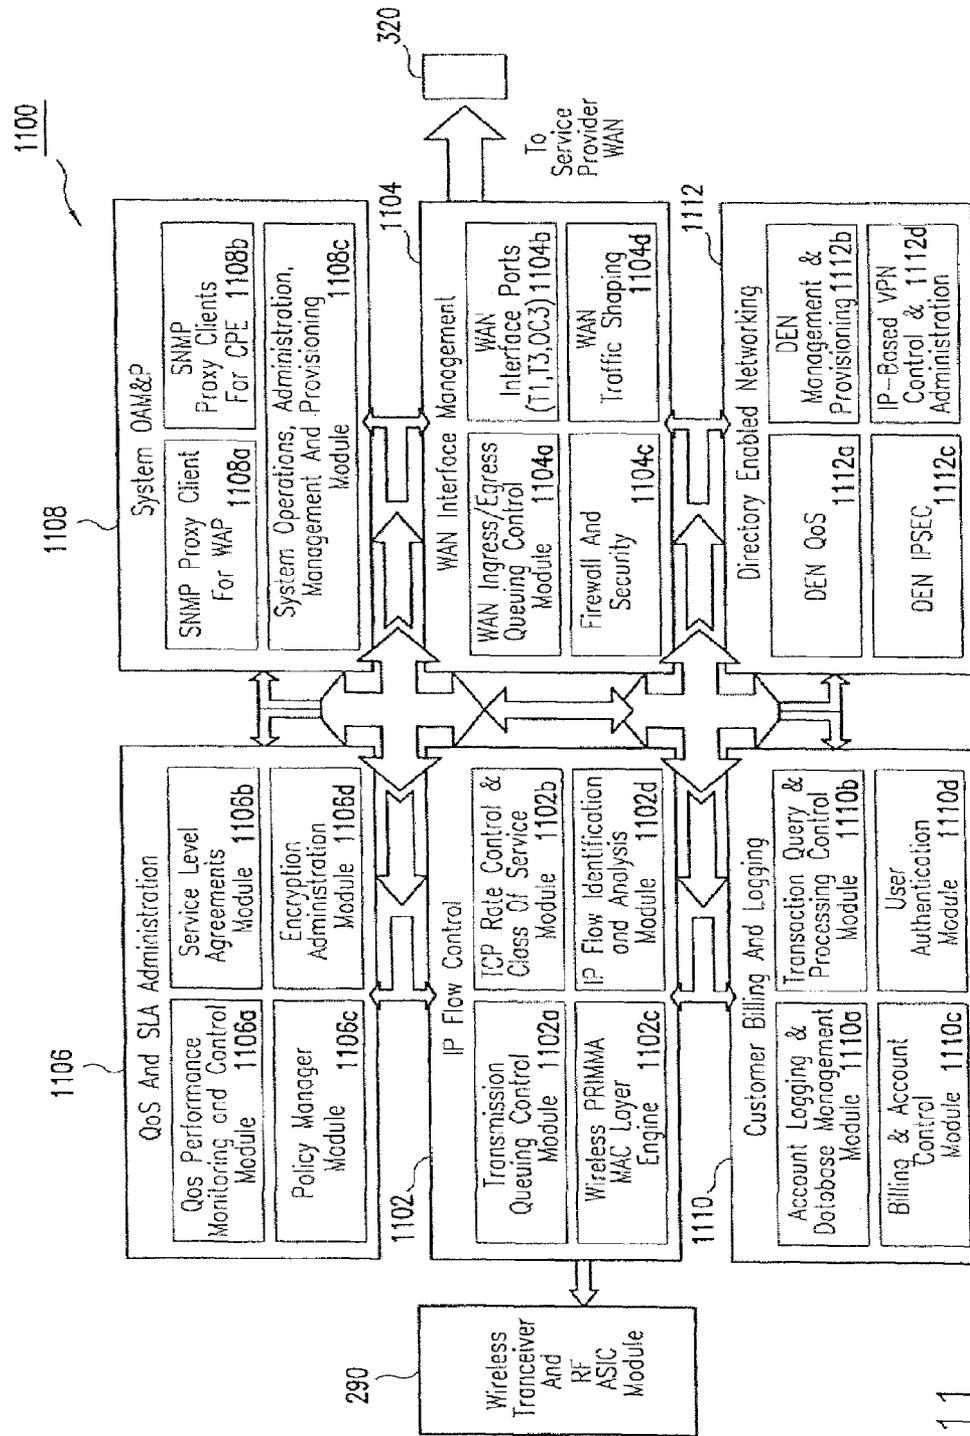


FIG. 11

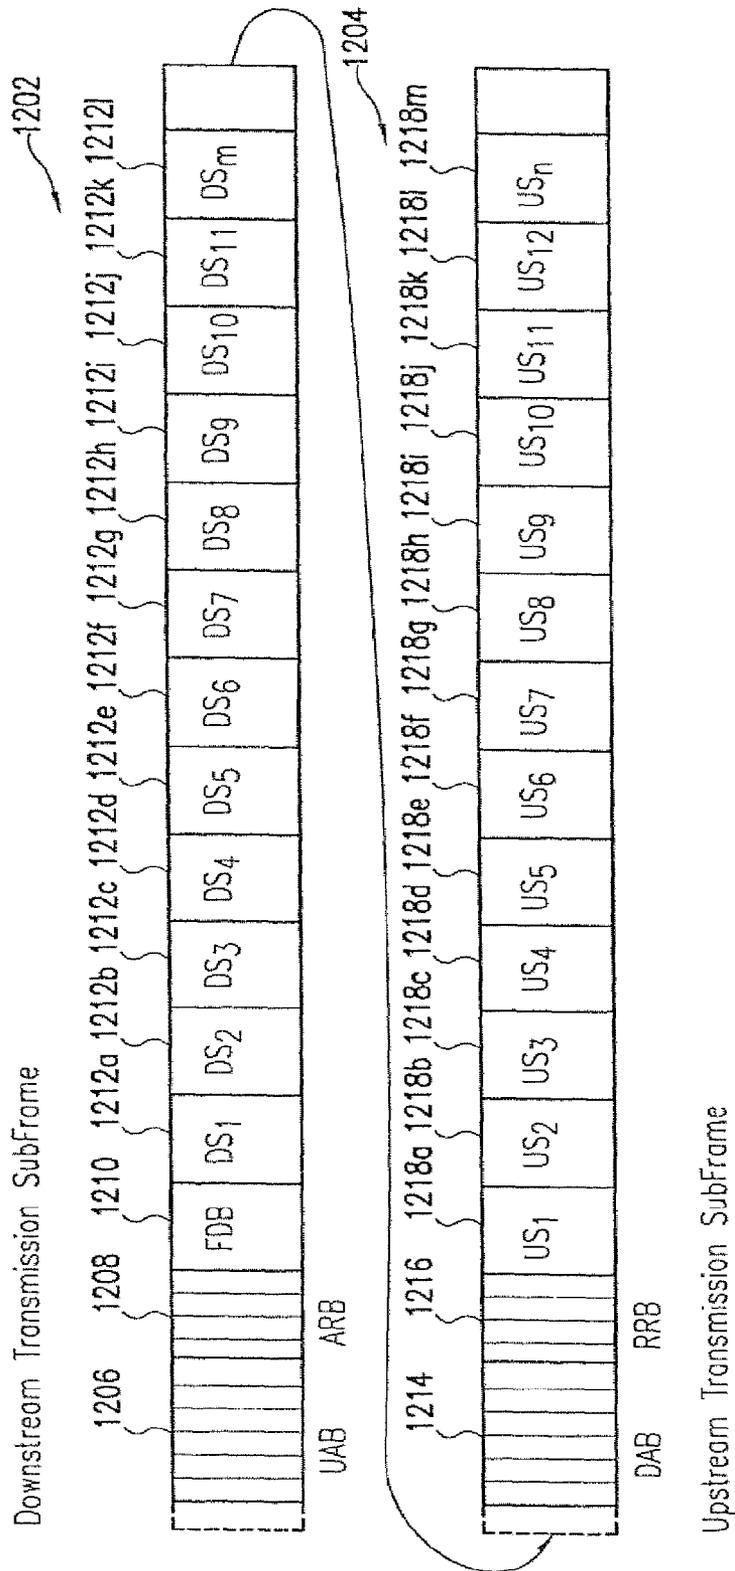


FIG.12A

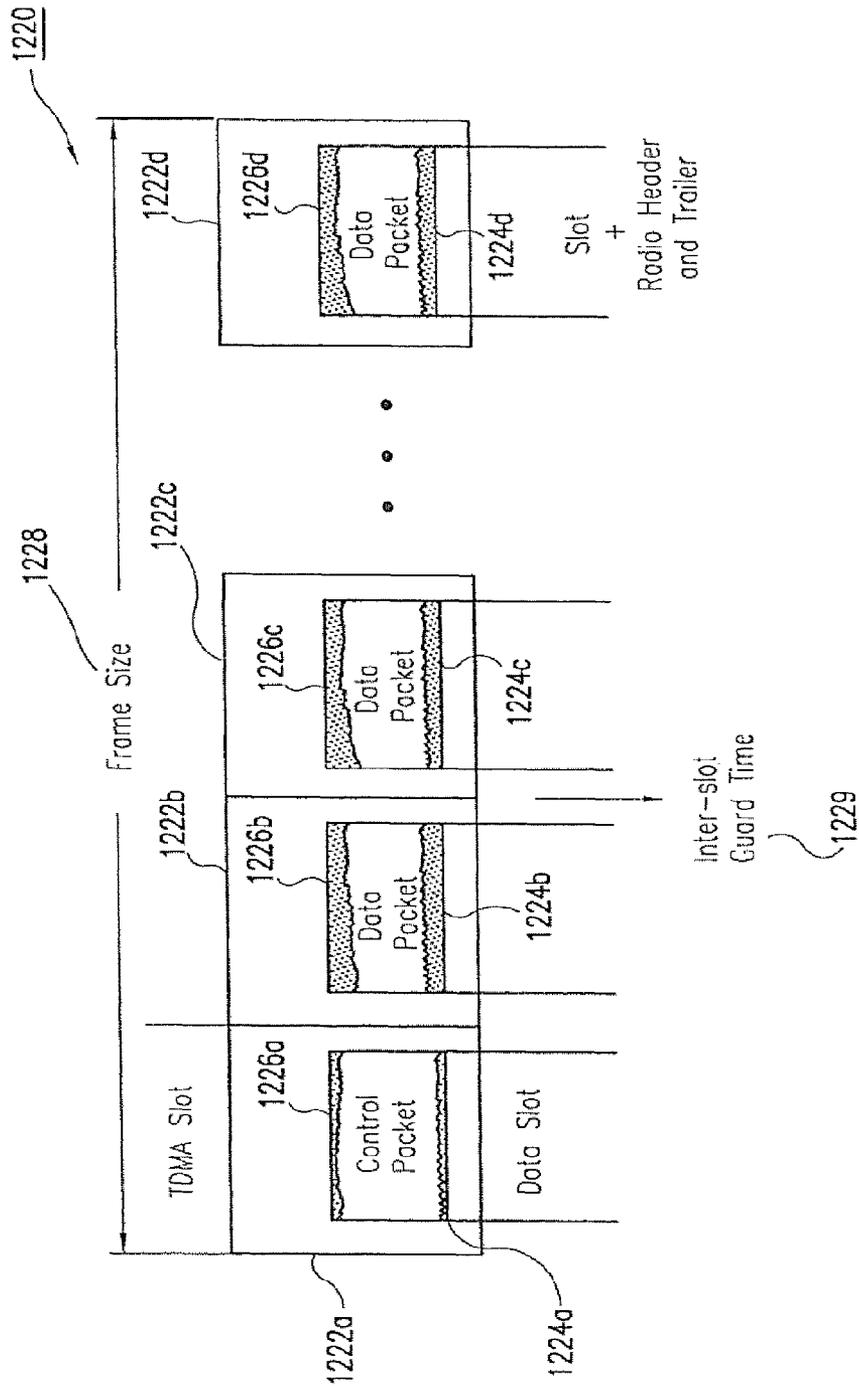


FIG.12B

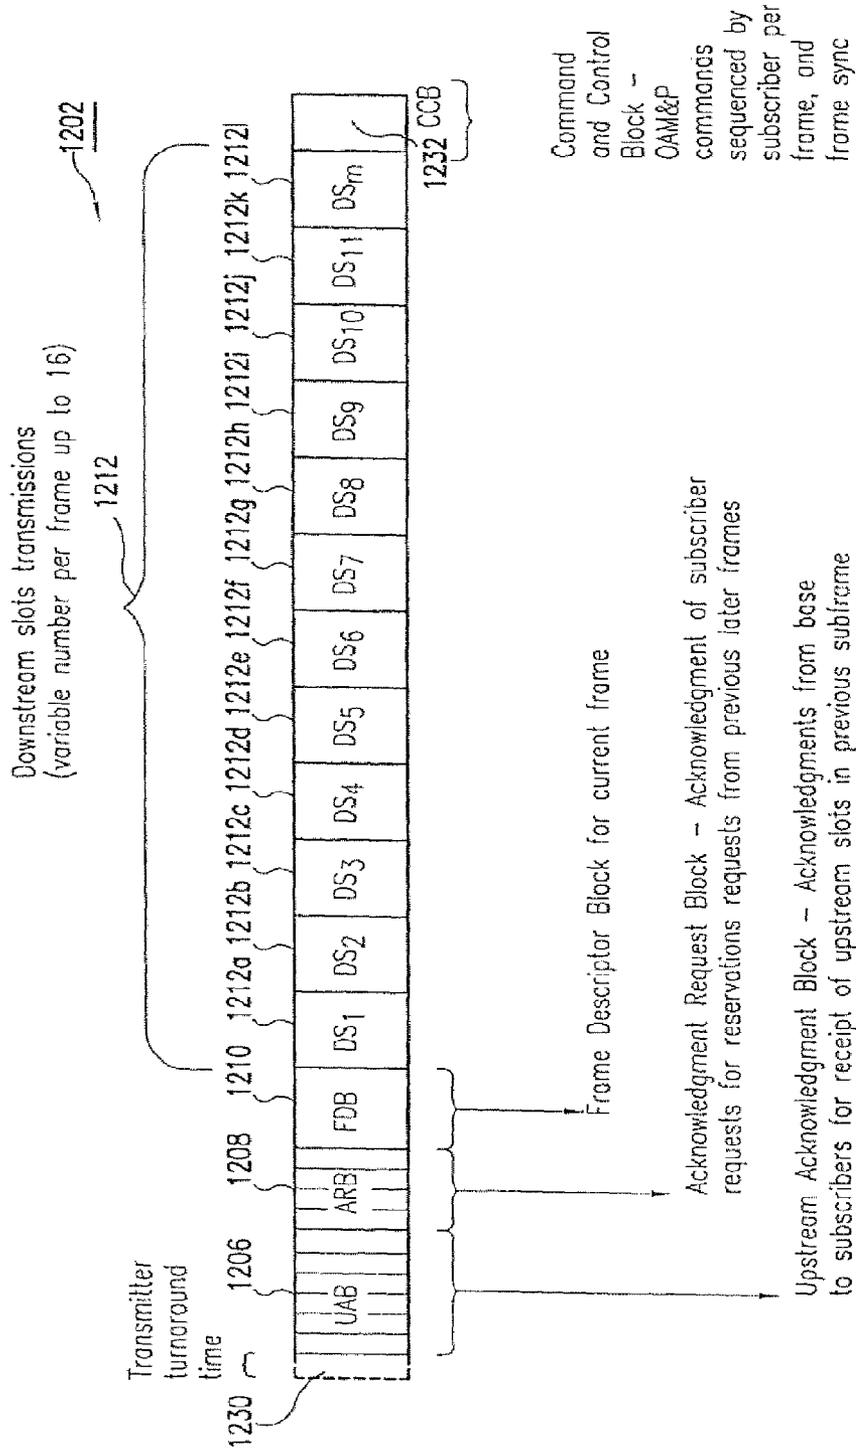


FIG.12C

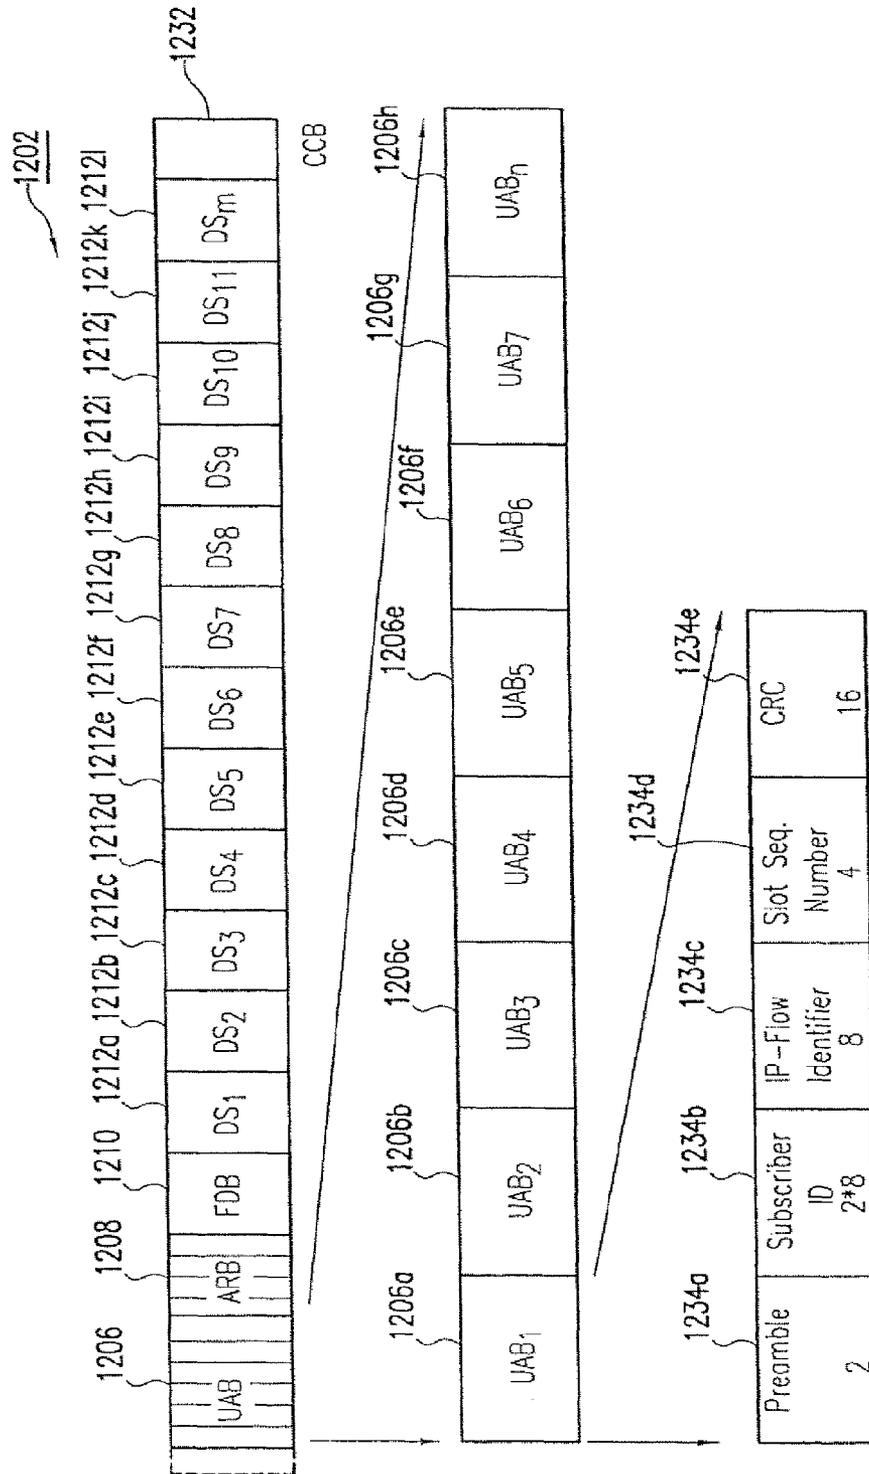


FIG.12D

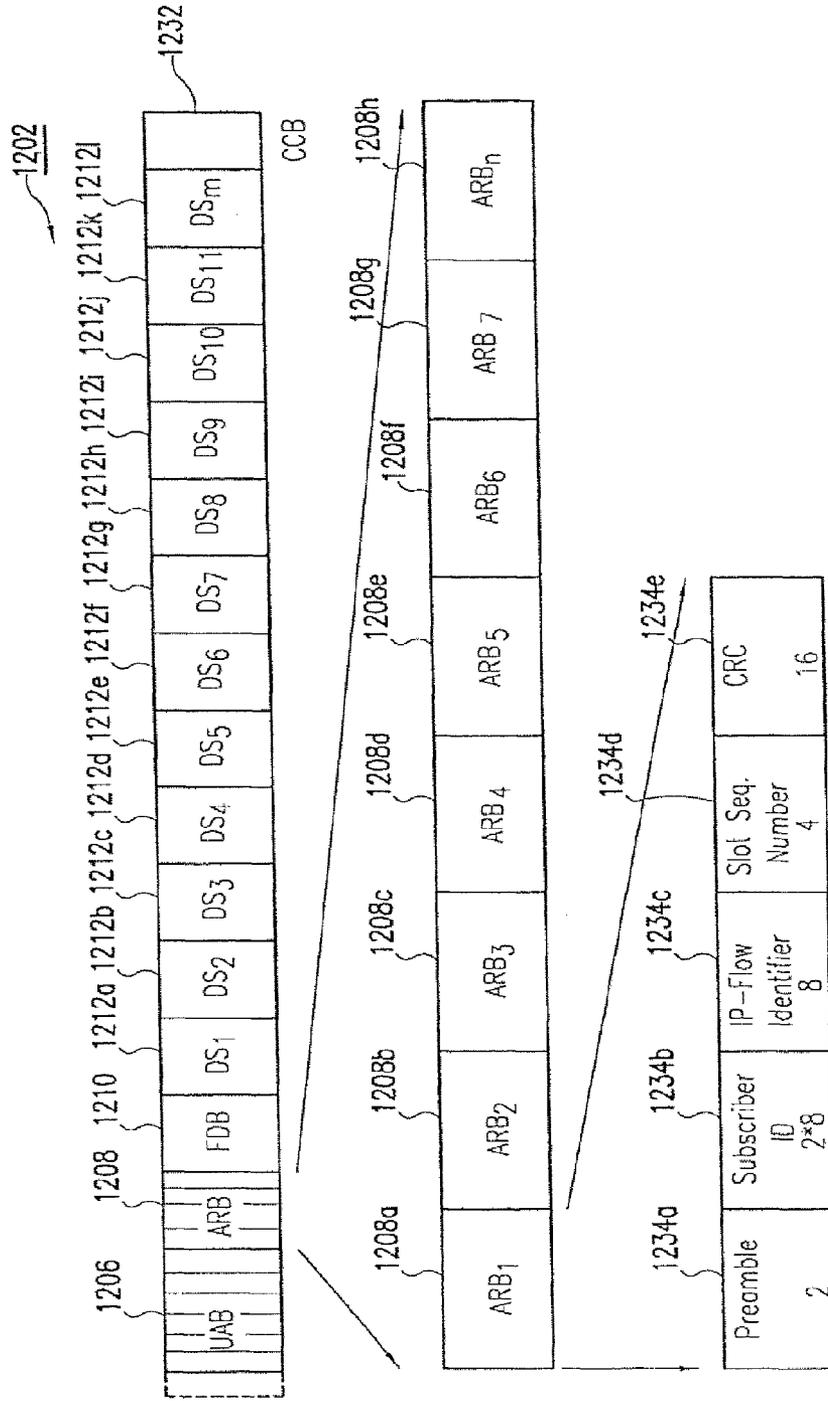


FIG.12E

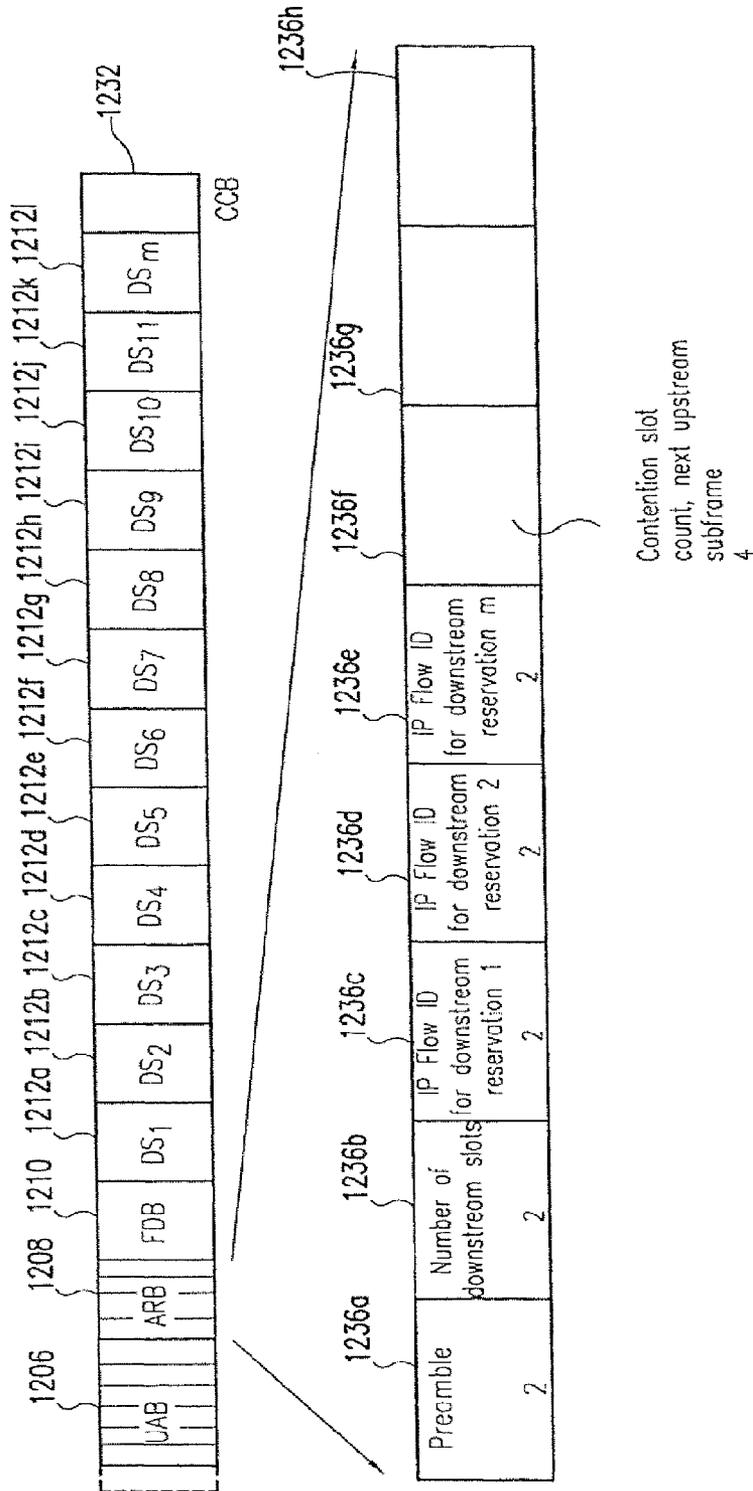


FIG.12F

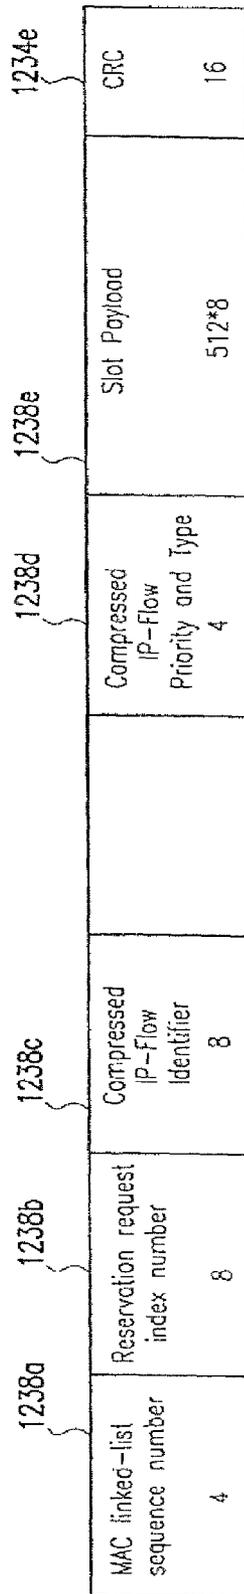


FIG.12G

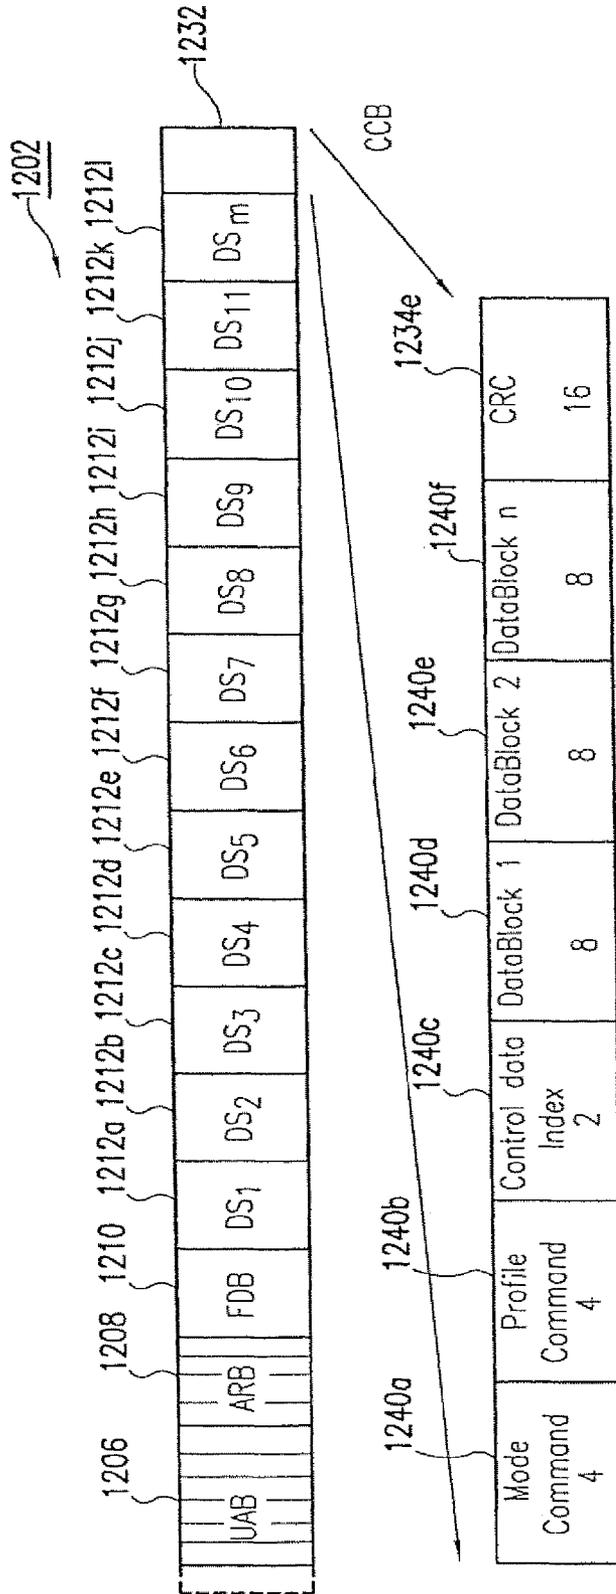


FIG. 12H



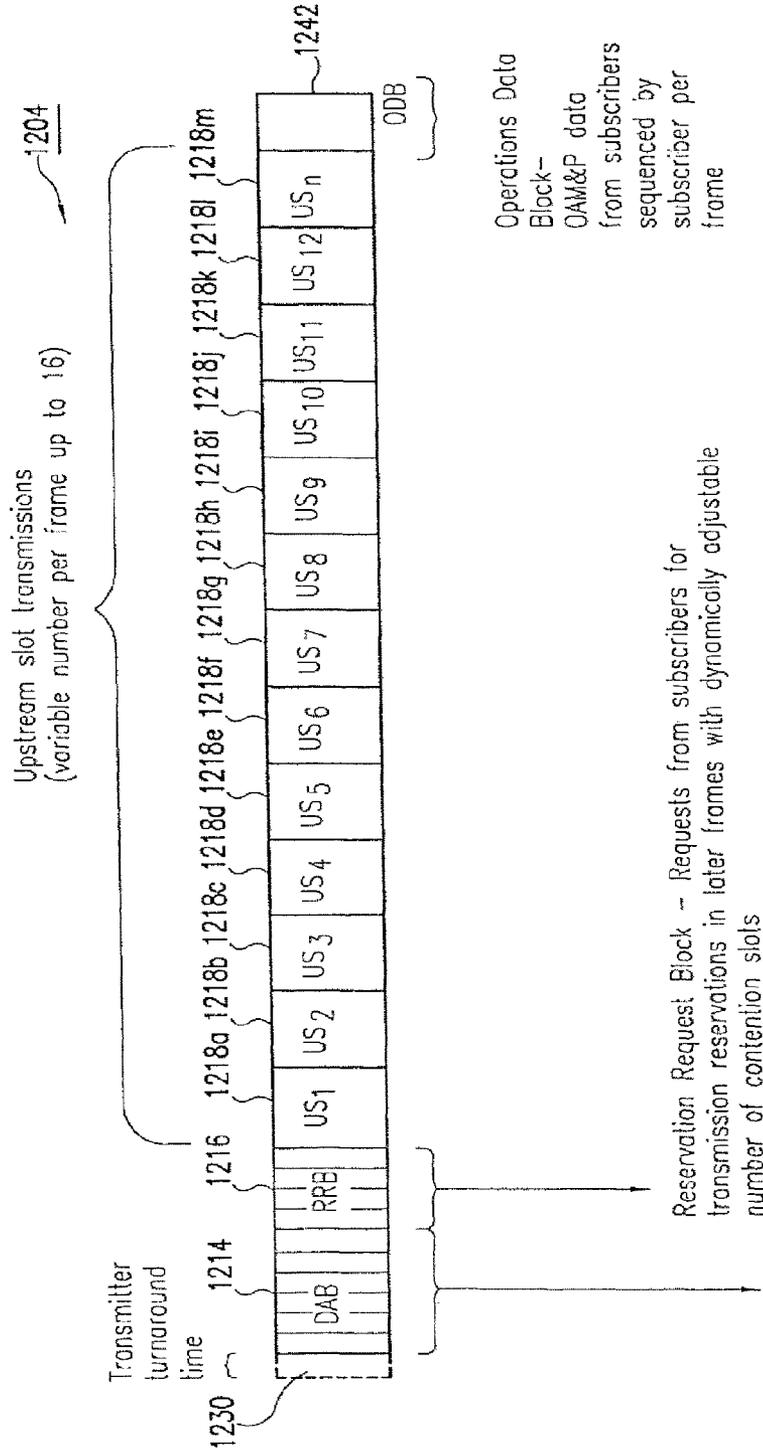


FIG. 12I

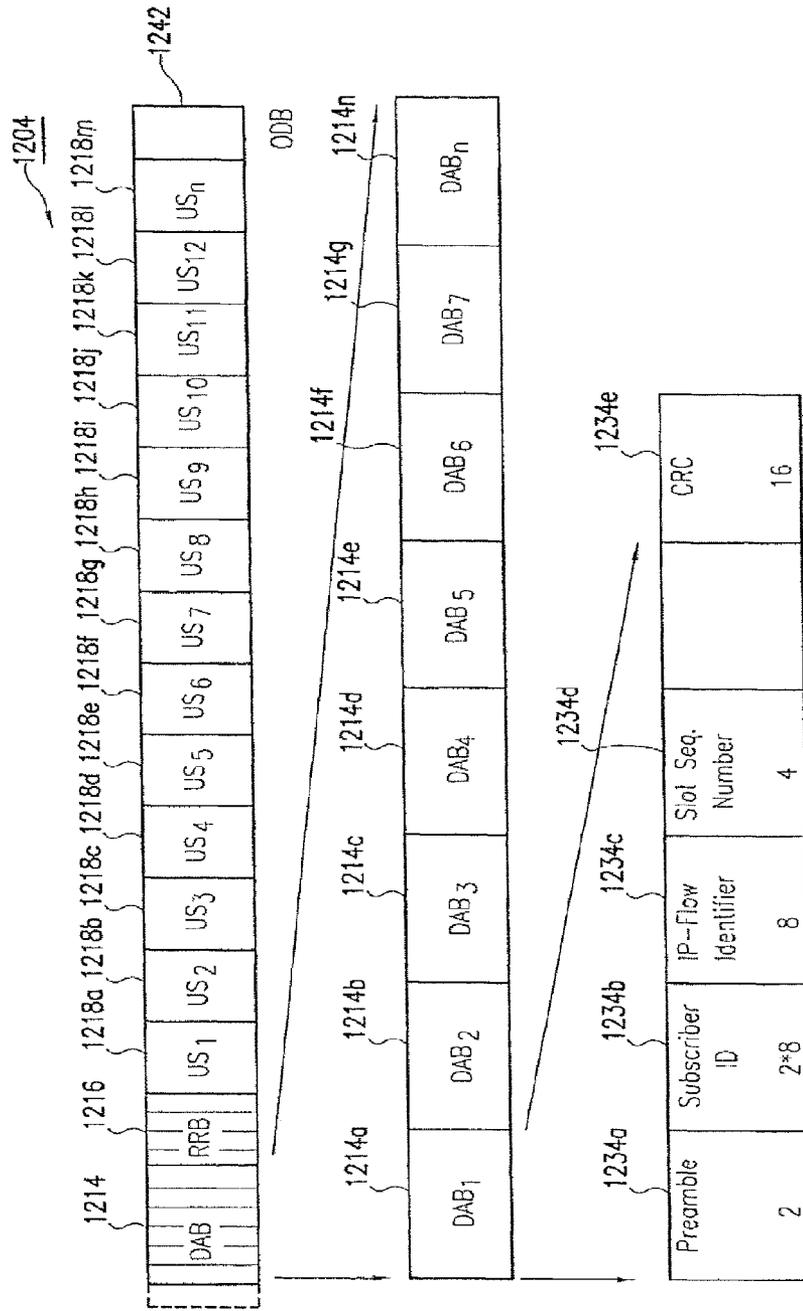

CPE Acknowledging Receipt of Slot Transmitted from Base

FIG. 12J

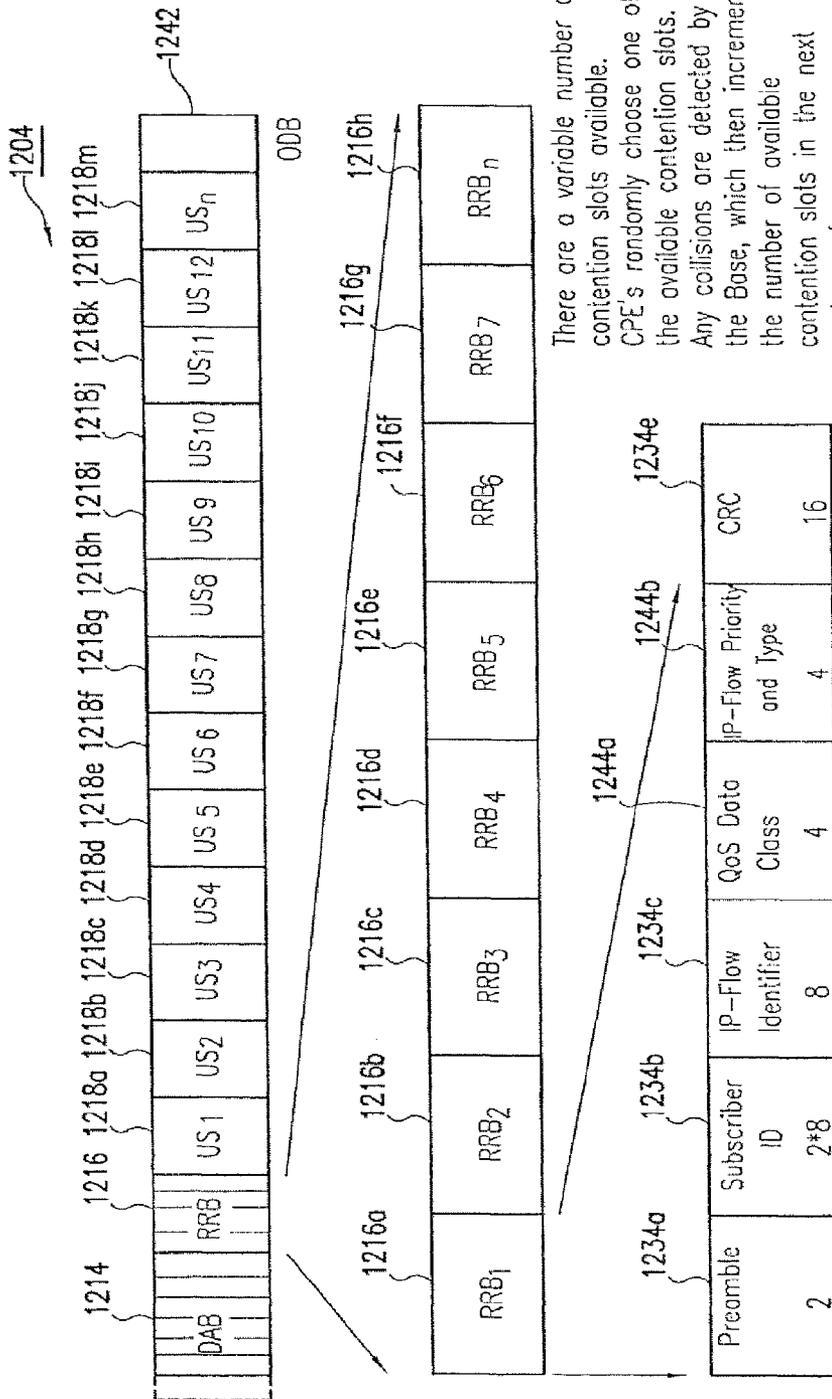

CPE Requesting a Reservation for Upstream Transmission of Slot

FIG. 12K

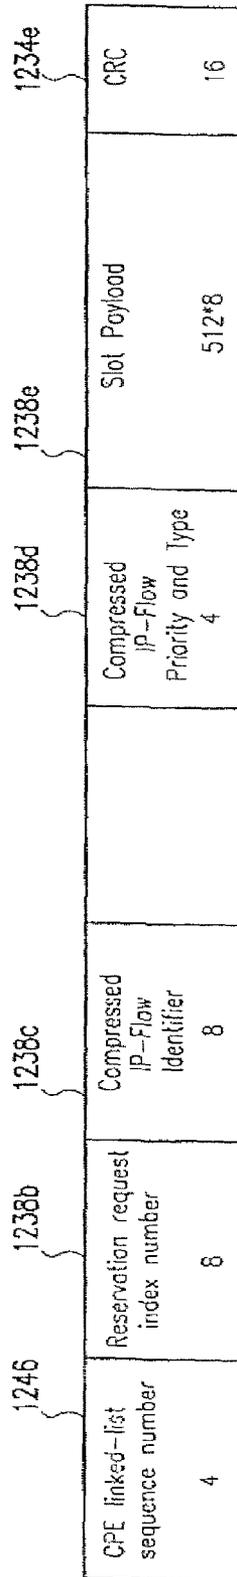


FIG.12L

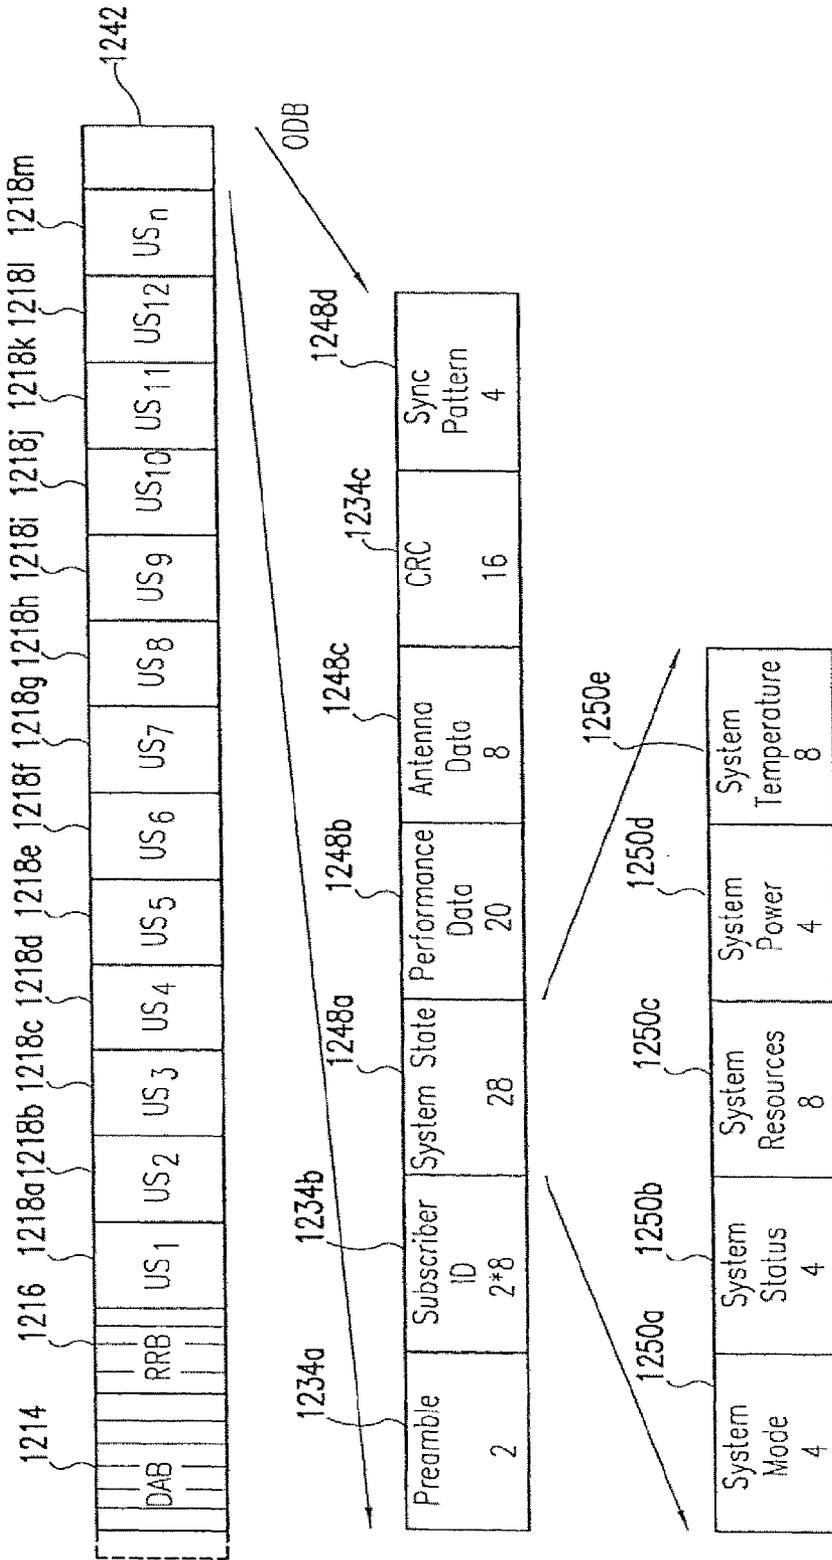


FIG. 12M

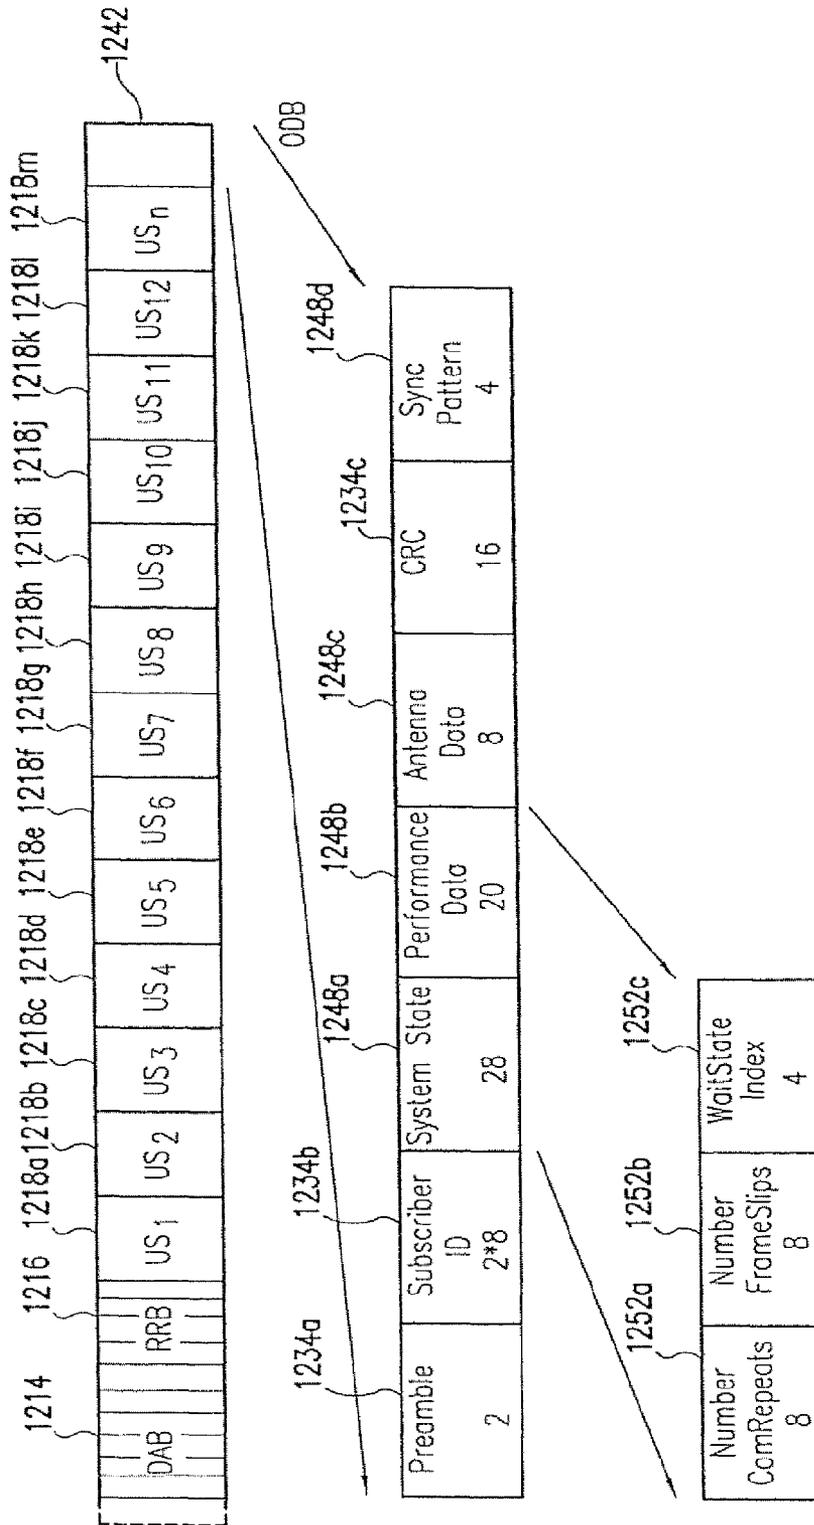


FIG.12N

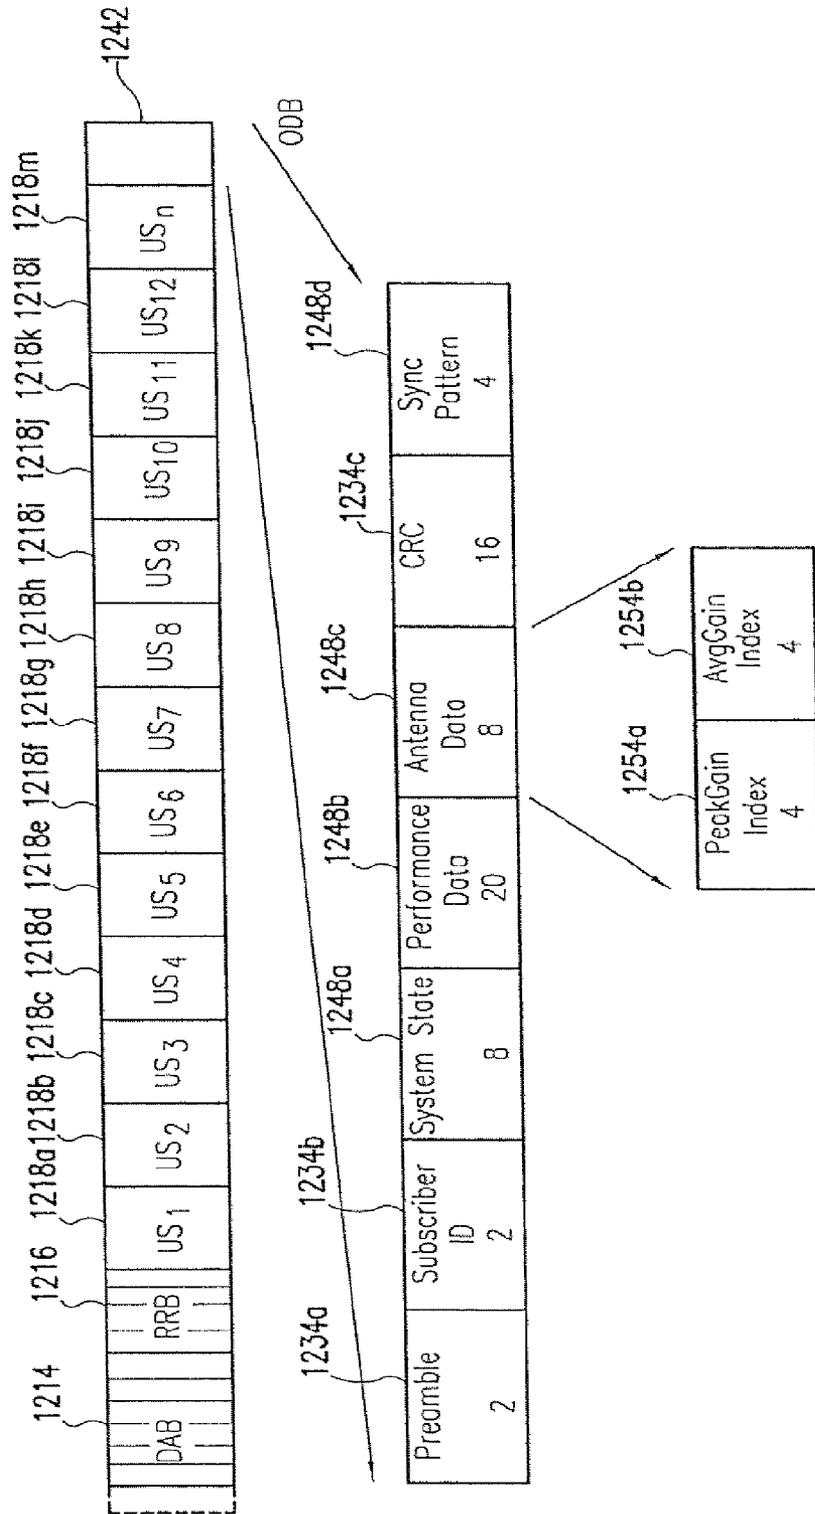


FIG. 120

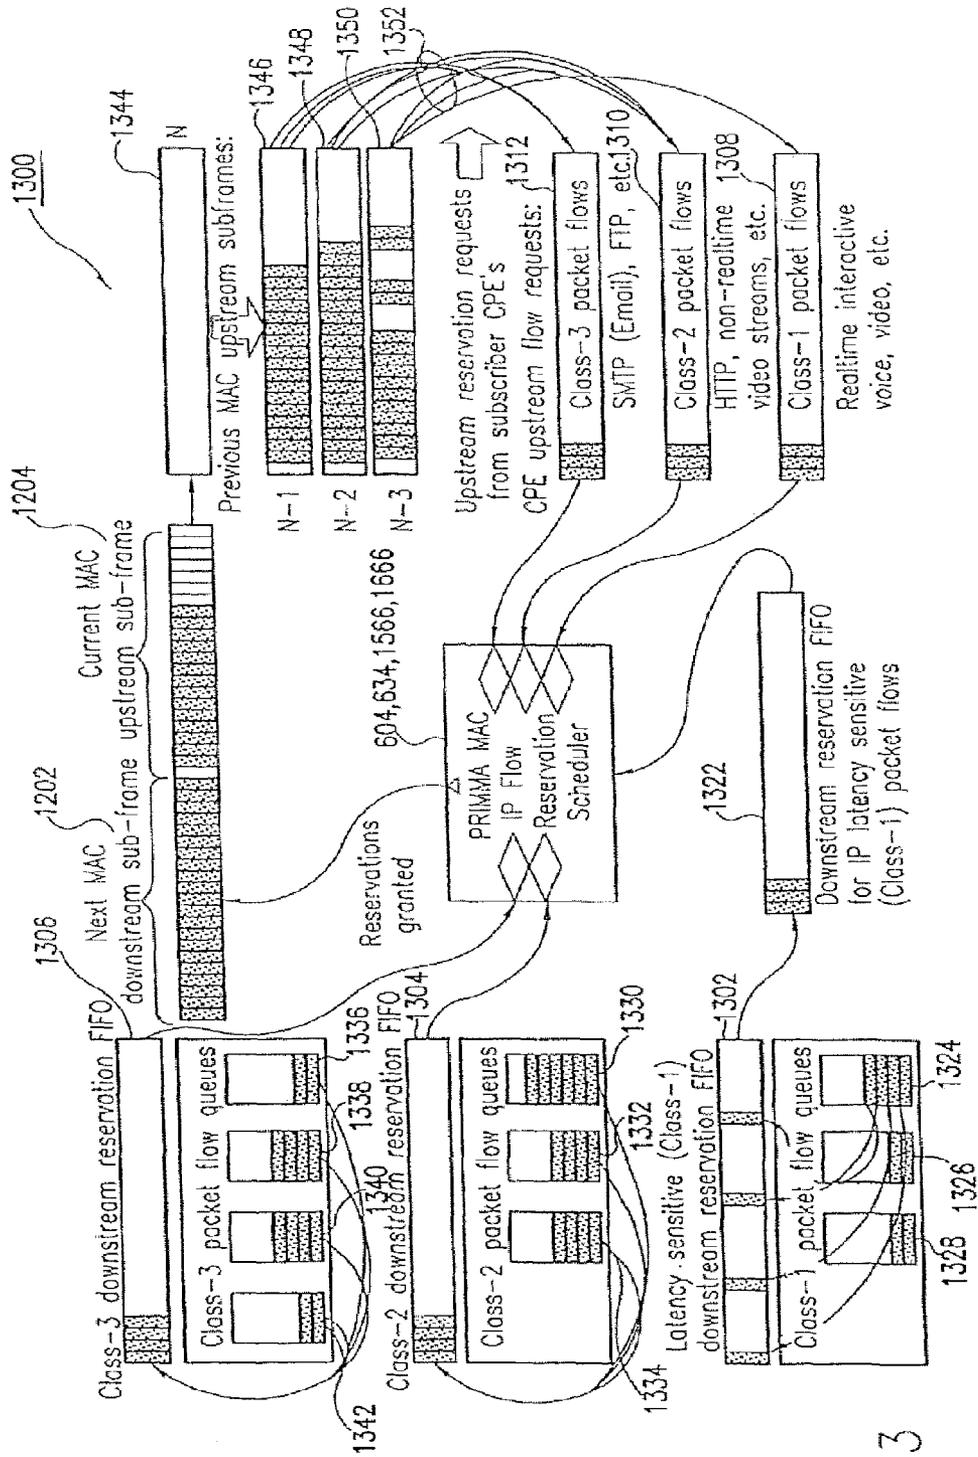


FIG. 13

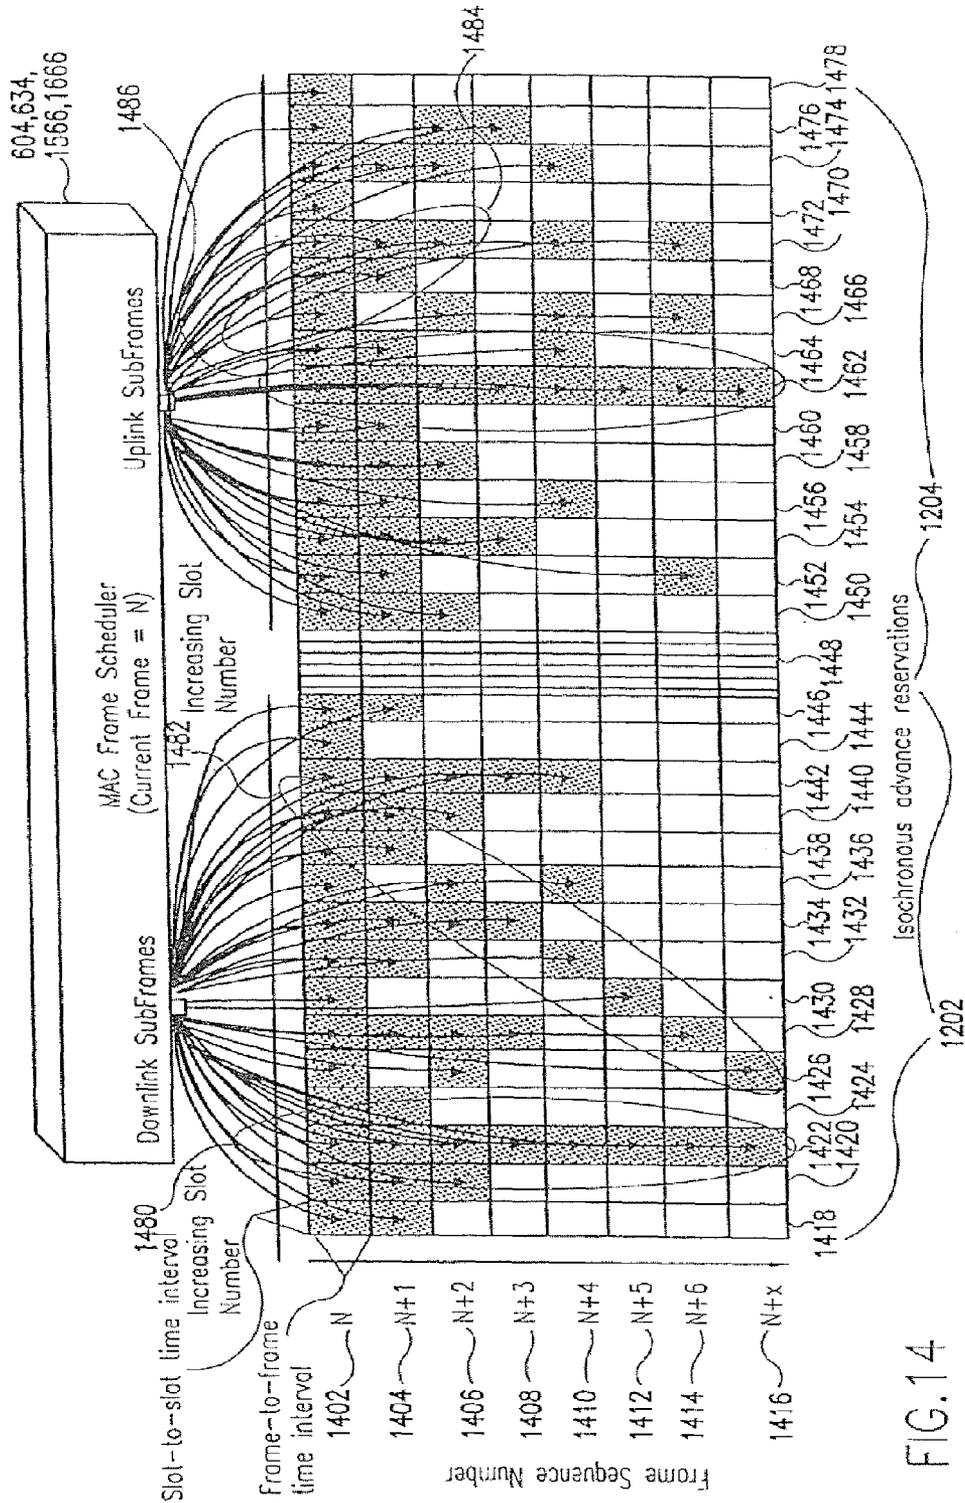
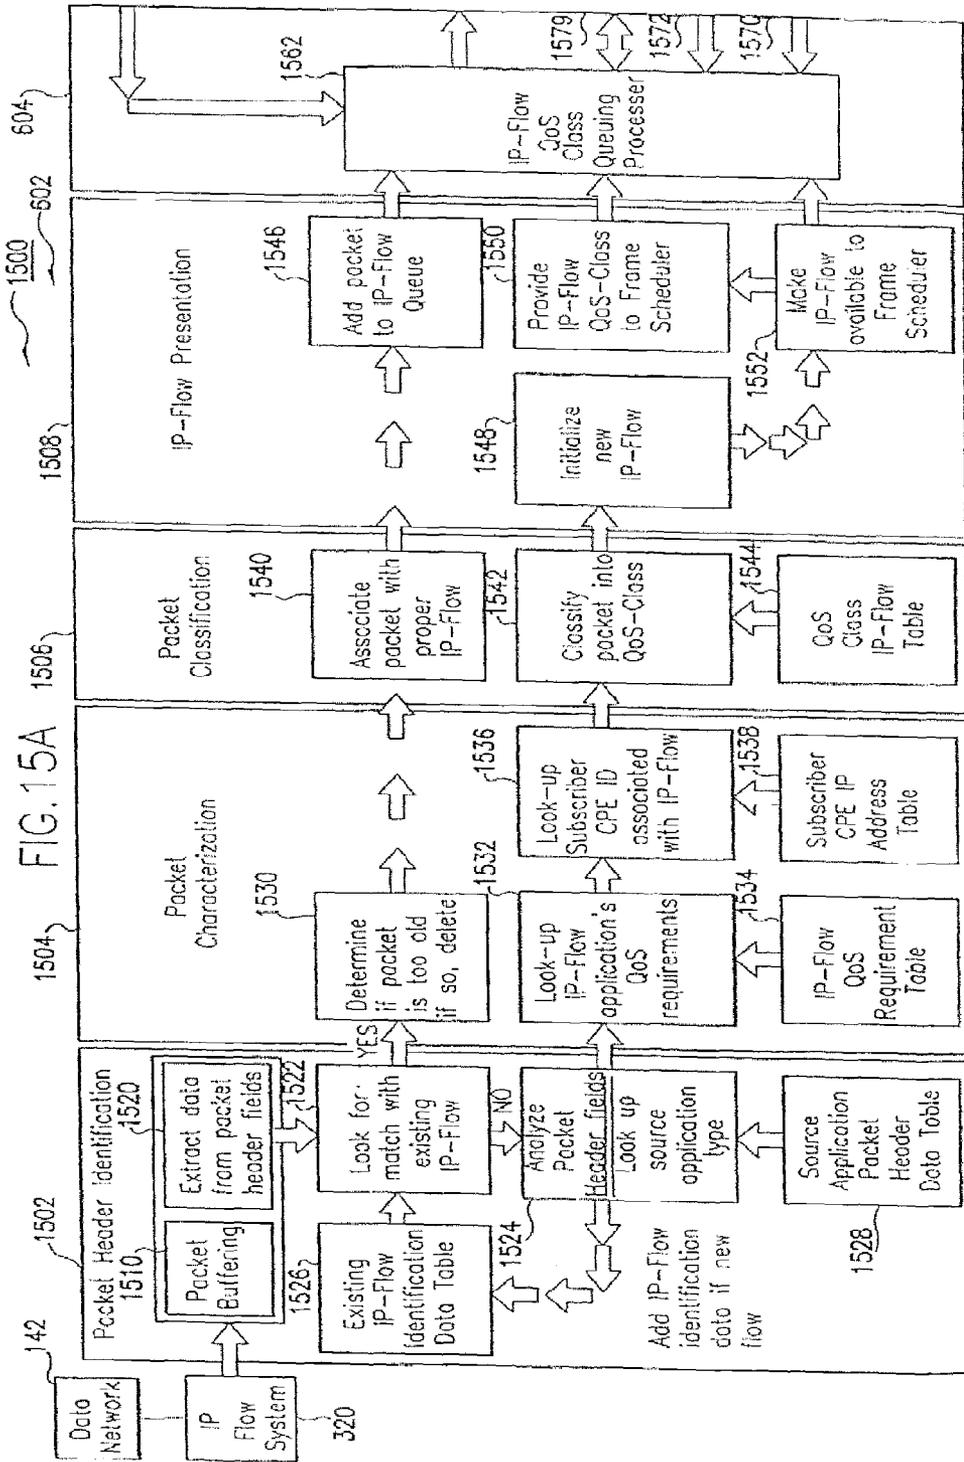
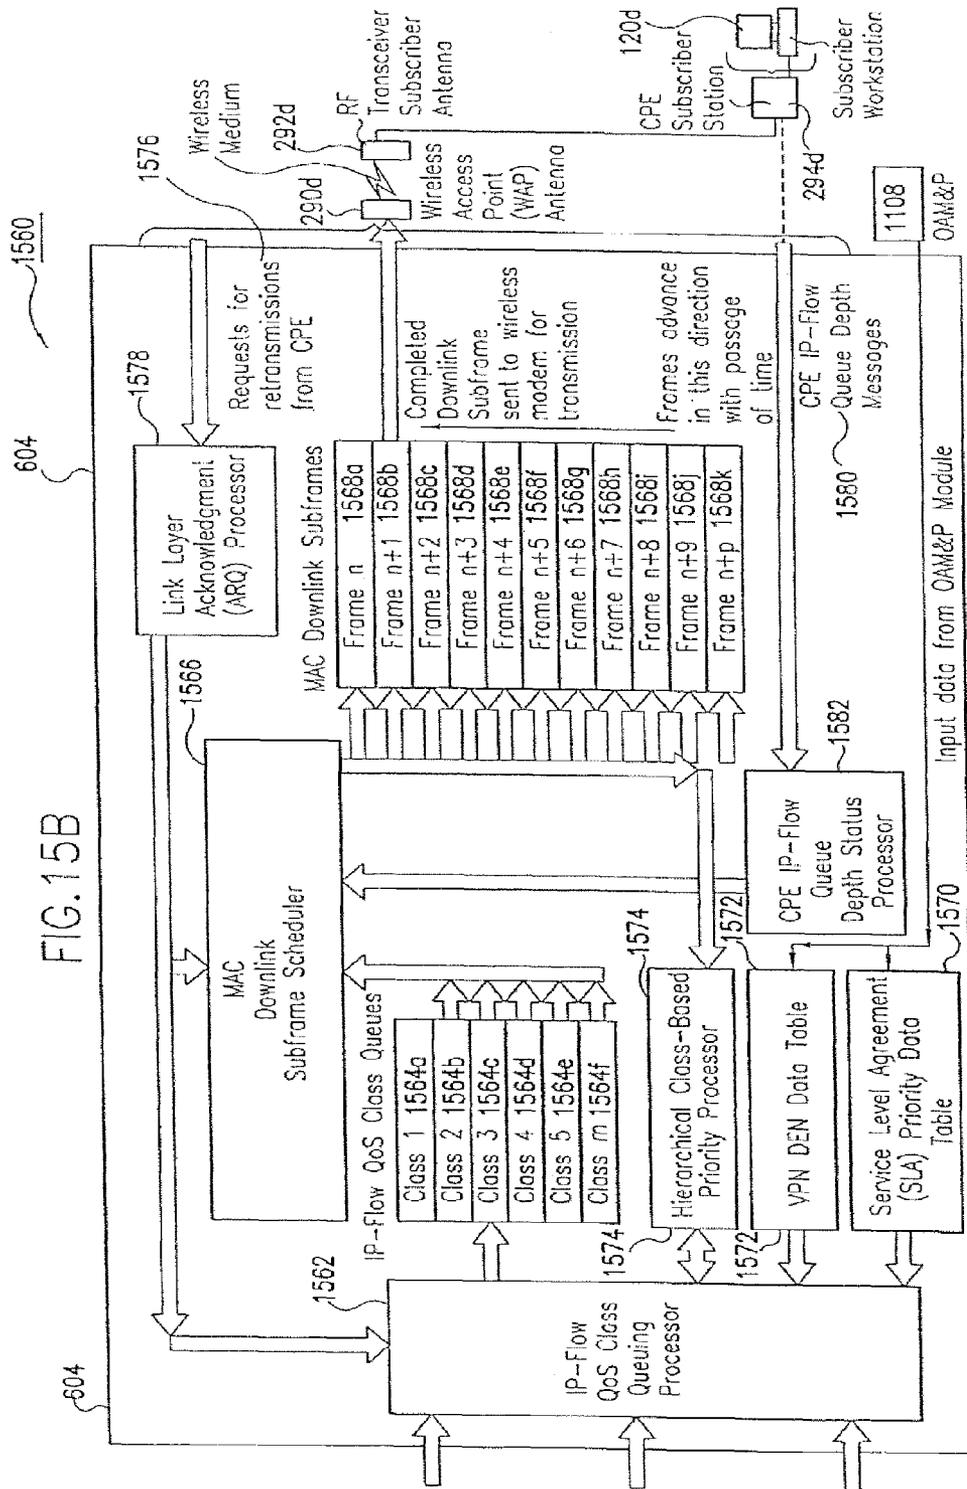
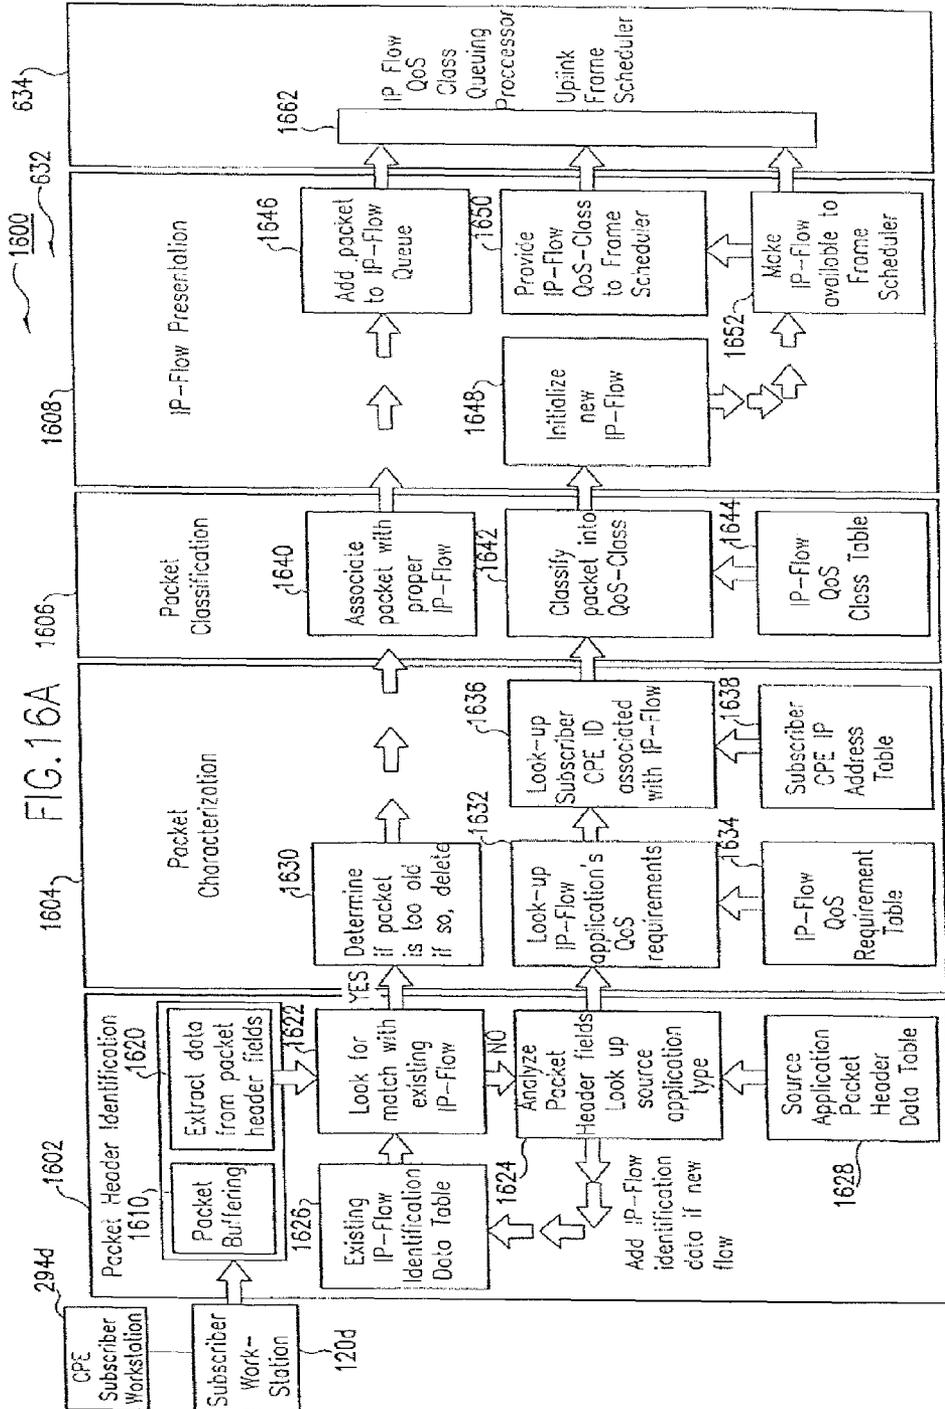


FIG.14







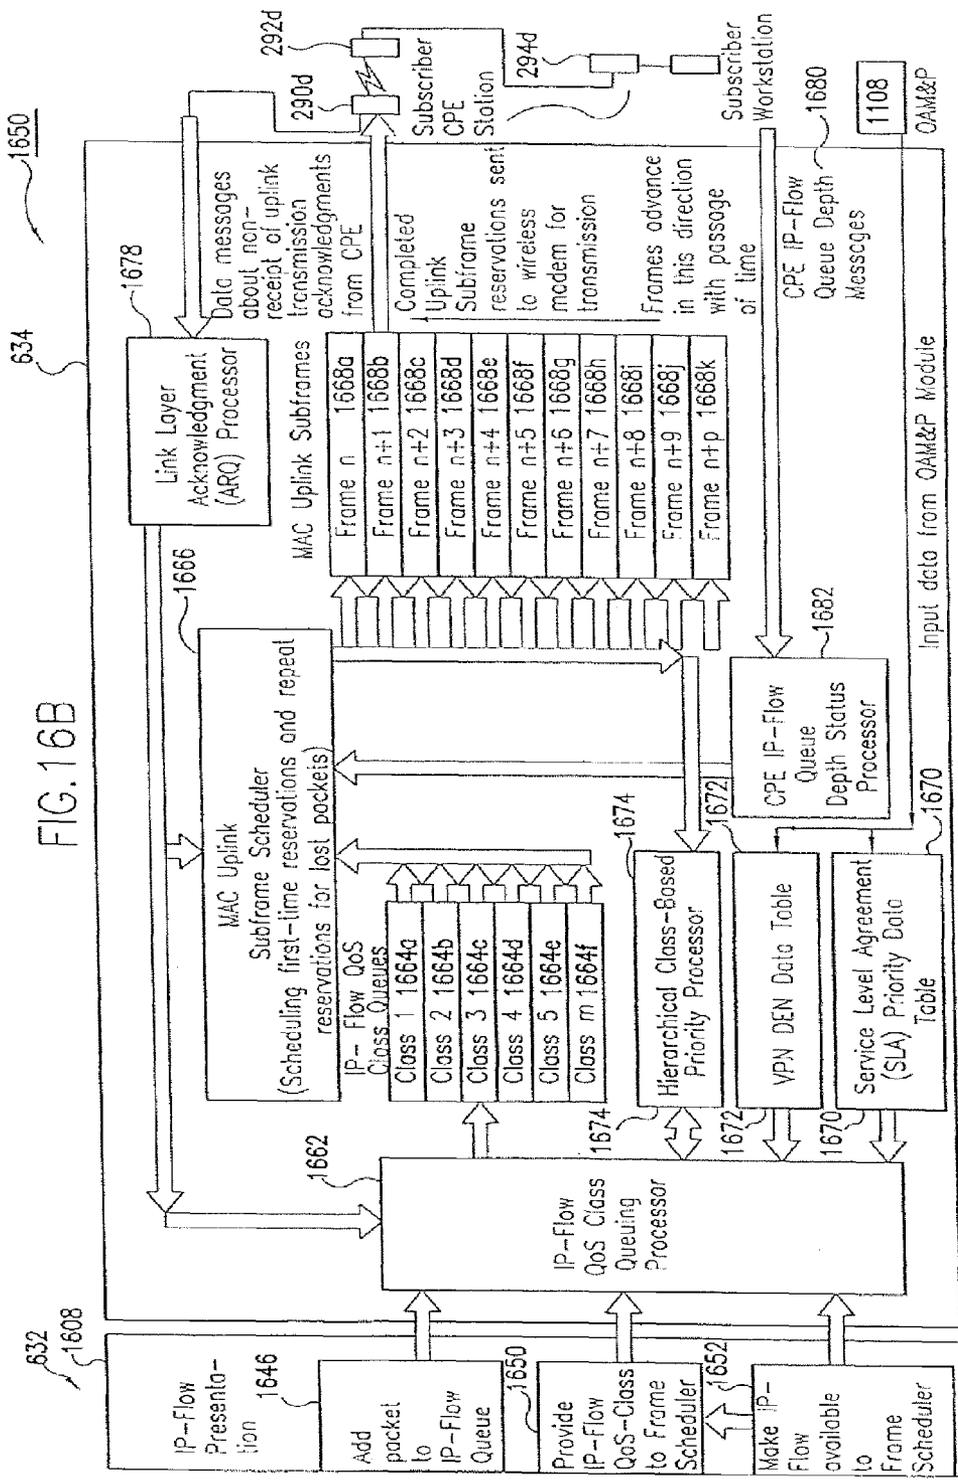


FIG. 16B

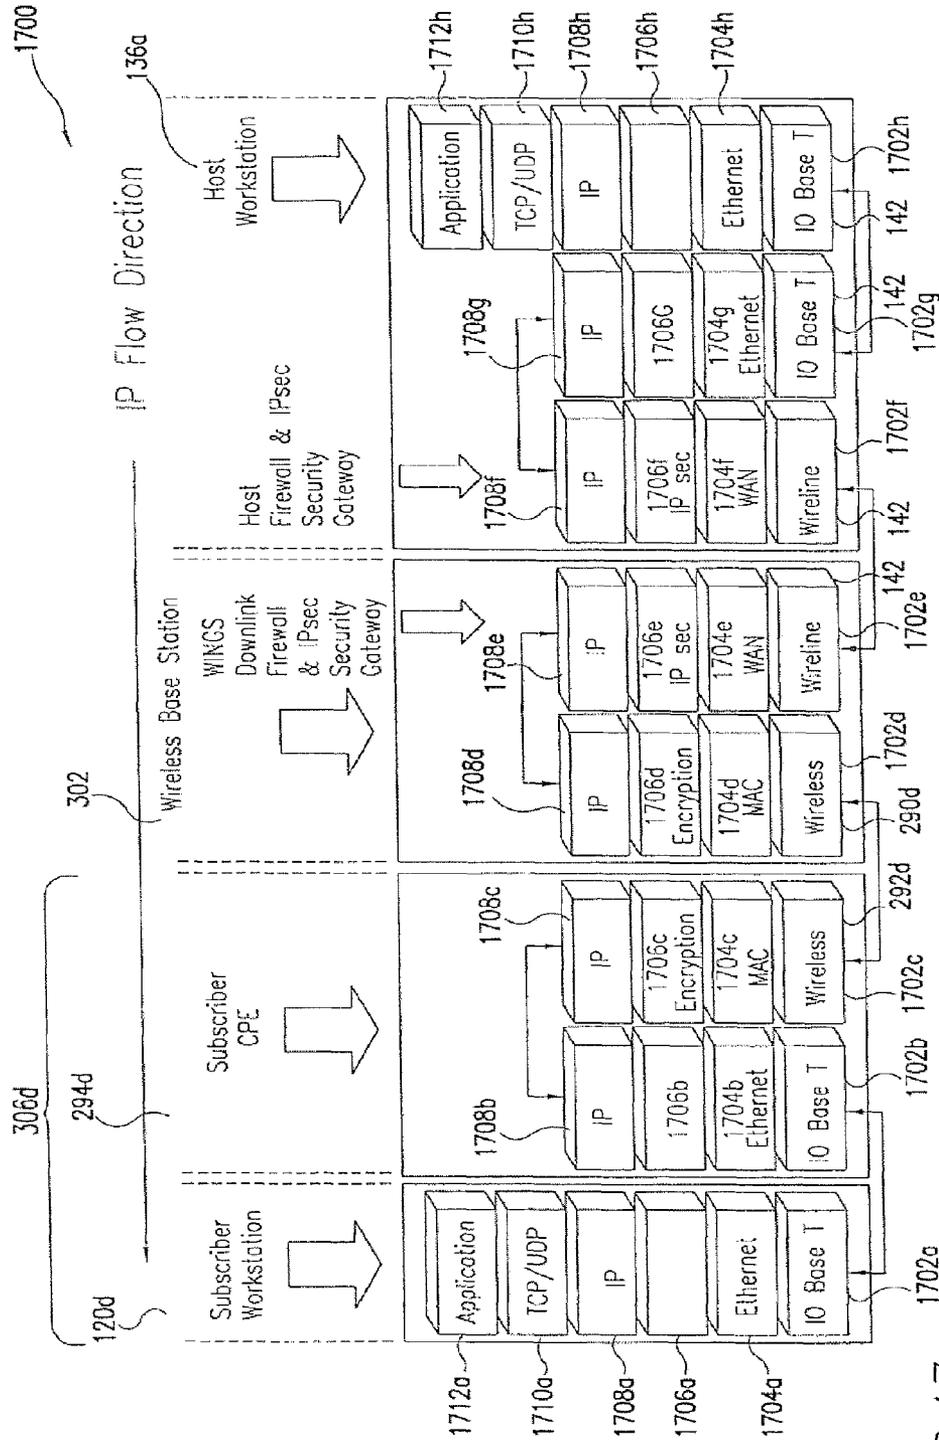


FIG. 17

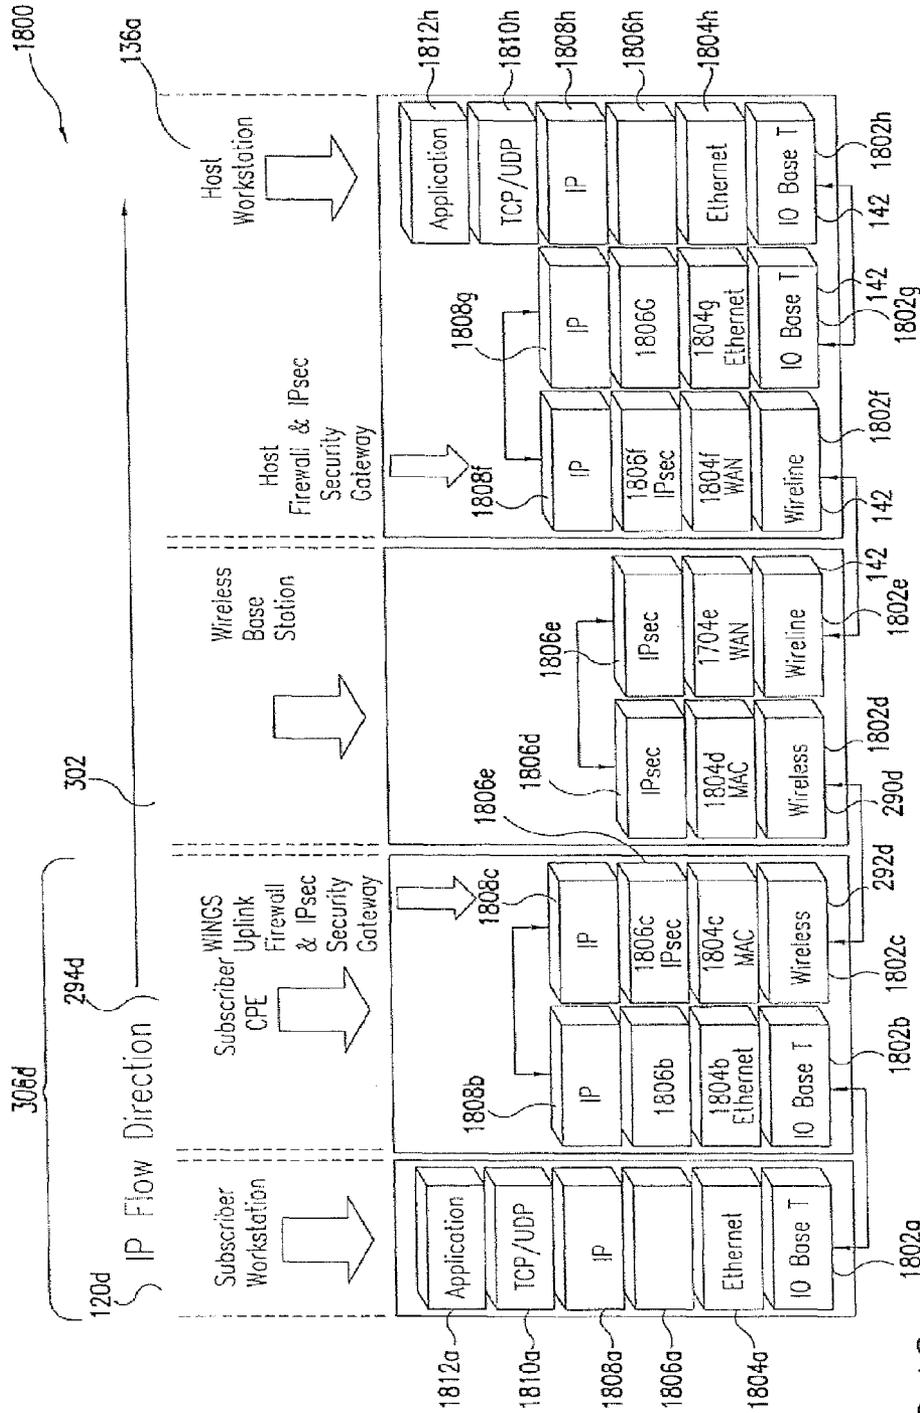


FIG. 18

**METHOD AND COMPUTER PROGRAM  
PRODUCT FOR INTERNET PROTOCOL  
(IP)—FLOW CLASSIFICATION IN A  
WIRELESS POINT TO MULTI-POINT  
(PTMP) TRANSMISSION SYSTEM**

**Matter enclosed in heavy brackets [ ] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.**

This application is a continuation of U.S. application Ser. No. 09/350,156, filed Jul. 9, 1999, entitled IP-FLOW CLASSIFICATION IN A WIRELESS POINT TO MULTI-POINT (PtMP) TRANSMISSION SYSTEM, which issued as U.S. Pat. No. 6,452,915 on Sep. 17, 2002, and which claims the benefit of priority from U.S. Provisional Patent Application No. 60/092,452, filed Jul. 10, 1998, the disclosures of each are incorporated herein by reference thereto.

**CROSS-REFERENCE TO OTHER  
APPLICATIONS**

The following applications of common assignee contain common disclosure:

U.S. Patent Application entitled "Transmission Control Protocol/Internet Protocol (TCP/IP) Packet-Centric Wireless Point to Multi-Point (PtMP) Transmission System Architecture," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,477, issued as U.S. Pat. No. 6,862,622.

U.S. Patent Application entitled "Quality of Service (QoS)—Aware Wireless Point to Multi-Point (PtMP) Transmission System Architecture," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,480, now abandoned.

U.S. Patent Application entitled "Method for Providing Dynamic Bandwidth Allocation Based on IP-Flow Characteristics in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/350,126, now abandoned.

U.S. Patent Application entitled "Method for Providing for Quality of Service (QoS)—Based Handling of IP-Flows in a Wireless Point to Multi-Point Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/350,118, now abandoned.

U.S. Patent Application entitled "IP-Flow Identification in a Wireless Point to Multi-Point Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/347,856, issued as U.S. Pat. No. 6,594,246.

U.S. Patent Application entitled "IP-Flow Characterization in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/350,150, issued as U.S. Pat. No. 6,590,885.

U.S. Patent Application entitled "IP-Flow Prioritization in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,476, now abandoned.

U.S. Patent Application entitled "Method of Operation for Providing for Service Level Agreement (SLA) Based Prioritization in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/350,170, now abandoned.

U.S. Patent Application entitled "Method for Transmission Control Protocol (TCP) Rate Control With Link-Layer

Acknowledgments in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,481, now abandoned.

U.S. Patent Application entitled "Transmission Control Protocol/Internet Protocol (TCP/IP)—Centric QoS Aware Media Access Control (MAC) Layer in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 350,159, now abandoned.

U.S. Patent Application entitled "Use of Priority-Based Scheduling for the Optimization of Latency and Jitter Sensitive IP Flows in a Wireless Point to Multi-Point Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/347,857, now abandoned.

U.S. Patent Application entitled "Time Division Multiple Access/Time Division Duplex (TDMA/TDD) Access Method for a Wireless Point to Multi-Point Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,475, now abandoned.

U.S. Patent Application entitled "Reservation Based Prioritization Method for Wireless Transmission of Latency and Jitter Sensitive IP-Flows in a Wireless Point to Multi-Point Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,483, issued as U.S. Pat. No. 6,628,629.

U.S. Patent Application entitled "Translation of Internet-Prioritized Internet Protocol (IP)-Flows into Wireless System Resource Allocations in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,479, now abandoned.

U.S. Patent Application entitled "Method of Operation for the Integration of Differentiated services (Diff-serv) Marked IP-Flows into a Quality of Service (QoS) Priorities in a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/350,162, now abandoned.

U.S. Patent Application entitled "Method for the Recognition and Operation of Virtual Private Networks (VPNs) over a Wireless Point to Multi-Point (PtMP) Transmission System," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,975, issued as U.S. Pat. No. 6,680,922.

U.S. Patent Application entitled "Time Division Multiple Access/Time Division Duplex (TDMA/TDD) Transmission Media Access Control (MAC) Air Frame," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/350,173, now abandoned.

U.S. Patent Application entitled "Application—Aware, Quality of Service (QoS) Sensitive, Media Access Control (MAC) Layer," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,482, issued as U.S. Pat. No. 6,640,248.

U.S. Patent Application entitled "Transmission Control Protocol/Internet Protocol (TCP/IP) Packet-Centric Wireless Point to Point (PtP) Transmission System Architecture," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,478, now abandoned.

U.S. Patent Application entitled "Transmission Control Protocol/Internet Protocol (TCP/IP) Packet-Centric Cable Point to Multi-Point (PtMP) Transmission System Architecture," filed Jul. 9, 1999, assigned U.S. application Ser. No. 09/349,474, now abandoned.

U.S. Patent Application entitled "Transmission Control Protocol/Internet Protocol (TCP/IP) Packet-Centric Wireless Point to Multi-Point (PtMP) Transmission System Architecture," filed Feb. 28, 2005, assigned U.S. application Ser. No. 11/068,719.

U.S. Patent Application entitled "Method for Providing Dynamic Bandwidth Allocation Based on IP-Flow Charac-

teristics in a Wireless Point to Multi-Point (PtMP) Transmission System,” filed Aug. 10, 2007, assigned U.S. application Ser. No. 11/502,331.

U.S. Patent Application entitled “Use of Priority-Based Scheduling for the Optimization of Latency and Jitter Sensitive IP Flows in a Wireless Point to Multi-Point Transmission System,” filed Aug. 10, 2007, assigned U.S. application Ser. No. 11/502,583.

U.S. Patent Application entitled “Quality of Service (QoS)—Aware Wireless Point to Multi-Point (PtMP) Transmission System Architecture,” filed Aug. 10, 2006, assigned U.S. application Ser. No. 11/502,596.

U.S. Patent Application entitled “Method for Providing for Quality of Service (QoS)—Based Handling of IP-Flows in a Wireless Point to Multi-Point Transmission System,” filed Aug. 10, 2006, assigned U.S. application Ser. No. 11/502,348.

U.S. Patent Application entitled “Transmission Control Protocol/Internet Protocol (TCP/IP)—Centric QoS Aware Media Access Control (MAC) Layer in a Wireless Point to Multi-Point (PtMP) Transmission System,” filed Aug. 10, 2006, assigned U.S. application Ser. No. 11/502,599.

U.S. Patent Application entitled “Method of Operation for the Integration of Differentiated Services (Diff-Serv) Marked IP-Flows into a Quality of Service (QoS) Priorities in a Wireless Point to Multi-Point (PtMP) Transmission System,” filed Aug. 10, 2006, assigned U.S. application Ser. No. 11/502,101.

U.S. Patent Application entitled “Time Division Multiple Access/Time Division Duplex (TDMA/TDD) Transmission Media Access Control (MAC) Air Frame,” filed Aug. 10, 2006, assigned U.S. application Ser. No. 11/502,601.

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates generally to telecommunications and, more particularly, to a system and method for implementing a QoS aware wireless point-to-multi-point transmission system.

### 2. Related Art

Telecommunication networks such as voice, data and video networks have conventionally been customized for the type of traffic each is to transport. For example, voice traffic is very latency sensitive but quality is less important, so voice networks are designed to transport voice traffic with limited latency. Traditional data traffic, such as, e.g., a spreadsheet, on the other hand is not latency sensitive, but error-free delivery is required. Conventional telecommunications networks use circuit switching to achieve acceptable end user quality of service (QoS). With the advent of new packet switching high bandwidth data networks, different types of traffic can be transported over a data network. Specifically, convergence of separate voice, data and video networks into a single broadband telecommunications network is enabled. To ensure end user satisfaction, a system is desired that provides QoS for various types of traffic to be transported.

Wireless networks present particular challenges over their wireline counterparts in delivering QoS. For example, wireless networks traditionally exhibit high bit error rates (BER) due to a number of reasons. Conventional wireless networks also implement circuit switched connections to provide reliable communications channels. However the use of circuit switched connections allocates bandwidth between communicating nodes whether or not traffic is constantly

being transferred between the nodes. Therefore, circuit switched connections use communications bandwidth rather inefficiently.

Packet switching makes more efficient use of available bandwidth than does traditional circuit switching. Packet switching breaks up traffic into so-called “packets” which can then be transported from a source node to a destination for reassembly. Thus a particular portion of bandwidth can be shared by many sources and destinations yielding more efficient use of bandwidth.

A wireless broadband access telecommunications system is desired which can provide a QoS capability that is comparable to that delivered by wireline broadband access devices. Conventionally, one of the barriers to the deployment of wireless broadband access systems has been the absence of acceptable QoS characteristics, while at the same time delivering bandwidth sufficient to qualify as broadband. Delivery of raw bandwidth over wireless media without acceptable QoS would not benefit end users. Likewise, the delivery of a high level of QoS at the cost of sufficient bandwidth would also not benefit endusers.

Conventional efforts to provide wireless broadband access systems have not granted sufficient priority to QoS as a guiding principle in architecting the wireless systems, resulting in sub-optimal designs. With the rapid emergence of the Internet, the packet switching paradigm, and transmission control protocol/interact protocol (TCP/IP) as a universal data protocol, it has become clear that a new wireless system design has become necessary.

What is needed then is an IP-centric wireless broadband access system with true QoS capabilities.

## SUMMARY OF THE INVENTION

The present invention is directed to an IP flow classification system used in a wireless telecommunications system. More specifically, the IP flow classification system groups IP flows in a packet-centric wireless point to multi-point telecommunications system.

The classification system includes: a wireless base station coupled to a first data network; one or more host workstations coupled to the first data network; one or more subscriber customer premise equipment (CPE) stations in wireless communication with the wireless base station over a shared bandwidth using a packet-centric protocol; and one or more subscriber workstations coupled to each of the subscriber CPE stations over a second network; a resource allocation device optimizes end-user quality of service (QoS) and allocates shared bandwidth among the subscriber CPE stations; an analyzing and scheduling device analyzes and schedules internet protocol (IP) flow over the shared wireless bandwidth. The analyzing device includes the above IP flow classifier that classifies the IP flow.

In one embodiment, the classifier includes a means for associating a packet of an existing IP flow with the IP flow. The classifier can include a QoS grouping device that groups a packet of a new IP flow into a QoS class grouping. The QoS grouping device can include a determining device that determines and takes into account QoS class groupings for the IP flow. The QoS grouping device can include an optional differentiated services (Diff Serv) device that takes into account an optional DiffServs field priority marking for the IP flow. The QoS grouping device can also include an optional type of service (TOS) device that takes into account any optional type of service (TOS) field priority marking for said IP flow.

The cross-referenced applications are incorporated herein by reference in their entireties.

#### BRIEF DESCRIPTION OF THE FIGURES

The present invention will be described with reference to the accompanying figures, wherein:

FIG. 1A is a block diagram providing an overview of a standard telecommunications network providing local exchange carrier services within one or more local access and transport areas;

FIG. 1B depicts an exemplary network including workstations coupled to a data network;

FIG. 1C illustrates a conventional video network, such as for example a cable television (CATV) network;

FIG. 2A is a block diagram illustrating an overview of a standard telecommunications network providing both local exchange carrier and interexchange carrier services between subscribers located in different local access and transport areas;

FIG. 2B illustrates a signaling network in detail;

FIG. 2C illustrates an exemplary network carrying voice, data and video traffic over a data network;

FIG. 2D depicts a network including a point-to-multipoint wireless network coupled via a router to a data network;

FIG. 3A depicts an exemplary perspective diagram of a point-to-multipoint network;

FIG. 3B depicts a block diagram further illustrating a wireless point-to-multipoint network;

FIG. 4 depicts a wireless Internet protocol network access architecture of the present invention;

FIG. 5A depicts Internet protocol flows from a subscriber host to a wireless base station, and through a wireline connection to a destination host;

FIG. 5B illustrates a functional flow diagram including an example functional description of a transmission control protocol adjunct agent performing an outgoing transmission control protocol spoof function;

FIG. 5C illustrates a functional flow diagram including an exemplary functional description of a transmission control protocol adjunct agent performing an incoming transmission control protocol spoof function;

FIG. 6 illustrates a block diagram representing scheduling of mixed Internet protocol flows;

FIG. 7 illustrates packet header field information which can be used to identify Internet protocol flows and the quality of service requirements of the Internet protocol flows;

FIG. 8A is a block diagram summarizing an exemplary downlink analysis, prioritization and scheduling function;

FIG. 8B is a block diagram summarizing an exemplary uplink analysis prioritization and scheduling function;

FIG. 9 illustrates how a downlink flow scheduler can take into account a service level agreement in prioritizing a frame slot and scheduling resource allocation;

FIG. 10 depicts an embodiment of an inventive media access control hardware architecture;

FIG. 11 is an exemplary software organization for a packet-centric wireless point to multi-point telecommunications system;

FIG. 12A illustrates an exemplary time division multiple access media access control air frame;

FIG. 12B illustrates an exemplary structure for a time division multiple access/time division duplex air frame;

FIG. 12C illustrates an exemplary downstream transmission subframe;

FIG. 12D illustrates an exemplary upstream acknowledgment block field of a downstream transmission subframe;

FIG. 12E illustrates an exemplary acknowledgment request block field of a downstream transmission subframe;

FIG. 12F illustrates an exemplary frame descriptor block field of a downstream transmission subframe;

FIG. 12G illustrates an exemplary downstream media access control payload data unit of a downstream transmission subframe;

FIG. 12H illustrates an exemplary command and control block of a downstream transmission subframe;

FIG. 12I illustrates an exemplary upstream transmission subframe;

FIG. 12J illustrates an exemplary downstream acknowledgment block of an upstream transmission subframe;

FIG. 12K illustrates an exemplary reservation request block of an upstream transmission subframe 1204;

FIG. 12L illustrates an exemplary media access control payload data unit of an upstream transmission subframe;

FIGS. 12M, 12N and 12O illustrate an exemplary operations data block of an upstream transmission subframe;

FIG. 13 illustrates how an exemplary flow scheduler for the present invention functions;

FIG. 14 is an exemplary two-dimensional block diagram of an advanced reservation algorithm;

FIG. 15A is an exemplary logical flow diagram for a downlink flow analyzer;

FIG. 15B is an exemplary logical flow diagram for a downlink flow scheduler;

FIG. 16A is an exemplary logical flow diagram for an uplink flow analyzer;

FIG. 16B is an exemplary logical flow diagram for an uplink flow scheduler;

FIG. 17 illustrates Internet protocol flow in a downlink direction, including Internet protocol security encryption; and

FIG. 18 illustrates an uplink direction of Internet protocol security support.

In the figures, like reference numbers generally indicate identical, functional similar, and/or structurally similar elements. The figure in which an element first appears is indicated by the leftmost digit(s) in the reference number.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

##### I. An Example Environment

The present invention is described in terms of an example environment. The example environment uses a fixed wireless point-to-multi-point (PtMP) connection to transmit packetized data information including for example, IP telephony, video, data, received from a telecommunications carrier. As used herein, a telecommunications carrier can include US domestic entities (see Definitions below at section II) such as, e.g., ILECs, CLECs, IXCs, NGTs and Enhanced Service Providers (ESPs), as well as global entities such as PTTs and NEs, recognized by those skilled in the art. In addition, as used herein a telecommunications system includes domestic systems used by entities such as, e.g., ILECs, CLECs, IXCs and Enhanced Service Providers (ESPs), as well as global systems recognized by those skilled in the art.

In the preferred embodiment, the traffic arrives at a wide area network (WAN) connection.

Data traffic is received from a data network through a network router and can be demodulated from internet protocol (IP) format to, for example, the point-to-point protocol

(PPP). Network routers can include, for example, a general purpose computer, such as the SUN workstation running routing software or a dedicated routing device such as various models from CISCO of San Jose, Calif., ASCEND of Alameda, Calif., NETOPIA of Alameda, Calif., or 3COM of Santa Clara, Calif.

In the alternative, a virtual private networking protocol, such as the point-to-point tunneling protocol (PPTP), can be used to create a "tunnel" between a remote user and a corporate data network. A tunnel permits a network administrator to extend a virtual private network from a server (e.g., a Windows NT server) to a data network (e.g., the Internet).

Although the invention is described in terms of this example environment, it is important to note that description in these terms is provided for purposes of illustration only. It is not intended that the invention be limited to this example environment or to the precise inter-operations between the above-noted devices. In fact, after reading the following description, it will become apparent to a person skilled in the relevant art how to implement the invention in alternative environments.

II. Definitions

Table 1 below defines common telecommunications terminology. These terms are used throughout the remainder of the description of the invention.

TABLE 1

Term	Definition
access tandem (AT)	An AT is a class 3/4 switch used to switch calls between EOs in a LATA. An AT provides subscribers access to the IXCs, to provide long distance calling services. An access tandem is a network node. Other network nodes can include, for example, a CLEC, or other enhanced services provider (ESP), an international gateway or global point-of-presence (GPOP), or an intelligent peripheral (IP).
bearer (B) channels	Bearer (B) channels are digital channels used to carry both digital voice and digital data information. An ISDN bearer channel is 64,000 bits per second, which can carry PCM-digitized voice or data.
called party	The called party is the caller receiving a call sent over a network at the destination or termination end.
calling party	The calling party is the caller placing a call over any kind of network from the origination end.
central office (CO)	A CO is a facility that houses an EO homed. EOs are often called COs.
class 1 switch	A class 1 switching office, the Regional Center (RC), is the highest level of local and long distance switching, or "office of last resort" to complete a call.
class 3 switch	A class 3 switching office was a Primary Center (PC); an access tandem (AT) has class 3 functionality.
class 4 switch	A class 4 switching office was a Toll Center (TC) if operators were present or else a Toll Point (TP); an access tandem (AT) has class 4 functionality.
class 5 switch	A class 5 switching office is an end office (EO) or the lowest level of local and long distance switching, a local central office. The switch closest to the end subscriber.
competitive LEC (CLEC)	CLECs are telecommunications services providers of local services that can compete with ILECs. Interprise and Century 21 are examples. A CLEC may or may not handle IXC services as well.

TABLE 1-continued

Term	Definition
5 competitive access providers (CAPS)	Teligent and Winstar are examples.
customer premises equipment (CPE)	CPE refers to devices residing on the premises of a customer and used to connect to a telephone network, including ordinary telephones, key telephone systems, PBXs, video conferencing devices and modems.
10 digitized data (or digital data)	Digitized data refers to analog data that has been sampled into a binary representation (i.e., comprising sequences of 0's and 1's). Digitized data is less susceptible to noise and attenuation distortions because it is more easily regenerated to reconstruct the original signal.
15 egress end office	The egress EO is the node or destination EO with a direct connection to the called party, the termination point. The called party is "homed" to the egress EQ.
egress	Egress refers to the connection from a called party or termination at the destination end of a network, to the serving wire center (SWC).
20 end office (EO)	An EO is a class 5 switch used to switch local calls within a LATA. Subscribers of the LEC are connected ("homed") to EOs, meaning that EOs are the last switches to which the subscribers are connected.
Enhanced Service Provider (ESP)	A network services provider.
25 equal access	1+ dialing as used in US domestic calling for access to any long distance carrier as required under the terms of the modified final judgment (MFJ) requiring divestiture of the Regional Bell Operating Companies (RBOCs) from their parent company, AT&T.
30 global point of presence (GPOP)	A GPOP refers to the location where international telecommunications facilities and domestic facilities interface, an international gateway POP. ILECs are traditional LECs in the US, which are the Regional Bell Operating Companies (RBOCs). Bell South and US West are examples. ILEC can also stand for an independent LEC such as a GTE.
incumbent LEC (ILEC)	The ingress EO is the node or serving wire center (SVC) with a direct connection to the calling party, the origination point. The calling party is "homed" to the ingress EO.
35 ingress end office	Ingress refers to the connection from a calling party or origination.
40 ingress	An ISDN Basic Rate Interface (BRI) line provides 2 bearer B channels and 1 data D line (known as "2B + D" over one or two pairs) to a subscriber.
integrated service digital network (ISDN) basic rate interface (BRI) line	ISDN is a network that provides a standard for communications (voice, data and signaling), end-to-end digital transmission circuits, out-of-band signaling, and a features significant amount of bandwidth.
45 integrated services digital network (ISDN)	An inter-machine trunk (IMT) is a circuit between two commonly-connected switches.
50 inter machine trunk (IMT)	IXCs are U.S. domestic long distance telecommunications services providers. AT&T, MCI, Sprint, are examples.
inter-exchange carrier (IXC)	IP is part of the TCP/IP protocols. It is used to recognize incoming messages, route outgoing messages, and keep track of Internet node addresses (using a number to specify a TCP/IP host on the Internet). IP corresponds to the network layer of OSI.
55 internet protocol (IP)	An ISP is a company that provides Internet access to subscribers.
Internet service provider (ISP)	An ISDN Primary Rate Interface (PRI) line provides the ISDN equivalent of a T1 circuit. The PRI delivered to a customer's premises can provide 23B + D (in North America) or 30B + D (in Europe) channels running at 1,544 megabits per second and 2,048 megabits per second, respectively.
60 ISDN primary rate interface (PRI)	
65	

TABLE 1-continued

Term	Definition
local exchange carrier (LEC)	LECs are local telecommunications services providers. Bell Atlantic and U.S. West are examples.
local access and transport area (LATA)	A LATA is a region in which a LEC offers services. There are over 160 LATAs of these local geographical areas within the United States.
local area network (LAN)	A LAN is a communications network providing connections between computers and peripheral devices (e.g., printers and modems) over a relatively short distance (e.g., within a building) under standardized control.
modified final judgment (MFJ)	Modified final judgment (MFJ) was the decision requiring divestiture of the Regional Bell Operating Companies (RBOCs) from their parent company, AT&T.
network node	A network node is a generic term for the resources in a telecommunications network, including switches, DACS, regenerators, etc. Network nodes essentially include all non-circuit (transport) devices. Other network nodes can include, for example, equipment of a CLEC, or other enhanced service provider (ESP), a point-of-presence (POP), an international gateway or global point-of-presence (GPOP).
new entrant (NE)	A new generation global telecommunications.
next generation telephone (NGT)	A new telecommunications services provider, especially IP telephony providers. Examples are Level 3 and Qwest.
packetized voice or voice over a backbone	One example of packetized voice is voice over internet protocol (VOIP). Voice over packet refers to the carrying of telephony or voice traffic over a data network, e.g. voice over frame, voice over ATM, voice over Internet Protocol (IP), over virtual private networks (VPNs), voice over a backbone, etc.
Pipe or dedicated communications facility	A pipe or dedicated communications facility connects an ISP to the internet.
point of presence (POP)	A POP refers to the location within a LATA where the IXC and LEC facilities interface.
point-to-point tunneling protocol (PPTP)	A virtual private networking protocol, point-to-point tunneling protocol (PPTP), can be used to create a "tunnel" between a remote user and a data network. A tunnel permits a network administrator to extend a virtual private network (VPN) from a server (e.g., a Windows NT server) to a data network (e.g., the Internet).
point-to-point (PPP) protocol	PPP is a protocol permitting a computer to establish a connection with the Internet using a modem. PPP supports high-quality graphical front ends, like Netscape.
postal telephone telegraph (PTT)	State regulated telephone companies, many of which are being deregulated. NTT is an example.
private branch exchange (PBX)	A PBX is a private switch located on the premises of a user. The user is typically a private company which desires to provide switching locally.
private line with a dial tone	A private line is a direct channel specifically dedicated to a customer's use between two specified points. A private line with a dial tone can connect a PBX or an ISP's access concentrator to an end office (e.g. a channelized T1 or PR1). A private line can also be known as a leased line.
public switched telephone network (PSTN)	The PSTN is the worldwide switched voice network.
regional Bell operating companies (RBOCs)	RBOCs are the Bell operating companies providing LEC services after being divested from AT&T.
signaling system 7 (SS7)	SS7 is a type of common channel interoffice signaling (CCIS) used widely throughout the world. The SS7 network provides the signaling functions of indicating the arrival of calls, transmitting routing and destination signals, and monitoring line and circuit status.

TABLE 1-continued

Term	Definition
switching hierarchy or office classification	An office class is a functional ranking of a telephone central office switch depending on transmission requirements and hierarchical relationship to other switching centers. Prior to AT&T's divestiture of the RBOCs, an office classification was the number assigned to offices according to their hierarchical function in the U.S. public switched network (PSTN). The following class numbers are used: class 1 = Regional Center (RC), class 2 = Sectional Center (SC), class 3 = Primary Center (PC), class 4 = Toll Center (TC) if operators are present or else Toll Point (TP), class 5 = End Office (EO) a local central office. Any one center handles traffic from one to two or more centers lower in the hierarchy. Since divestiture and with more intelligent software in switching offices, these designations have become less firm. The class 5 switch was the closest to the end subscriber. Technology has distributed technology closer to the end user, diffusing traditional definitions of network switching hierarchies and the class of switches.
telecommunications carrier	A LEC, a CLEC, an IXC, an Enhanced Service Provider (ESP), an intelligent peripheral (IP), an international/global point-of-presence (GPOP), i.e., any provider of telecommunications services.
transmission control protocol (TCP)	TCP is an end-to-end protocol that operates at the transport and sessions layers of OSI, providing delivery of data bytes between processes running in host computers via separation and sequencing of IP packets.
transmission control protocol/internet protocol (TCP/IP)	TCP/IP is a protocol that provides communications between interconnected networks. The TCP/IP protocol is widely used on the Internet, which is a network comprising several large networks connected by high-speed connections.
trunk	A trunk connects an access tandem (AT) to an end office (EO).
wide area network (WAN)	A WAN is a data network that extends a LAN over the circuits of a telecommunications carrier. The carrier is typically a common carrier. A bridging switch or a router is used to connect the LAN to the WAN.
40	III. Introduction
	A. Quality of Service (QoS) in a Wireless Environment
45	The concept of quality of service (QoS) is one of the most difficult and least understood topics in data networking. Although a common term in data networking, there are many different usages and definitions for QoS, leading to confusion regarding an exact meaning in precise or quantitative terms. Even further confusion is found when attempts are made to measure or specify numeric quantities sufficient to allow comparison of equipment or network performance with respect to QoS.
50	The confusion about QoS in general data networking is transferred and magnified when applied to wireless data communications. Wireless transmission has a higher inherent bit error rate (BER) than does wireline transmission. The addition of, e.g., a point-to-multipoint (PtMP) topology for multiple users sharing a wireless medium makes it desirable that QoS be defined in a manner that specifically addresses the multiple complicating factors in wireless data communications.
55	To provide a non-ambiguous definition of QoS that applies to wireless data communications, the nature of the problem that QoS is meant to solve is helpful. Many of the problems of data communications over wireless are unique and distinct from those of wireline data communications, while some are in fact shared. For wireless broadband access systems, the problems of quality delivery are somewhat
60	
65	

more complex than for the wireline analog. Like its wireline counterpart, the problems encountered in wireless delivery of data include, e.g., slow peripheral access, data errors, “drop-outs,” unnecessary retransmissions, traffic congestion, out-of-sequence data packets, latency, and jitter. In addition to these problems, wireless delivery adds problems including, e.g., high inherent bit error rates (BERs), limited bandwidth, user contention, radio interference, and TCP traffic rate management. A QoS-aware wireless system is desired to address all these problems.

There are a number of ways in which users or subscribers to a data network experience difficulties. One network difficulty is due to a lack of network availability. Depending on the access technology being used, this can include a “modem no-answer” condition, “network busy” condition, or a sudden unexpected “drop” of a network connection. These conditions would not be described as being consistent with high QoS. Once network connectivity is achieved, slow traffic caused by congestion, local access bottlenecks, and network failures can be experienced as slow web page loading, slow file transfers, or poor voice/video quality in streaming multimedia applications. Poor quality in streaming multimedia applications can instead result from high “jitter,” or large and rapid variations in latency, leading to interruptions, distortion, or termination of session. Many different conditions can lead to actual data errors, which in some contexts can be catastrophic, such as in the file transfer of a spreadsheet. It is desirable that these problems of a data communications network be minimized or eliminated.

### 1. Quality

In data networking, quality usually implies the process of delivering data in a reliable and timely manner. What is reliable and timely is dependent on the nature of the traffic being addressed. These terms may include references to limitations in data loss, expectations of data accuracy, limitations of data latency variations (also known as jitter), and limitations of data retransmissions and limitations of data packet order inversions. Therefore, QoS is a complex concept, which can require a correspondingly complex mechanism to implement it.

QoS can be a relative term, finding different meanings for different users. A casual user doing occasional web browsing, but no file transfer protocol (FTP) file downloads or real time multimedia sessions may have different a different definition of QoS than a power user doing many FTP file downloads of large database or financial files, frequent H.323 video conferencing and IP telephony calls. Also, a user can pay a premium rate (i.e. a so-called service level agreement (SLA)) for high network availability, low latency, and low jitter, while another user can pay a low rate for occasional web surfing only, and on weekends only. Therefore, perhaps it is best to understand QoS as a continuum, defined by what network performance characteristic is most important to a particular user and the user’s SLA. Maximizing the end-user experience is an essential component of providing wireless QoS.

### 2. Service

In data networking, a service can be defined as a type of connection from one end of a network to another. Formerly, this could have been further defined to be protocol specific, such as, e.g., IBM’s systems network architecture (SNA), Novell’s IPX, Digital’s DECnet. However, it appears that TCP/IP (i.e. including user datagram protocol (UDP)) has evolved to become the overwhelming protocol of choice, and will continue to be in the foreseeable future. Therefore, service can be defined to be a particular type of TCP/IP connection or transmission. Such service types might

include, e.g., FTP file transfers, e-mail traffic, hypertext transfer protocol (HTTP) traffic, H.323 videoconferencing sessions. It is desirable that a QoS mechanism deal with these differing types of service, in addition to dealing with the different types of quality as discussed previously.

### 3. QoS as a Mechanism

QoS can be thought of as a mechanism to selectively allocate scarce networking, transmission and communications resources to differentiated classes of network traffic with appropriate levels of priority. Ideally, the nature of the data traffic, the demands of the users, the conditions of the network, and the characteristics of the traffic sources and destinations all modify how the QoS mechanism is operating at any given instant. Ultimately, however, it is desirable that the QoS mechanism operate in a manner that provides the user with optimal service, in whatever manner the user defines it.

#### a. Circuit-Switched QoS

In legacy networks created primarily for voice traffic by telephone companies, data transmission was accomplished with reference to a circuit-centric definition of QoS. In this definition, QoS implied the ability to carry asynchronous (i.e. transmission of data through start and stop sequences without the use of a common clock) as well as isochronous (i.e. consistent timed access of network bandwidth for time-sensitive voice and video) traffic. Circuit-switched QoS was accomplished by dedicating an end-to-end circuit for each connection or service, whether it was voice (see FIG. 1A) or data. The circuit-centric QoS mechanism was simply the provision of this circuit for exclusive use by the user. Of course, this approach dedicates the circuit, all transmission channels associated with the circuit, and the transport media itself to a single user for the entire duration of the session, regardless of whether data is actually being transmitted every instant of the session. It was generally believed that only in this manner could true QoS be achieved. Therefore, traditional designs for wireless broadband access systems (see FIG. 2A) also used this approach, dedicating a wireless radio channel to each particular data connection, regardless of the application or whether indeed any data was being transmitted at any given moment. This circuit-centric approach to QoS is fairly expensive, in terms of the cost of the equipment, and the utilization factors for the transmission media itself.

#### b. Asynchronous Transfer Mode (ATM) QoS

With ATM networking, telephone companies could continue to provide a circuit-centric QoS mechanism with the establishment of permanent virtual connections (PVCs) (i.e. a virtual path or channel connection (VPC or VCC) provisioned for indefinite use) and switched virtual connections (SVCs) (i.e. a logical connection between endpoints established by an ATM network on demand based upon signaling messages received from the end user or another network) in an analogous manner to the legacy voice circuit mechanism. However, several new concepts were needed, including admission policy, traffic shaping, and mechanisms such as, e.g., leaky-buckets, in order to handle traffic that was now categorized as variable bit rate (VBR), constant bit rate (CBR), and unspecified bit rate (UBR).

Virtual circuits were to be established for data transmission sessions, again regardless of the data application or whether data was being transmitted at any given moment. Although ATM provides QoS for broadband network traffic, the underlying assumptions of ATM design include the low BER characteristic of wireline networks, not the high BER of the wireless medium. Without a recognition of the characteristics of the traffic that is being carried by the ATM

mechanism and the high inherent BER of wireless, true QoS can not be provided. ATM QoS mechanisms do not address the unique challenges associated with wireless communication.

#### c. Packet-Switched QoS

Packet-switching is revolutionizing data communications, so conventional circuit-switch and ATM networking concepts and their legacy QoS mechanisms are in need of update. With packet-switched data communications, one cannot dedicate a circuit to a particular data communications session. Indeed, a strength of packet-switching lies in route flexibility and parallelism of its corresponding physical network. Therefore, the QoS mechanism cannot work in the same manner as the legacy circuit-centric QoS mechanism did.

Simply providing "adequate" bandwidth is not a sufficient QoS mechanism for packet-switched networks, and certainly not for wireless broadband access systems. Although some IP-flows are "bandwidth-sensitive," other flows are latency- and/or jitter-sensitive. Real time or multimedia flows and applications cannot be guaranteed timely behavior by simply providing excessive bandwidth, even if it were not cost-prohibitive to do so. It is desirable that QoS mechanisms for an IP-centric wireless broadband access system recognize the detailed flow-by-flow requirements of the traffic, and allocate system and media resources necessary to deliver these flows in an optimal manner.

#### d. Summary—QoS Mechanisms

Ultimately, the end-user experience is the final arbiter of QoS. It is desirable that an IP-centric wireless broadband access system assign and regulate system and media resources in a manner that can maximize the end-user experience. For some applications such as an initial screen of a Web page download, data transmission speed is the best measure of QoS. For other applications, such as the download or upload of a spreadsheet, the best measure of QoS can be the minimization of transmission error. For some applications, the best measure of QoS can be the optimization of both speed and error. For some applications, the timely delivery of packets can be the best measure of QoS. It is important to note that fast data transmission may not be the same as timely delivery of packets. For instance, data packets that are already "too old" can be transmitted rapidly, but by being too old can be of no use to the user. The nature of the data application itself and the desired end-user experience then can provide the most reliable criteria for the QoS mechanism. It is desired that an IP-centric wireless broadband access system provide a QoS mechanism that can dynamically optimize system behavior to each particular IP flow, and can also adapt to changes with changing network load, congestion and error rates.

#### 4. Service Guarantees and Service Level Agreements (SLAs)

Service guarantees can be made and service level agreements (SLAs) can be entered into between a telecommunications service provider and a subscriber whereby a specified level of network availability can be described, and access charges can be based upon the specified level. Unfortunately, it is difficult to quantify the degree of network availability at any given time, and therefore this becomes a rather crude measure of service performance. It is desired that data delivery rate, error rate, retransmissions, latency, and jitter be used as measures of network availability, but measuring these quantities on a real-time basis can be beyond the capability of conventional network service providers (NSPs).

Another level of service discrimination desired by network service providers is a service level agreement (SLA) that provides for differing traffic rates, network availability, bandwidth, error rate, latency and jitter guarantees. It is desired that an IP-centric wireless broadband access system be provided that can provide for SLAs, enabling service providers to have more opportunities for service differentiation and profitability.

#### 5. Class of Service and Quality of Service

In order to implement a practical QoS mechanism, it is desired that a system be able to differentiate between types of traffic or service types so that differing levels of system resources can be allocated to these types. It is customary to speak of "classes of service" as a means of grouping traffic types that can receive similar treatment or allocation of system and media resources.

Currently, there are several methods that can be used in wireline network devices to implement differentiated service classes. Example methods include traffic shaping, admission control, IP precedence, and differential congestion management. It is desired that an IP-centric wireless broadband access system use all of these methods to differentiate traffic into classes of service, to map these classes of service against a QoS matrix, and thereby to simplify the operation and administration of the QoS mechanism.

#### B. QoS and IP-Centric Wireless Environment

In a point-to-multipoint (PtMP) wireless system like the present invention, it is desirable that the QoS mechanism cope not only with wireline networking considerations, but also with considerations particular to the wireless environment. As stated earlier, it is desired that the inherent BER of wireless be handled. The high BER can require that error detection, correction, and re-transmission be done in an efficient manner. It is desired that a BER handling mechanism also work efficiently with the re-transmission algorithms of TCP/IP so as to not cause further unnecessary degradation of bandwidth utilization. An additional challenge of wireless is contention among users for limited wireless bandwidth. It is desirable that the system handle service requests from multiple users in a radio medium subject to interference and noise, which can make efficient allocation of radio bandwidth difficult.

As discussed above, the change from circuit-switched and ATM data networks to packet-switched data networks has impacted the definition of QoS mechanisms. The present invention provides a novel QoS mechanism in a point-to-multi-point IP-centric wireless system for packet-switched network traffic. In order for the system to provide optimal QoS performance, it is desirable that it include a novel approach to QoS mechanisms. The use of QoS as the underlying guide to system architecture and design constitutes an important, substantial and advantageous difference of the IP-centric wireless broadband access system of the present invention over existing wireless broadband access systems designed with traditional circuit-centric or ATM cell circuit-centric approaches such as those used by Teligent and Winstar.

#### C. IP-Centric Wireless Broadband Access QoS and Queuing Disciplines

##### 1. Managing Queues

Queuing is a commonly accepted tool required for manipulating data communications flows. In order for packet headers to be examined or modified, for routing decisions to be made, or for data flows to be output on appropriate ports, it is desirable that data packets be queued. However, queuing introduces, by definition, a delay in the traffic streams that can be detrimental, and can even totally

defeat the intent of queuing. Excessive queuing can have detrimental effects on traffic by delaying time sensitive packets beyond their useful time frames, or by increasing the RTT (Round Trip Time), producing unacceptable jitter or even causing the time-out of data transport mechanisms. Therefore, it is desired that queuing be used intelligently and sparingly, without introducing undue delay in delay-sensitive traffic such as real-time sessions.

In a wireless environment where time division multiple access (TDMA), forward error detection (FEC), and other such techniques can be necessary, it is desirable that queuing be used merely to enable packet and radio frame processing. However, in the case of real-time flows, the overall added delay in real-time traffic can preferably be held to below approximately 20 milliseconds.

The use of queue management as the primary QoS mechanism in providing QoS-based differentiated services is a simple and straight forward method for wireless broadband systems. However, wireless systems are usually more bandwidth constrained and therefore more sensitive to delay than their wireline counterparts. For this reason, it is desirable that QoS-based differentiated services be provided with mechanisms that go beyond what simple queuing can do. However, some queuing can still be required, and the different queuing methods are now discussed.

#### 2. First in, First out (FIFO) Queuing

First in, first out (FIFO) queuing can be used in wireless systems, like wireline systems, in buffering data packets when the downstream data channel becomes temporarily congested. If temporary congestion is caused by bursty traffic, a FIFO queue of reasonable depth can be used to smooth the flow of data into the congested communications segment. However, if the congestion becomes severe in extent, or relatively long in duration, FIFO can lead to the discarding of packets as the FIFO queues are filled to capacity and the network is not capable of accepting additional packets causing discarding of packets, i.e. so-called "packet-tossing." Although this can have a detrimental effect on QoS in and of itself, the discarding of packets may cause future problems with traffic flow as the TCP protocol causes the retransmission of lost packets in the proper sequence, further exacerbating the problem. The problem of packet discards can be minimized by increasing the size of the FIFO buffers so that more time can pass before discards occur. Unfortunately, eventually the FIFO can become large enough that packets can become too old and the round-trip time (RTT) can increase to the point that the packets are useless, and the data connection is virtually lost.

In a wireless broadband environment, the requirement for FIFO queuing is partially dependent upon the type of RF access method being used. For time division multiple access/time division duplex (TDMA/TDD), it can be desirable that data be queued even for collecting enough data for the construction of data frames for transmission. Frequency division multiple access (FDMA) and code-division multiple access (CDMA) are not as "sequential" in nature as TDMA, and therefore have less of a requirement for FIFO queuing. However, generally for all wireless access techniques, noise and interference are factors that can lead to retransmissions, and therefore further delays and consequent adverse effect on QoS.

Using FIFO queuing, shared wireless broadband systems can uniformly delay all traffic. This can seem to be the "fairest" method, but it is not necessarily the best method if the goal is to provide high QoS to users. By using different types of queue management, a much better base of overall QoS can be achieved.

#### 3. Priority Queuing

The shared wireless broadband environment can include a constricted bandwidth segment as data is transmitted over the RF medium. Therefore, regardless of access technique, these systems can require some amount of queuing. However, using FIFO queuing can result in a constant delay to all traffic, regardless of the priority or type of traffic. Most data communications environments can consist of a mixture of traffic, with combinations of real time interactive data, file and data downloads, web page access, etc. Some of these types of traffic are more sensitive to delay, and jitter, than others. Priority queuing simply reorders data packets in the queue based on their relative priorities and types, so that data from more latency- and jitter-sensitive traffic can be moved to the front of the queue.

Unfortunately, if there is downlink data channel congestion, or congestion caused by an overabundance of high priority traffic, the condition of "buffer starvation" can occur. Because of the relative volume of high priority packets consuming a majority of buffer space, little room is left for lower priority packets. These lower priority packets can experience significant delays while system resources are devoted to the high priority packets. In addition to low priority packets being held in buffers for long periods of time, or never reaching the buffers, resulting in significantly delayed data flows for these packets, the actual applications corresponding to these low priority packets can also be disrupted, and stop working. Because of the nature of this queuing approach, overall latency and jitter and RTT for lower priority packets can be unpredictable, having an adverse effect on QoS.

If queue sizes are small, reordering data within the queues can have little beneficial effect on the QoS. In fact, processing required to examine packet headers in order to obtain the information necessary to reorder the queues may itself add significant delay to the data stream. Therefore, particularly for wireless broadband data environments, priority queuing can be not much better than FIFO queuing as a QoS mechanism.

#### 4. Classed Based Queuing

By allocating queue space and system resources to packets based on the class of the packets, buffer starvation can be avoided. Each class can be defined to include of data flows with certain similar priorities and types. All classes can be given a certain minimum level of service so that one high priority data flow cannot monopolize all system resources. With the classification approach, because no data flow is ever completely shut off, the source application can receive information about the traffic rate, and can be able to provide TCP-mediated transmission rate adjustment supporting smooth traffic flow.

Although this approach can work better than FIFO queuing in wireless broadband systems, latency and jitter sensitive flows can still be adversely affected by high priority flows of large volume.

#### 5. Weighted Fair Queuing

A weighted fair queuing method can attempt to provide low-volume flows with guaranteed queuing resources, and can then allow remaining flows, regardless of volume or priority, to have equal amounts of resource. Although this can prevent buffer starvation, and can lead to somewhat better latency and jitter performance, it can be difficult to attain stable performance in the face of rapidly changing RF downlink channel bandwidth availability.

Providing a high quality of service can require a QoS mechanism that is more sophisticated than simple queue management.

#### D. IP-Centric Wireless Broadband Access QoS and TCP/IP

##### 1. TCP/IP

The TCP/IP protocol stack has become the standard method of transmitting data over the Internet, and increasingly it is becoming a standard in virtual private networks (VPNs). The TCP/IP protocol stack includes not only internet protocol (IP), but also transmission control protocol (TCP), user datagram protocol (UDP), and internet control message protocol (ICMP). By assuming that the TCP/IP protocol stack is the standard network protocol for data communications, the creation of a set of optimal QoS mechanisms for the wireless broadband data environment is more manageable. QoS mechanisms can be created that can span the entire extent of the network, including both the wireline and the wireless portions of the network. These mechanisms can integrate in a smooth and transparent manner with TCP rate control mechanisms and provide end-to-end QoS mechanisms that are adaptive to both the wireline and wireless portions of the network. Of course, segments of the wireline network that are congested or are experiencing other transport problems cannot be solved by a wireless QoS mechanism. However, a wireless QoS mechanism can optimize data flows in a manner that can enhance the end user experience when there is no severe wireline network congestion or bottleneck present.

##### 2. Differentiation by Class

Data traffic can be handled based on classes of service, as discussed above. To differentiate traffic by class, data traffic (or a sequence of data packets associated with a particular application, function, or purpose) can be classified into one of several classes of service. Differentiation can be done on the basis of some identifiable information contained in packet headers. One method can include analyzing several items in, e.g., an IP packet header, which can serve to uniquely identify and associate the packet and other packets from that packet flow with a particular application, function or purpose. As a minimum, a source IP address, a source TCP or UDP port, a destination IP address, and a destination IP or UDP port can serve to associate packets into a common flow, i.e. can be used to classify the packets into a class of service.

By creating a finite and manageable number of discrete classes of service, multiple IP flows can be consolidated and handled with a given set of QoS parameters by the QoS mechanisms. These classes can be defined to provide common and useful characteristics for optimal management in the combined wireline and wireless network segments.

##### 3. Per-Flow Differentiation

A finite and discrete set of classes of service, can enable QoS mechanisms to be less compute-intensive, to use less memory, fewer state machines, and therefore have better scalability than having individual QoS mechanisms (or sets of parameters) for each individual IP flow. However, in a network access device such as, e.g., a point to multi-point (PtMP) wireless broadband access system, the total number of simultaneous IP flows typically will not exceed the range of 1000, and therefore the amount of processing overhead that could be required could permit a per-flow QoS differentiation without resorting to classes of service. However, class of service consolidation of IP flows provides advantages related to marketing, billing and administration.

Prior to the present invention, per-flow differentiation has not been used in a wireless environment (including radio frequencies transmitted over coaxial cables and satellite communications).

##### 4. Using IP Precedence for Class of Service

IP precedence bits in a type of service (IP TOS) field, as described in Internet Engineering Task Force (IETF)1992b, can theoretically be used as a means to sort IP flows into classes of service. IETF RFC1349 proposed a set of 4-bit definitions with 5 different meanings: minimize delay; maximize throughput; maximize reliability; minimize monetary cost; and normal service.

These definitions could add significantly to networks, routers and access devices in differentiating different types of flow so that resources could be appropriately allocated, resulting in improved QoS. However, the proposal has not been widely used. Several proposals in the IETF could make use of this field, along with resource reservation protocol (RSVP), to improve network handling of packets.

Although the type of service (TOS) field has been an integral component of the TCP/IP specification for many years, the field is not commonly used. Absent appropriate bits in the field being set by a source processor, the access devices, the network and network routers cannot implement QoS mechanisms.

##### 5. TCP-Mediated Transmission Rate Mechanisms

The manner in which TCP governs transmission rate can be incorporated and managed by an IP-centric wireless QoS mechanism. If a TCP mechanism is not managed, any wireless QoS mechanism can be overwhelmed or countered by wireless bandwidth factors. Before addressing the specific wireless factors that can impact TCP transmission speed, a review of TCP transmission rate mechanism is needed.

TCP can control transmission rate by "sensing" when packet loss occurs. Because TCP/IP was created primarily for wireline environment with its extremely low inherent BER, such as those found over fiber optic lines, any packet loss is assumed by TCP to be due to network congestion, not loss through bit error. Therefore, TCP assumes that the transmission rate exceeded the capacity of the network, and responds by slowing the rate of transmission. However, packet loss in the wireless link segment is due primarily to inherently high BER, not congestion. The difference turns out to be not insubstantial.

TCP can initially cause the transmission rate to ramp-up at the beginning of a packet flow, and is called slow-start mode. The rate can be continuously increased until there is a loss or time-out of the packet-receipt acknowledgment message. TCP can then "back-off", can decrease the transmission window size, and then can retransmit lost packets in the proper order at a significantly slower rate. TCP can then slowly increase the transmission rate in a linear fashion, which can be called congestion-avoidance mode.

If multiple users share a wireless radio link as with the present invention, the inherently high BER of the medium could potentially cause frequent packet loss leading to unproductive TCP retransmission in congestion avoidance mode. Because wireless bandwidth can be a precious commodity, a IP-centric wireless QoS mechanism preferably provides for packet retransmission without invoking TCP retransmission and consequent and unnecessary "whipsawing" of the transmission rate. This, along with several other factors, makes desirable creation of an IP-centric wireless media access control (MAC) layer. One function of an IP-centric MAC layer can be to mediate local retransmission of lost packets without signaling TCP and unnecessarily altering the TCP transmission speed. A primary task of the IP-centric wireless MAC layer is to provide for shared access to the wireless medium in an orderly and efficient manner. The MAC layer according to the present invention,

Proactive Reservation-based Intelligent Multimedia-aware Media Access (PRIMMA) layer, available from Malibu Networks Inc., of Calabasas, Calif., can also schedule all packet transmissions across the wireless medium on the basis of, e.g., IP flow type, service level agreements (SLAs), and QoS considerations.

#### 6. TCP Congestion Avoidance in an IP-Centric Wireless System

##### a. Network Congestion Collapse, Global Synchronization and IP-Centric Wireless TCP Congestion Avoidance

The inherently high bit error rate (BER) of wireless transmission can make an occurrence of problems known as congestion collapse or global synchronization collapse more likely than in a wireline environment. When multiple TCP senders simultaneously detect congestion because of packet loss, the TCP senders can all go into TCP slow start mode by shrinking their transmission window sizes and by pausing momentarily. The multiple senders can then all attempt to retransmit the lost packets simultaneously. Because they can all start transmitting again in rough synchrony, a possibility of creating congestion can arise, and the cycle can start all over again.

In the wireless environment, an occurrence of burst noise can cause packet loss from many IP streams simultaneously. The TCP transmission rate mechanisms of the TCP senders can assume that packet loss was due to congestion, and they can all back-off in synchrony. When the TCP senders restart, the senders can restart in rough synchrony, and indeed can now create real congestion in the wireless link segment. This cyclical behavior can continue for some time, and can possibly cause unpredictable system performance. This can be due in part to overflowing system queues which can cause more packets to be dropped and can cause more unproductive retransmissions. This can degenerate into a "race" state that could take many minutes before re-establishing stability; this can have an obvious negative impact on QoS.

In the wireline world, random early detection (RED) can be used to circumvent global synchronization. By randomly selecting packets from randomly selected packet flows before congestion collapse occurs, global synchronization can be avoided. Queues can be monitored, and when queue depth exceeds a preset limit, RED can be activated, activating asynchronously the TCP senders' transmission rate controllers. This can avoid the initial congestion which would otherwise result in collapse and then global synchronization.

Instead of purely random packet discards, the packets to be discarded can be done with consideration to packet priority or type. While still random, the probability of discard for a given flow can be a function of the by packet priority or type. In a wireless system, weighted random early detection (WRED) can be used without the concern of retransmission and TCP rate reset by preferentially selecting UDP packets of real time IP flows such as streaming audio, and H.323 flows with a more critical packet Time-to-Live parameter. These IP flows are more sensitive to latency and jitter, and less sensitive to packet loss.

In the wireless environment, with an appropriately designed MAC layer, packet loss due to BER that might otherwise trigger congestion collapse and global synchronization can best be managed with local retransmission of lost packets according to the present invention and without RED and the unnecessary retransmission of packets by the TCP sender and the resulting reset of TCP transmission rate. The IP-centric wireless system separately manages the TCP transmission window of the TCP sender remotely by transmitting a packet receipt-acknowledgment before the TCP

sender detects a lost packet and initiates retransmission along with an unnecessary reset of the transmission rate. This IP-centric wireless system TCP transmission window manager communicates with the MAC layer in order to be aware of the status of all packets transmitted over the wireless medium.

##### b. The Effect of Fractal Self-Similar Network Traffic Characteristics vs. Poisson Distributions on Network Congestion

Conventionally, it has been believed that network traffic can be modeled with a Poisson distribution. Using this distribution leads to the conclusion, through system simulations, that the sum of thousands of individual traffic flows with Poisson distributions results in a uniform overall network traffic distribution. In other words, the overall network can "average-out" the burstiness of individual traffic flows. Using this model, network congestion behavior, burst behavior, and dynamic traffic characteristics have been used to create conventional congestion avoidance strategies, design queue buffer sizes in network devices, and traffic and capacity limitation predictions.

More recent studies have demonstrated that TCP/IP-based traffic causes networks to behave in a fractal, or self-similar fashion. With this model, when the burstiness of individual traffic flows is summed for the entire network, the entire network becomes bursty. The bursty nature of network traffic flow is seen over all time scales and flow scales of the network. This has huge implications both in design of an IP-centric wireless broadband system according to the present invention, and in the design of congestion avoidance strategies in the network as a whole. With this new perspective on network behavior, it has become clear that network routers, switches and transmission facilities in many cases have been "under-engineered." This under-engineering has led to a further exacerbation of the congestion behavior of the network.

The implications for IP-centric wireless system architecture and design range from queue buffer capacity to local congestion avoidance strategies. Because wireless systems have the added burden of a high inherent BER, the effect of network-wide congestion behavior on local (wireless media channel) congestion avoidance strategies must be properly gauged and countered. For this reason, it is desirable that congestion avoidance algorithms of the IP-centric wireless system be crafted to optimize traffic flow with new mathematical and engineering considerations that until very recently were not apparent or available to system designers.

With these considerations in mind, IP-centric wireless system design cannot be done with the conventional wireline system design approaches without resulting in very low system performance characteristics. With traditional design approaches of a circuit-centric wireless system, bandwidth utilization, real time multimedia quality, and overall system QoS provide for a dramatically lower end-user experience.

#### 7. Application-Specific Flow Control in an IP-Centric Wireless System

With a range of data flows, each having different bandwidth, latency and jitter requirements, for the achievement of high QoS as perceived by the end user, it is desirable that the IP-centric wireless system be able to manage QoS mechanism parameters over a wide range, and in real time. The QoS mechanism must be able to alter system behavior to the extent that one or more data flows corresponding to specific applications be switched on and off from appropriate end users in a transparent manner. This approach is in contrast to other QoS mechanisms that seek to achieve high QoS by establishing circuit-centric connections from end to

end without regard for an underlying application's actual QoS requirements. By using the present invention, providing a QoS mechanism that is application-specific rather than circuit-specific, scarce wireless bandwidth can be conserved and dynamically allocated where needed by the QoS mechanisms associated with each application type.

#### B. QoS and IP-Centric Wireless Media Access Control

##### 1. Proactive Reservation-based Intelligent Multimedia-aware Media Access (PRIMMA) MAC Layer

The present invention's proactive reservation-based intelligent multimedia-aware media access (PRIMMA) media access control (MAC) layer provides an application switching function of the IP-centric wireless QoS mechanism. Once the nature and QoS requirements of each IP stream are determined by other portions of the system, this information is communicated to the PRIMMA MAC layer so that the IP flows of each application can be switched to appropriate destinations in a proper priority order.

##### 2. PRIMMA IP Protocol Stack Vertical Signaling

For IP streams that originate from a local user's CPE, application-level information about the nature of the application can be used by the system to assign appropriate QoS mechanism parameters to the IP stream. For IP streams that originate from a non-local host, information about the IP streams for use in configuring the appropriate QoS mechanism parameters can be extracted from packet headers. The information about the IP streams is communicated "vertically" in the protocol stack model from the application layer (i.e. OSI level 7) to the PRIMMA MAC layer (i.e. OSI level 2) for bandwidth reservation and application switching purposes. Although this violates the conventional practice of providing isolation and independence to each layer of the protocol stack, thereby somewhat limiting the degree of interchangeability for individual layers of the stack, the advantages far outweigh the negatives in an IP-centric wireless broadband access system.

##### 3. PRIMMA IP Flow Control and Application Switching

Based on a specific set of QoS requirements of each IP application flow in the IP-centric wireless system, applications are switched in a "proactive" manner by appropriate reservations of bandwidth over the wireless medium. The wireless transmission frames in each direction are constructed in a manner dictated by the individual QoS requirements of each IP flow. By using QoS requirements to build the wireless transmission frames, optimal QoS performance can result over the entire range of applications being handled by the system. For example, latency and jitter sensitive IP telephony, other H.323 compliant IP streams, and real-time audio and video streams can be given a higher priority for optimal placement in the wireless transmission frames. On the other hand, hypertext transport protocol (HTTP) traffic, such as, e.g., initial web page transmissions, can be given higher bandwidth reservation priorities for that particular application task. Other traffic without latency, jitter, or bandwidth requirements such as, e.g., file transfer protocol (FTP) file downloads, email transmissions, can be assigned a lower priority for system resources and placement in the wireless transmission frame.

##### 4. PRIMMA TCP Transmission Rate Agent

Wireless end users are separated from a high speed, low BER wireline backbone by a lower speed, high BER wireless segment which can be subject to burst error events. TCP/IP traffic that traverses the wireless segment can experience frequent packet loss that, without intervention, can create congestion collapse and global synchronization as previously discussed. Therefore, it is desirable that the present invention's IP-centric wireless system make use of

a TCP transmission rate agent that can monitor packet loss over the wireless segment, and can manage the remote TCP transmission rate function by recreating and transmitting any lost packet acknowledgments. The PRIMMA MAC layer can itself retransmit any lost packets over the wireless medium.

The IP-centric wireless TCP transmission rate agent or "adjunct" can also flow-control the IP streams when necessary, and in accordance with the QoS requirements of the IP flows. All IP-centric wireless TCP transmission rate agent functionality can be transparent to both local and remote hosts and applications.

#### F. Telecommunications Networks

##### 1. Voice Network

###### a. Simple Voice Network

FIG. 1A is a block diagram providing an overview of a standard telecommunications network **100** providing local exchange carrier (LEC) services within one or more local access and transport areas (LATAs). Telecommunications network **100** can provide a switched voice connection from a calling party **102** to a called party **110**. FIG. 1A is shown to also include a private branch exchange **112** which can provide multiple users access to LEC services by, e.g., a private line. Calling party **102** and called party **110** can be ordinary telephone equipment, key telephone systems, a private branch exchange (PBX) **112**, or applications running on a host computer. Network **100** can be used for modem access as a data connection from calling party **102** to, for example, an Internet service provider (ISP) (not shown). Network **100** can also be used for access to, e.g., a private data network. For example, calling party **102** can be an employee working on a notebook computer at a remote location who is accessing his employer's private data network through, for example, a dial-up modem connection.

FIG. 1A includes end offices (EOs) **104** and **108**. EO **104** is called an ingress EO because it provides a connection from calling party **102** to public switched telephone network (PSTN) facilities. EO **108** is called an egress EO because it provides a connection from the PSTN facilities to a called party **110**. In addition to ingress EO **104** and egress EO **108**, the PSTN facilities associated with telecommunications network **100** include an access tandem (AT) (not shown) at points of presence (POPs) **132** and **134** that can provide access to, e.g., one or more inter-exchange carriers (IXCs) **106** for long distance traffic, see FIG. 2A. Alternatively, it would be apparent to a person having ordinary skill in the art that IXC **106** could also be, for example, a CLEC, or other enhanced service provider (ESP), an international gateway or global point-of-presence (GPOP), or an intelligent peripheral (IP).

FIG. 1A also includes a private branch exchange (PBX) **112** coupled to EO **104**. PBX **112** couples calling parties **124** and **126**, fax **116**, client computer **118** and associated modem **130**, and local area network **128** having client computer **120** and server computer **122** coupled via an associated modem **130**. PBX **112** is a specific example of a general class of telecommunications devices located at a subscriber site, commonly referred to as customer premises equipment (CPE).

Network **100** also includes a common channel interactive signaling (CCIS) network for call setup and call tear down. Specifically, FIG. 1 includes a Signaling System 7 (SS7) signaling network **114**. Signaling network **114** will be described further below with reference to FIG. 2B.

###### b. Detailed Voice Network

FIG. 2A is a block diagram illustrating an overview of a standard telecommunications network **200**, providing both

LEC and IXC carrier services between subscribers located in different LATAs. Telecommunications network **200** is a more detailed version of telecommunications network **100**. Calling party **102a** and called party **110a** are coupled to EO switches **104a** and **108a**, respectively. In other words, calling party **102a** is homed to ingress EO **104a** in a first LATA, whereas called party **110a** is homed to an egress EO **108a** in a second LATA. Calls between subscribers in different LATAs are long distance calls that are typically routed to IXCs. Sample IXCs in the United States include AT&T, MCI and Sprint.

Telecommunications network **200** includes access tandems (AT) **206** and **208**. AT **206** provides connection to points of presence (POPs) **132a**, **132b**, **132c** and **132d**. IXCs **106a**, **106b** and **106c** provide connection between POPs **132a**, **132b** and **132c** (in the first LATA) and POPs **134a**, **134b** and **134c** (in the second LATA). Competitive local exchange carrier (CLEC) **214** provides an alternative connection between POP **132d** and POP **134d**. POPs **134a**, **134b**, **134c** and **134d**, in turn, are connected to AT **208**, which provides connection to egress EO **108a**. Called party **110a** can receive calls from EO **108a**, which is its homed EO.

Alternatively, it would be apparent to a person having ordinary skill in the art that an AT **206** can also be, for example, a CLEC, or other enhanced service provider (ESP), an international gateway or global point-of-presence (GPOP), or an intelligent peripheral.

Network **200** also includes calling party **102c** homed to CLEC switch **104c**. Following the 1996 Telecommunications Act in the U.S., CLECs gained permission to compete for access within the local RBOCs territory. RBOCs are now referred to as incumbent local exchange carriers (ILECs).

#### i. Fixed Wireless CLECs

Network **200** further includes a fixed wireless CLEC **209**. Example fixed wireless CLECs are Teligent Inc., of Vienna, Va., WinStar Communications Inc., Advanced Radio Telecom Corp. And the BizTel unit of Teleport Communications Group Inc. Fixed wireless CLEC **209** includes a wireless transceiver/receiver radio frequency (RF) tower **210** in communication over an RF link to a subscriber transceiver RF tower **212**. Subscriber RF tower **212** is depicted coupled to a CPE box, PBX **112b**. PBX **112b** couples calling parties **124b** and **126b**, fax **116b**, client computer **118b** and associated modem **130b**, and local area network **128b** having client computer **120b** and server computer **122b** coupled via an associated modem **130b**.

Network **200** also includes called party **110a**, a fax **116a**, client computer **118a** and associated modem **130a**, and cellular communications RF tower **202** and associated cellular subscriber called party **204**, all coupled to EO **108a**, as shown.

EO **104a**, **108a** and AT **206**, **208** are part of a switching hierarchy. EO **104a** is known as a class 5 office and AT **208** is a class 3/4 office switch. Prior to the divestiture of the regional Bell Operating Companies (RBOCs) from AT&T following the modified final judgment, an office classification was the number assigned to offices according to their hierarchical function in the U.S. public switched network (PSTN). An office class is a functional ranking of a telephone central office switch depending on transmission requirements and hierarchical relationship to other switching centers. A class 1 office was known as a Regional Center (RC), the highest level office, or the "office of last resort" to complete a call. A class 2 office was known as a Sectional Center (SC). A class 3 office was known as a Primary Center (PC). A class 4 office was known as either a Toll Center (TC)

if operators were present, or otherwise as a Toll Point (TP). A class 5 office was an End Office (EO), i.e., a local central office, the lowest level for local and long distance switching, and was the closest to the end subscriber. Any one center handles traffic from one or more centers lower in the hierarchy. Since divestiture and with more intelligent software in switching offices, these designations have become less firm. Technology has distributed functionality closer to the end user, diffusing traditional definitions of network hierarchies and the class of switches.

#### ii. Connectivity to Internet Service Providers (ISPs)

In addition to providing a voice connection from calling party **102a** to called party **110a**, the PSTN can provide calling party **102a** a data connection to an ISP (i.e. similar to client **118b**).

Network **200** can also include an Internet service provider (ISP) (not shown) which could include a server computer **122** coupled to a data network **142** as will be discussed further below with reference to FIG. **1B**. The Internet is a well-known, worldwide network comprising several large networks connected together by data links. These links can include, for example, Integrated Digital Services Network (ISDN), T1, T3, FDDI and SONET links. Alternatively, an internet can be a private network interconnecting a plurality of LANs and/or WANs, such as, for example, an intranet. An ISP can provide Internet access services for subscribers such as client **118b**.

To establish a connection with an ISP, client **118b** can use a host computer connected to a modem (modulator/demodulator) **130b**. The modem can modulate data from the host computer into a form (traditionally an analog form) for transmission to the LEC facilities. Typically, the LEC facilities convert the incoming analog signal into a digital form. In one embodiment, the data is converted into the point-to-point protocol (PPP) format. (PPP is a well-known protocol that permits a computer to establish a connection with the Internet using a standard modem. It supports high-quality, graphical user-interfaces.) As those skilled in the art will recognize, other formats are available, including, e.g., a transmission control program, interact protocol (TCP/IP) packet format, a user datagram protocol, internet protocol (UDP/IP) packet format, an asynchronous transfer mode (ATM) cell packet format, a serial line interface protocol (SLIP) protocol format, a point-to-point (PPP) protocol format, a point-to-point tunneling protocol (PPTP) format, a NETBIOS extended user interface (NETBEUI) protocol format, an Appletalk protocol format, a DECnet, BANYAN/VINES, an Internet packet exchange (IPX) protocol format, and an internet control message protocol (ICMP) protocol format.

#### iii. Communications Links

Note that FIGS. **1A**, **2A** and other figures described herein include lines which may refer to communications lines or which may refer to logical connections between network nodes, or systems, which are physically implemented by telecommunications carrier devices. These carrier devices include circuits and network nodes between the circuits including, for example, digital access and cross-connect system (DACS), regenerators, tandems, copper wires, and fiber optic cable. It would be apparent to persons having ordinary skill in the art that alternative communications lines can be used to connect one or more telecommunications systems devices. Also, a telecommunications carrier as defined here, can include, for example, a LEC, a CLEC, an IXC, an Enhanced Service Provider (ESP), a global or international services provider such as a global point-of-presence (GPOP), and an intelligent peripheral.

EO 104a and AT 206 are connected by a trunk. A trunk connects an AT to an EO. A trunk can be called an inter machine trunk (IMT). AT 208 and EO 108a are connected by a trunk which can be an IMT.

Referring to FIG. 1A, EO 104 and PBX 112 can be connected by a private line with a dial tone. A private line can also connect an ISP (not shown) to EO 104, for example. A private line with a dial tone can be connected to a modem bay or access converter equipment at the ISP. Examples of a private line are a channelized T1 or integrated services digital network (ISDN) primary rate interface (PRI). An ISP can also attach to the Internet by means of a pipe or dedicated communications facility. A pipe can be a dedicated communications facility. A private line can handle data modem traffic to and from an ISP.

Trunks can handle switched voice traffic and data traffic. For example, trunks can include digital signals DS1-DS4 transmitted over T1-T4 carriers. Table 2 provides typical carriers, along with their respective digital signals, number of channels, and bandwidth capacities.

TABLE 2

Digital signal	Number of channels	Designation of carrier	Bandwidth in Megabits per second (Mbps)
DS0	1	None	0.064
DS1	24	T1	1.544
DS2	96	T2	6.312
DS3	672	T3	44.736
DS4	4032	T4	274.176

Alternatively, trunks can include optical carriers (OCs), such as OC-1, OC-3, etc. Table 3 provides typical optical carriers, along with their respective synchronous transport signals (STSs), ITU designations, and bandwidth capacities.

TABLE 3

Optical carrier (OC) signal	Electrical signal, or synchronous transport signal (STS)	International Telecommunications Union (ITU) terminology	Bandwidth in Megabits per second (Mbps)
OC-1	STS-1		51.84
OC-3	STS-3	STM-1	155.52
OC-9	STS-9	STM-3	466.56
OC-12	STS-12	STM-4	622.08
OC-18	STS-18	STM-6	933.12
OC-24	STS-24	STM-8	1244.16
OC-36	STS-36	STM-12	1866.24
OC-48	STS-48	STM-16	2488.32

As noted, a private line is a connection that can carry data modem traffic. A private line can be a direct channel specifically dedicated to a customer's use between two specified points. A private line can also be known as a leased line. In one embodiment, a private line is an ISDN/primary rate interface (ISDN PRI) connection. An ISDN PRI connection can include a single signal channel (called a data or D channel) on a T1, with the remaining 23 channels being used as bearer or B channels (Bearer channels are digital channels that bear voice and data information.) If multiple ISDN PRI lines are used, the signaling for all of the lines can be carried over a single D channel, freeing up the remaining lines to carry only bearer channels.

iv. Telecommunications Traffic

Telecommunications traffic can be sent and received from any network node of a telecommunications carrier. A telecommunications carrier can include, for example, a LEC, a

CLEC, an IXC, and an Enhanced Service Provider (ESP). In an embodiment, this traffic can be received from a network node which is, for example, a class 5 switch, such as EO 104a, or from a class 3/4 switch, such as AT 206. Alternatively, the network system can also be, for example, a CLEC, or other enhanced service provider (ESP), an international gateway or global point-of-presence (GPOP), or an intelligent peripheral.

Voice traffic refers, for example, to a switched voice connection between calling party 102a and called party 110a. It is important to note that this is on a point-to-point dedicated path, i.e., that bandwidth is allocated whether it is being used or not. A switched voice connection is established between calling party 102a and EO 104a, then to AT 206 then over an IXC's network such as that of IXC 106a to AT 208 and then to EO 108a and over a trunk to called party 110a. In another embodiment, AT 206 or IXC 106a can also be, for example, a CLEC, or other enhanced service provider (ESP), an international gateway or global point-of-presence (GPOP), or an intelligent peripheral.

It is possible that calling party 102a is a computer with a data connection to a server over the voice network. Data traffic refers, for example, to a data connection between a calling party 102a (using a modem) and a server 122b that could be part of an ISP. A data connection can be established, e.g., between calling party 102a and EO 104a, then to AT 206, then to CLEC 214, then over a fixed wireless CLEC 209 link to PBX 112b to a modem 130b associated with server 122b.

c. Signaling Network

FIG. 2B illustrates signaling network 114 in greater detail. Signaling network 114 is a separate network used to handle the set up, tear down, and supervision of calls between calling party 102 and called party 110. Signaling network 114 in the given example is the Signaling System 7 (SS7) network. Signaling network 114 includes service switching points (SSPs) 236, 238, 240 and 242, signal transfer points (STPs) 222, 224, 226, 228, 230 and 232, and service control point (SCP) 234.

In the SS7 network, the SSPs are the portions of the backbone switches providing SS7 functions. The SSPs can be, for example, a combination of a voice switch and an SS7 switch, or a computer connected to a voice switch. The SSPs communicate with the switches using primitives, and create packets for transmission over the SS7 network.

EOs 104a, 108a and ATs 206, 208 can be respectively represented in SS7 signaling network 114 as SSPs 236, 238, 240 and 242. Accordingly, the connections between EOs 104a, 108a and ATs 206, 208 (presented as dashed lines) can be represented by connections 254, 256, 258 and 268. The types of these links are described below.

The STPs act as routers in the SS7 network, typically being provided as adjuncts to in-place switches. The STPs route messages from originating SSPs to destination SSPs. Architecturally, STPs can and are typically provided in "mated pairs" to provide redundancy in the event of congestion or failure and to share resources (i.e., load sharing is done automatically). As illustrated in FIG. 2B, STPs can be arranged in hierarchical levels, to provide hierarchical routing of signaling messages. For example, mated STPs 222, 224 and mated STPs 226, 228 are at a first hierarchical level, while mated STPs 230, 232 are at a second hierarchical level.

SCPs provide database functions. SCPs can be used to provide advanced features in an SS7 network, including routing of special service numbers (e.g., 800 and 900 numbers), storing information regarding subscriber services,

providing calling card validation and fraud protection, and offering advanced intelligent network (AIN) services. SCP 234 is connected to mated STPs 230 and 232.

In the SS7 network, there are unique links between the different network elements. Table 4 provides definitions for common SS7 links.

Referring to FIG. 2B, mated STP pairs are connected by C links. For example, STPs 222, 224, mated STPs 226, 228, and mated STPs 230, 232 are connected by C links (not labeled). SSPs 236, 238 and SSPs 240, 242 are connected by F links 262 and 264.

Mated STPs 222, 224 and mated STPs 226, 228, which are at the same hierarchical level, are connected by B links 270, 272, 244 and 282. Mated STPs 222, 224 and mated STPs 230, 232, which are at different hierarchical levels, are connected by D links 266, 268, 274 and 276. Similarly, mated STPs 226, 228 and mated STPs 230, 232, which are at different hierarchical levels, are connected by D links 278, 280, 246 and 248.

SSPs 236, 238 and mated STPs 222, 224 are connected by A links 254 and 256. SSPs 240, 242 and mated STPs 226, 228 are connected by A links 258 and 260.

SSPs 236, 238 can also be connected to mated STPs 230, 232 by E links (not shown). Finally, mated STPs 230, 232 are connected to SCP 234 by A links 250 and 252.

For a more elaborate description of SS7 network topology, the reader is referred to Russell, Travis, Signaling System #7, McGraw-Hill, New York, N.Y. 10020, ISBN 0-07-054991-5, which is incorporated herein by reference in its entirety.

TABLE 4

SS7 link terminology	Definitions
Access (A) links	A links connect SSPs to STPs, or SCPs to STPs, providing network access and database access through the STPs.
Bridge (B) links	B links connect mated STPs to other mated STPs.
Cross (C) links	C links connect the STPs in a mated pair to one another. During normal conditions, only network management messages are sent over C links.
Diagonal (D) links	D links connect the mated STPs at a primary hierarchical level to mated STPs at a secondary hierarchical level.
Extended (E) links	E links connect SSPs to remote mated STPs, and are used in the event that the A links to home mated STPs are congested.
Fully associated (F) links	F links provide direct connections between local SSPs (bypassing STPs) in the event there is much traffic between SSPs, or if a direct connection to an STP is not available. F links are used only for call setup and call teardown.

#### d. SS7 Signaled Call Flow

To initiate a call in an SS7 telecommunications network, a calling party using a telephone connected to an ingress EO switch, dials a telephone number of a called party. The telephone number is passed from the telephone to the SSP at the ingress EO of the calling party's local exchange carrier (LEC). First, the SSP can process triggers and internal route rules based on satisfaction of certain criteria. Second, the SSP can initiate further signaling messages to another EO or access tandem (AT), if necessary. The signaling information can be passed from the SSP to STPs, which route the signals between the ingress EO and the terminating end office, or egress EO. The egress EO has a port designated by the telephone number of the called party. The call is set up as a

direct connection between the EOs through tandem switches if no direct trunking exists or if direct trunking is full. If the call is a long distance call, i.e., between a calling party and a called party located in different local access transport areas (LATAs), then the call is connected through an inter exchange carrier (IXC) switch. Such a long distance call is commonly referred to as an inter-LATA call. LECs and IXCs are collectively referred to as the public switched telephone network (PSTN).

Passage of the Telecommunications Act of 1996, authorizing competition in the local phone service market, has permitted CLECs to compete with ILECs in providing local exchange services. This competition, however, has still not provided the bandwidth necessary to handle the large volume of voice and data communications. This is due to the limitations of circuit switching technology which limits the bandwidth of the equipment being used by the LECs, and to the high costs of adding additional equipment.

#### e. Circuit-Switching

Circuit switching dedicates a channel to a call for the duration of the call. Thus, using circuit switching, a large amount of switching bandwidth is required to handle the high volume of voice calls. This problem is compounded by the use of voice circuits to carry data communications over the same equipment that were designed to handle voice communications.

#### i. Time Division Multiplexed (TDM) Circuit Switching

TDM circuit switching creates a full-time connection or a dedicated circuit between any two attached devices for the duration of the connection. TDM divides the bandwidth down into fixed time slots in which there can be multiple time slots, each with its own fixed capacity, available. Each attached device on the TDM network is assigned a fixed portion of the bandwidth using one or more time slots depending on the need for speed. When the device is in transmit mode, the data is merely placed in this time slot without any extra overhead such as processing or translations. Therefore, TDM is protocol transparent to the traffic being carried. Unfortunately, however, when the device is not sending data, the time slots remain empty, thereby wasting the use of the bandwidth. A higher-speed device on the network can be slowed down or bottled up waiting to transmit data, but the capacity that sits idle cannot be allocated to this higher priority device for the duration of the transmission. TDM is not well suited for the bursts of data that are becoming the norm for the data needs in today's organization.

#### 2. Data Network

FIG. 1B depicts an example network 148 including workstations 144 and 146 coupled to data network 142. Data network 142 can act as a wide area network (WAN) for coupling a plurality of local area networks (LANs) together. Network 148 includes an example local area network including a plurality of host computers such as, e.g., client workstation 138 and server 136, coupled together by wiring including network interface cards (NICs) and a hub, such as, e.g., an Ethernet hub. The LAN is coupled to data network 142 by a network router 140 which permits data traffic to be routed to workstations 144 and 146 from client 138 and server 136.

#### a. Packet-Switching

Unlike voice networks 100 and 200 described above with reference to FIGS. 1A and 2A which transport traffic over circuit-switched connections, data network 148 transports traffic using packet switching.

Currently, internets, intranets, and similar public or private data networks that interconnect computers generally

use packet switching technology. Packet switching provides for more efficient use of a communication channel than does circuit switching. Packet switched networks transport packets of information which can include various types of data such as, e.g., digitized voice, data, and video. With packet switching, many different calls can share a communication channel rather than the channel being dedicated to a single call. During a voice call, for instance, digitized voice information might be transferred between the callers only 60% of the time, with silence being transferred the other 40% of the time. With a circuit switched connection, the voice call could tie-up a communications channel that could have 50% of its bandwidth, unused because of the silence. For a data call, information might be transferred between two computers only 10% of the time. With the data call, 90% of the channel's bandwidth may go unused. In contrast, a packet-switched connection would permit the voice call, the data call and possibly other call information to all be sent over the same channel.

Packet switching breaks a media stream into pieces known as, for example, packets, cells or frames. Each packet can then be encoded with address information for delivery to the proper destination and can be sent through the network. The packets can be received at the destination and the media stream is reassembled into its original form for delivery to the recipient. This process is made possible using an important family of communications protocols, commonly called the Internet Protocol (IP).

In a packet-switched network, there is no single, unbroken physical connection between sender and receiver. The packets from many different calls share network bandwidth with other transmissions. The packets can be sent over many different routes at the same time toward the destination, and can then be reassembled at the receiving end. The result is much more efficient use of a telecommunications network's bandwidth than could be achieved with circuit-switching.

#### b. Routers

Data network **142** can include a plurality of network routers **140**. Network routers are used to route information between multiple networks. Routers act as an interface between two or more networks. Routers can find the best path between any two networks, even if there are several different networks between the two networks.

Network routers can include tables describing various network domains. A domain can be thought of as a local area network (LAN) or wide area network (WAN). Information can be transferred between a plurality of LANs and/or WANs via network routers. Routers look at a packet and determine from the destination address in the header of the packet, the destination domain of the packet. If the router is not directly connected to the destination domain, then the router can route the packet to the router's default router, i.e. a router higher in a hierarchy of routers. Since each router has a default router to which it is attached, a packet can be transmitted through a series of routers to the destination domain and to the destination host bearing the packet's final destination address.

#### c. Local Area Networks (LANs) and Wide Area Networks (WANs)

A local area network (LAN) can be thought of as a plurality of host computers interconnected via network interface cards (NICs) in the host computers. The NICs are connected via, for example, copper wires so as to permit communication between the host computers. Examples of LANs include an ethernet bus network, an ethernet switch network, a token ring network, a fiber digital data interconnect (FDDI) network, and an ATM network.

A wide area network (WAN) is a network connecting host computers over a wide area. In order for host computers on a particular LAN to communicate with a host computer on another LAN or on a WAN, network interfaces interconnecting the LANs and WANs must exist. An example of a network interface is a router discussed above.

A network designed to interconnect multiple LANs and/or WANs is known as an internet (with a lower case "i"). An internet can transfer data between any of a plurality of networks including both LANs and WANs. Communication occurs between host computers on one LAN and host computers on another LAN via, for example, an internet protocol (IP) protocol. The IP protocol is used to assign each host computer of a network, a unique IP address enabling packets to be transferred over the internet to other host computers on other LANs and/or WANs that are connected to the internet. An internet can comprise a router interconnecting two or more networks.

The "Internet" (with a capital "I") is a global internet interconnecting networks all over the world. The Internet includes a global network of computers which intercommunicate via the internet protocol (IP) family of protocols.

An "intranet" is an internet which is a private network that uses internet software and internet standards, such as the internet protocol (IP). An intranet can be reserved for use by parties who have been given the authority necessary to use that network.

#### d. Switching vs. Routing

Routing is done at the middle network architecture levels on such protocols as IPX or TCP/IP. Switching is done at a lower level, at layer 2 of the OSI model, i.e. the media access control (MAC) layer.

#### e. TCP/IP Packet-Centric vs. ATM Circuit-Centric Data Networks

Asynchronous Transfer Mode (ATM) is a fixed-size cell switched circuit-centric data network. ATM implements virtual circuits (VCs), virtual paths (VPs) and transmission paths (TPs). A circuit-centric network like ATM sets up virtual circuits between source and destination nodes which provide QoS by dedicating the virtual circuit to a specific traffic type.

Some networks are packet-centric networks. Unlike a circuit-centric network, a packet-centric network does not use dedicated circuits through which to transfer packets. TCP/IP performs a packetization of user data to be sent between and among the various systems on the IP network. When a large file is sent down the protocol stack, the IP function is responsible for segmentation and packetization of the data. Then a header is placed on the packet for delivery to the data link. The routing and switching of this data is handled at the IP (i.e. network) layer. IP is in a sense a dumb protocol. When a packet is prepared for transmission across the medium, IP does not specifically route the call across a specific channel. Instead, it places a header on the packet and lets the network deal with it. Therefore, the outward bound packets can take various routes to get from a source to a destination. This means that the packets are in a datagram form and not sequentially numbered as they are in other protocols. IP makes its best attempt to deliver the packets to the destination network interface; but it makes no assurances that data will arrive, that data will be free of errors, and that nodes along the way will concern themselves with the accuracy of the data and sequencing, or come back and alert the originator that something is wrong in the delivery mechanism. It is possible that in IP routing of a packet, the packet can be sent along the network in a loop, so IP has a mechanism in its header information to allow a

certain number of “hops” or what is called “time to live” on the network. Rather than permit an undeliverable pack to loop around the network, IP has a counter mechanism that decrements every time the packet passes through a network node. If the counter expires, the node will discard the packet. Working together with IP is TCP which provides controls to ensure that a reliable data stream is sent and delivered. At the sending end, TCP puts a byte count header on information that will be delivered to the IP protocol layer and encapsulates it as part of the packet. The receiving end, when it gets packets is responsible for resequencing the packets and ensuring its accuracy. If all of the IP flow is not received correctly, the byte count acknowledgment or nonacknowledgment message can be sent back to the sending end, prompting the sending end to resend the bytes necessary to fill in the remaining portions of the packet flow. TCP buffers additional packets until after resending the nonacknowledged packet.

### 3. Video Network

FIG. 1C illustrates a conventional video network **150** such as, e.g., a cable television (CATV) network. Video network **150** can include video network **160** coupled to various video capture, distribution links and video output monitors. Video input devices can include, e.g., conference cameras **154** and **158**. Video output devices can include, e.g., televisions **152** and **156**. Video network **160** can include a variety of head end (i.e. the serving end of the cable) and distribution link equipment such as, e.g., coaxial cable television (CATV) and national television standard code (NTSC) tuner equipment for multiplexing various video signals. Standard cable systems have an immense amount of bandwidth available to them.

It is important to note that CATV is a wireless communication method. The frequencies of many video signals are distributed along the cable at the same time. A television tuner selects a particular channel by tuning into a specific frequency or a “frequency band.”

Although a cable television CATV video network often includes only one physical cable, a number of channels can simultaneously be present on the cable. This accomplished by sharing the frequency spectrum of the cable and assigning different frequency ranges to different channels using frequency division multiplexing (FDM). A broadband cable communications system can operate exactly like a CATV system. A counter to this FDM technique is division of the cable not divided into frequency bands but into time slots using time-division multiplexing (TDM). With TDM, each transmitting video station can grab the entire bandwidth of the cable, but only for a very short period of time. The cable is currently capable of carrying up to 750 MHz. FDM techniques can be used to divide the channels into a number of dedicated logical channels. Innovations have allowed a time division multiple access (TDMA) within an FDM channel.

A cable system can allow multiplexing on two separate dimensions to achieve data channels over a cable. The channels can be separated by FDM, and in a frequency band the channel can then be shared via TDMA among multiple users. The most common of the TDMA access methods on broadband cable is CSMA/CD developed by XEROX for Ethernet.

Using a single cable, a midsplit arrangement can accommodate two-way simultaneous transmission. Another way to accommodate this is to use a dual cable system.

Broadband is inherently an analog signaling method. Because video cameras, e.g., are also analog devices, a signal from a video camera (or video recorder) can be

directly transmitted onto a broadband cable channel in red/green/blue (RGB) format.

### G. Convergence of Voice/Data/Video Networks

Recognizing the inherent efficiency of packet-switched data networks such as the Internet, attention has recently focused on the digitization and transmission of voice, data, video and other information over converged packet-switched data networks. In order to deliver a high quality of service (QoS) end-user experience, the data networks attempt to provide mechanisms to deliver the different types of information timely and with appropriate bandwidth to provide an acceptable end-user experience.

FIG. 2C illustrates an example network **286** carrying voice, data and video traffic over a data network. Network **286** includes calling party **102b** homed to EO **104b**, where EO **104b** is linked to a telephony gateway **288b**. Network **286** also includes called party **110c** homed to EO **108c**, where EO **108c** is linked to a telephony gateway **288c**. EOs **104b** and **108c** and telephony gateways **288b** and **288c** can be linked to signaling network **114**. Telephony gateways **288b** and **288c** can also be coupled to data network **142** via routers **140b** and **140c**, respectively.

Still referring to FIG. 2C, telephony gateways **288b** and **288c** can be used to packetize voice traffic and signaling information into a form appropriate for transport over data network **142**. It would be apparent to those skilled in the art that telephony gateways **288b** and **288c** can include various computer devices designed for controlling, setting up and tearing down calls. Voice calls delivered over the data network can include, e.g., voice over packet (VoP), voice over data (VoD), voice over internet protocol (VoIP), voice over asynchronous transfer mode (VoATM), voice over frame (VoF). An example of a telephony gateway **288b** and **288c** is a media gateway control protocol (MGCP) compliant gateway available from various vendors such as, e.g., Lucent, of Parsippany, N.J., and CISCO of Palo Alto, Calif. It is important to note that other network devices such as a softswitch available from several member companies of the SoftSwitch Consortium, including Level 3 Communications of Louisville, Colo., could also be necessary to enable transport of, e.g., VoIP.

Network **286** is depicted to include other devices coupled to data network **142**. First, an H.323 compliant video-conferencing system **289** is illustrated including a camera **154g** and television **152g** and router **140g**. Second, a local area network (LAN) **128a** including a client workstation **138a** and a server **136a** are coupled to data network **142** via network router **140a**. Similarly, LAN **128f** having a client workstation **138f** and a server **136f** are coupled via network router **140f** to data network **142**.

Data Network **142** can provide for routing of packets of information through network routing devices from source locations to destination locations coupled to data network **142**. For example, data network **142** can route internet protocol (IP) packets for transmission of voice and data traffic from telephony gateway **288b** to telephony gateway **288c**. Data Network **142** represents any art-recognized packet centric data network. One well-known data network is the global Internet. Other examples include a private intranet, a packet-switched network, a frame relay network, and an asynchronous transfer mode (ATM) circuit-centric network.

In an example embodiment, data network **142** can be an IP packet-switched network. A packet-switched network such as, e.g., an IP network, unlike a circuit-switched network, does not require dedicated circuits between originating and terminating locations within the packet switched

network. The packet-switched network instead breaks a message into pieces known as packets of information. Such packets can then be encapsulated with a header which designates a destination address to which the packet must be routed. The packet-switched network then takes the packets and routes them to the destination designated by the destination address contained in the header of the packet.

Routers **140a**, **140b**, **140c**, **140d**, **140e**, **140f** and **140g** can be connected to one another via physical media such as, for example, optical fiber link connections, and copper wire connections. Routers **140a-g** transfer information between one another and intercommunicate according to routing protocols.

Data network **142** could be implemented using any data network such as, e.g., IP networks, ATM virtual circuit-centric networks, frame relay networks, X.25 networks, and other kinds of LANs and WANs. Other data networks could be used interchangeably for data network **142** such as, for example, FDDI, Fast Ethernet, or an SMDS packet switched network. Frame relay and ATM are connection-oriented, circuit-centric services. Switched multi-megabyte data service (SMDS) is a connection-oriented mass packet service that offers speeds up to 45 Mbps.

#### 1. Example Data Networks

##### a. Asynchronous Transfer Mode (ATM)

ATM is a high-bandwidth, low-delay, fixed-sized cell-based multiplexing network technology. Bandwidth capacity is segmented into 53-byte cells, having a header and payload fields. ATM uses fixed-length cells with the belief that the fixed length cells can be switched more easily in hardware than variable size packets and thus should result in faster transmissions in certain environments.

The ATM environment sets up virtual circuits in a circuit-centric manner. Thus, ATM segments variable length IP packet flows into fixed size cells using a segmentation and resequencing algorithm (SAR).

Each ATM cell contains a 48-byte payload field and a 5-byte header that identifies the so-called "virtual circuit" of the cell. ATM is thought suitable for high-speed combinations of voice, data, and video services. Currently, ATM access can perform at speeds as high as 622 Mbps or higher. ATM has recently been doubling its maximum speed every year.

ATM is defined by a protocol standardized by the International Telecommunications Union (ITU-T), American National Standards Institute (ANSI), ETSI, and the ATM Forum. ATM comprises a number of building blocks, including transmission paths, virtual paths, and virtual channels. Asynchronous transfer mode (ATM) is a cell based switching and multiplexing technology designed to be a general purpose connection-oriented transfer mode for a wide range of telecommunications services. ATM can also be applied to LAN and private network technologies as specified by the ATM Forum.

ATM handles both connection-oriented traffic directly or through adaptation layers, or connectionless traffic through the use of adaptation layers. ATM virtual connections may operate at either a constant bit rate (CBR) or a variable bit rate (VBR). Each ATM cell sent into an ATM network contains a small header including information that establishes a virtual circuit-centric connection from origination to destination. All cells are transferred, in sequence, over this virtual connection. ATM provides either permanent or switched virtual connections (PVCs or SVCs). ATM is asynchronous because the transmitted cells need not be periodic as time slots of data are required to be in synchronous transfer mode (STM).

ATM uses an approach by which a header field prefixes each fixed-length payload. The ATM header identifies the virtual channel (VC). Therefore, time slots are available to any host which has data ready for transmission. If no hosts are ready to transmit, then an empty, or idle, cell is sent.

ATM permits standardization on one network architecture defining a multiplexing and a switching method. Synchronous optical network (SONET) provides the basis for physical transmission at very high-speed rates. ATM can also support multiple quality of service (QoS) classes for differing application requirements by providing separate virtual circuits for different types of traffic, depending on delay and loss performance. ATM can also support LAN-like access to available bandwidth.

Cells are mapped into a physical transmission path, such as the North American DS1, DS3, and SONET; European, E1, E3, and E4; ITU-T STM standards; and various local fiber and electrical transmission payloads. All information is multiplexed and switched in an ATM network via these fixed-length cells.

The ATM cell header field identifies cell type, and priority, and includes six portions. An ATM cell header includes a generic flow control (GFC), a virtual path identifier (VPI), a virtual channel identifier (VCI), a payload type (PT), a call loss priority (CLP), and a header error check (HEC). VPI and VCI hold local significance only, and identify the destination. GFC allows a multiplexer to control the rate of an ATM terminal. PT indicates whether the cell contains user data, signaling data, or maintenance information. CLP indicates the relative priority of the cell, i.e., lower priority cells are discarded before higher priority cells during congested intervals. HEC detects and corrects errors in the header.

The ATM cell payload field is passed through the network intact, with no error checking or correction. ATM relies on higher-layer protocols to perform error checking and correction on the payload. For example, a transmission control protocol (TCP) can be used to perform error correction functions. The fixed cell size simplifies the implementation of ATM switches and multiplexers and enables implementations at high speeds.

When using ATM, longer packets cannot delay shorter packets as in other packet-switched networks, because long packets are separated into many fixed length cells. This feature enables ATM to carry CBR traffic, such as voice and video, in conjunction with VBR data traffic, potentially having very long packets, within the same network.

ATM switches take traffic and segment it into the fixed-length cells, and multiplex the cells into a single bit stream for transmission across a physical medium. As an example, different kinds of traffic can be transmitted over an ATM network including voice, video, and data traffic. Video and voice traffic are very time-sensitive, so delay cannot have significant variations. Data, on the other hand, can be sent in either connection-oriented or connectionless mode. In either case, data is not nearly as delay-sensitive as voice or video traffic. Data traffic, as e.g., spread sheet data requires accurate transmission. Therefore, ATM conventionally must discriminate between voice, video, and data traffic. Voice and video traffic requires priority and guaranteed delivery with bounded delay, while data traffic requires, simultaneously, assurance of low loss. In a converged data network, data traffic can also carry voice traffic, making it also time-dependent. Using ATM, in one embodiment, multiple types of traffic can be combined over a single ATM virtual path (VP), with virtual circuits (VCs) being assigned to separate data, voice, and video traffic.

A transmission path can include one or more VPs. Each VP can include one or more VCs. Thus, multiple VCs can be trunked over a single VP. Switching can be performed on a transmission path, VPs, or at the level of VCs.

The capability of ATM to switch to a virtual channel level is similar to the operation of a private or public branch exchange (PBX) or telephone switch in the telephone world. In a PBX switch, each channel within a trunk group can be switched. Devices which perform VC connections are commonly called VC switches because of the analogy to telephone switches. ATM devices which connect VPs are commonly referred to as VP cross-connects, by analogy with the transmission network. The analogies are intended for explanatory reasons, but should not be taken literally. An ATM cell-switching machine need not be restricted to switching only VCs and cross-connection to only VPs.

At the ATM layer, users are provided a choice of either a virtual path connection (VPC) or a virtual channel connection (VCC). Virtual path connections (VPCs) are switched based upon the virtual path identifier (VPI) value only. Users of a VPC can assign VCCs within a VPI transparently, since they follow the same route. Virtual channel connections (VCCs) are switched upon a combined VPI and virtual channel identifier (VCI) value.

Both VPIs and VCIs are used to route calls through a network. Note that VPI and VCI values must be unique on a specific transmission path (TP).

It is important to note that data network **142** can be any of a number of other data-type networks, including various packet-switched data-type networks, in addition to an ATM network.

#### b. Frame Relay

Alternatively, data network **142** can be a frame relay network. It would be apparent to persons having ordinary skill in the art, that a frame relay network could be used as data network **142**. Rather than transporting data in ATM cells, data could be transported in frames.

Frame relay is a packet-switching protocol used in WANs that has become popular for LAN-to-LAN connections between remote locations. Formerly frame relay access would top out at about 1.5 Mbps. Today, so-called "high-speed" frame relay offers around 45 Mbps. This speed is still relatively slow as compared with other technology such as ATM.

Frame relay services employ a form of packet-switching analogous to a streamlined version of X.25 networks. The packets are in the form of frames, which are variable in length. The key advantage to this approach is that a frame relay network can accommodate data packets of various sizes associated with virtually any native data protocol. A frame relay network is completely protocol independent. A frame relay network embodiment of data network **142** does not undertake a lengthy protocol conversion process, and therefore offers faster and less-expensive switching than some alternative networks. Frame relay also is faster than traditional X.25 networks because it was designed for the reliable circuits available today and performs less-rigorous error detection.

#### c. Internet Protocol (IP)

In an embodiment, data network **142** can be an internet protocol (IP) network over an ATM network. It would be apparent to those skilled in the art, that an internet protocol (IP) network over various other data link layer network such as, e.g., Ethernet, could be used as data network **142**. Rather than transporting data in fixed length ATM circuit-centric cells, data could be transported in variable length IP datagram packet-centric packets as segmented by TCP. The IP

data network can lie above any of a number of physical networks such as, for example, a SONET optical network.

#### 2. Virtual Private Networks (VPNs)

A virtual private network (VPN) is a wide area communications network operated by a telecommunications carrier that provides what appears to be dedicated lines when used, but that actually includes trunks shared among all customers as in a public network. Just as a VPN can be provided as a service through a wireline network, a VPN can be provided in a wireless network. A VPN can allow a private network to be configured within a public network.

VPNs can be provided by telecommunications carriers to customers to provide secure, guaranteed, long-distance bandwidth for their WANs. These VPNs generally use frame relay or switched multi-megabyte data service (SMDS) as a protocol of choice because those protocols define groups of users logically on the network without regard to physical location. ATM has gained favor as a VPN protocol as companies require higher reliability and greater bandwidth to handle more complex applications. VPNs using ATM offer networks of companies with the same virtual security and QoS as WANs designed with dedicated circuits.

The Internet has created an alternative to VPNs, at a much lower cost, i.e. the virtual private Internet. The virtual private Internet (VPI) lets companies connect disparate LANs via the Internet. A user installs either a software-only or a hardware-software combination that creates a shared, secure intranet with VPN-style network authorizations and encryption capabilities. A VPI normally uses browser-based administration interfaces.

#### 3. H.323 Video Conferencing

The H.323 Recommendation for video conferencing will now be briefly overviewed. The H.323 standard provides a foundation for, for example, audio, video, and data communications across IP-based networks, including the Internet. By complying with the H.323 Recommendation, multimedia products and applications from multiple vendors can interoperate, allowing users to communicate without concern for compatibility. H.323 promises to be the foundation of future LAN-based products multimedia applications.

H.323 is an umbrella recommendation from the International Telecommunications Union (ITU) that sets standards for multimedia communications over Local Area Networks (LANs) that do not provide a guaranteed Quality of Service (QoS). These networks dominate today's corporate desktops and include packet-switched TCP/IP and IPX over Ethernet, Fast Ethernet and Token Ring network technologies. Therefore, the H.323 standards are important building blocks for a broad new range of collaborative, LAN-based applications for multimedia communications.

The H.323 specification was approved in 1996 by the ITU's Study Group 16. Version 2 was approved in January 1998. The standard is broad in scope and includes both stand-alone devices and embedded personal computer technology as well as point-to-point and multipoint conferences. H.323 also addresses call control, multimedia management, and bandwidth management as well as interfaces between LANs and other networks.

H.323 is part of a series of communications standards that enable videoconferencing across a range of networks. Known as H.32X, this series includes H.320 and H.324, which address ISDN and PSTN communications, respectively.

The H.323 architecture defines four major components for network-based communications, including terminals, gateways, gatekeepers, and multipoint control units (MCUs).

Terminals are client endpoints on the LAN that provide real-time, two-way communications. All terminals support voice communications; video and data are optional. H.323 specifies the modes of operation required for different audio, video, and/or data terminals to work together. H.323 is the standard of next generation Internet phones, audio conferencing terminals, and video conferencing technologies.

All H.323 terminals also support H.245, which is used to negotiate channel usage and capabilities. Three other components are required: Q.931 for call signaling and call setup, a component called Registration/Admission/Status (RAS), which is a protocol used to communicate with a gatekeeper; and support for RTP/RTCP for sequencing audio and video packets.

Optional components in an H.323 terminal are video codecs, T.120 data conferencing protocols, and MCU capabilities.

A gateway is an optional element in an H.323 conference. An H.323 gateway can provide many services, the most common being a translation function between H.323 conferencing endpoints and other terminal types. This function includes translation between transmission formats (i.e. H.225.0 to H.221) and between communications procedures (i.e. H.245 to H.242). In addition, a gateway also translates between audio and video codecs and performs call setup and clearing on both the LAN side and the switched-circuit network side.

In general, the purpose of the H.323 gateway is to reflect characteristics of a LAN endpoint to an SCN endpoint and vice versa. The primary applications of gateways are likely to be establishing links with analog PSTN terminals, establishing links with remote H.320 compliant terminals over ISDN-based switched-circuit networks, and establishing links with remote H.324-compliant terminals over PSTN networks.

Gateways are not required if connections to other networks are not needed, since endpoints may directly communicate with other endpoints on the same LAN. Terminals communicate with gateways using the H.245 and Q.931 protocols.

With the appropriate transcoders, H.323 gateways **5806** can support terminals that comply with H.310, H.321, H.322, and V.70.

Many gateway functions are left to the designer. For example, the actual number of H.323 terminals that can communicate through the gateway is not subject to standardization. Similarly, the number of SCN connections, the number of simultaneous independent conferences supported, the audio/video/data conversion functions, and inclusion of multipoint functions are left to the manufacturer. By incorporating H.323 gateway technology into the H.323 specification, the ITU has positioned H.323 as the means to hold standards-based conferencing endpoints together.

The gatekeeper is the most important component of an H.323 enabled network. It can act as the central point for all calls within its zone and provides call control services to registered endpoints. In many ways, an H.323 gatekeeper acts as a virtual switch.

Gatekeepers perform two important call control functions. The first is address translation from LAN aliases for terminals and gateways to IP or IPX addresses, as defined in the RAS specification. The second function is bandwidth management, which is also designated within RAS. For instance, if a network manager has specified a threshold for the number of simultaneous conferences on the LAN, the gatekeeper can refuse to make any more connections once the

threshold is reached. The effect is to limit the total conferencing bandwidth to some fraction of the total available; the remaining capacity is left for e-mail, file transfers, and other LAN protocols. A collection of all terminals, gateways, and multipoint control units which can be managed by a single gatekeeper are known as an H.323 Zone.

An optional, but valuable feature of a gatekeeper is its ability to route H.323 calls. By routing a call through a gatekeeper, it can be controlled more effectively. Service providers need this ability in order to bill for calls placed through their network. This service can also be used to re-route a call to another endpoint if a called endpoint is unavailable. In addition, a gatekeeper capable of routing H.323 calls can help make decisions involving balancing among multiple gateways. For instance, if a call is routed through a gatekeeper, that gatekeeper can then re-route the call to one of many gateways based on some proprietary routing logic.

While a gatekeeper is logically separate from H.323 endpoints, vendors can incorporate gatekeeper functionality into the physical implementation of gateways and MCUs.

A gatekeeper is not required in an H.323 system. However, if a gatekeeper is present, terminals must make use of the services offered by gatekeepers. RAS defines these as address translation, admissions control, bandwidth control, and zone management.

Gatekeepers can also play a role in multipoint connections. To support multipoint conferences, users would employ a gatekeeper to receive H.245 control channels from two terminals in a point-to-point conference. When the conference switches to multipoint, the gatekeeper can redirect the H.245 Control Channel to a multipoint controller, the MC. A gatekeeper need not process the H.245 signaling; it only needs to pass it between the terminals or between the terminals and the MC.

LANs which contain gateways could also contain a gatekeeper to translate incoming E.164 addresses into Transport Addresses. Because a Zone is defined by its gatekeeper, H.323 entities that contain an internal gatekeeper can require a mechanism to disable the internal function so that when there are multiple H.323 entities that contain a gatekeeper on a LAN, the entities can be configured into the same Zone.

The Multipoint Control Unit (MCU) supports conferences between three or more endpoints. Under H.323, an MCU consists of a Multipoint Controller (MC), which is required, and zero or more Multipoint Processors (MP). The MC handles H.245 negotiations between all terminals to determine common capabilities for audio and video processing. The MC also controls conference resources by determining which, if any, of the audio and video streams will be multicast.

The MC does not deal directly with any of the media streams. This is left to the MP, which mixes, switches, and processes audio, video, and/or data bits. MC and MP capabilities can exist in a dedicated component or be part of other H.323 components.

The present invention supports multicast for wireless base station **302**, including providing: compatibility with RFC 1112, **1584**; recognition and support of multicasting applications, including: multimedia, teleconferencing, database, distributed computing, real-time workgroups; support of broadcasting function over wireless link; preserves bandwidth, retains QoS latency performance; support of IPv6 IGMP and IPv4 IGMP multicast; group membership query, group membership report messages.

Approved in January of 1998, version 2 of the H.323 standard addresses deficiencies in version 1 and introduces

new functionality within existing protocols, such as Q.931, H.245 and H.225, as well as entirely new protocols. The most significant advances were in security, fast call setup, supplementary services and T.120/H.323 integration.

#### G. Packet-Centric QoS-Aware Wireless Point-to-Multi-Point (PtMP) Telecommunications System

##### 1. Wireless Point-to-MultiPoint Telecommunications System

FIG. 2D depicts network 296 including a point-to-multi-point (PtMP) wireless network 298 coupled via router 140d to data network 142. It is important to note that network 296 includes network 286 from FIG. 2C, plus PtMP wireless network 298. PtMP wireless network 298 enables customer premise equipment (CPE) at a subscriber location to gain access to the various voice, data and video resources coupled to data network 142 by means of wireless connectivity over a shared bandwidth. The wireless PtMP network 298 is a packet switched network which is TCP/IP packet-centric (i.e. no dedicated circuit is created in delivering a communication IP flow) and QoS aware.

Specifically, PtMP wireless network 298 includes a wireless access point (WAP) 290d coupled to router 140d by, e.g., a wireline connection. A wireless access point 290e can be similarly coupled to router 140e by a wireline connection. WAP 290d is in wireless communication, such as, e.g., radio frequency (RF) communication, with one or more wireless transceiver subscriber antennae 292d and 292e. It would be apparent to those skilled in the art that various wireless communication methods could be used such as, e.g., microwave, cellular, spread spectrum, personal communications systems (PCS), and satellite.

In an alternative embodiment, RF communication is accomplished over cable television (CATV) coaxial cable. As those skilled in the relevant art will understand, a coaxial cable functions as a waveguide over which RF waves propagate. Accordingly, it is possible for the communications link between RF transceiver subscriber antenna 292d and WAP 290d to be a coaxial cable. Therefore, a coaxial cable connection is analogous to a wireless connection, and is referred to as an alternative form of wireless connection in the present invention.

In another alternative embodiment, RF communication is accomplished over a satellite connection, such as, e.g., a low earth orbit (LEO) satellite connection or a high earth orbit satellite. Taking the example of an LEO satellite connection, WAP 290d and RF transceiver subscriber antenna 292d function as satellite gateways, with the additional functionalities described in the present invention.

As would be apparent to those skilled in the art, although the present invention has been described in the context of a point-to-multi-point network, the invention is equally applicable to a point-to-point network environment.

Referring to FIG. 3A, in an embodiment of the invention, WAPs 290d and 290e can be coupled to a wireless base station 302 where "IP flow" traffic can be queued, analyzed, characterized, classified, prioritized and scheduled, as described more fully below with reference to the ensuing figures.

Referring to FIG. 3B, one embodiment of the invention, antennae 292d and 292e are coupled to subscriber customer premise equipment (CPE) stations 294d and 294e, respectively (also referred to as CPEs 294d, 294e). Subscriber CPE stations 294d and 294e are coupled to various other CPE equipment via wireline or wireless connections. For example, CPE stations 290d and 290e can be coupled to voice calling parties 124d, 124e, 126d and 126e, fax machines 116d and 116e, video conferencing equipment

including video monitors 152d and 152e, and cameras 154d and 154e, host computers including client computers 120d and 120e and servers 122d and 122e. Various legacy devices such as PBXs can be coupled to CPEs 294d and 294e. In addition, next generation technologies such as Ethernet phones available from Selsius, a subsidiary of CISCO Systems from San Jose, Calif. and other Internet appliances can be coupled via LAN connections to CPEs 294d and 294e. Other video conferencing equipment as well as H.323 compliant conferencing equipment can also be coupled to CPEs 294d and 294e.

In an embodiment of the invention, either of antennae 292d and 292e can communicate with both WAPs 290d and 290e for alternate or backup wireless communications paths.

Returning to FIG. 3A, it depicts an example perspective diagram 300 of a PtMP network of the present invention. Diagram 300 includes a wireless base station 302 shown in wireless communication with subscriber locations 306a, 306b, 306c, 306d, 306e, 306f, 306g, 306h, 306i and 306j. Specifically, wireless base station 302 communicates via wireless access point 290d to subscriber antennae 292a-j of subscriber locations 306a-j.

Wireless base station 302 is coupled at interface 320 to network router 140d by, e.g., a wireline connection. Network router 140d is coupled to data network 142 which includes various other network routers 140b for routing traffic to other nodes on data network 142 such as, e.g., telephony gateway 288b.

Returning to FIG. 3B, it depicts block diagram 310 further illustrating the wireless PtMP of the present invention. Diagram 310 includes wireless base station 302 coupled at interface 320 to data network 142. Also coupled to data network 142 are router 140d and telephony gateway 288b which is in turn coupled to a class 5 central office (CO) switch at EO 104b. IP telephony gateway 288b can terminate telephony traffic to PSTN facilities by, e.g., translating packets into time domain multiplexed (TDM) standard telephone signals. Wireless base station 302 is in communication with wireless CPE 294d at subscriber location 306d via antenna WAP 290d and 292d. It would be apparent to those skilled in the art that other configurations of CPE 294d are possible, such as, e.g., one or more host computers with no telephone devices, one or more telephones with no host computers, one or more host computers and one or more telephone devices, and one or more H.323 capable video-conferencing platforms which could include a host computer with monitor and camera.

CPE 294d is shown with several telephone devices 124d and 126d, e.g., analog phones, and host computers, client 120d and server 122d. Client 120d and server 122d can be coupled to CPE 294d via a LAN connection such as, e.g., an Ethernet LAN, or via a legacy V.35 device 322d providing a high speed data connection. Other Internet appliances capable of attachment to a data network can also be coupled to CPE 294d.

##### 2. Networking Protocol Stack Architecture—Wireless IP Network Access Architecture (WINAAR)

FIG. 4 depicts the wireless IP network access architecture (WINAAR) 400 of the present invention. Architecture 400 illustrates the networking protocol stack which is a version of a TCP/IP protocol stack enhanced to support IP-centric, QoS over a packet switched, shared bandwidth, wireless PtMP connection. The networking protocol stack will be described in terms of the Open Systems Interconnect (OSI) 7 layer networking protocol stack standard which includes physical layer (OSI layer 1) 402, data link layer (OSI layer

2) **404**, network layer (OSI layer 7) **406** and **408**, transport layer (OSI layer 4) **410** and applications layer (OSI layer 7) **412**.

a. Physical Layer

In an example embodiment, physical layer **402** can be implemented using several wireless application specific integrated circuits (wASICs), an off-the-shelf 16QAM/QPSK **416** ASIC; an Interference Mitigation and Multipath Negation (IMMUNE)/RF **418** algorithm ASIC for minimizing and/or eliminating harmful interference; and a frequency hopping (FH) **419** ASIC for providing dynamic and adaptive multi-channel transmission that optimizes data link integrity by changing frequency levels depending on the noise level of a given frequency. Physical layer **402** can include the radio frequency (RF) signal **415**.

b. Data Link Layer

Data link layer **404** lies on top of physical layer **402**. Data link layer **404** can include a media access control (MAC) layer **414** which is depicted graphically in diagram **400** as MAC layer portion **414a** and proactive reservation-based intelligent multi-media access (PRIMMA) technology portions **414b** and **414c**. Arrows **426**, **428** and **430**, respectively, illustrate that MAC layer **414** can read header information from data and multimedia applications **425**, TCP/UDP **427** and IP **429** layers to analyze and schedule an IP packet of an "IP flow." IP packets of the IP flow are identified by analyzing the header information to determine QoS requirements of the IP flow, so that the IP flow can be characterized, classified, presented, prioritized and scheduled.

c. Network Layer

1. Internet Protocol (IP)

Network layer **408** is the Internet protocol (IP) **429**. As will be discussed further below and as already discussed above with reference to data network **142**, IP is a standard protocol for addressing packets of information. Referring now to FIG. 7, IP header fields **702** can include, e.g., source and destination IP addresses, IP type of service (TOS), IP time to live (TTL), and protocol fields. IP is a datagram protocol that is highly resilient to network failures, but does not guarantee sequence delivery. Routers send error and control messages to other routers using the Internet control message protocol (ICMP). ICMP can also provide a function in which a user can send a "ping" (echo packet) to verify reachability and round trip delay of an IP-addressed host. Another OSI layer 3 protocol is address resolution protocol (ARP) which can directly interface to the data link layer. ARP maps a physical address, e.g., an Ethernet MAC address, to an IP address.

2. Internet Protocol (IP)v4 and IPv6

IP **429** of network layer **408** can be, e.g., an IP version 4 (IPv4) or an IP version 6 (IPv6). IPv6 (sometimes called next-generation internet protocol or IPng) is a backward-compatible extension of the current version of the Internet protocol, IPv4. IPv6 is designed to solve problems brought on by the success of the Internet (such as running out of address space and router tables). IPv6 also adds needed features, including circuiting security, auto-configuration, and real-time services similar to QoS. Increased Internet usage and the allocation of many of the available IP addresses has created an urgent need for increased addressing capacity. IPv4 uses a 32-byte number to form an address, which can offer about 4 billion distinct network addresses. In comparison, IPv6 uses 128-bytes per address, which provides for a much larger number of available addresses.

3. Resource Reservation Protocol (RSVP)

IP **429** of network layer **408** can have RSVP enhancement. Developed to enhance IPv4 with QoS features, RSVP

is supposed to let network managers allocate bandwidth based on the bandwidth requirements of an application. Basically, RSVP is an emerging communications protocol that is hoped to signal a router to reserve bandwidth for real-time transmission of data, video, and audio traffic.

Resource reservation protocols that operate on a per-connection basis can be used in a network to elevate the priority of a given user temporarily. RSVP runs end to end to communicate application requirements for special handling. RSVP identifies a session between a client and a server and asks the routers handling the session to give its communications a priority in accessing resources. When the session is completed, the resources reserved for the session are freed for the use of others.

RSVP unfortunately offers only two levels of priority in its signaling scheme. Packets are identified at each router hop as either low or high priority. However, in crowded networks, two-level classification may not be sufficient. In addition, packets prioritized at one router hop might be rejected at the next.

Accepted as an IETF standard in 1997, RSVP does not attempt to govern who should receive bandwidth, and questions remain about what will happen when several users all demand a large block of bandwidth at the same time. Currently, the technology outlines a first-come, first-served response to this situation. The IETF has formed a task force to consider the issue.

Because RSVP provides a special level of service, many people equate QoS with the protocol. For example, Cisco currently uses RSVP in its IPv4-based internetwork router operating system to deliver IPv6-type QoS features. However, RSVP is only a small part of the QoS picture because it is effective only as far as it is supported within a given client/server connection. Although RSVP allows an application to request latency and bandwidth, RSVP does not provide for congestion control or network-wide priority with the traffic flow management needed to integrate QoS across an enterprise. Further, RSVP does not address the particular challenges related to delivering packets over a wireless medium.

The present invention supports RSVP by providing: (1) compatibility with RFC 2205; (2) recognition and support of RSVP messages, including: Path messages, Reservation (Resv), Path teardown messages, Resv teardown messages, Path error messages, Resv error messages, and Confirmation messages; (3) recognition and support of RSVP objects, including: Null, Session, RSVP\_Hop, Time\_Values, Style, Flowspec, Sender\_Template, Sender\_Tspec, Adspec, Error\_Spec, Policy\_Data, Integrity, and Scope, Resv Confirm; (4) configurable translation of RSVP Flowspecs for QoS resource allocation in wireless base station **302**.

The present invention provides support of DiffServ and RSVP/int-serv by providing: (1) support of RFC 2474 and 2475; (2) DiffServ in the core of Internet; (3) RSVP/int-serv for hosts and edge networks; (4) admission control capability for DiffServ compatibility; (5) differentiated services (DSs) (a field marking supported for use by DiffServ, and translation into a wireless base station **302** resource allocation); and (6) support for binding of multiple end-to-end sessions to one tunnel session.

4. Real-time Transport Protocol (RTP) and Real-time Control Protocol (RTCP)

TCP of transport layer **410** can have a RTP and RTCP enhancement. Real-time transport protocol (RTP) is an emerging protocol for the Internet championed by the audio/video transport workgroup of the IETF. Referring to FIG. 7, RTP and RTCP header fields **708** can include several sub

fields of information. RTP supports real-time transmission of interactive voice and video over packet-switched networks. RTP is a thin protocol that provides content identification, packet sequencing, timing reconstruction, loss detection, and security. With RTP, data can be delivered to one or more destinations, with a limit on delay.

RTP and other Internet real-time protocols, such as the Internet stream protocol version 2 (ST2), focus on the efficiency of data transport. RTP and other Internet real-time protocols like RTCP are designed for communications sessions that are persistent and that exchange large amounts of data. RTP does not handle resource reservation or QoS control. Instead, RTP relies on resource reservation protocols such as RSVP, communicating dynamically to allocate appropriate bandwidth.

RTP adds a time stamp and a header that distinguishes whether an IP packet is data or voice, allowing prioritization of voice packets, while RSVP allows networking devices to reserve bandwidth for carrying unbroken multimedia data streams.

Real-time Control Protocol (RTCP) is a companion protocol to RTP that analyzes network conditions. RTCP operates in a multi-cast fashion to provide feedback to RTP data sources as well as all session participants. RTCP can be adopted to circumvent datagram transport of voice-over-IP in private IP networks. With RTCP, software can adjust to changing network loads by notifying applications of spikes, or variations, in network transmissions. Using RTCP network feedback, telephony software can switch compression algorithms in response to degraded connections.

#### 5. IP Multi-Casting Protocols

IP 429 of network layer 408 can also support multi-casting protocols. Digital voice and video comprise of large quantities of data that, when broken up into packets, must be delivered in a timely fashion and in the right order to preserve the qualities of the original content. Protocol developments have been focused on providing efficient ways to send content to multiple recipients, transmission referred to as multi-casting. Multi-casting involves the broadcasting of a message from one host to many hosts in a one-to-many relationship. A network device broadcasts a message to a select group of other devices such as PCS or workstations on a LAN, WAN, or the Internet. For example, a router might send information about a routing table update to other routers in a network.

Several protocols are being implemented for IP multi-casting, including upgrades to the Internet protocol itself. For example, some of the changes in the newest version of IP, IPv6, will support different forms of addressing for uni-cast (point-to-point communications), any cast (communications with the closest member of a device group), and multi-cast. Support for IP multi-casting comes from several protocols, including the Internet group management protocol (IGMP), protocol-independent multi-cast (PIM) and distance vector multi-cast routing protocol (DVMRP). Queuing algorithms can also be used to ensure that video or other multi-cast data types arrive when they are supposed to without visible or audible distortion.

Real-time transport protocol (RTP) is currently an IETF draft, designed for end-to-end, real-time delivery of data such as video and voice. RTP works over the user datagram protocol (UDP), providing no guarantee of in-time delivery, quality of service (QoS), delivery, or order of delivery. RTP works in conjunction with a mixer and translator and supports encryption and security. The real-time control protocol (RTCP) is a part of the RTP definition that analyzes network conditions. RTCP provides mandatory monitoring of ser-

vices and collects information on participants. RTP communicates with RSVP dynamically to allocate appropriate bandwidth.

Internet packets typically move on a first-come, first-serve basis. When the network becomes congested, Resource Reservation Protocol (RSVP) can enable certain types of traffic, such as video conferences, to be delivered before less time-sensitive traffic such as E-mail for potentially a premium price. RSVP could change the Internet's pricing structure by offering different QoS at different prices. Using SLAs, different QoS levels can be provided to users at CPE location stations depending on SLA subscription level.

The RSVP protocol can be used by a host, on behalf of an application, to request a specific QoS from the network for particular data streams or flows. Routers can use the RSVP protocol to deliver QoS control requests to all necessary network nodes to establish and maintain the state necessary to provide the requested service. RSVP requests can generally, although not necessarily, result in resources being reserved in each node along the data path.

RSVP is not itself a routing protocol. RSVP is designed to operate with current and future uni-cast and multi-cast routing protocols. An RSVP process consults the local routing database to obtain routes. In the multi-cast case for example, the host sends IGMP messages to join a multi-cast group and then sends RSVP messages to reserve resources along the delivery paths of that group. Routing protocols determine where packets are forwarded. RSVP is concerned with only the QoS of those packets as they are forwarded in accordance with that routing. The present invention delivers QoS-aware wireless PtMP access to users over a shared wireless bandwidth, and can take into account priority information provided within packet headers of packets in IP flows received for transmission over the wireless base station's bandwidth.

d. VPN Networks (Example Optional Protocols) at Network Layer

Also at network layer 406 are depicted example optional virtual private network (VPN) protocols point to point protocol (PPP) 420 and IPsec 422, discussed below.

A plurality of protocol standards exist today for VPNs. For example, IP security (IPsec), point-to-point tunneling protocol (PPTP), layer 2 forwarding protocol (L2F) and layer 2 tunneling protocol (L2TP). The IETF has proposed a security architecture for the Internet protocol (IP) that can be used for securing Internet-based VPNs. IPsec facilitates secure private sessions across the Internet between organizational firewalls by encrypting traffic as it enters the Internet and decrypting it at the other end, while allowing vendors to use many encryption algorithms, key lengths and key escrow techniques. The goal of IPsec is to let companies mix-and-match the best firewall, encryption, and TCP/IP protocol products.

IPsec is designed to link two LANs together via an encrypted data stream across the Internet.

#### 1. Point-to-Point Tunneling Protocol (PPTP)

Point-to-point tunneling protocol (PPTP) provides an alternate approach to VPN security than the use of IPsec. Unlike IPsec, which is designed to link two LANs together via an encrypted data stream across the Internet, PPTP allows users to connect to a network of an organization via the Internet by a PPTP server or by an ISP that supports PPTP. PPTP was proposed as a standard to the IETF in early 1996. Firewall vendors are expected to support PPTP.

PPTP was developed by Microsoft along with 3Com, Ascend and US Robotics and is currently implemented in WINDOWS NT SERVER 4.0, WINDOWS NT WORK-

STATION 4.0, WINDOWS 95 via an upgrade and WINDOWS 98, available from Microsoft Corporation of Redmond, Wash.

The "tunneling" in PPTP refers to encapsulating a message so that the message can be encrypted and then transmitted over the Internet. PPTP, by creating a tunnel between the server and the client, can tie up processing resources.

#### 2. Layer 2 Forwarding (L2F) Protocol

Developed by Cisco, layer 2 forwarding protocol (L2F) resembles PPTP in that it also encapsulates other protocols inside a TCP/IP packet for transport across the Internet, or any other TCP/IP network, such as data network 112. Unlike PPTP, L2F requires a special L2F-compliant router (which can require changes to a LAN or WAN infrastructure), runs at a lower level of the network protocol stack and does not require TCP/IP routing to function. L2F also provides additional security for user names and passwords beyond that found in PPTP.

#### 3. Layer 2 Tunneling Protocol (L2TP)

The layer 2 tunneling protocol (L2TP) combines specifications from L2F with PPTP. In November 1997, the IETF approved the L2TP standard. Cisco is putting L2TP into its Internet operating system software and Microsoft is incorporating it into WINDOWS NT 5.0. A key advantage of L2TP over IPsec, which covers only TCP/IP communications, is that L2TP can carry multiple protocols. L2TP also offers transmission capability over non-IP networks. L2TP however ignores data encryption, an important security feature for network administrators to employ VPNs with confidence.

#### 4. IPsec

IP flows using the security encryption features of IPsec 422 are supported by the present invention. The integration of IPsec 422 flows of WINAAR architecture 400 are described below in the downlink and uplink directions with reference to FIGS. 17A and 17B, respectively. Wireless base station 302 supports prioritization of IPsec encrypted streams by placing the firewall at the wireless base station and unencrypting the datastream and packet header information prior to identification analysis. Through the wireless transmission medium, the frame stream already includes encryption of the frame data and implements frequency hopping.

IPsec provides for secure data transmission for, e.g., VPNs and eCommerce security. IPsec is compatible with RFC 2401-2407. IPsec is supported with IPv4 and IPv6, and also IPsec tunnel mode. Wireless base station 302 security protocol support includes authentication header (AH) and encapsulating security payload (ESP). Wireless base station 302 supports IPsec authentication (MD5), encryption algorithms, and automatic key management (IKE and ISAKMP/Oakley). Wireless base station 302 provides for a choice of transport mode or tunnel mode and selectable granularity of security service, such as, e.g., providing a single encrypted tunnel for all traffic between two hosts, or providing separate encrypted tunnel for each TCP connection between hosts.

#### e. Transport Layer

##### 1. Transmission Control Protocol/Internet Protocol (TCP/IP) and User Datagram Protocol/Internet Protocol (UDP/IP)

As already discussed, internet protocol (IP) has become the primary networking protocol used today. This success is largely a part of the Internet, which is based on the transmission control protocol/internet protocol (TCP/IP) family of protocols. TCP/IP is the most common method of connecting PCs, workstations, and servers. TCP/IP is included as part of many software products, including desktop oper-

ating systems (e.g., Microsoft's Windows 95 or Windows NT) and LAN operating systems.

The most pervasive LAN protocol to date, has been IPX/SPX from Novell's NetWare network operating system (NOS). However, IPX/SPX is losing ground to TCP/IP. Novell now incorporates native IP support into NetWare, ending NetWare's need to encapsulate IPX packets when carrying them over TCP/IP connections. Both UNIX and Windows NT servers can use TCP/IP. Banyan's VINES, IBM's OS/2 and other LAN server operating systems can also use TCP/IP.

Transport layer four 410 can include transmission control protocol (TCP) or user datagram protocol (UDP) 427 part of the standard TCP/UDP/IP protocol family suite of networking protocols. As will be discussed further below and as already mentioned briefly above with reference to data network 142, TCP is a standard protocol for segmenting traffic into packets, transmitting, reassembling and retransmitting packets of information between a source and destination IP address. Referring now to FIG. 7, TCP header fields 706 can include, e.g., source and destination port numbers, window size, urgent pointer, flags (SYN, ISN, PSH, RST, FIN), and maximum segment size (MSS). Both TCP and UDP provide a capability for the TCP/IP host to distinguish among multiple applications through port numbers. TCP can provide for a reliable, sequenced delivery of data to applications. TCP can also provide adaptive flow control, segmentation, and reassembly, and prioritization of data flows. UDP only provides unacknowledged datagram capability. The recently defined real time protocol (RTP), RFC 1889, can provide real time capabilities in support of multimedia applications, for example.

TCP uses a window-based flow control. Each TCP source has a dynamically changing transmit window that determines how many packets it can transmit during each successive round-trip time (RTT). The TCP source can continue increasing its transmit window if no packets were lost within the last RTT. Once congestion is detected, the source TCP throttles back its transmission, i.e. it "backs-off," via a multiplicative decrease. An increasing width of the so-called TCP window versus time corresponds to increasingly longer bursts of packets. TCP's window flow-controlled protocol exhibits this effect of increasing throughput and buffer utilization until terminated by loss, followed by a period of rapid backoff.

TCP works over IP to provide end-to-end reliable transmission of data across data network 142. TCP controls the amount of unacknowledged data in transit by dynamically reducing either window size or segment size. The reverse is also true in that increased window or segment size values achieve higher throughput if all intervening network elements have low error rates, support the larger packets, and have sufficient buffering to support larger window sizes.

#### f. Application Layer

Applications layer seven 412 can include applications 426 such as, e.g., over TCP, hypertext transport protocol (HTTP), file transfer protocol (FTP), TELNET remote terminal login, and simple mail transfer protocol (SMTP); and over UDP, simple network management protocol (SNMP), RPC, NFS, and TFTP. Other applications can also run over the network stack such as, e.g., a world wide web browser such as NETSCAPE NAVIGATOR available from AOL of Reston, Va., a spreadsheet application program such as LOTUS 123 available from IBM of Armonk, N.Y. or a video teleconferencing program such as MS NetMeeting available from MICROSOFT of Redmond, Wash. Packets

transmitted from such applications could require special handling and prioritization to achieve an appropriate end-user QoS.

### 3. PRIMMA-System IP Flow Prioritization

#### a. Scheduling of Mixed IP Flows

FIG. 6 illustrates block diagram 600 representing scheduling of mixed IP flows. Block diagram 600 shows the scheduling of wireless base station 302. The functionality of block diagram 600 includes PRIMMA management of Internet, VPN, and realtime IP flows. Referring back to FIG. 3A, wireless IP flows are coming from data network 142 via network router 140d to interface 320 of wireless base station 302. IP flows are then scheduled for transmission from wireless base station 302 via antenna 290d through subscriber location 306d via antenna 292d.

Referring back to block diagram 600 of FIG. 6, illustrated therein are the downlink and uplink flows between interface 320 and wireless base station antenna 290d. An IP flow, as described herein, refers to a series of related packets of data transmitted from a source to a destination post computer. IP flow 630 from data network 142 (over interface 320) comprises Internet IP flows 608, VPN IP flows 610, and realtime IP flows 612. IP flow 630 is in the downlink direction.

Downlink IP flow analyzer 602 (hereinafter downlink flow analyzer 602) analyzes Internet IP flow 608, VPN IP flow 610 and realtime IP flow 612. IP flow analyzer 602 is described further below with reference to FIGS. 8A and 15A. IP flow analyzer 602 receives packets and analyzes packet header fields to identify new or existing IP flows. IP flow analyzer 602 can also characterize QoS requirements for the IP flow depending on packet header field contents. IP flow analyzer 602 can classify the IP flow and associate a given packet with other packets from an existing IP flow and can group together IP flows with similar QoS requirements. IP flow analyzer 602 can also present the IP flows to a flow scheduler.

Downlink PRIMMA MAC IP flow scheduler 604 (hereinafter downlink flow scheduler 604) schedules received IP flows 608, 610, and 612 for transmission in the downlink direction. Downlink flow scheduler 604 can prioritize the different classes of IP flows. For example, scheduler 604 can reserve slots in downlink frames for latency sensitive IP flows; for FTP type IP flows 608, scheduler 604 can allocate large amounts of bandwidth for file transfer; and for e-mail type IP flows 608, a lower priority can be given to packets. In prioritizing allocation of wireless bandwidth frame slots, downlink flow scheduler 604 can take into account the fact that an IP flow 630 is a VPN IP flow 610 from a virtual private network (VPN), such as, e.g., a remote branch office tying into a corporate network. All traffic from a VPN can be given a higher priority or specific types of VPN traffic can request particular service levels. Downlink flow scheduler 604 can prioritize realtime IP flows 612 such that their arrival at CPEs 294 at CPE subscriber locations 306 will occur as required.

Downlink PRIMMA MAC segmentation and resequencing (SAR) and framer 606 (hereinafter downlink SAR and framer 606) segments and frames the data packets of received IP flows into frames for transmission over the wireless medium to CPEs 294 at CPE subscriber locations 306. For example IP flow 616, 624 can be transmitted to CPE 294d at CPE subscriber location 306d, via base station antenna 290d over a wireless medium to subscriber antenna 292d and CPE 294d at CPE subscriber location 306d. In the present invention, the term wireless medium is used to broadly encompass not only propagation of RF transmis-

sions over cellular communications, but also RF transmissions over satellite communications and cable (e.g., coaxial cable) communications.

In the uplink direction, IP flow 626 from CPE 294d at CPE subscriber station 306d is received at wireless base station antenna 290d. IP flow 626 can include Internet IP flow 618, VPN IP flow 620 and realtime IP flow 622. Uplink IP flow analyzer 632 (hereinafter uplink flow analyzer 632) analyzes Internet IP flow 618, VPN IP flow 620 and realtime IP flow 622. Uplink flow analyzer 632 is described further below with reference to FIGS. 8B and 15B. In one embodiment, the functionality of IP flow analyzer 632 occurs at the CPE 294d at subscriber CPE location 306d and sends a request to transmit data up to wireless base station 302, including information about an IP flow for which CPE 294d would like to schedule an uplink slot.

Uplink PRIMMA MAC IP flow scheduler 634 (hereinafter uplink flow scheduler 634) can schedule the requested IP flow. In one embodiment, the functionality of scheduler 634 can be performed at CPE 294d at subscriber CPE location 306d. In another embodiment, the functionality of scheduler 634 can be performed at the wireless base station 302. An advantage of placing uplink flow scheduler 634 at the wireless base station is that this provides efficiencies particularly in a point-to-multi-point architecture. It is more efficient to have one centralized scheduler at the base station 302 rather than to place multiple uplink flow schedulers 634 at CPEs 294 of subscriber CPE locations 306.

Uplink PRIMMA MAC segmentation and resequencing (SAR) and framer 636 (hereinafter SAR and framer 636) can segment and frame the data packets of IP flows into frames for transmission over the wireless medium from CPE 294 at CPE subscriber locations 306 to wireless base station 302 for further transmission over data network 142. IP flow 626 from CPE 294d at CPE subscriber location 306d can be transmitted to base station antenna 290d over a wireless medium such as, e.g., RF communication, cable modem and satellite communication, from subscriber antenna 292d coupled to CPE 294d at CPE subscriber location 306d.

#### b. Summary of Downlink and Uplink SubFrame Prioritization

Block diagram 800 of FIG. 8A summarizes an exemplary downlink analysis, prioritization and scheduling function. Similarly, block diagram 830 of FIG. 8B summarizes an exemplary uplink analysis prioritization and scheduling function. Block diagram 800 and 830 are more detailed views of the function of block diagram 600 of FIG. 6.

Beginning with block diagram 800 (of FIG. 8A), it depicts how IP flow prioritization and scheduling of a shared wireless bandwidth is performed in the downlink path, from data network 142—to router 140d—to interface 320—to wireless base station 302—WAP 290d—over a wireless medium—to wireless transceiver subscriber antenna 292d—to subscriber CPE station 294d at subscriber CPE location 306d.

IP flow analyzer 602 performs the function of identifying, characterizing, classifying, and presenting data packets to a downlink frame scheduler. The functions of identifying, characterizing, classifying and presenting the data packets are described with respect to FIG. 15A.

During identification, it is determined whether a data packet of an incoming IP data flow is known to the system, i.e. is an “existing IP flow”, or rather is the first data packet of a new IP data flow, based on fields in a packet header section. Identification can also include, e.g., determining the source of the packet in order to extrapolate the type of information in the packet payload.

During characterization, a new data packet (of a new IP data flow) previously unknown to the system is characterized based on the packet header information to determine the QoS requirements for the IP data flow, and to identify the subscriber CPE station that will receive the IP data flow.

During classification, the new IP data flow is classified into a communications priority class. Classification can also include grouping together packets from different IP flows having similar characteristics into a single class. Example class groupings of IP flows **630** are illustrated as IP classes **810a-810g**.

During presentation, the new IP data flow is initialized and presented to a downlink flow scheduler **604**.

Downlink flow scheduler places the data packets of an IP data flow into a class queue based on class queue priorities, and using a set of rules, schedules the data packets for transmission over a wireless medium to a subscriber CPE station **294** at subscriber CPE location **306** with an advanced reservation algorithm. The rules are determined by inputs to the downlink flow scheduler based on, e.g., a hierarchical class-based prioritization, a virtual private network (VPN) directory enabled data priority (such as, for example, directory enabled networking (DEN)), and a service level agreement priority. The advanced reservation algorithm for use in scheduling, e.g., isochronous traffic, is described with respect to FIG. **14** below.

SAR and framer **606** breaks up, sequences, and frames the data packets for wireless transmission from WAP **290d** over the wireless medium to a wireless transceiver subscriber antenna **292**. Illustrated in block diagram **800** are a number of subscriber applications **820a-820e** running on devices such as, e.g., subscriber workstation **120d** (not shown), connected to subscriber CPE stations **294a-e** (not shown) located at subscriber CPE locations **306a-306e**. Each subscriber CPE location **306** can house one or more subscriber CPE stations **294**, and each subscriber CPE station **294** can receive and transmit one or more IP data flows to and from one or more subscriber workstations **120**. In fact, each application connected to a single CPE station can receive or transmit multiple IP data flows.

Referring to subscriber CPE location **306a** of FIG. **8A**, a CPE SAR and framer **814a** resequences the received data and transmits it through CPE flow scheduler **816a**, and CPE IP flow analyzer **818a**, to subscriber application **820a**. CPE IP flow schedulers **816a-816e** can perform the same function as downlink flow scheduler **604** for uplink traffic. Similarly, CPE IP flow analyzers **818a-818e** perform the same function as downlink flow analyzer **602**.

In an embodiment of the invention, in downlink mode, CPE IP flow schedulers **816a-816e** and CPE IP flow analyzers **818a-818e** perform no function.

Block diagram **800** illustrates the logical functions performed on the downlink path, not necessarily the physical locations of these functions.

The functions of subscriber applications **820a-820e**, and CPE SAR and framers **814a-814e** can be performed in the actual subscriber CPE stations **294** connected over a wireless connection to wireless base station **302**.

Block diagram **800** lists an exemplary set of priorities **812** used by downlink flow scheduler **604** to place received data packets into priority class queues. Listed are the following set of example priorities: latency-sensitive UDP priority **812a**, high priority **812b**, intermediate priority **812c**, initial hypertext transfer protocol (HTTP) screens priority **812d**, latency-neutral priority **812e**, file transfer protocol (FTP), simple mail transfer protocol (SMTP) and other e-mail traffic priority **812f** and low priority **812g**. Persons skilled in

the art will recognize that many different priority classes are possible, depending upon the QoS requirements of the end-users. Latency-sensitive UDP priority data can refer to data that has the highest priority because it is sensitive to jitter (i.e., time synchronization is important) and latency (i.e., the amount of time passage between IP data flows in reverse directions). High priority **812b** can refer to, e.g., premium VPN service, and a high priority SLA service. Intermediate priority **812c** can refer to, e.g., a value VPN service level and an intermediate level SLA service. HTTP screens priority **812d** can refer to the download of HTTP data, for example, an initial HTTP screen, which is important for making an Internet user feel as if he has a great deal of bandwidth available for his Internet session. Latency-neutral priority **812e** can refer to data that is neutral to latency, such as, e.g., e-mail traffic. FTP, SMTP priority **812f** data includes data that is insensitive to latency and jitter, but requires a large amount of bandwidth to be downloaded accurately because of the size of a transmission. Finally, low priority data **812g** can refer to data that can be transmitted over a long period of time, as when one network device transmits its status information to another network device on a 24 hour basis.

Block diagram **830** (of FIG. **8B**) depicts how IP flow analysis, prioritization and scheduling of the shared wireless bandwidth is performed in the uplink path, from subscriber CPE station **294d**—to wireless transceiver subscriber antenna **292d**—over the wireless medium—to WAP **290d**—to wireless base station **302**—to interface **320**—to router **140d**—to data network **140**.

Block diagram **830** includes uplink flow analyzer **632**, uplink flow scheduler **634** and uplink SAR and framer **636**. These components are similar in function to downlink flow analyzer **602**, downlink flow scheduler **604** and downlink SAR and framer **606**, but instead analyze, schedule and sequence and frame data packets being transmitted from subscriber workstations **120** of subscriber CPE stations **294** (at subscriber CPE locations **306a-306e**) over the wireless medium, and transmit the data packets to interface **320** for transmission to data network **142**.

Illustrated in FIG. **8B** are subscriber applications **820a-820e**, which are the same applications shown in FIG. **8A**. Also shown therein are CPE IP flow analyzers **819a-819e**, CPE IP flow schedulers **817a-817e**, and CPE SAR and framers **815a-815e**. These components function analogously to subscriber applications **820a-820e**, CPE IP flow analyzers **818a-818e**, CPE IP flow schedulers **816a-816e**, and CPE SAR and framers **814a-814e**. However, these components function to analyze, schedule and transmit IP flows in the uplink path, from subscriber CPE stations (at subscriber CPE locations **306a-306e**) to wireless base station **302** for routing to destination host workstations **136** (not shown).

As noted, multiple applications can be connected to one or more subscriber CPE stations at subscriber CPE locations **306a-306e**. To prevent collisions between multiple applications contending for a fixed number of bandwidth allocations for uplink communication, in one embodiment of the present invention a reservation scheduling system is used. The bandwidth allocations for data packets are called frame slots, and are described below with respect to FIGS. **12A-12Q**, **14**, **16A** and **16B**.

Block diagram **830** illustrates the logical functions performed on the uplink path, not necessarily the physical locations of these functions.

For example, in one embodiment, the analysis function of IP flow analyzer **632** which identifies a packet for uplink, characterizes and classifies the packet, can occur in a pre-

ferred embodiment in CPE IP flow analyzers **819a-819e** at the CPE subscriber stations **294a-294e** (not shown) at subscriber locations **306a-306e**.

Also, one embodiment, the functions of CPE IP flow schedulers **817a-817f** for scheduling uplinks subframe slots can be performed in wireless base station **302** for each of the subscriber CPE stations **294** connected over the wireless connection to wireless base station **302**.

In this embodiment, the scheduling function is performed at uplink flow scheduler **634** at wireless base station **302** based on classification information provided to the wireless base station **302** through an uplink IP flow reservation request from the CPE station. By placing all scheduling function at the wireless base station **302**, overall system quality of service can be optimized by centralizing the control of scheduling.

In another embodiment, however, their respective functions can be performed in the actual subscriber CPE stations.

In the reservation scheduling function of this embodiment, each subscriber CPE station requests the reservation of frame slots for its uplink transmissions using a reservation request block (RRB) of the TDMA airframe, described further below with reference to FIGS. **12A-12O**, before it is permitted to communicate in the uplink path with interface **320**. After the reservation request, uplink flow scheduler **634** transmits, as indicated by line **640**, to the requesting subscriber CPE station **294** a description of one or more slots which the CPE station **294** can use to transmit its uplink data packets from source subscriber workstations **120**, over the wireless medium, which are directed toward destination host workstations **136**, over data network **142**.

c. Service Level Requests

FIG. **9** illustrates how PRIMMA MAC IP flow scheduler **604** can also take into account a Service Level Agreement in prioritizing frame slot scheduling and resource allocation. FIG. **9** depicts SLA-mediated IP flow management diagram **900** including prioritization of uplink traffic being transmitted to wireless base station **302** from CPE subscriber locations **306a**, **306b**, **306c** and **306d**. For example, suppose subscribers of telecommunications services have subscribed to one of four SLA levels, **P1 902a**, **P2 904a**, **P3 906a** and **P4 908a**. In the illustrated example, suppose IP flows **902b** are being sent to a subscriber at CPE location **306a** and have an SLA priority level of **P1 902a**. Similarly, IP flows **904b**, **906b** and **908b** are being sent to subscribers at CPE locations **306b**, **306c** and **306d** and have SLA priority levels of **P2 904a**, **906a** and **908a**, respectively. PRIMMA MAC scheduler **604**, **634** of wireless base station **302** can take into account SLA-based priorities in allocating available bandwidth to the subscriber CPE IP flows **902b**, **904b**, **906b** and **908b**. In the example illustration, IP flow **902b** can be allocated frame slot **902c** based on SLA priority **902a**. Frame slots **904c**, **906c** and **908c** can be similarly scheduled taking into account SLA priorities. Uplinked IP flow traffic can then be transmitted on to data network **142**.

SLA-based prioritization can provide a valuable means for a telecommunications provider to provide differentiated services to a variety of customers. For example, it is possible that low priority traffic from a subscriber who has purchased a premium SLA service agreement, can be scheduled at a higher priority than high priority traffic from a subscriber which has only signed up for a value level or low cost SLA service priority.

d. Identification of Headers

FIG. **7** illustrates packet header field information **700** which can be used to identify IP flows and the QoS requirements of the IP flows. Specifically, IP header fields **702** can include, e.g., source and destination IP addresses, helpful in providing application aware preferential resource allocation; IP type of service (TOS), a useful field for assisting

PRIMMA MAC in classifying a packet or IP flow; IP time to live (TTL), a useful field for anticipating application packet discards; and protocol fields which can be used in identifying IP flows.

Packet header information **700** also includes UDP header fields **704**. Included in UDP packet header fields **704** are source and destination port numbers.

Packet header information **700** also includes TCP header fields **706**. Included in TCP packet header fields **706** are source and destination port numbers; TCP sliding window size; urgent pointer; SYN, ISN, PSH, RST and FIN flags; and maximum segment size (MSS).

Packet header information **700** also includes realtime protocol RTP and RTCP header fields **708**.

It would be apparent to those skilled in the art that other packet header fields could be useful in identifying an IP flow. The fields have been given by way of example and are not intended to be an exhaustive list of useful packet header fields. Other fields, such as, e.g., fields from IP v6 relating to differentiated services (DIFF SERV) could also be useful to IP flow analyzer **602** and **632** of wireless base station **302**.

e. TDMA MAC Air Frame

FIGS. **12A-12O** illustrate an exemplary time domain multiple access (TDMA) media access control (MAC) transmission air frame. The fields described herein merely refer to one embodiment for the present invention, and are not limiting to the numerous implementations of the present invention.

FIG. **12A** illustrates an entire TDMA MAC transmission air frame. Air frame **1202** includes downstream transmission subframe **1202** and upstream transmission subframe **1204**.

The TDMA MAC air frame of FIG. **12A** includes upstream acknowledgment block (UAB) **1206**, acknowledgment request block (ARB) **1208**, frame descriptor block (FDB) **1210**, data slot (DS)<sub>1</sub> **1212a**, DS<sub>2</sub> **1212b**, DS<sub>3</sub> **1212c**, DS<sub>4</sub> **1212d**, DS<sub>5</sub> **1212e**, DS<sub>6</sub> **1212f**, DS<sub>7</sub> **1212g**, DS<sub>8</sub> **1212h**, DS<sub>9</sub> **1212i**, DS<sub>10</sub> **1212j**, DS<sub>11</sub> **1212k**, DS<sub>m</sub> **1212l**, downstream acknowledgment block (DAB) **1214**, reservation request block (RRB) **1216**, UA<sub>1</sub> **1218a**, UA<sub>2</sub> **1218b**, UA<sub>3</sub> **1218c**, UA<sub>4</sub> **1218U**, UA<sub>5</sub> **1218e**, UA<sub>6</sub> **1218f**, UA<sub>7</sub> **1218g**, UA<sub>8</sub> **1218h**, UA<sub>9</sub> **1218i**, UA<sub>10</sub> **1218j**, UA<sub>11</sub> **1218k**, UA<sub>12</sub> **1218l**, and UA<sub>n</sub> **1218m**.

In the embodiment described herein, the type of TDMA used is TDMA/time division duplex (TDMA/TDD). In TDMA/TDD, for one interval of time, transmission is from a CPE station **294** to a wireless base station **302**, and in another instance of time, it is from a wireless base station **302** to a CPE station **194**. Any number of slots can be used for the uplink or for the downlink. The number of slots is dynamically assigned for both the uplink and the downlink. However, because the downlink data rate is usually higher than the uplink data rate, more slots are assigned to the downlink. Although distribution of slots between the downlink and uplink is dynamically assigned, the total number of slots for a frame is fixed in this embodiment.

TABLE 5

MAC Air Frame	Block/ Sub-Frame	Slots	Name	Description
0	1-8	DAB/Up-stream	Downstream Acknowledgment Request Block	Acknowledgments from subscribers CPE stations to wireless base station of receipt of downstream slots in previous downstream subframe

TABLE 5-continued

MAC Air Frame	Slots	Block/Sub-Frame	Name	Description
0	1-8	RRB/Up-stream	Reservation Request Block	Requests from subscriber CPE stations for transmission reservations in later frames with dynamically adjustable number of contention slots
0	up to 16	US <sub>1-16</sub> /Up-stream	Upstream Slot Transmissions	Data slots in the upstream subframe, which is a variable number per frame (up to 16 in one embodiment)
0	1-3	ODB/Up-stream	Operations Data Block	OA&MP data from subscribers sequenced by a subscriber CPE station per frame
0	0	UAB/Down-stream	Upstream Acknowledgment Block	Acknowledgments from wireless base station to subscriber CPE stations of receipt of upstream slots in a previous subframe
0	0	ARB/Down-stream	Acknowledgment Request Block	Acknowledgments of subscriber CPE requests of having received reservation requests in a previous subframe
0	0	FD/Down-stream	Frame Descriptor Block for current frame	Describes the contents of the downstream transmission subframe
0	up to 16	DS <sub>1-16</sub> /Down-stream	Downstream Slot Transmissions	Data slots in the downstream subframe, which is variable per frame (up to 16 in one embodiment)
0	0	CCB/Down-stream	Command and Control Block	OA&MP commands sequenced by subscribers per frame and frame synchronization

FIG. 12B is a symbolic illustration of an exemplary TDMA/TDD air frame 1220 of the present invention. TDMA/TDD air frame structure 1220 depicts a frame of frame size 1228, which can be, e.g., 16 slots or 32 slots. It would be apparent to those skilled in the art that frame structures 1220 having other numbers of slots could be used without departing from the spirit and scope of the invention. Frame structure 1220 includes, e.g., various TDMA slots 1222a, 1222b, 1222c and 1222d. Within each TDMA slot 1222a-c, can be included a data slot 1224a, 1224b, 1224c and 1224d which in turn can contain a control packet 1226a, or a data packet 1226b-d, respectively.

In the present embodiment the sum of all TDMA slots 1222 within a frame of frame size 1228 is fixed. However, as noted, using the resource allocation methodologies of the present invention it is possible to dynamically allocate a subset of the entire number of TDMA slots 1222 to an uplink direction, where all the uplink TDMA slots are known collectively as an uplink subframe or an upstream transmission subframe 1204, and to dynamically allocate a subset of the entire number of TDMA slots 1222 to a downlink direction, where all the downlink TDMA slots are known collectively as a downlink subframe or a downlink transmission subframe 1202. Using the resource allocation method of the present invention, it is possible to allocate all TDMA slots 1222 to a given upstream or downstream direction. It is further possible to allocate all data slots 1224 to a single CPE station. The wireless base station 302 has a state machine, and knows the state of each CPE station 294 having a connection therewith (i.e., having an IP flow recognized by the wireless base station 294).

Downstream transmission subframe 1202 and upstream transmission subframe 1204 are described in detail below.

1. Downstream Transmission SubFrames

FIG. 12C depicts an exemplary downstream transmission subframe 1202. The downstream transmission subframe of FIG. 12C includes transmitter turnaround time 1230, UAB 1206, ARB 1208, FDB 1210, a variable number of DSs per frame (e.g., 16) 1212, and command and control block (CCB) 1232. The DS transmissions 1212 include DS<sub>1</sub> 1212a, DS<sub>2</sub> 1212b, DS<sub>3</sub> 1212c, DS<sub>4</sub> 1212d, DS<sub>5</sub> 1212e, DS<sub>6</sub> 1212f, DS<sub>7</sub> 1212g, DS<sub>8</sub> 1212h, DS<sub>9</sub> 1212i, DS<sub>10</sub> 1212j, DS<sub>11</sub> 1212k, and DS<sub>m</sub> 1212l.

FIG. 12D depicts an exemplary UAB 1206 of a downstream transmission subframe 1202. The downstream transmission subframe of FIG. 12D includes UAB 1206, ARB 1208, FDB 1210, DS<sub>1</sub> 1212a, DS<sub>2</sub> 1212b, DS<sub>3</sub> 1212c, DS<sub>4</sub> 1212d, DS<sub>5</sub> 1212e, DS<sub>6</sub> 1212f, DS<sub>7</sub> 1212g, DS<sub>n</sub> 1212h, DS<sub>9</sub> 1212i, DS<sub>10</sub> 1212j, DS<sub>11</sub> 1212k, DS<sub>m</sub> 1212l, and CCB 1232.

UAB 1206 includes subslots UAB<sub>1</sub> 1206a, UAB<sub>2</sub> 1206b, UAB<sub>3</sub> 1206c, UAB<sub>4</sub> 1206d, UAB<sub>5</sub> 1206e, UAB<sub>6</sub> 1206f, UAB<sub>7</sub> 1206g, and UAB<sub>n</sub> 1206h. UAB<sub>1</sub> 1206a includes a preamble 1234a, subscriber ID 1234b, IP-flow identifier 1234c, slot sequence number 1234d, and cyclical redundancy check (CRC) 1234e.

The UAB field is an acknowledgment by a wireless base station 302 to a CPE station 294 that the slots (e.g., US<sub>1-16</sub>) of an upstream transmission subframe have been received. The reader is referred to the discussion of the upstream transmission subframe below.

In subslot UAB<sub>1</sub> 1206a of ARB 1206: preamble 1234a includes data used for link integrity purposes; subscriber ID 1234b identifies which CPE station 294 is making the reservation request; IP-flow identifier 1234c identifies the IP data flow; quality of service data class 1234a identifies the priority class of the IP data flow, if known to the CPE station 294; IP-flow priority and type 1234b is an indicator of a new IP data flow; and CRC 1234e, which stands for cyclic redundancy code, provides error checking bits for subslot RRB<sub>1</sub> 1216a.

FIG. 12E depicts an exemplary ARB 1208 of a downstream transmission subframe 1202. The downstream transmission subframe of FIG. 12E includes UAB 1206, ARB 1208, FDB 1210, DS<sub>1</sub> 1212a, DS<sub>2</sub> 1212b, DS<sub>3</sub> 1212c, DS<sub>4</sub> 1212d, DS<sub>5</sub> 1212e, DS<sub>6</sub> 1212f, DS<sub>7</sub> 1212g, DS<sub>n</sub> 1212h, DS<sub>9</sub> 1212i, DS<sub>10</sub> 1212j, DS<sub>11</sub> 1212k, DS<sub>m</sub> 1212l, and CCB 1232.

ARB 1208 includes subslots ARB<sub>1</sub> 1208a, ARB<sub>2</sub> 1208b, ARB<sub>3</sub> 1208c, ARB<sub>4</sub> 1208d, ARB<sub>5</sub> 1208e, ARB<sub>6</sub> 1208f, ARB<sub>7</sub> 1208g, and ARB<sub>n</sub> 1208h. ARB<sub>1</sub> 1208a includes a preamble 1234a, subscriber ID 1234b, IP-flow identifier 1234c, slot sequence number 1234d, and CRC 1234e.

The ARB field is an acknowledgment by a wireless base station 302 to a CPE station 294 that the wireless base station 302 has received an upstream reservation request from the CPE station 294. The reader is referred to the discussion of the upstream transmission subframe below.

In subslot ARB<sub>1</sub> 1208a of ARB 1208: preamble 1234a includes data used for link integrity purposes; subscriber ID 1234b identifies which CPE station 294 is making the reservation request; IP-flow identifier 1234c identifies the IP data flow; quality of service data class 1234a identifies the priority class of the IP data flow, if known to the CPE station 294; IP-flow priority and type 1234b is an indicator of a new IP data flow; and CRC 1234e, which stands for cyclic redundancy code, provides error checking bits for subslot RRB<sub>1</sub> 1216a.

FIG. 12F depicts an exemplary FDB 1210 of a downstream transmission subframe 1202. The downstream trans-

mission subframe of FIG. 12F includes UAB 1206, ARB 1208, FDB 1210, DS<sub>1</sub> 1212a, DS<sub>2</sub> 1212b, DS<sub>3</sub> 1212c, DS<sub>4</sub> 1212d, DS<sub>5</sub> 1212e, DS<sub>6</sub> 1212f, DS<sub>7</sub> 1212g, DS<sub>n</sub> 1212h, DS<sub>9</sub> 1212i, DS<sub>10</sub> 1212j, DS<sub>11</sub> 1212k, DS<sub>m</sub> 1212l, and CCB 1232.

The FDB includes detailed information pertaining to the slots (e.g., DS<sub>2</sub>-DS<sub>16</sub>) of the downstream transmission subframe.

FDB 1210 includes a preamble subslot 1236a, number of downstream slots subslot, 1236b, IP-flow ID for upstream reservation 1 subslot 1236c, IP-flow ID for upstream reservation 2 subslot 1236d, IP-flow ID for upstream reservation n subslot 1236e, and contention slot count for next upstream subframe subslot 1236f.

In FDB 1210, the fields are defined as follows: preamble subslot 1236a includes data used for link integrity purposes; number of downstream slots subslot 1236b includes the number of downstream slots (DSs), IP-flow ID for downstream reservation subslot 1236c includes an IP flow identification for DS<sub>1</sub>; IP-flow ID for downstream reservation subslot 1236d includes a second IP flow identification for DS<sub>2</sub>; IP-flow ID for downstream reservation n subslot 1236e includes another IP flow identification for DS<sub>m</sub>; contention slot count for next upstream subframe subslot 1236f provides a count for the next available upstream subframe.

FIG. 12G depicts an exemplary downstream MAC payload data unit (PDU). The downstream MAC PDU includes information regarding the actual structure of the payload. The downstream MAC PDU of FIG. 12G includes MAC linked list sequence number 1238a (the sequence number of the MAC linked list), reservation request index number 1238b (an index to the downstream IP flow), compressed IP-flow identifier 1238c, compressed IP-flow priority and type 1238d (identifying the priority and type of a compressed IP flow), slot payload 1238e (the amount of data in a downstream data slot), and CRC 1234e (error checking information).

FIG. 12H depicts an exemplary CCB of a downstream transmission subframe 1202. The CCB comprises OAM&P commands sequenced by subscriber CPE station 294 per frame and frame synchronization. CCB 1232 includes a mode command subslot 1240a (includes options of what mode the CPE station is to take), profile command subslot 1240b (includes specific system commands, such as a patch for a module), control data index subslot 1240c (including download locations and memory requirements or other information needed by the CPE stations to download data), datablock 1 subslot 1240d (includes specific system data), datablock 2 subslot 1240e (same), datablock n subslot 1240f (same), and CRC subslot 1234e (error checking information).

## 2. Upstream Transmission SubFrames

FIG. 12I depicts an exemplary upstream transmission subframe 1204. The upstream transmission subframe of FIG. 12I includes transmitter turnaround time 1230, DAB 1214, RRB 1216, a variable number of USs per frame, e.g., 16, 1218, and operations data block (ODB) 1242, consisting of OAM&P data from subscribers, sequenced by subscriber per frame. The US transmissions 1218 include US<sub>1</sub> 1218a, US<sub>2</sub> 1218b, US<sub>3</sub> 1218c, US<sub>4</sub> 1218d, US<sub>5</sub> 1218e, US<sub>6</sub> 1218f, US<sub>7</sub> 1218g, US<sub>8</sub> 1218h, US<sub>9</sub> 1218i, US<sub>10</sub> 1218j, US<sub>11</sub> 1218k, US<sub>12</sub> 1218l, and US<sub>n</sub> 1218m.

FIG. 12K depicts an exemplary RRB 1216 of an upstream transmission subframe 1204. The upstream transmission subframe of FIG. 12K also shows DAB 1214, RRB 1216, US<sub>1</sub> 1218a, US<sub>2</sub> 1218b, US<sub>3</sub> 1218c, US<sub>4</sub> 1218d, US<sub>5</sub> 1218e, US<sub>6</sub> 1218f, US<sub>7</sub> 1218g, US<sub>8</sub> 1218h, US<sub>9</sub> 1218i, US<sub>10</sub> 1218j, US<sub>11</sub> 1218k, US<sub>12</sub> 1218l, US<sub>n</sub> 1218m, and ODB 1242.

RRB 1216 includes subslots RRB<sub>1</sub> 1216a, RRB<sub>2</sub> 1216b, RRB<sub>3</sub> 1216c, RRB<sub>4</sub> 1216d, RRB<sub>5</sub> 1216e, RRB<sub>6</sub> 1216f, RRB<sub>7</sub> 1216g, and RRB<sub>n</sub> 1216h. RRB<sub>1</sub> 1216a includes a preamble 1234a, subscriber ID 1234b, IP-flow identifier 1234c, quality of service data class 1244a, IP-flow priority and type 1244b, and CRC 1234e.

A CPE station 294 uses one of the subslots (RRB<sub>1</sub> 1216a, RRB<sub>2</sub> 1216b, RRB<sub>3</sub> 1216c, RRB<sub>4</sub> 1216d, RRB<sub>5</sub> 1216e, RRB<sub>6</sub> 1216f, RRB<sub>7</sub> 1216g, and RRB<sub>n</sub> 1216h) of RRB 1216 to make a reservation request, which is a request by the CPE station 294 for bandwidth in a future uplink transmission subframe. If two CPE stations 294d, 294e attempt to access the same subslot in RRB 1216, which can occur because their pseudorandom number generators select the same subslot, then a "collision" occurs and the data is not readable by wireless base station 302. The two CPE stations 294d, 294e are required to try again.

Reservation request slots can be provided on an IP flow basis. Rather than allocate a reservation request slot to every CPE subscriber station, a default number (e.g., 5) are made available as contention slots. If collisions are detected by a greater number of requesting subscribers than the number of reservation request slots, then the slots allocated can be dynamically varied to provide additional RRB slots. (Collisions are analogous to CSMA/CD collisions in Ethernet, where colliding devices on an Ethernet network attempt to retransmit over the bus architecture by retrying at a random time.)

The radio contention method of the present invention builds upon aspects of the "Slotted Aloha" method developed by L. Roberts in 1972, as a refinement of the "Aloha" method developed by N. Abramson in the early 1970's, and so-called bit-mapped reservation protocols. Like the Slotted Aloha method, the present invention provides for discrete slots for transmission of data, rather than allowing the transmission of data at any point. However, instead of transmitting the actual "payload" of data, the present invention advantageously transmits only a "reservation request" describing the actual data payload contents. Also, the number of slots for reservation requests can advantageously be dynamically altered according to the frequency of detected collisions in the recent past.

Unlike various Carrier Sense Multiple Access (CSMA) techniques previously used in wireless, both persistent and non-persistent, the present method advantageously does not require that subscriber CPE station 294d "sense" the carrier (the radio channel) before transmission. Instead, a subscriber CPE station 294d selects a "subslot" to transmit through a pseudo-random number selection, without a prior carrier sense. If a collision is detected, the subscriber CPE station 294d will try again in the next frame using the pseudo-random number process.

Instead of using a bit-map protocol for the resolution of contention, as is used in some reservation protocols, the wireless base station can explicitly grant reservation requests. The standard bit-map protocol can require that all stations can receive signals from all other stations so that the subsequent order of transmission can be implicitly determined from the resulting bit-map pattern. The present method advantageously does not require the receipt of reservation request signals from other CPE subscriber stations 294d. This is advantageous because, at higher frequencies (such as, e.g., 2 GHz to 30 GHz) where there may be line-of-sight and distance constraints, the requirement for receipt of the transmissions of other CPE subscriber stations 294d could unduly constrain the topology, locations and distances of CPE subscriber stations.

Advantageously, by allowing the wireless base station 302 to explicitly grant the requested reservation, other factors such as relative or dynamic CPE subscriber station 294d (or IP-flow) priority factors can be considered. Therefore, the present invention's reservation protocol with a dynamically adjustable number of contention subslots and explicit wireless base station reservation grants, allows a more optimal means of providing for the allocation of wireless, such as, e.g., radio, bandwidth in response to QoS requirements of IP-flows than any prior method.

As noted, RRB<sub>1</sub> 1216a includes the following fields: a preamble 1234a, subscriber ID 1234b, IP-flow identifier 1234c, quality of service data class 1244a, IP-flow priority and type 1244b, and CRC 1234e. In subslot RRB<sub>1</sub> 1216a of RRB 1216: preamble 1234a includes data used for link integrity purposes; subscriber ID 1234b identifies which CPE station 294 is making the reservation request; IP-flow identifier 1234c identifies the IP data flow; quality of service data class 1234a identifies the priority class of the IP data flow, if known to the CPE station 294; IP-flow priority and type 1234b is an indicator of a new IP data flow; and CRC 1234e, which stands for cyclic redundancy code, provides error checking bits for subslot RRB<sub>1</sub> 1216a. Optionally, an additional field can be provided in subslot RRB<sub>1</sub> 1216a which includes the number of data packets CPE station 294 will transmit in its IP data flow.

FIG. 12J depicts an exemplary DAB 1214 of an upstream transmission subframe 1204, where a CPE acknowledges receipt of a slot from base. The DAB is an acknowledgment from a subscriber CPE station 294 to the wireless base station that downstream slots have been received in a previous subframe.

The DAB 1214 includes subslots DAB<sub>1</sub> 1214a, DAB<sub>2</sub> 1214b, DAB<sub>3</sub> 1214c, DAB<sub>4</sub> 1214d, DAB<sub>5</sub> 1214e, DAB<sub>6</sub> 1214f, DAB<sub>7</sub> 1214g, and DAB<sub>n</sub> 1214h. Subslot DAB<sub>1</sub> 1214a includes a preamble 1234a, subscriber ID 1234b, IP-flow identifier 1234c, slot sequence number 1234d, and CRC 1234e. (These fields have the same information as described with respect to the RRB.)

FIG. 12L depicts an exemplary MAC PDU upstream slot. The MAC PDU upstream slot of FIG. 12L includes a CPE linked-list sequence number 1246, reservation request index number 1236b, compressed IP-flow identifier 1238c, compressed IP-flow priority and type 1238d, slot payload 1238e, and CRC 1234e. The upstream MAC PDU is similar to the downstream MAC PDU, but is used instead for upstream subframe payload information.

FIGS. 12M, 12N and 12O depict an exemplary ODB 1242 in detail. This field is used to store information regarding the connection between the wireless base station 302 and the CPE station 294. ODB 1242 includes preamble 1234a (including link integrity data), subscriber ID 1234b (identifies which CPE station 294 is making the reservation request), system state 1248a (information about the status of the CPE station 294), performance data 1248b (how full the buffer statistics, cpe processor performance statistics, system state), antenna data 1248c (information pertaining to the antenna), CRC 1234e (error checking information) and synchronization pattern 1248d (error checking information).

Referring to FIG. 12M, system state subslot 1248a comprises system mode 1250a (the mode of the CPE station, e.g., command mode, operations mode, or initialization mode of the system), system status 1250b (the status of the CPE station), system resources 1250a (the mode of the CPE station), system power 1250b (the mode of the CPE station), system temperature 1250a (the temperature of the CPE

station). The CPE stations 294 are required to take turns using ODB 1242 to transmit their information.

Referring to FIG. 12N, performance data 1248a comprises the number of comrepeats 1252a (the number of repeats of communication attempts), number of frameslips 1252b (the number of frames that have slipped), waitstate index 1252c (an index to the waiting state).

f. Exemplary Class-based Frame Prioritization

FIG. 13 shows block diagram 1300, illustrating how an exemplary flow scheduler for the present invention functions to schedule products. Block diagram 1300 includes: flow scheduler 604, 634 (which is a combination of downlink flow scheduler 604 and uplink flow scheduler 634), downlink transmission subframe 1202 (i.e., the next MAC downstream subframe), uplink transmission subframe 1204 (i.e., the current MAC upstream subframe). Block diagram 1300 also includes the following downstream components: downstream reservation first-in-first-out queue 1322, class 1 downstream queue 1302, class 2 downstream queue 1304, and class 3 downstream queue 1306. Block diagram 1300 also includes the following upstream reservation components: current upstream subframe 1344 (with the current upstream subframe 1204 about to be stored in it), previous upstream subframes 1346, 1348, 1350, class 1 upstream reservation request queue 1308, class 2 upstream reservation request queue 1310, and class 3 upstream reservation request queue 1312.

In the downlink path, an IP flow QoS class queuing processor (described below with respect to FIGS. 15A and 15B) queues the received data packets into class 1 packet flow queues 1324, 1326 and 1328, class 2 packet flow queues 1330, 1332, 1334, and class 3 packet flow queues 1336, 1338, 1340 and 1342.

Based on inputs from a hierarchical class-based priority processor, a virtual private network (VPN) directory enabled (DEN) data table and a service level agreement (SLA) priority data table (described below with respect to FIGS. 15A and 15B), the class 1, class 2, and class 3 packet flow queues are respectively assigned to class 1 downstream queue 1302, class 2 downstream queue 1304, and class 3 downstream queue 1306. Flow scheduler 604, 634 schedules these downlink data packets onto the downlink transmission subframe 1202.

In one embodiment, additional processing is used to minimize latency and jitter. For example, suppose the data packets of class 1 packet flow queue 1324 require jitter-free and latency-free delivery, i.e., delivery of packets must be at constant time intervals and in real-time. Packet flow queue 1324 creates, e.g., 4 equal time spaced slot reservations in future frames, as shown in class 1 downstream queue 1302 and described with respect to FIG. 14 below. The reservations are fed to downstream reservation first-in-first-out queue 1322, and are scheduled onto a future downstream frame 1202 by flow scheduler 604, 634.

In the uplink path, reservation requests for future upstream slots arrive at wireless base station 302 as part of the current upstream subframe 1204 received from CPE subscriber stations 294 over the wireless medium. Current upstream subframe 1344 can temporarily store reservation requests for analysis and scheduling of uplink packets in accord with the description of FIG. 8B above. Previous upstream subframes 1346, 1348, 1350 include upstream reservation requests awaiting upstream frame slot allocations in future upstream subframes 1204. Reservation request blocks (RRBs), described further above with reference to FIG. 12\*\*\*, include a request for a number of slots for a single IP flow with an IP flow identifier # and class of

the flow. The upstream reservation requests (by IP flow and class) are queued onto class 1 upstream reservation request queue **1308**, class 2 upstream reservation request queue **1310**, and class 3 upstream reservation request queue **1312** by an IP flow QoS class queuing processor (described below with respect to FIGS. **16A** and **16B**). Flow scheduler **604** and **1566**, and **634** and **1666**, uses these downstream reservations and upstream reservation requests to assign slots to data packets in the next downstream transmission subframe **1202** and upstream transmission subframe **1204**, respectively.

FIG. **14** is an exemplary two-dimensional block diagram **1400** of the advanced reservation algorithm. FIG. **14** includes MAC subframe scheduler **1566**, **1666**, frames current frame,  $n$  **1402**, and future frames,  $n+1$  **1404**,  $n+2$  **1406**,  $n+3$  **1408**,  $n+4$  **1410**,  $n+5$  **1412**,  $n+6$  **1414** . . .  $n+x$  **1416**, representing frames of data packets to be transmitted at times  $n$ ,  $n+1$ ,  $n+2$  . . .  $n+x$ . Each frame is divided into a variable length downlink subframe **1202** and a variable length uplink subframe **1204**. The lengths of downlink subframe **1202** and uplink subframe **1204** together comprise the length of an entire frame.

Each frame  $n$  **1402** includes a number of slots (**1418-1478**). Slots **1418-1446** comprise the downlink subframe **1202**, and slots **1448-1478** comprise the uplink subframe **1204**. In one embodiment, the slots are fixed in length, with each slot capable of storing a single data packet. The total number of frame slots in a frame remains constant. For example, if a given frame includes 64 frame slots, the slots can be allocated dynamically in either the uplink or downlink directions, such as, e.g., 32 up and 32 down, 64 up and 0 down, 0 up and 64 down. Block diagram **1400** can be thought of as a two dimensional matrix with each slot having a time value (i.e., a slot-to-slot time interval), e.g., 0.01 ms, and each frame having a total frame interval time value (i.e., a frame-to-frame time interval), e.g., 0.5 ms.

In the present invention, an advanced reservation algorithm assigns future slots to data packets based on the priority of the IP data flow with which the packet is associated. Exemplary priorities are described above with respect to FIGS. **8A** and **8B**. For calls that are sensitive to jitter, meaning calls that are time sensitive, it is important to maintain an isochronous (i.e., in phase with respect to time) connection. With such signals, it is important that the data be dispersed in the same slot between frames, or in slots having a periodic variation between frames. For example, vertical reservation **1480** shows a jitter sensitive signal receiving the same slot for downlink communications in each frame. Specifically, the signal is assigned slot **1422** in frames **1402-1416**. If the frame-to-frame interval is 0.5 ms, then a slot will be provided to the IP flow every 0.5 ms. As another example, diagonal reservation **1482** shows a jitter sensitive signal receiving a slot varying by a period of one between sequential frames. Specifically, the signal is assigned slot **1440** in frame **1402**, slot **1438** in slot **1404**, . . . slot **1426** in frame **1416**, to create a "diagonal." If the frame-to-frame interval is 0.5 ms and the slot-to-slot interval is 0.01 ms, then a slot can be provided to the IP flow every 0.5 minus 0.01, equals 0.49 mms. Thus, to decrease the frame interval, a diagonal reservation of positive slope can be used. To obtain an increased frame interval, a diagonal of negative slope such as, e.g., negative slope diagonal uplink reservation **1486**. The diagonal reservation **1482** can also be more pronounced (i.e., using a greater or lesser slope), depending on the period between sequential frames desired. Reservation patterns **1480**, **1482**, **1484** and **1486** are useful patterns for jitter sensitive communications. Also illustrated is a

vertical reservation **1486**, similar to vertical reservation **1480**, useful for a jitter sensitive communication in the uplink direction.

For latency sensitivity, one or more slots can be guaranteed in each frame. For example, for a call that is latency sensitive, but not jitter sensitive, each frame can be assigned one (or more) slots for communications. However, the slot(s) need not be periodic between frames, as with jitter sensitive calls. The greater the number of slots allocated per frame to an IP flow, the greater total bandwidth per frame rate for the IP flow.

For calls that are less latency sensitive, fewer slots per frame can be assigned for the communication. For example, a communication that is less latency sensitive can receive a guaranteed bandwidth of one slot every four frames. A call that is even less latency sensitive can receive, e.g., a single slot every ten frames.

Using these principles, the advanced reservation algorithm can assign the slots from highest priority to lowest priority, exhausting the number of available slots in future frames. IP data flows that are both jitter and latency sensitive can be assigned slots with periodic patterns first (e.g., patterns **1480**, **1482**, **1484** and **1486**), followed by flows that are highly latency sensitive (but not jitter sensitive), et cetera, until the flows of lowest latency sensitivity are assigned to slots. Prioritization of different classes of IP flows by scheduler **604**, **634**, **1566**, **1666** is described further below with reference to FIGS. **15A**, **15B**, **16A** and **16B**.

#### g. Downlink SubFrame Prioritization

##### 1. Overview

FIGS. **15A** and **15B** are exemplary logical flow diagrams for analysis and scheduling of the shared wireless bandwidth for the downlink direction. The logical flow pertains to IP packet flows arriving from data network **140**, at the wireless base station **302**, for transmission down to a subscriber CPE station **294d** over the wireless medium. FIG. **15A** is an exemplary logical flow diagram **1500** for downlink IP analyzer **602**. FIG. **15B** is an exemplary logical flow diagram **1560** for the downlink flow scheduler **604**.

The functional components for FIGS. **15A** and **15B** are explained by way of method modules, which can be viewed as physical units (e.g., comprising software, hardware, or a combination thereof) or logical vehicles (e.g., used for explanatory purposes only). Those skilled in the art will recognize that the modules are used only to explain an exemplary embodiment, and are not to be considered limiting.

The exemplary logical flow diagram **1500** for downlink IP flow analyzer of FIG. **15A** includes packet header identification component **1502**, packet characterization component **1504**, packet classification component **1506**, and IP flow presentation component **1508**. The functions of these components are explained in detail below.

In one embodiment, downlink IP flow analyzer **602** is physically located in wireless base station **302**, although those skilled in the art will recognize that the same functionality can be located remotely from wireless base station **302**.

FIGS. **2D**, **3A** and **3B** are helpful to the reader for an understanding of the downlink IP flow analyzer.

##### 2. Introduction

IP flow analyzer **602** performs the function of identifying, characterizing, classifying, and presenting data packets to a downlink frame scheduler **604**. The functions of identifying, characterizing, classifying and presenting the data packets are respectively performed by packet header identification component **1502**, packet characterization component **1504**,

packet classification component **1506** and IP flow presentation component **1508** of downlink IP flow analyzer **602**.

Packet header identification component **1502** determines whether a data packet of an incoming IP data flow is part of an IP flow that is known to the system, or is the first data packet of a new IP data flow, based on the contents of fields of the packet header section. Packet header identification component **1502** also identifies, e.g., the source of the packet using the packet header field contents. Packet characterization component **1504** characterizes a new data packet (of a new IP data flow) to determine the QoS requirements for the IP data flow, and identifies the subscriber CPE station associated with the subscriber workstation that will receive the IP data flow. Packet classification component **1506** classifies the new IP data flow into a communications priority class, grouping the packet together with similar type IP flows. IP data flow presentation **1508** initializes the new IP data flow and presents it to downlink flow scheduler **604**.

Downlink flow scheduler **604** places the data packets of an IP data flow into a class queue, and based on a set of rules, schedules the data packets for transmission over the wireless medium to a subscriber CPE station using, e.g., an advanced reservation algorithm. The rules can be determined by inputs to the downlink flow scheduler from a hierarchical class-based priority processor module **1574**, a virtual private network (VPN) directory enabled (DEN) data table **1572**, and a service level agreement (SLA) priority data table **1570**. The advanced reservation algorithm is described further above with respect to FIG. **14**.

### 3. Identification

Packet header identification component **1502** identifies the IP flow received from data network **142** at data interface **320** based on the packet header.

An IP flow packet stream from data network **142**, including packets from various IP flows (where each IP flow is associated with a single data "call") is received at packet header identification component **1502**. An IP flow can include packetized data including any type of digital information such as, e.g., packetized voice, video, audio, data, IP flows, VPN flows, and real time flows. The IP flow is transmitted over data network **142** from, e.g., a host workstation **136d** and arrives at interface **302** of wireless base station **320**. Interface **302** transmits the packets of the IP flow to packet header identification component **1502**. At module **1510**, the received packets are buffered into a storage area. At module **1520**, the contents of the packet header fields are extracted and parsed.

For IP flows known to the system, so-called "existing IP flows," there are entries in a table **1526**. An IP flow is in the system if there is an existing characterized IP data call. In module **1522**, it is determined if there is a match between the incoming packet and an existing IP flow call in an entry in existing IP flow identification table **1526**. If so, then the IP flow is known to the system, and control passes to module **1530** of the packet characterization component **1504**.

If not, meaning that the IP flow is a new IP data flow, then control passes to module **1524**, where the packet header fields are analyzed. Module **1524** analyzes the packet header source field and determines from source application packet header data table **1528** the type of source application making the data call or transmitting the IP packet. The application can be any of the applications described with respect to FIG. **2D** or known to those skilled in the art. Examples include a file transfer protocol (FTP) download from another client workstation **138f**, an IP voice telephony call (over telephony gateway **288b**), a voice telephony call from a caller **124d** (connected over a modem), an e-mail from a LAN **128a**

attached host workstation **136a**, a fax machine call, and a conference call from multiple callers **124d** and **126d** (connected over a modem), to name a few. If the IP flow is not known to the system, then the IP flow is given an IP flow identifier number, and control passes to module **1526** where the IP flow identifier number is added to the existing IP flow identification table **1526**.

Once the type source application has been determined by packet header information or by another means, such as direct application identification, then control passes from module **1524** to module **1532** of the packet characterization component **1504**. In order to identify the type of source application of the IP flow, any type of service (TOS) or differentiated service (DiffServ) field can also be analyzed.

### 4. Characterization

Packet characterization component **1504** characterizes new IP flows and passes them to packet classification component **1506** for classification.

For an existing IP flow, control passes to module **1530** from module **1522** of the packet header identification component **1502**. If in module **1522** it is determined that the IP data flow is known to the system, in module **1530** it is determined whether the packet is old (i.e., stale). This can include, e.g., determining from a time-to-live field (a field in the IP packet header) the age of the packet, and comparing the field to a threshold age value. If the packet is determined to be stale, it can be discarded. Based on the age of the packet, client application discards can be anticipated. Otherwise, control can pass to module **1540** of the packet classification component **1506**.

For a new IP flow, control passes to module **1532** from module **1524** of the packet header identification component **1502**. If in module **1524** it is determined that the IP flow is not known to the system, in module **1532** the QoS requirements for the application are determined using the source application information identified in modules **1524** and **1528**. Module **1532** performs this operation by looking up the QoS requirements for the identified source application in the QoS requirement table **1534**. Different applications have different QoS requirements in order to provide an acceptable end-user experience. For example, bandwidth allocation (i.e., allocating an appropriate amount of bandwidth) is important to an application performing FTP file transfer downloads, and not jitter (i.e., time synchronizing the received data) and latency (i.e., the amount of time passage between responses). On the other hand, jitter and latency are important to voice telephony and conference calls, while bandwidth allocation is not.

After processing by module **1532**, in module **1536** a destination CPE subscriber station ID lookup from subscriber CPE IP address table **1538**, is performed for the IP flow. Each subscriber CPE station **294d** can have one or more applications, running on one or more subscriber workstations **120d**, homed to it. Accordingly, the IP flows can be directed to one or more applications on one or more subscriber workstations of one or more CPE stations **294d**. A subscriber workstation can be any device coupled to a subscriber CPE station **294d**. Module **1536** looks up the IP flow in table **1538**, to determine the identity of the subscriber CPE station **294d** that will receive the packets of the new IP flow from data network **142**. Control then passes from module **1536** to module **1542** of the packet classification component **1506**.

### 5. Classification

Packet classification component **1506** classifies the IP flow and passes it to IP flow presentation component **1508** for presentation.

For an existing IP flow, control passes to module **1540** from module **1530** of the packet characterization component **1504**. If in module **1530** it is determined that the packet is not stale, then in module **1540** the packet is associated with its existing IP flow. As illustrated in FIG. **15A**, the packet processed herein was determined to be a portion of an IP flow known to the system. Therefore, the QoS processing of modules **1532**, **1536** and **1542** are unnecessary, because the QoS requirements of the present packet are assumed to be the same as for its IP flow. In another embodiment, all packets are characterized and classified. From module **1540**, control can continue with module **1546** of IP flow presentation **1508**.

For the new IP flow, control passes to module **1542** from module **1536** of the packet characterization component **1504**. In module **1542** the packet is classified into a QoS class by performing a table lookup into IP flow QoS class table module **1544**, where the types of QoS classes are stored depending on the QoS requirements for packets. Similar IP flows, (i.e., IP flows having similar QoS requirements) can be grouped together in module **1542**. In classifying packets and IP flows, QoS class groupings, any DiffServ priority markings, and any TOS priority markings can be taken into account. From the module **1542**, control passes to module **1548** of IP flow presentation component **1508**.

#### 6. IP Flow Presentation

IP flow presentation component **1508** prepares and presents the IP flow packets to downlink flow scheduler **604**.

For existing IP flows, control passes to module **1546** from module **1540** of the packet classification component **1540**. In module **1546** the packet is added to the associated existing IP flow queue, which is the queue for the current IP flow. From module **1546**, control passes to IP flow QoS class queuing processor module **1562** of downlink flow scheduler **604**.

For the new IP flow, control passes to module **1548** from module **1542** of the packet classification component **1506**. In module **1548**, this new IP flow can be initialized for presentation to module **1552**. In module **1550**, the IP flow QoS class is presented to frame scheduler **604** to be placed in an appropriate class queue. Module **1552** presents the IP flow (in particular, the data packet) and IP flow identifier to IP flow QoS class queuing processor module **1562** of downlink flow scheduler **604**.

#### 7. Downlink Flow Scheduler

The exemplary logical flow diagram **1560** for the downlink flow scheduler **604** of FIG. **15B** comprises IP flow QoS class queuing processor module **1562**, MAC downlink subframe scheduler module **1566**, hierarchical class-based priority processor module **1574**, VPN DEN data table module **1572**, SLA priority data table **1570**, CPE IP flow queue depth status processor **1582** and link layer acknowledgment processor module **1578**.

Downlink flow scheduler **604** of FIG. **15B** also includes QoS class queues as follows: class 1, **1564a**; class 2, **1564b**; class 3, **1564c**; class 4, **1564d**; class 5, **1564e**; and class 6, **1564f**; and MAC downlink subframes: frame n, **1568a**; frame n+1, **1568b**; frame n+2, **1568c**; frame n+3, **1568d**; . . . frame n+p, **1568k**.

In one embodiment, downlink flow scheduler **604** is physically located in wireless base station **302**, although those skilled in the art will recognize that the same functionality can be located remotely from wireless base station **302**.

Downlink flow scheduler **604** is used to schedule the downlink subframe. An entire frame can be divided into an

uplink portion (called an uplink subframe) for transmitting uplink frames, and a downlink portion (called a downlink subframe) for transmitting downlink frames.

Also illustrated on FIG. **15B** are WAP antenna, the wireless medium, **290d**, RF transceiver subscriber antenna **292d**, subscriber CPE station **294d** and subscriber workstation **120d**. WAP antenna **290d** and RF transceiver subscriber antenna **292d** respectively provide a wireless connection between wireless base station **302** (where downlink flow scheduler **604** resides in one embodiment) and subscriber CPE station **294d**, which can transmit an IP flow to an application running on subscriber workstation **120d**. WAP antenna **290d** serves as a wireless gateway for data network **142**, and RF transceiver subscriber antenna serves as a wireless gateway for subscriber CPE station **294d**. The connection is also illustrated in FIGS. **2D** and **3B**.

IP flow QoS class queuing processor module **1562** receives the packets from IP flow presentation component **1508**. Module **1562** then creates class queues **1564a-1564f**, which is a variable number of queues, and places the packets in these class queues. How packets are placed in class queues **1564a-1564f** is determined by the inputs to module **1562**.

Module **1562** can receive inputs from hierarchical class-based priority processor module **1574**, VPN DEN data table **1572** and service level agreement (SLA) priority data table **1570**. The queuing function of module **1562** can be based on these inputs.

SLA priority data table **1570** can use predetermined service level agreements for particular customers to affect the queuing function. A customer can be provided a higher quality of telecommunications service by, for example, paying additional money to receive such premium service. An algorithm running on module **1562** can increase the queuing priority for messages transmitted to such customers.

Virtual private network (VPN) directory enabled networking (DEN) data table **1572** can provide prioritization for a predetermined quality of service for a VPN for a company that pays for the VPN function. A VPN is understood by those skilled in the relevant art to be a private network, including a guaranteed allocation of bandwidth on the network, provided by the telecommunications service provider. VPN DEN data table **1572** permits module **1562** to provide higher quality of service for customer-purchased VPNs. As with SLA priority data table **1570**, the queuing priority can be increased for such VPNs. For example, a platinum level VPN's lowest priority IP flow classes could also be given a higher priority than a high priority brass level VPN.

Both SLA priority data table **1570** and VPN DEN data table **1572** receive input from operations, administration, maintenance and provisioning (OAM&P) module **1108**. This is a module that is kept off-line, and includes storage and revision of administrative information regarding new customers, or updates of information pertaining to existing customers. For example, the SLA priority of the customers and VPN information is updated from OAM&P module **1108**.

Hierarchical class-based priority processor module **1574** is a module that operates under the principles of hierarchical class-based queuing. Hierarchical class-based queuing was created by Sally Floyd and Van Jacobson, considered early architects of the Internet.

Hierarchical class-based queuing classifies different types of IP flows using a tree structure at the edge access device routers. Each branch of the tree signifies a different class of IP flows, and each class is dedicated a set limited amount of

bandwidth. In this manner, different classes of flows are guaranteed minimum bandwidth, so that no single IP data flow within a class, and no single class of IP flows, can use up all available bandwidth. The present invention adds a prioritization feature enabling class based priority reservations to be made using the hierarchical class queue concept, as discussed above with respect to FIGS. 13 and 14.

MAC downlink subframe scheduler 1566 is a processor module that takes the packets queued in class queues 1564a-1564f, and can make frame slot reservations to fill up subframes 1568a-1568k based on priorities 1570, 1572 and 1574, which is a variable number of frames. In one embodiment, each subframe is scheduled (filled) with up to a predetermined number of packets from each of the classes 1564a-1564f according to priorities 1570, 1572 and 1574. In another embodiment, the subframes are scheduled according to the inventive advanced reservation algorithm method described with respect to FIGS. 13 and 14 for isochronous reservations. In yet another embodiment, the subframes are scheduled according to a combination of known methods and the advanced reservation algorithm method of the present invention.

The subframes can then be sent to WAP antenna 290d for wireless transmission over the wireless medium to RF transceiver subscriber antenna 292d coupled to subscriber CPE station 294d, which in turn can send the packets contained in the subframes to subscriber workstation 120d at CPE subscriber location 306d. The subframes can be scheduled from highest priority to lowest priority.

Hierarchical class-based priority (HCBP) processor module 1574 receives as input the subframes that have been scheduled and transmitted from WAP antenna 290d. By maintaining awareness of the status of the packets (i.e., by knowing which packets have been sent out), HCBP processor module 1574 knows which packets from which class queues 1564a-1564f must yet be scheduled.

Every once in a while, a packet is lost through, e.g., noise. When this situation arises, the subscriber CPE station 294d sends a retransmit request 1576 to WAP 290d, which transmits the request to link layer acknowledgment (ARQ) processor 1578. ARQ processor 1578 informs MAC downlink subframe scheduler 1566 of this condition, which in turn reschedules the requested packets from the appropriate class queues 1564a-1564f for retransmission. Link layer acknowledgment ARQ processor 1578 also awaits positive acknowledgments from subscriber CPE station 294d, to determine that the data packets have been properly received. Only after receiving a positive receipt acknowledgment does MAC downlink subframe scheduler 1566 remove the packet from class queues 1564a-1564f.

Each subscriber CPE station 294d has a limited amount of memory available for received data packets in an IP flow. When, for example, the devices coupled to the subscriber CPE station 294d (e.g., subscriber workstation 120d) stop receiving IP data flows (e.g., subscriber workstation 120d goes down), the CPE data packet queues in CPE subscriber station 294d are quickly filled up. In this scenario, subscriber CPE station 294d transmits a CPE IP flow queue depth message 1580 indicating that the queue is filled up, which can be received by CPE IP flow queue depth status processor 1582. CPE queue depth processor 1582 informs MAC downlink subframe scheduler 1566 of this condition, which stops scheduling downlink subframes directed to subscriber CPE station 294d. Processor 1582 can also send messages to MAC downlink subframe scheduler 1566 to flush particular IP flows from class queues 1564a-1564f.

## h. Uplink SubFrame Prioritization

### 1. Overview

FIGS. 16A and 16B are exemplary logical flow diagrams for the uplink. The logical flow pertains to analysis and scheduling of shared wireless bandwidth to IP packet flows from a subscriber workstation 120d coupled to a subscriber CPE station 294d, being transmitted over the wireless medium up to the wireless base station 302, and on to data network 142 for transmission to a destination host workstation 136a. FIG. 16A is an exemplary logical flow diagram 1600 for uplink IP flow analyzer 632. FIG. 16B is an exemplary logical flow diagram 1660 for the uplink flow scheduler 634.

The functional components for FIGS. 16A and 16B are explained by way of method modules, which can be viewed as physical units (e.g., comprising software, hardware, or a combination thereof) or logical vehicles (e.g., used for explanatory purposes only). Those skilled in the art will recognize that the modules are used only to explain an exemplary embodiment, and are not to be considered limiting.

The exemplary logical flow diagram 1600 for uplink IP flow analyzer 632 of FIG. 16A includes packet header identification component 1602, packet characterization component 1604, packet classification component 1606, and IP flow presentation component 1608. The functions of these components are explained in detail below.

In one embodiment, uplink IP flow analyzer 632 is physically located in wireless base station 302, although those skilled in the art will recognize that the same functionality can be located remotely from wireless base station 302. In a preferred embodiment of the present invention, the function of IP flow analyzer 632 is performed at a subscriber CPE station 294d desiring an uplink reservation slot for uplinking a packet/IP flow up to base station 302. A reservation request block (RRB) request detailing the IP flow identifier, number of packets and classification of the IP flow can be created then by IP flow analyzer 632 and can be uplinked via preferably a contention RRB slot for scheduling by uplink frame scheduler 634 in future uplink subframe slots up at wireless base station 302.

FIGS. 2D, 3A and 3B are helpful to the reader for an understanding of the uplink IP flow analyzer.

### 2. Introduction

IP flow analyzer 632 performs the function of identifying, characterizing, classifying, and presenting data packets to an uplink frame scheduler 634. The functions of identifying, characterizing, classifying and presenting the data packets can be respectively performed by packet header identification component 1602, packet characterization component 1604, packet classification component 1606 and IP flow presentation component 1608 of uplink IP flow analyzer 632.

Packet header identification component 1602 determines whether a packet of an incoming IP flow is known to the system (i.e. is an existing IP flow), or if it is the first data packet of a new IP data flow, and determines the source application based on fields in the header section of the packet. Identification 1602 can include buffering packets and extracting and parsing the header contents. Packet characterization component 1604 characterizes a new data packet (of a new IP flow) to determine the QoS requirements for the IP flow based on the source application, and to identify the subscriber CPE station that will receive the IP flow. Packet classification component 1606 classifies the new IP data flow into one of several priority classes. Classification 1606 can include, e.g., grouping packets hav-

ing similar QoS requirements. IP data flow presentation **1608** initializes the new IP data flow and presents it to uplink flow scheduler **634**.

Each time a subscriber CPE station **294d** attempts to communicate in the uplink direction with wireless base station **302**, it requests a reservation by inserting an RRB in the uplink subframe. Uplink frame scheduler **634** then schedules the reservation request in a future uplink subframe and notifies the CPE station **294d** of the reservation. In a downlink signal, uplink flow scheduler **634** located preferably at wireless base station **302**, transmits a reservation slot in a particular future frame for the requesting subscriber CPE station **294d** to transmit its uplink data. Uplink flow scheduler **634** assigns the reservation based on the same parameters as the downlink flow scheduler **604** uses in the downlink. In other words, uplink flow scheduler **634** determines the reservation slots based on the queue class priority and based on a set of rules, schedules the reservations for uplink transmissions from subscriber CPE station **294d** using, e.g., an advanced reservation algorithm. The rules are determined by inputs to the uplink flow scheduler **634** from a hierarchical class-based priority processor module **1674**, a virtual private network (VPN) directory enabled (DEN) data table **1672**, and a service level agreement (SLA) priority data table **1670**. The advanced reservation algorithm is described with respect to FIG. **14**.

### 3. Identification

Packet header identification component **1602** identifies the IP flow received from a subscriber CPE station **294d** based on the packet's header contents.

A stream of packets, also known as packets from several IP flows (i.e. each IP flow is associated with a single "call") is received at packet header identification component **1602**. The IP flow in one embodiment is transmitted to subscriber CPE station **294d** from one or more subscriber workstations **120d** for uplink to host computers **136a** coupled to wireless base station **302** by data network **142**. Subscriber CPE station **294d** can transmit the data packets of the IP flow to packet buffer module **1610** of packet header identification component **1602**. In one embodiment, packet header identification component is within CPE subscriber station **294d**. At module **1610**, the received packets are buffered in a storage area for transfer to header extraction module **1620**. At module **1620**, the packet header files are extracted and parsed to obtain the contents of the packet header fields.

Relevant fields can include, e.g., source, destination, type of service (TOS) and differentiated service (DiffServ) markings, if any exist.

For IP flows known to the system, there are entries in existing IP flow identification table **1626**. An IP flow is in the system if a previous packet of the IP flow of the existing IP data call has already been identified. In module **1622**, it is determined if there is a match between the incoming IP flow and an entry in table **1626**. If so, then the IP flow is known to the system, and control passes to module **1630** of the packet characterization component **1604**.

If the IP flow is not an existing flow known to the system, meaning that the IP flow is a new IP flow, then control passes to module **1624**, where the packet header fields are analyzed to identify the source application of the IP flow.

Packet header analysis module **1624** determines from source application packet header table **1628** the type of source application making the IP flow. The application can be any of the types of applications described with respect to FIG. **2D** or known to those skilled in the art. Examples include a file transfer protocol (FTP) download from another client workstation **138f**, a voice telephony call from a caller

**124d** (connected over a modem), a fax machine call, and a conference call from multiple callers **124d** and **126d** (connected over a modem), to name a few. If the IP flow is a new IP flow, then the identification information about the new IP flow is added to table **1626**, and control passes from analysis module **1624** to module **1632** of the packet characterization component **1604**.

### 4. Characterization

Packet characterization component **1604** characterizes the IP flow and passes it to packet classification component **1606** for classification.

If the IP flow is an existing IP flow, control passes to module **1630** from module **1622** of the packet header identification component **1602**. If in module **1622** it is determined that the IP data flow is known to the system, in module **1630** it is determined whether the packet is old (i.e., stale). This can include determining from a time-to-live field (a field in the IP packet header) the age of the packet, and comparing the field to a threshold age value. If the packet is determined to be stale, it is discarded. Module **1630** can anticipate application packet discards. From module **1630**, control passes to module **1640** of the packet classification component **1606**.

If the IP flow is new, control passes to module **1632** from module **1624** of the packet header identification component **1602**. If in module **1624** it is determined that the application associated with the IP flow application is not known to the system, in IP flow QoS requirements lookup module **1632** the QoS requirements for the application associated with the IP flow are determined. Module **1632** performs this operation by looking up the application in IP flow QoS requirement table **1634**. Different applications have different requirements. For example, bandwidth allocation (i.e., allocating an appropriate amount of bandwidth) is important to an application performing FTP downloads, and not jitter (i.e., time synchronizing the received data) and latency (i.e., the amount of time passage between responses). On the other hand, jitter and latency are important to voice telephony and conference calls, and bandwidth allocation is not.

After processing by module **1632**, control passes to module **163b**. In CPE subscriber station identifier (ID) lookup module **1636** a subscriber CPE ID lookup is performed for the new IP data flow. Each subscriber CPE station **294d** can have one or more applications, running on one or more subscriber workstations **120d**, homed to it. Accordingly, one or many subscribers can generate or receive an IP flow directed from or at a subscriber CPE station **294d**. A subscriber workstation **120d** can be any device coupled to a subscriber CPE station **294d**. Module **1636** looks up the CPE station identifier for the IP flow in table **1638**, to provide the CPE ID in the reservation request block (RRB). Control then passes from module **1636** to module **1648** of the packet classification component **1606**.

### 5. Classification

Packet classification component **1606** classifies the IP flow and passes it to IP flow presentation component **1608** for presentation.

For existing IP flows, control passes to module **1640** from module **1630** of the packet characterization component **1604**. If in module **1630** it is determined that the packet is not stale, then in module **1640** the packet is associated with its IP flow. As illustrated in FIG. **16A**, the packet processed herein was determined to be a portion of an IP flow known to the system. Therefore, the QoS processing of modules **1632**, **1636** and **1642** are unnecessary, because the QoS requirements of the present packet are the same as for its IP flow.

For new IP flows, control passes to module **1642** from module **1636** of the packet characterization component **1604**. In module **1642** the packet is classified or grouped into a QoS class by performing an IP flow QoS requirement table **1644** lookup where the QoS classes are stored depending on the QoS requirements for packets. From module **1642**, control passes to module **1648** of IP flow presentation component **1608**.

#### 6. IP Flow Presentation

IP flow presentation component **1608** prepares and presents the IP data flow packets to flow scheduler **634**. In one embodiment of the uplink direction, a reservation request block (RRB) is created and uplinked via a contention slot to the wireless base station **302** for scheduling by IP flow scheduler **634**. In another embodiment, the scheduler is located at the CPE station **294d** so no reservation request is needed.

For existing IP flows, control passes to module **1646** from module **1640** of the packet classification component **1640**. In module **1646**, the packet is added to the IP flow queue, which is the queue for the current existing IP flow. In one embodiment, this can include preparation of a RRB. From module **1646**, control passes to module **1662** of uplink flow scheduler **634**. In one embodiment, this can include uplink of the RRB from CPE **294d** to wireless base station **302**.

For a new IP flow, control passes to module **1648** from module **1642** of the packet classification component **1606**. In initialize IP flow module **1648**, this new IP flow is initialized for presentation to module **1652**. Module **1652** presents the IP data flow (in particular, the reservation request block data packet) to module **1662** of uplink flow scheduler **634**. In module **1650**, the QoS class for the IP flow is presented to scheduler **634**, preferably by inclusion in a RRB.

#### 7. Uplink Flow Scheduler

The exemplary logical flow diagram for the uplink flow scheduler **634** of FIG. **16B** comprises IP flow QoS class queuing processor module **1662**, MAC uplink subframe scheduler module **1666**, hierarchical class-based priority processor module **1674**, VPN DEN data table module **1672**, SLA priority data table **1670**, CPE IP flow queue depth status processor **1682** and link layer acknowledgment processor module **1678**.

Uplink flow scheduler **634** of FIG. **16B** also includes QoS class queues for class 1, **1664a**; class 2, **1664b**; class 3, **1664c**; class 4, **1664d**; class 5, **1664e**; and class 6, **1664f**; and MAC uplink subframes: frame n **1668a**; frame n+1, **1668b**; frame n+2, **1668c**; frame n+3, **1668d**, . . . frame n+p, **1668k**.

In one embodiment, uplink flow scheduler **634** is physically located in wireless base station **302**, although those skilled in the art will recognize that the same functionality can be located remotely from wireless base station **302**. For example, in another embodiment, uplink flow scheduler **634** can be located at CPE station **294d** and is in communication with other CPE stations **294** and the wireless base station **302**.

Uplink flow scheduler **634** is used to schedule the uplink subframe. The entire frame is divided into an uplink portion (called an uplink subframe) for transmitting uplink frames, and a downlink portion (called a downlink subframe) for transmitting downlink frames.

Illustrated in FIG. **16B** are WAP antenna **290d**, the wireless medium, RF transceiver subscriber antenna **292d**, subscriber CPE station **294d** and subscriber workstation **120d**. WAP **290d** and RF transceiver subscriber antenna **292d** respectively provide a wireless connection between wireless base station **302** (where uplink flow scheduler **634**

resides in one embodiment) and subscriber CPE station **294d**, which can transmit upstream an IP flow from an application running on client computer **120d**. WAP **290d** serves as a wireless gateway for data network **142**, and RF transceiver subscriber antenna **292d** serves as a wireless gateway for subscriber CPE station **294d** to uplink the IP flow packet data.

Also illustrated in FIG. **16B** is data interface **320**, which provides a connection from uplink flow scheduler **634** for sending uplinked IP flow packets on to data router **140d** of data network **142** and on to a destination host computer **136a**. These connections are also illustrated in FIGS. **2D** and **3B**.

The previous frame includes an uplink reservation request which is received by the wireless base station from a subscriber CPE station **294d**. At this point, the reservation request block has been identified, characterized, classified, and presented, preferably at the CPE station **294d**, and has been transmitted to uplink flow scheduler **634** from uplink flow analyzer **632** at the CPE **294d**. In particular, the reservation request block is presented to IP flow QoS class queuing processor module **1662** from module **1650**. Module **1662** informs MAC uplink subframe scheduler **1666** of the reservation.

In turn, MAC uplink subframe scheduler **1666** uses a slot in the subframe to acknowledge receipt of the request called the acknowledgment request block (ARB). An exemplary slot used to convey the frame, slot, and IP flow identifier for this reservation is described with respect to FIG. **12**. Scheduler **1666** transmits in this reservation slot the CPE identification data, along with which future slot(s) and frame(s) the requesting subscriber CPE station **294d** is permitted to use for uplink of the requested data packet IP flow transmissions.

The future slot(s) in the future frame(s) are assigned, e.g., based on inputs from hierarchical class-based priority processor module **1674**, VPN DEN data table **1672** and service level agreement (SLA) priority data table **1670**. These components function in a similar manner to hierarchical class-based priority processor module **1574**, VPN DEN data table **1572** and service level agreement (SLA) priority data table **1570**, described with respect to the downlink flow scheduler **604**.

When IP flow QoS class queuing processor module **1662** receives packets of an existing or new IP flow from IP flow presentation module **1608**, it then creates class queues **1664a-1664f**, which is a variable number of queues, and places the packets in these class queues. In a preferred embodiment there are between 3 and 10 classes. These queues hold reservation request packets for scheduling. Packets are placed in class queues **1664a-1664f** according to the contents of the reservation request block for input to module **1662**.

Module **1662** receives inputs from hierarchical class-based priority processor module **1674**, VPN DEN data table **1672** and service level agreement (SLA) priority data table **1670**. The queuing function of module **1662** is based on these inputs. These components function analogously to their counterparts in the downlink flow scheduling method. SLA priority data table **1670** and VPN DEN data table **1672** receive input from operations, administration, maintenance and provisioning (OAM&P) module **1108**. OAM&P module **1108** provides updates to priorities when, e.g., a subscriber modifies its service level agreement or a VPN subscription is changed.

MAC uplink subframe scheduler **1666** takes the requests queued in class queues **1664a-1664f**, and schedules reser-

variations of slots in frames **1668a-1668k**, which is a variable number of frames. In one embodiment, each frame is scheduled with up to a predetermined number limit or percentage limit of packets from each of the classes **1664a-1664f**. The requests can be scheduled as shown in FIG. **13**, taking into account certain priorities. In another embodiment, the frames are scheduled according to the inventive advanced reservation algorithm method for scheduling isochronous type traffic described with respect to FIG. **14**. In yet another embodiment, the frames are scheduled according to a combination of known methods and the advanced reservation algorithm method of the present invention.

The reservation slot schedule can then be sent down to the CPE stations **294** using, e.g., FDB slots such as **1236g** and **1236h** of FIG. **12F**. The uplink slots can then be inserted by CPE station **294d** into the uplink subframe as scheduled. The frame slots are then transmitted up from CPE station **294d** to wireless base station **302** and are then sent on as packets to their destination addresses. For example, from wireless base station **302** the packets can be transmitted over data network **142** to a host computer **136a**.

After the uplink packets are received by the wireless base station **302**, the wireless base station **302** sends an upstream acknowledgment data block (UAB) message back down to the transmitting subscriber CPE station **294d**, to acknowledge receipt of the transmitted data packets.

Every once in a while, a packet is lost through noise or other interference in the wireless medium. When this situation arises, the subscriber CPE station **294d** determines that it has not received a UAB data acknowledgment, so it sends a retransmit request requesting another uplink reservation slot to wireless base station **302** via WAP **290d**, which transmits the request to link layer acknowledgment (ARQ) processor **1678**. ARQ processor **1678** informs MAC uplink subframe scheduler **1666** of the need of retransmission (i.e. the need of a frame slot reservation for resending the uplink packet). CPE subscriber station **294d** can also send to ARQ processor **1678**, other data messages about nonreceipt of uplink transmission acknowledgments. The ARQ **1678** can forward such messages on to the uplink subframe scheduler **1666**. The uplink subframe scheduler **1666** in turn reschedules the requested uplink reservation from the appropriate class queues **1664a-1664f**. Alternatively, in another embodiment, link layer acknowledgment processor **1678** can also send a positive UAB acknowledgment to the subscriber CPE station **294d**, to indicate that the data packets have been properly received. Thus uplink scheduler **1666** in addition to scheduling first time reservations, also can schedule repeat reservations for lost packets.

Each subscriber CPE station **294d** has a limited amount of memory space available for queuing packets received from subscriber workstations **120d** awaiting reservation slots of uplink from the CPE **294d** to wireless base station **302**. When, for example, the the queue of subscriber CPE station **294d** becomes full from a backup of packets awaiting upstream reservations, IP data flows can potentially be lost, or packets may become stale. In this scenario, subscriber CPE station **294d** transmits a CPE IP flow queue depth message **1680** to the wireless base station **302** indicating that the queue is filled up, which can be received by CPE IP flow queue depth status processor **1682**. Processor **1682** can inform MAC uplink subframe scheduler **1666** of this condition, which can, e.g., increase temporarily the priority of IP flows at subscriber CPE station **294d** to overcome the backlog or can, e.g., stop transmitting additional downlink packets to the CPE station **294d** until the queue depth backlog is decreased to an acceptable level again. Processor

**1682** can also send messages to MAC uplink subframe scheduler **1666** to flush reservation requests from the subscriber CPE station **294d** in class queues **1664a-1664f**.

#### 4. TCP Adjunct Agent

TCP is a reliable transport protocol tuned to perform well in traditional networks where congestion is the primary cause of packet loss. However, networks with wireless links incur significant losses due to bit-errors. The wireless environment violates many assumptions made by TCP, causing degraded end-to-end performance. See for example, Balakrishnan, H., Seshan, S. and Katz, R. H., "Improving Reliable Transport and Handoff Performance in Cellular Wireless Networks," University of California at Berkeley, Berkeley, Calif., accessible over the Internet at URL, <http://www.cs.berkeley.edu/~ss/papers/winet/html/winet.html>, dealing more directly with handoffs and bit errors in a narrowband wireless environment, the contents of which are incorporated by reference. Attempts to address this problem have modified TCP in order to overcome it. However, this is not a commercially feasible means of overcoming this challenge. It is impracticable to implement any solution that requires a change to the standard operation of TCP.

The present invention uses an enhanced MAC layer which interfaces with a TCP adjunct agent to intercept TCP layer requests to manipulate the TCP layers at either a source or destination end of a transmission, to modify TCP behavior at the source and destination of the TCP/IP transmission which includes an intermediary wireless link. Packets can be queued at the wireless base station awaiting receipt acknowledgment and the base station can perform local retransmissions across the wireless link to overcome packet loss caused by high bit-error rates. Communication over wireless links is characterized by limited bandwidth, high latencies, sporadic high bit-error rates and temporary disconnections which must be dealt with by network protocols and applications.

Reliable transport protocols such as TCP have been tuned for traditional wired line networks. TCP performs very well on such networks by adapting to end-to-end delays and packet losses caused by congestion. TCP provides reliability by maintaining a running average of estimated round-trip delay and mean deviation, and by retransmitting any packet whose acknowledgment is not received within four times the deviation from the average. Due to the relatively low bit-error rates over wired networks, all packet losses are correctly assumed to be caused by congestion.

In the presence of the high bit-error rates characteristic of wireless environments, TCP reacts to packet losses as it would in the wired environment, i.e. it drops its transmission window size before retransmitting packets, initiates congestion control or avoidance mechanisms (e.g., slow start) and resets its retransmission timer. These measures result in an unnecessary reduction in the link's bandwidth utilization, thereby causing a significant degradation in performance in the form of poor throughput and very high interactive delays.

The present invention maintains packets in class queues awaiting acknowledgment of receipt from the subscriber CPE stations. Unacknowledged data slots can then be resent by having the wireless base station perform local retransmissions to the subscriber CPE station. By using duplicate acknowledgments to identify a packet loss and performing local retransmissions as soon as the loss is detected, the wireless base station can shield the sender from the inherently high bit error rate of the wireless link. In particular, transient situations of very low communication quality and temporary disconnectivity can be hidden from the sender.

For transfer of data from a CPE subscriber host to a wireless base station host, missing packets are detected at the wireless base station and negative acknowledgments can be generated for them. The negative acknowledgments can request that the packet be resent from the CPE subscriber host (the sender). The CPE subscriber host can then process the negative acknowledgment and retransmit corresponding missing packets. Advantageously, no modifications to the sender TCP or receiver TCP is necessary, since the present invention places TCP aware functionality in the MAC layer.

FIG. 5A illustrates flow 500 depicting IP flows from a source TCP at a subscriber host, down a protocol stack for transmission through a CPE subscriber station, through a wireless medium to a wireless base station, up and through a protocol stack at the wireless base station having an example TCP adjunct agent, then through a wireline connection and through a protocol stack to a destination host. The adjunct TCP agent modifies operation of a TCP sliding window algorithm at the transmitting TCP and in cooperation with proactive reservation-based intelligent multi-media access technology (PRIMMA) media access control (MAC) enables local retransmission over the wireless medium in accord with the present invention.

Specifically, flow 500 illustrates IP packet flow from subscriber workstation 120d, through CPE subscriber station 294d at CPE subscriber location 306d, then over a wireless transmission medium to wireless base station 302, and eventually over a wireline link over data network 142 to host workstation 136a.

TCP adjunct agent 510e makes sure transport is reliable by modifying operation of the TCP sliding window algorithm at the transmitting TCP in a manner that optimizes the window for the wireless medium. TCP adjunct agent 510e advantageously is transparent to industry standard protocols as agent 510e does not require modification of the standard TCP/UDP layer of client subscriber workstation 120d or host workstation 136a.

Flow 500 includes IP flows from application layer 512a, down the protocol stack through TCP/UDP layer 510a, through IP layer 508a, then through point-to-point (PPP) layer 520a, then through data link Ethernet layer 504a, then through 10 BaseT Ethernet network interface card (NIC) physical layer 502a, over a wire line connection to 10 BaseT Ethernet NIC physical layer 502b of subscriber CPE 294d.

Subscriber CPE 294d flows packets coming in from NIC 502b, back up its protocol stack through Ethernet layer 504b, through PPP layers 520b and 520c, back down through PRIMMA MAC 504c to wireless physical layer 502c including antenna 292d, then over the wireless medium to antenna 290d of wireless base station 302.

Wireless base station 302 flows packet IP flows up from antenna 290d at physical layer 502d through PRIMMA MAC layer 504d, through PPP layer 520a, through IP layer 508d to TCP adjunct agent 510e, which can flow IP flows down through IP layer 508e, through PPP layer 520e, through wide area network (WAN) layer 504e, through wireline physical layer 502e, through interface 320, over routers 140d, through data network 142, via wireline connections to wireline layer 502f of WAN host workstation 136a.

Host workstation 136a flows IP flows from wireline layer 502f, up through its protocol stack through WAN layer 504f, through PPP layer 520f, through IP layer 508f, to TCP/UDP layer 510f and on to application layer 512f.

TCP/UDP layers 510a and 510f act to provide such transport functions as, e.g., segmentation, managing a transmission window, resequencing, and requesting retransmis-

sion of lost packet flows. Normally TCP layers 510a and 510f would send a window of packets and then await acknowledgment or requests for retransmission. A TCP sliding window algorithm is normally used to vary the transmission flow to provide optimized transport and to back off when congestion is detected by receipt of requests for retransmission. Unfortunately in the wireless environment, due to high bit error rates, not all packets may reach the destination address, not because of congestion, but rather because of high bit error rates, so as to prompt a retransmission request from the destination IP host to the source. Rather than slow transport, TCP adjunct agent 510e modifies operation of the TCP sliding window algorithm to optimize operation over wireless. PRIMMA MAC layer 504d interacts with TCP adjunct agent 510e permitting the agent to intercept, e.g., retransmission requests, from TCP layer 510a of subscriber workstation 120d intended for host 136a, and allowing the wireless base station to retransmit the desired packets or flows to subscriber workstation 120d rather than forwarding on the retransmission request to host 136a, since the packets could still be stored in the queue of PRIMMA 504d and would not be discarded until an acknowledgment of receipt is received from the subscriber CPE. Since retransmission can be performed according to the present invention at the PRIMMA MAC data link layer, i.e. layer 2, retransmission can occur from the base station to the CPE subscriber, rather than requiring a retransmission from all the way over at the transmitting source TCP which would cause TCP to backoff its sliding window algorithm. Thus, by having wireless base station 302 retransmit until receipt is acknowledged over the wireless link, the inherently high bit error rate can be overcome, while maintaining an optimal TCP window.

Recall, a TCP transmitter transmits a TCP sliding window block of packets and alters the size of the window upon detection of congestion. The TCP transmitter transports a block of packets in a window, and then awaits acknowledgment from the receiver. If transmission is going smoothly, i.e. no congestion or lost packets occur, then the transmitter TCP ramps up the transmission rate. This increased transmission rate continues until the transmitting TCP detects congestion or packet loss. When notified of congestion, the transmitting TCP stops transmitting, backs off and sends a smaller block (i.e. a smaller window) of packets.

TCP adjunct agent modifies normal TCP operation by tricking the transmitting TCP and its transmitting window algorithm. The TCP adjunct agent prevents the transmitter from being notified of loss, i.e. receiving congestion notification, from the receiving TCP by, e.g., preventing duplicate retransmission requests. Since the transmitting TCP does not receive such notification, it does not modify the TCP sliding window and transmission continues at the higher rate.

In the event that real congestion occurs, i.e. if the TCP adjunct agent recognizes packets really were lost, then the TCP adjunct agent can let the retransmission request go through to the transmitting TCP. This is advantageously accomplished because the MAC link layer of the present invention is in communication with the higher protocol layers, it is application aware, transport aware and network aware. In this case, because the MAC layer is transport layer aware, PRIMMA MAC layer 504d communicates with the TCP adjunct agent 510e at layer 4. Since the MAC requires acknowledgment of receipt of wireless transmissions sent to the CPE subscriber station 294d for every packet sent from the wireless base station 302, the MAC layer 504d knows whether an inter-TCP layer communication, e.g., a request

for retransmission, is sent from a client computer TCP at the CPE station is created because the lost packet was lost in wireless transmission, or because of real congestion.

If PRIMMA MAC 504d does not receive an acknowledgment from 504c, then the PRIMMA MAC 504d of wireless base station 302 can retransmit the contents of the lost packet to the subscriber CPE station 294d. If the PRIMMA MAC 504c of the subscriber CPE station 294d acknowledges receipt and still requests a retransmission, then real congestion could have occurred and the PRIMMA MAC 504d of the wireless base station 302 can let the TCP adjunct agent 510e know that it should allow the retransmission request to be sent to the transmitting TCP 510f of host workstation 136a.

Thus, TCP adjunct agent 510e of the present invention can modify operation of the TCP sliding window algorithm in a manner that is optimal for the wireless medium, without requiring any change to commercially available TCP layers 510a and 510f at the receiver and sender hosts. In an embodiment, TCP adjunct agent 510e obviates the need for any modification of the TCP layers at either the sending (i.e. transmitting) host or client. In another embodiment the host and client TCP layers are unaware of the modification of operation by the TCP adjunct agent, i.e. it is transparent to source and destination TCP layers. In another embodiment, TCP adjunct agent 510e intercepts retransmission requests between a TCP layer of the client computer coupled to the subscriber CPE station and the TCP layer of the host workstation coupled to the data network.

FIG. 5B illustrates functional flow diagram 522 including an example functional description of TCP adjunct agent 510e performing an outgoing TCP spoof function. Referring to FIG. 5B and 5A, diagram 522 assumes that a TCP layer 510f at a transmitting host 136a has transmitted a windowful of packet data to subscriber workstation 120d, and awaits acknowledgment. Diagram 522 illustrates receipt of an outgoing TCP message 524 in TCP adjunct agent 510e at wireless base station 302 which has been sent from subscriber workstation 120d via subscriber CPE station 294d.

In step 526, the TCP header contents of outgoing TCP message 524 is parsed in order to reveal the contents of the message being sent from subscriber workstation 120d through the wireless network toward the transmitting host 136a.

In step 528, it is determined whether the TCP header contents includes a duplicate acknowledgment message from the CPE station. Receiving a duplicate acknowledgment request from the CPE subscriber location could be indicative of a lost message in the wireless medium, or a real congestion problem. If in step 528 the TCP packet is determined to be a duplicate acknowledgment message, then processing can continue with step 532, if not, then processing can continue with step 530.

In step 530, it is determined that there was real congestion, i.e., this was not a duplicate acknowledgment message caused by retransmission attempts at the wireless link layer. Thus, in step 530, the TCP message is permitted to pass through TCP adjunct 510e without modification, and can continue through flow 500 to TCP layer 510f of FIG. 5A.

In step 532, since there was a duplicate acknowledgment detected in step 528, it is determined whether the packet was successfully transmitted, or not. Step 532 is performed via intercommunication between TCP adjunct agent 510e and PRIMMA MAC layer 504d. This is an example of the interactivity between PRIMMA MAC and higher layer protocols illustrated as line 428 in FIG. 4. PRIMMA MAC layer 504d can identify whether a packet was successfully

sent from wireless base station 302 to CPE station 294d since, as illustrated in FIG. 15B, requests for retransmission 1576 are received from CPE station 294d at link layer acknowledgment (ARQ) processor 1578 to MAC downlink subframe scheduler 1566 alerting the scheduler 1566 to retransmit the lost packet in a future frame 1568. If in step 532, it is determined that the packet was successfully transmitted, then processing can continue with step 530, as described above. If however it is determined that the packet was not successfully transmitted, then processing continues with step 534.

In step 534, since the packet was not successfully transmitted, TCP adjunct agent 510e can suppress transmission of TCP message 524 since it can be assumed that the packet was lost in the wireless medium. Processing can continue with step 536.

In step 536, TCP adjunct agent 510e can wait for notification from PRIMMA MAC 504d that a successful link layer retransmission of the lost packet was received at link layer acknowledgment processor 1578. From step 536, processing can continue with step 538.

In step 538, upon receipt of acknowledgment of a successful PRIMMA MAC 504d link layer retransmission, then normal TCP messages can be resumed.

In another step (not shown), TCP adjunct agent and PRIMMA MAC layers can set a limit of a threshold number of retransmission attempts, and if that threshold is reached, then processing can continue with step 530 to permit the TCP message to pass without modification.

FIG. 5C illustrates functional flow diagram 540 including an example functional description of TCP adjunct agent 510e performing an incoming TCP spoof function. Referring to FIG. 15C and 5A, diagram 540 assumes that a TCP layer 510a at a transmitting subscriber workstation 120d has transmitted a windowful of packet data to host 136a, and awaits acknowledgment. Diagram 544 illustrates receipt of an incoming TCP message 542 in TCP adjunct agent 510e at wireless base station 302 which has been sent from host workstation 136a via data network 142 for transmission over the wireless medium to subscriber CPE 294d to subscriber workstation 120d.

In step 544, the TCP header contents of ingoing TCP message 542 is parsed in order to reveal the contents of the message being sent from host 136a through the wireless network toward the transmitting subscriber workstation 120d.

In step 546, it is determined whether the TCP header contents includes a duplicate acknowledgment message from host 136a. Receiving a duplicate acknowledgment request from the host could be indicative of a lost message in the wireless medium, or a real congestion problem. If in step 546 the TCP packet is determined to be a duplicate acknowledgment message, then processing can continue with step 550, if not, then processing can continue with step 548.

In step 548, it is determined that there was real congestion, i.e., this was not a duplicate acknowledgment message caused by retransmission attempts at the wireless link layer. Thus, in step 548, the TCP message is permitted to pass through TCP adjunct 510e without modification, and can continue through flow 500 to TCP layer 510a of FIG. 5A.

In step 550, since there was a duplicate acknowledgment detected in step 546, it can be determined whether the packet was successfully transmitted, or not. Step 550 can be performed via intercommunication between TCP adjunct agent 510e and PRIMMA MAC layer 504d. This is an example of the interactivity between PRIMMA MAC and higher layer

protocols illustrated as line 428 in FIG. 4. PRIMMA MAC layer 504d can identify whether a packet was successfully sent from CPE station 294d to wireless base station 302, as illustrated in FIG. 16B, requests for retransmission 1676 are received from CPE station 294d at link layer acknowledgment (ARQ) processor 1678 to MAC downlink subframe scheduler 1666 alerting the scheduler 1666 to retransmit the lost packet in a future frame 1668. If in step 550, it is determined that the packet was successfully transmitted, then processing can continue with step 548, as described above. If however it is determined that the packet was not successfully transmitted, then processing continues with step 552.

In step 552, since the packet was not successfully transmitted, TCP adjunct agent 510e can suppress transmission of TCP message 542 since it can be assumed that the packet was lost in the wireless medium. Processing can continue with step 554.

In step 554, TCP adjunct agent 510e can wait for notification from PRIMMA MAC 504d that a successful link layer retransmission of the lost packet was received at link layer acknowledgment processor 1678. From step 554, processing can continue with step 556.

In step 556, upon receipt of acknowledgment of a successful PRIMMA MAC 504d link layer retransmission, then normal TCP messages can be resumed.

In another step (not shown), TCP adjunct agent and PRIMMA MAC layers can set a limit of a threshold number of retransmission attempts, and if that threshold is reached, then processing can continue with step 548 to permit the TCP message to pass without modification.

#### 5. Wireless QoS Aware PRIMMA Media Access Control (MAC) Hardware Architecture

FIG. 10 illustratively depicts an embodiment of PRIMMA MAC hardware architecture 1000. Architecture 1000 shows data network 142 coupled by a wireline bidirectional connection to WAN interface 320.

WAN interface 320 is bidirectionally linked to a bidirectional data frame FIFO 1002 which is bidirectionally coupled to both segmentation and resequencing (SAR) 1004 and QoS/SLA rules engine and processor 1008.

QoS/SLA rules engine and processor 1008 is also bidirectionally coupled to IP flow buffers 1014 and flash random access memory (RAM) 1010.

SAR 1004 is bidirectionally coupled to IP flow buffers 1014, flash RAM 1010, QoS/SLA rules engine and processor 1008 and PRIMMA MAC scheduler ASIC 1012.

PRIMA MAC scheduler ASIC 1012 is also bidirectionally coupled to an RF interface 290, a static RAM (SRAM) radio cell buffer 1018 and IP flow buffer 1014.

#### 6. Wireless Base Station Software Organization

FIG. 11 is an exemplary software organization for a packet-centric wireless point to multi-point telecommunications system. The software organization of FIG. 11 includes wireless transceiver and RF application specific integrated circuit (ASIC) module 290, IP flow control component 1102, WAN interface management component 1104, QoS and SLA administration component 1106, system and OAM&P component 1108, customer billing and logging component 1110, directory enabled networking (DEN) component 1112, and wireless base station 320.

IP flow control module 1102 includes transmission queuing control module 1102a, TCP rate control and class of service module 1102b, wireless PRIMMA MAC layer engine 1102c and IP flow identification and analysis module 1102d.

WAN interface management component 1104 includes WAN ingress/egress queuing control module 1104a, WAN interface ports (e.g., for T1, T3, OC3 ports) 1104b, firewall and security module 1104c, and WAN traffic shaping module 1104d.

The IP Flow control component 1102 and WAN interface management component 1104 represent the "core" of the system, where the packet processing, MAC layer scheduling, TCP proxy agent, and WAN I/F control functions are located. Much of the activities of the "non-core" components described above support and control these core components.

QoS and SLA administration component 1106 includes QoS performance monitoring and control module 1106a, service level agreements module 1106b, policy manager module 1106c and encryption administration module 1106d.

The QoS and SLA administration component 1106 provides the static data needed by the system in order to properly group particular IP-flows into QoS classes. Typically, during the provisioning phase of installing the system, the service provider will (remotely) download pertinent information about the subscriber CPE station 294, including the subscriber CPE stations's SLA, any policy-based information (such as hours of operation or peak data transmission rate allowance.). Encryption keys or "strengths" can also be downloaded, which may be subscriber CPE station or service provider specific.

System OAM&P component 1108 includes SNMP proxy client for WAP module 1108a, SNMP proxy clients for CPE module 1108b, and system operations, administration, management and provisioning module 1108c.

The OAM&P component 1108 allows remote service personnel and equipment to monitor, control, service, modify and repair the system. System performance levels can be automatically monitored, and system traps and traces can be set. Subscriber complaints can be addressed with the use of remote test and debug services controlled by OAM&P component 1108. System capacity limits can be monitored, and proactive provisioning of additional WAN connectivity can occur, as the result of automatic trend analysis functions in OAM&P component 1108.

Customer billing and logging module 1110 includes account logging and database management module 1110a, transaction query and processing control module 1110b, billing and account control module 1110c, and user authentication module 1110d.

The customer billing and logging component 1110 allows the service provider to receive account, billing and transaction information pertaining to subscribers in the system. For service providers who bill on the basis of usage, cumulative system resource utilization data can be gathered. For specific types of activities (eg. video conferencing, multi-casting, etc.) there may be special billing data that is collected and transmitted to the service provider. This component also controls the availability of the system to subscribers through the operation of the subscriber authentication function. Once a subscriber is authorized to use the system, a new subscriber authentication entry is made (remotely) by the service provider. Likewise, a subscriber can be denied further access to the system for delinquent payment for services, or for other reasons. The service provider can also remotely query the system for specific account-related transactions.

Directory Enabled Networking (DEN) component 1112 includes DEN QoS 1112a module, DEN management and provisioning 1112b module, DEN IPSEC module 1112c and IP-based VPN control and administration module 1112d.

The DEN component **1112** allows the service provider the means to input into the system relevant information regarding the operation of DEN-based VPN's of subscribers. Subscriber VPNs need to be "initialized" and "provisioned" so that the system properly allocates system resources to subscribers with these VPNs, and provides for the recognition and operation of these VPNs. Data from DEN component **1112** are utilized by the system to apply the appropriate priorities to IP-flows of the subject subscribers.

The invention's packet-centric wireless base station supports directory enabled networking (DEN), a MICROSOFT, INTEL and CISCO standard for providing a standard structure for how distributed sites manage IP flows. The present invention prioritizes VPN traffic in a lightweight directory access protocol (LDAP)-compliant (LDAP is available from MICROSOFT of Redmond, Wash.) manner which allows remote administration, provisioning and management. The present invention is also LDAP version 2 compliant. The present invention also complies with the X.500 standard promulgated by the international telecommunications union/telecommunications section (ITU/T), and with the RFC 1777.

In one embodiment, DEN provides policy-based network management, IPsec compatible network security, and IPsec based VPNs. The DEN of the wireless base station **302** is planned to be common information model (CIM) 3.0 compatible (once the specification is finalized). The wireless base station **302** can provide native DEN support and supports directory based DEN QoS mechanisms including reservation model (i.e. RSVP, per-flow queuing), and precedence/priority/differentiated model (i.e. packet marking). Wireless base station **302** can plan support of DEN network policy QoS, and until DEN is complete, can support internal QoS and network extensions.

#### 6. IPsec Support

IPsec is introduced above with reference to FIG. 4. IPsec provides a standard method of encrypting packets. In VPN tunnel mode, an entire header can be encoded, i.e. encrypted. In order for the present invention to be able to implement its packet-centric, QoS aware prioritization, during identification of a packet/IP flow, the wireless base station needs to be able to analyze the contents of header fields of the packets. Therefore, analysis of unencrypted packets is desirable.

The present invention already encrypts the data stream prior to transmitting frames over the wireless medium, so IPsec does not really need to be used over the wireless link to provide for encrypted transmission. Where a service provider finds it desirable to use IPsec, IPsec can be used for authentication and secure encapsulation of the header and payload, or just the payload data. IPsec is normally integrated at a firewall. If a service provider desires to implement the present invention and IPsec, then the present invention should be implemented behind the firewall, i.e. the firewall can be moved to the wireless base station. This permits ending the IPsec stream at the base station which can provide the base station access to packet header fields.

FIG. 17 illustrates IP flow in the downlink direction including IPsec encryption. Similarly, FIG. 18 illustratively depicts an uplink direction of IPsec support of the present invention.

FIG. 17 illustrates downlink flow **1700** depicting downlink direction IP flows from a source host workstation **136a**, down a protocol stack which supports IPsec, for transmission up and through wireless base station **302** which is coupled to data network **142**, through encryption layers, then through the wireless link to subscriber CPE **294d**, up and through a protocol stack at the subscriber CPE **294d**, then

through a wireline connection to data network **142** and up through the protocol stack to the destination subscriber workstation **120d** at subscriber location **306d**.

Specifically, flow **1700** illustrates IP packet flow from host workstation **136a**, through wireless base station **302**, then over a wireless transmission link to subscriber CPE **294d**, and over a wireline link to subscriber workstation **120d**.

Host workstation **136a** flows IP flows down from application layer **1712h**, down through TCP/UDP layer **1705h**, through IP layer **1708h**, through optional PPP layer **1706h**, through Ethernet layer **1705h**, down through 10BaseT layer **1702h**, over data network **142** to 10BaseT layer **1702g**, then up through Ethernet **1704g**, up its protocol stack through optional PPP layer **1706g** to IP layer **1708g** and **1708h**, back down through Internet firewall and IPsec security gateway **1706f**, down through WAN layer **1704f**, to wireline layer **1702f** to data network **142** to wireline physical layer **1702e**.

Wireline physical layer **1702e** of wireless base station **302**, flows IP flows up the protocol stack through WAN layer **1704e** through IPsec security gateway **1706e** and firewall to IP network layer **1708e** and **1708d** and then down through encryption layer **1706d**, PRIMMA MAC layer **1704d** and down to wireless link to subscriber CPE **294d**.

Subscriber CPE **294d** flows packet IP flows up from antenna **292d** at physical wireless layer **1702c** up through MAC layer **1704c**, through encryption layer **1706c**, through IP layers **1708b** and **1708c**, then down through optional layer **1706b** to Ethernet layer **1704b** to 10BaseT connection **1702b** to 10BaseT connection.

Subscriber workstation **120d** flows IP flows up from 10BaseT layer **1702a** up through its protocol stack through Ethernet layer **1704a**, through optional PPP layer **1706a**, through IP layer **1708a**, to TCP/UDP layer **1710a** and on up to application layer **1712a**.

FIG. 18 illustrates uplink flow **1800** depicting uplink direction IP flows from a source TCP at subscriber workstation **120d** at CPE location **306d**, down a protocol stack for transmission through Ethernet coupled CPE subscriber station **294d** through wireless medium to wireless base station **302**, up and through a protocol stack at the wireless base station **302** which supports IPsec, then through a wireline connection to data network **142** and through a protocol stack to a destination host.

Specifically, flow **1800** illustrates IP packet flow from subscriber workstation **120d**, through subscriber CPE **294d**, then over a wireless transmission medium to wireless base station **302**, and eventually over a wireline link to host workstation **136a**.

Flow **1800** includes IP flows from application layer **1812a**, down the protocol stack through TCP/UDP layer **1810a**, through IP layer **1808a**, then through optional point-to-point (PPP) layer **1806a**, then through data link Ethernet layer **1804a**, then through 10BaseT Ethernet network interface card (NIC) physical layer **1802a**, over a wire line connection to 10BaseT Ethernet NIC physical layer **1802b** of subscriber CPE **294d**.

Subscriber CPE **294d** flows packets coming in from NIC **1802b**, back up its protocol stack through Ethernet layer **1804b**, through optional PPP layer **1806b** to IP layer **1808b** and **1808c**, back down through an Internet firewall and IPsec security gateway **1806c**, down through PRIMMA MAC **1804c** to wireless physical layer **1802c** including antenna **292d**, then over the wireless medium, such as, e.g., RF communication, cable RE, and satellite link, to antenna **290d** of wireless base station **302** at wireless physical layer **1802d**.

Wireless base station **302** flows packet IP flows up from antenna **290d** at physical wireless layer **1802d** up through MAC layer **1804d**, through IPsec layers **1806d** and **1806d**, which can encapsulate packets and encrypt them. From IPsec layer **1806e**, IP flows can flow down through WAN layer **1804e** and through wireline physical layer **1802e** over data network **142**.

Wireline physical layer **1802f** flows IP flows up the protocol stack through WAN layer **1804f** through IPsec security gateway **1806f** and firewall to IP network layer **1808f** and **1808g** and then down through optional PPP layer **1806h**, Ethernet layer **1804h** and down through 10BaseT layer **1802g**, through interface **320**, over routers **140d**, through data network **142**, via wireline connections to 10BaseT physical layer **1802h** of host workstation **136a**.

Host workstation **136a** flows IP flows up from 10BaseT layer **1802h** up through its protocol stack through Ethernet layer **1805h**, through optional PPP layer **1806h**, through IP layer **1808h**, to TCP/UDP layer **1810h** and on to application layer **1812h**.

#### IV. Conclusion

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

What is claimed is:

1. A method for IP flow classification grouping IP flows in a packet-centric wireless point to multi-point telecommunications system, said method comprising:

analyzing an Internet Protocol (IP) flow in a packet-centric manner;

classifying said IP flow; and

scheduling said IP flow for transmission over a shared wireless bandwidth between a wireless base station and at least one subscriber customer premises equipment (CPE) station, including

allocating said shared wireless bandwidth to communication of said IP flow between said wireless base station and a subscriber CPE station, so as to optimize end-user quality of service (QoS) associated with said IP flow.

2. The method according to claim 1, further comprising: dynamically allocating said shared wireless bandwidth to communication between said wireless base station and said subscriber CPE station.

3. The method according to claim 2, further comprising: allocating said shared wireless bandwidth on a frame basis.

4. The method according to claim 3, further comprising: allocating a frame of said shared wireless bandwidth in an uplink direction from said subscriber CPE station to said wireless base station.

5. The method according to claim 3, further comprising: allocating a frame of said shared wireless bandwidth in a downlink direction from said wireless base station to said subscriber CPE station.

6. The method according to claim 2, further comprising: allocating said shared wireless bandwidth on a subframe within a frame basis.

7. The method according to claim 6, further comprising: allocating a subframe of said shared wireless bandwidth in an uplink direction from said subscriber CPE station to said wireless base station.

8. The method according to claim 6, further comprising: allocating a subframe of said shared wireless bandwidth in a downlink direction from said wireless base station to said subscriber CPE station.

9. The method according to claim 2, further comprising: allocating said shared wireless bandwidth on a slot within a frame basis.

10. The method according to claim 9, further comprising: allocating a slot of said shared wireless bandwidth in an uplink direction from said CPE station to said wireless base station.

11. The method according to claim 9, further comprising: allocating a slot of said shared wireless bandwidth in a downlink direction from said wireless base station to said subscriber CPE station.

12. The method according to claim 2, further comprising: allocating said shared wireless bandwidth on a subslot within a frame basis.

13. The method according to claim 12, further comprising: allocating a subslot of said shared wireless bandwidth in an uplink direction from said subscriber CPE station to said wireless base station.

14. The method according to claim 12, further comprising: allocating a subslot of said shared wireless bandwidth in a downlink direction from said wireless base station to said subscriber CPE station.

15. The method according to claim 6, further comprising: allocating said shared wireless bandwidth to one or more control packets.

16. The method according to claim 15, further comprising at least one of:

allocating a downstream acknowledgment slot;

allocating a reservation request slot;

allocating an operations data slot;

allocating an upstream acknowledgment slot;

allocating an acknowledgment request slot;

allocating a frame descriptor slot; and

allocating a command and control slot.

17. The method according to claim 2, further comprising: allocating said shared wireless bandwidth to one or more data packets.

18. The method according to claim 17, further comprising at least one of:

allocating said shared wireless bandwidth in an uplink direction; and

allocating said shared wireless bandwidth in a downlink direction.

19. The method according to claim 1, further comprising: allocating shared wireless bandwidth to said subscriber CPE station so as to optimize end-user internet protocol (IP) quality of service (QoS).

20. The method according to claim 18, further comprising at least one of:

identifying said IP flow;

characterizing said IP flow;

storing said IP flow; and

prioritizing said IP flow.

21. The method according to claim 20, wherein said identifying step comprises:

analyzing a packet of said IP flow so as to determine whether said packet of said IP flow is associated with a new IP flow or an existing IP flow;

prioritizing said packet of said IP flow after characterizing said IP flow and classifying said IP flow, if said packet is determined to be associated with said new IP flow; and

83

prioritizing said packet of said IP flow without characterizing said IP flow, and without classifying said IP flow, if said packet is determined to be associated with said existing IP flow.

22. The method according to claim 21, wherein said analyzing step comprises:

- buffering said packet of said IP flow;
- extracting information from at least one of a packet header field and a packet payload field of said packet of said IP flow; and
- analyzing said information from said packet.

23. The method according to claim 21, further comprising:

- determining whether a version of said packet is Internet Protocol version IPv4 or IPv6; and
- parsing said packet accordingly.

24. The method according to claim 22, further comprising:

- determining a source application type of said packet.

25. The method according to claim 24, further comprising at least one of:

- storing a source application for a source address from a source application packet header table;
- retrieving said source application for said source address from said source application packet header table;
- determining a source application from a type of service (TOS) packet header field; and
- determining a source application from a differentiated services (DiffServ) packet header field.

26. The method according to claim 21, further comprising at least one of:

- storing an identifier of said IP flow to an IP flow identification data table; and
- retrieving said identifier of said IP flow from said IP flow identification data table.

27. The method according to claim 20, further comprising at least one of:

- determining whether an age of a packet is older than a threshold age;
- anticipating client application IP flow discards based on said age of said packet exceeding said threshold age;
- determining a QoS requirement for said IP flow; and
- determining a subscriber identification for said subscriber CPE station associated with said IP flow.

28. The method according to claim 27, further comprising:

- analyzing a time to live (TTL) packet header field for determining said age of said packet.

29. The method according to claim 27, further comprising:

- determining a QoS requirement for said IP flow.

30. The method according to claim 27, further comprising:

- determining a QoS requirement for said IP flow based on at least one of:
- a source address;
- a destination address; and
- a UDP port number.

31. The method according to claim 20, further comprising:

- buffering a packet of said IP flow in accordance with an existing IP flow for subsequent prioritizing, if said packet of said IP flow is identified as associated with said existing IP flow.

32. The method according to claim 20, further comprising:

- classifying a packet of said LIP flow into a QoS class grouping.

84

33. The method according to claim 32, further comprising:

- determining and taking into account said QoS class groupings when scheduling communication of said IP flow.

34. The method according to claim 33, further comprising:

- determining and taking into account any optional differentiated services (DiffServ) field priority marking for said IP flow when scheduling communication of said IP flow.

35. The method according to claim 33, further comprising:

- determining and taking into account any optional type of service (TOS) field priority marking for said IP flow when scheduling said IP flow.

36. The method according to claim 20, further comprising:

- determining and taking into account hierarchical class based priorities (HCBPs) for said IP flow when scheduling said IP flow.

37. The method according to claim 20, further comprising:

- determining and taking into account virtual private network (VPN) priorities for said IP flow when scheduling said IP flow.

38. The method according to claim 20, further comprising:

- determining and taking into account service level agreement (SLA) based priorities for said IP flow when scheduling said IP flow.

39. The method according to claim 20, further comprising:

- determining and taking into account any type of service (TOS) priorities for said IP flow when scheduling said IP flow.

40. The method according to claim 20, further comprising:

- determining and taking into account any differentiated services (DiffServ) priorities for said IP flow when scheduling said IP flow.

41. The method according to claim 38, further comprising the step of:

- prioritizing said IP flow based on priorities of a service level agreement (SLA) for SLA subscribers.

42. The method according to claim 41, further comprising the step of:

- analyzing said SLA for said IP flow.

43. The method according to claim 42, further comprising the step of:

- prioritizing said IP flow based on one or more subscriber-defined parameters.

44. The method according to claim 41, further comprising:

- prioritizing based on a premium service level;
- prioritizing based on a normal service level; and
- prioritizing based on a value service level.

45. The method according to claim 1, wherein the method comprises:

- assigning future slots of a transmission frame to a data packet in the transmission frame for transmission over said shared wireless medium, further comprising:
- applying an advanced reservation algorithm to schedule transmission of said IP flow;
- reserving a first slot in a future transmission frame based on said advanced reservation algorithm, for a first data packet of said IP flow; and
- reserving a second slot in a subsequent transmission frame subsequent in time to said future transmission

85

frame based on said advanced reservation algorithm, for a second data packet of said IP flow, wherein said second data packet of said IP flow is placed in said second slot of said subsequent transmission frame in an isochronous manner to the placing of said first data packet in said first slot of said future transmission frame.

46. The method according to claim 45, wherein there is a periodic variation between the placing of said first data packet in said first slot and the placing of second data packet in said second slot.

47. The method according to claim 45, wherein there is an aperiodic variation between the placing of said first data packet in said first slot and the placing of said second data packet in said second slot.

48. The method according to claim 45, wherein said advanced reservation algorithm determines whether said IP flow is jitter-sensitive.

49. The method according to claim 6, wherein the method comprises providing isochronous data packets in a telecommunications system, said telecommunications system comprising: said wireless base station coupled to a first data network; one or more host workstations coupled to said first data network; one or more of said subscriber CPE stations in wireless communication with said wireless base station over said shared wireless bandwidth using a packet-centric protocol; and one or more subscriber workstations coupled to each of said one or more subscriber CPE stations over a second network; resource allocation means optimizing end-user IP quality of service (QoS) and allocating said shared wireless bandwidth among said one or more subscriber CPE stations, the method comprising:

applying an advanced reservation algorithm to scheduling of an IP flow;

reserving succeeding slots in one or more succeeding future transmission frames of said IP flow in an isochronous manner based on said advanced reservation algorithm.

50. The method according to claim 49, wherein there is a periodic variation between said successive reserving of said succeeding slots.

51. The method according to claim 49, wherein there is no periodic variation between the successive reserving of said succeeding slots.

52. The method according to claim 49, wherein said advanced reservation algorithm determines whether said IP flow is jitter-sensitive.

53. The method according to claim 40, wherein the method comprises: integrating differentiated services (Diff-Serv) marked IP-Flows into quality of service (QoS) priorities in a wireless point to multi-point (PtMP) transmission system, said wireless point to multi-point (PtMP) transmission system comprising:

said wireless base station coupled to a first data network, one or more host workstations coupled to said first data network,

one or more subscriber CPE stations in wireless communication with said wireless base station over said shared wireless bandwidth using a packet-centric protocol, one or more subscriber workstations coupled to each of said one or more subscriber CPE stations over a second network, and

a resource allocator that allocates said shared wireless bandwidth among said one or more subscriber CPE stations in communication with said wireless base station, the method comprising the steps of:

86

analyzing said IP flow for a differentiated services (Diff-Serv) marking; and scheduling said IP flow taking into account any said DiffServ marking.

54. The method according to claim 53, wherein said IP flow comprises at least one of:

a TCP/IP flow; and

a UDP/IP flow.

55. The method according to claim 53, wherein said analyzing step comprises:

identifying said IP flow having said Diff Serv marking; characterizing said IP flow having said Diff Serv marking; and

classifying said IP flow having said Diff Serv marking.

56. The method according to claim 53, wherein said scheduling step comprises:

prioritizing said IP flow taking into account any said DiffServ marking and other IP priority header identification information.

57. The method according to claim 56, wherein said prioritizing step comprises a weighted fair priorities (WFP).

58. The method according to claim 57, wherein said prioritizing step comprises at least one of:

prioritizing based on an IP flow hierarchical class based priority;

prioritizing based on a service level agreement (SLA) class priority;

prioritizing based on a virtual private network (VPN) subscription; and

prioritizing based on a virtual private network (VPN) subscription class priority.

59. The method according to claim 55, wherein said identifying step comprises at least one of the steps of:

analyzing one or more packet header fields in said IP flow; and

distinguishing between a new and an existing IP flow.

60. The method according to claim 59, wherein said analyzing one or more packet header fields step comprises at least one of:

buffering packets of a plurality of IP flows;

extracting identification information from said packet header fields of each of said packets; and

analyzing said identification information from said packet header fields.

61. The method according to claim 60, wherein said extracting step comprises at least one step of:

determining whether said packets are a packet version IPv.4 or IPv.6; and

parsing said packet header fields of said plurality of IP flows.

62. The method according to claim 61, wherein said analyzing step comprises the step of:

determining a source application type.

63. The method according to claim 61, wherein said analyzing step comprises the step of:

taking into account any said differentiated service (Diff Serv) field priority marking.

64. The method according to claim 63, wherein said DiffServ field priority marking is compatible with Internet Engineering Task Force (IETF) RFC 2474.

65. The method according to claim 63, wherein said Diff Serv field priority marking is compatible with IETF RFC 2475.

66. The method according to claim 55, wherein said classifying step comprises the step of:

associating a packet of said IP flow with an existing IP flow.

87

67. The method according to claim 55, wherein said classifying step comprises the step of:  
grouping a packet of a new IP flow into a QoS priority class.

68. The method according to claim 67, wherein said grouping step comprises the step of:  
taking into account any said DiffServ marking for said IP flow.

69. The method according to claim 56, wherein said prioritizing step comprises the step of:  
taking into account any said DiffServ marking for said IP flow.

70. The method according to claim 37, further comprising a scheduling method for use in a packet-centric wireless point to multi-point telecommunications system, said telecommunications system comprising:

said wireless base station coupled to a first data network;  
one or more host workstations coupled to said first data network;

one or more of said subscriber customer premise equipment (CPE) stations in wireless communication with said wireless base station over said shared wireless bandwidth using a packet-centric protocol; and  
one or more subscriber workstations coupled to each of said one or more subscriber CPE stations over a second network;

resource allocation means optimizing end-user internet protocol (IP) quality of service (QoS) and allocating shared wireless bandwidth among said subscriber CPE stations;

means for analyzing and scheduling said IP flow over said shared wireless bandwidth, wherein the scheduling method comprises the steps of:

prioritizing said IP flow based on priorities of a virtual private network (VPN).

71. The method according to claim 70, further comprising the step of:

analyzing said priorities of said VPN for said IP flow.

72. The method according to claim 71, further comprising the step of:

prioritizing any VPN IP flows.

73. The method according to claim 71, further comprising the step of:

prioritizing said W flow based on one or more subscriber-defined parameters.

74. The method according to claim 70, wherein said VPN comprises a directory enabled networking (DEN) table management scheme.

75. The method according to claim 74, wherein said VPN DEN is common information model (CIM) 3.0 compatible.

76. The method according to claim 70, wherein said VPN is implemented using a point-to-point tunneling protocol (PPTP).

77. The method according to claim 70, wherein said VPN is implemented using internet protocol security (IPSec) protocol.

78. The method according to claim 10, wherein said allocating step comprises:

allocating said slot of said shared wireless bandwidth in an uplink direction based on reservation requests from said subscriber CPE station to said wireless base station.

79. The method according to claim 19, wherein said allocating said shared wireless bandwidth in an uplink direction step comprises:

allocating said shared wireless bandwidth in an uplink direction based on reservation requests.

88

80. The method according to claim 2, wherein the step of dynamically allocating said shared wireless bandwidth includes a time domain multiple access/time division duplex (TDMA/TDD) media access control (MAC) telecommunications access method, further comprising the steps of:

(a) accessing IP flow control information from one or more dynamically allocatable control slots that provide said IP flow control information over said shared wireless bandwidth between said wireless base station and one or more of said subscriber CPE stations; and

(b) accessing IP flow data information being transmitted in one or more dynamically allocatable data slots that provide said IP flow data information over said shared wireless bandwidth between said wireless base station and said one or more subscriber CPE stations.

81. The method according to claim 80, wherein step (a) comprises the steps of at least one of:

communicating a downstream acknowledgment;

communicating a reservation request;

communicating an operations data slot;

communicating an upstream acknowledgment slot;

communicating an acknowledgment request slot;

communicating a frame descriptor slot; and

communicating a command and control slot.

82. The method according to claim 80, further comprising the steps of:

communicating said IP flow data information in said dynamically allocatable data slots for transmission in an uplink direction from said subscriber CPE station to said wireless base station; and

communicating said IP flow data information in said dynamically allocatable data slots for transmission in a downlink direction from said wireless base station to said subscriber CPE station.

83. The method according to claim 82, further comprising the step of:

dynamically allocating said shared wireless bandwidth between a downlink subframe and an uplink subframe.

84. The method according to claim 83, further comprising the steps of:

scheduling multiple slots in said downlink subframe for said subscriber CPE station for a single internet protocol (IP) flow.

85. The method according to claim 83, further comprising the steps of:

scheduling multiple slots in said downlink subframe for said subscriber CPE station for a plurality of internet protocol (IP) flows.

86. The method according to claim 83, comprising the steps of:

scheduling multiple slots in said uplink subframe for said subscriber CPE station for a single internet protocol (IP) flow.

87. The method according to claim 83, further comprising the steps of:

scheduling multiple slots in said uplink subframe for said subscriber CPE station for a plurality of internet protocol (IP) flows.

88. The method according to claim 83, further comprising the steps of:

dynamically allocating one or more reservation request contention slots for addressing contentions between reservation requests for available uplink subframe slots between said wireless base station and said subscriber CPE station.

89

89. The method according to claim 88, further comprising the steps of:

dynamically allocating said contention slots according to the frequency of detected collisions between said reservation requests.

90. The method according to claim 83, further comprising:

transmitting one or more reservation slots in said downlink subframe defining where said subscriber CPE station requesting a reservation will place uplink data.

91. The method according to claim 82, wherein said steps of communicating said IP flow information use a time domain multiple access/time division duplex (TDMA/TDD) transmission media access control (MAC) access method.

92. The method according to claim 82, wherein said steps of communicating said IP flow information use a frequency division multiple access (FDMA) access method.

93. The method according to claim 82, wherein said steps of communicating said IP flow information use a code-division multiple access (CDMA) access method.

94. The method according to claim 80, wherein step (a) comprises the steps of at least one of:

communicating a downstream acknowledgment;  
communicating an operations data slot;  
communicating an upstream acknowledgment slot;  
communicating an acknowledgment request slot; and  
communicating a frame descriptor slot.

95. The method of claim 83, wherein said step of dynamically allocating a bandwidth further comprises:

analyzing and scheduling said IP flow over said shared wireless bandwidth comprising:  
identifying said IP flow;  
characterizing said IP flow;  
classifying said IP flow; and  
prioritizing said IP flow.

96. The method according to claim 1 comprising a step of: preventing operation of a transmission control protocol (TCP) sliding window algorithm that controls a TCP transmission rate in a wireless point to multi-point (PtMP) transmission system by:

ensuring that transport of a packet over a wireless telecommunications link occurs reliably so as to guarantee enduser quality of service (QoS); and  
preventing operation of a TCP sliding window algorithm taking into account application awareness if transport is not occurring reliably over said wireless telecommunications link in order to maintain a TCP transmission rate.

97. The method of claim 96, wherein said ensuring step comprises the steps of:

awaiting acknowledgment of wireless transmission of said packet at a link layer over said wireless telecommunications link; and  
retransmitting at said link layer an unacknowledged lost packet.

98. The method according to claim 97, wherein said link layer is a packet-centric QoS aware media access control (MAC) layer.

99. The method of claim 96, wherein said preventing step comprises the step of:

suppressing transmission of a TCP layer communication that would cause said TCP sliding window algorithm to modify said TCP transmission rate.

100. The method of claim 99, wherein said suppressing step comprises the step of:

preventing a source TCP from retransmitting said packet.

90

101. The method of claim 99, wherein said suppressing step comprises the step of:

avoiding modification of a source TCP layer and a destination TCP layer.

102. The method of claim 101, wherein said source and destination TCP layers are unaware of operation modification.

103. The method of claim 99, wherein said suppressing step comprises the step of:

intercepting retransmission requests between a destination TCP layer of a subscriber workstation coupled to said subscriber CPE station which is in wireless communication with said wireless base station, and a source TCP layer of a host workstation coupled to said wireless base station.

104. The method of claim 99, further comprising a step of: detecting real congestion and permitting transmission of a TCP layer communication that would cause said TCP sliding window algorithm to modify said TCP transmission rate if real congestion is detected.

105. The method of claim 104, wherein said detecting step comprises determining from said link layer whether said wireless transmission of said packet was acknowledged.

106. The method of claim 96, wherein said ensuring step comprises the steps of:

awaiting at a TCP adjunct an acknowledgment of wireless transmission of said packet over said wireless telecommunications link; and  
retransmitting a lost packet if said acknowledgment is not received at said TCP adjunct before a threshold time period.

107. The method according to claim 106, wherein said TCP adjunct is operative

to deliver end user QoS and is application aware.

[108. A computer program product embodied on a computer readable medium for IP flow classification grouping IP flows in a packet-centric wireless point to multi-point telecommunications system, the computer program product comprising:

means for enabling a processor to analyze an Internet Protocol (IP) flow in a packet-centric manner;  
means for enabling the processor to classify said IP flow; and

means for enabling the processor to schedule said IP flow for transmission over a shared wireless bandwidth between a wireless base station and at least one subscriber customer premises equipment (CPE) station, including

means for enabling the processor to allocate said shared wireless bandwidth to communication of said IP flow between said wireless base station and a subscriber CPE station, so as to optimize end-user quality of service (QoS) associated with said IP flow.]

109. A method for scheduling packets comprising:

classifying a plurality of packets according to end-user quality of service (QoS) requirements of said plurality of packets; and

scheduling said plurality of packets for communication in at least one of an upstream direction and a downstream direction over a shared wireless bandwidth according to a scheduling algorithm.

110. The method according to claim 109, wherein at least one of said classifying step and said scheduling step is performed at a customer premises equipment device (CPE) station.

111. The method according to claim 109, wherein at least one of said classifying step and said scheduling step is performed at a wireless base station.

112. The method according to claim 109, wherein at least one of said classifying step and said scheduling step is performed by a packet scheduler, wherein said packet scheduler is executed on at least one of a base station and a customer premises equipment (CPE) station.

113. The method according to claim 109, wherein at least one of said classifying step and said scheduling step is performed at an access point (AP) base station.

114. The method according to claim 109, further comprising:

communicating said end-user QoS requirements between a customer premises equipment station (STA) and an access point (AP).

115. The method according to claim 109, further comprising:

controlling packet scheduler behavior according to said end-user QoS requirements as managed by a network management system.

116. The method according to claim 109, further comprising:

constructing a wireless transmission frame from said plurality of packets taking into account said end-user quality of service (QoS) requirements so as to maximize wireless bandwidth utilization.

117. The method according to claim 116, wherein said constructing step comprises:

placement of at least one of a packet, a portion of a packet, an IP flow, and a portion of an IP flow into said wireless transmission frame.

118. The method according to claim 109, further comprising:

communicating said end-user QoS requirements between a station (STA) and an access point (AP).

119. The method according to claim 109, further comprising:

communicating said end-user quality of service (QoS) requirements between a wireless local area network (LAN) station (STA) and an access point (AP).

120. The method according to claim 109, further comprising:

communicating said end-user quality of service (QoS) requirements between a wireless wide area network (WAN) station (STA) and an access point (AP).

121. The method according to claim 109, the step of scheduling further comprising:

allocating resources of said shared wireless bandwidth among a plurality of wireless network stations to optimize end-user quality of service (QoS) for an Internet Protocol (IP) flow.

122. The method according to claim 121, the step of scheduling further comprising:

assigning future slots of a transmission frame to a portion of said IP flow in said transmission frame for transmission over said shared wireless network.

123. The method according to claim 122, the step of assigning, further comprising:

applying a reservation algorithm;  
reserving a slot for a first portion of a first IP flow in a future transmission frame based on said algorithm;  
reserving a second slot for a second portion of said first IP flow in a transmission frame subsequent in time to said future transmission frame based on said algorithm;  
placing said first portion of said first IP flow in said first slot; and

placing said second portion of said first IP flow in said second slot in an isochronous manner to the placing of said first portion in said first slot.

124. The method according to claim 123, further comprising:

interposing a periodic variation between the placing of said first portion in said first slot and the placing of said second portion in said second slot.

125. The method according to claim 123, further comprising:

interposing an aperiodic variation between the placing of said first portion in said first slot and the placing of said second portion in said second slot.

126. The method according to claim 121, further comprising:

determining whether said IP flow is at least one of a jitter-sensitive IP flow and a latency sensitive IP flow.

127. The method according to claim 121, the step of allocating further comprising:

accounting for hierarchical class based priorities (HCBPs) for said IP flow.

128. The method according to claim 121, the step of allocating further comprising:

accounting for virtual private network (VPN) priorities for said IP flow.

129. The method according to claim 121, the step of allocating further comprising:

accounting for service level agreement (SLA) based priorities for said IP flow.

130. The method according to claim 121, the step of allocating further comprising:

accounting for any type of service (TOS) priorities for said IP flow.

131. The method according to claim 121, the step of allocating further comprising:

accounting for any differentiated services (DiffServ) priorities for said IP flow.

132. The method according to claim 121, further comprising:

associating said IP flow with at least one of a voice-over-Internet Protocol (VoIP) data and a video data application.

133. The method according to claim 109, wherein said shared wireless bandwidth is at least one of a local area network (LAN) and a wide area network (WAN).

134. The method according to claim 121, wherein said wireless network stations comprise at least one of a local area network (LAN) wireless network station and a wide area network (WAN) wireless network station.

135. The method according to claim 109, the step of classifying further comprising:

controlling the behavior of a packet scheduler according to said end-user quality of service (QoS) requirements as managed by a service management system.

136. The method according to claim 109, further comprising:

constructing a wireless transmission frame from said plurality of packets including accounting for said end user QoS requirements and maximizing wireless bandwidth utilization.

137. The method according to claim 136, further comprising:

placing at least one of a complete and a partial packet into said wireless transmission frame.

138. The method according to claim 109, further comprising:

controlling a local area network media (LAN) access control (MAC) layer including accounting for said end-user QoS requirements.

**139.** The method according to claim **109**, wherein said scheduling step is performed by a packet scheduler comprising:

an off-the-shelf MAC/PHY network interface card (NIC) adapter including at least one of a PCI form factor, a PCMCIA form factor, a PC Card form factor, a PCI bus, a PCMCIA bus, and a PC Card bus.

**140.** The method according to claim **109**, further comprising:

coordinating, by an access point (AP), access to a radio frequency (RF) wireless resource by one or more wireless network stations comprising

controlling, by said AP, access to said RF wireless resource by said one or more wireless network stations comprising

receiving reservation requests from said one or more wireless network stations at said AP and sending grants from said AP to said one or more wireless network stations.

**141.** The method according to claim **140**, further comprising:

periodically polling said one or more wireless network stations for said reservation requests so as to minimize latency for new IP flows.

**142.** The method according to claim **140**, wherein said coordinating step further comprises:

obviating performance degradation caused by contention-based media access methods.

**143.** The method according to claim **140**, wherein said coordinating step further comprises:

allocating resources to said one or more wireless network stations comprising:

minimizing latency for new IP flows.

**144.** The method according to claim **140**, wherein said coordinating step further comprises:

ensuring high priority packets are provided appropriate bandwidth needed by said high priority packets.

**145.** The method according to claim **109**, wherein said scheduling step comprises:

allocating said shared wireless bandwidth for IP flows requiring special QoS treatment; and

providing application-aware packet discards, while avoiding at least one of uncontrolled packet discards and media access contention resolution.

**146.** The method according to claim **109**, wherein said scheduling step comprises:

allocating said shared wireless bandwidth in oversubscribed environments without consequent degradation of high priority Voice over IP (VoIP) and video applications.

\* \* \* \* \*