



US 20060248266A1

(19) **United States**(12) **Patent Application Publication****Sun Kim et al.**(10) **Pub. No.: US 2006/0248266 A1**(43) **Pub. Date: Nov. 2, 2006**(54) **METHOD OF ENSURING SYNCHRONOUS PRESENTATION OF ADDITIONAL DATA WITH AUDIO DATA RECORDED ON A REWRITABLE RECORDING MEDIUM**(30) **Foreign Application Priority Data**

Nov. 27, 2001 (KR) 01-74382

Publication Classification(76) Inventors: **Hyung Sun Kim**, Seoul (KR); **Kang Soo Seo**, Kyunggi-do (KR); **Byung Jin Kim**, Kyunggi-do (KR); **Soung Hyun Um**, Anyang-si (KR)(51) **Int. Cl.**
G06F 12/00 (2006.01)(52) **U.S. Cl.** 711/100

Correspondence Address:

BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)(57) **ABSTRACT**(21) Appl. No.: **11/409,990**(22) Filed: **Apr. 25, 2006****Related U.S. Application Data**

(62) Division of application No. 10/305,020, filed on Nov. 27, 2002.

A recording medium and a method and apparatus for managing data are provided. The method includes recording additional data in a data file separate from a file containing main data and recording navigation information that links the main data and the additional data. The additional data are segmented into a plurality of predetermined units, each of the predetermined units including time information indicating a presentation start time of the corresponding unit.

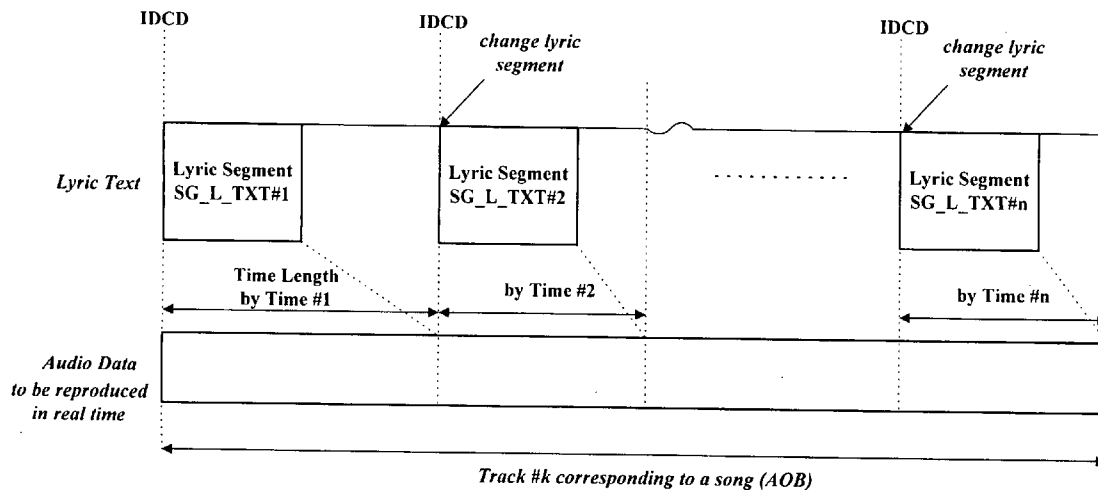


FIG. 1 RELATED ART

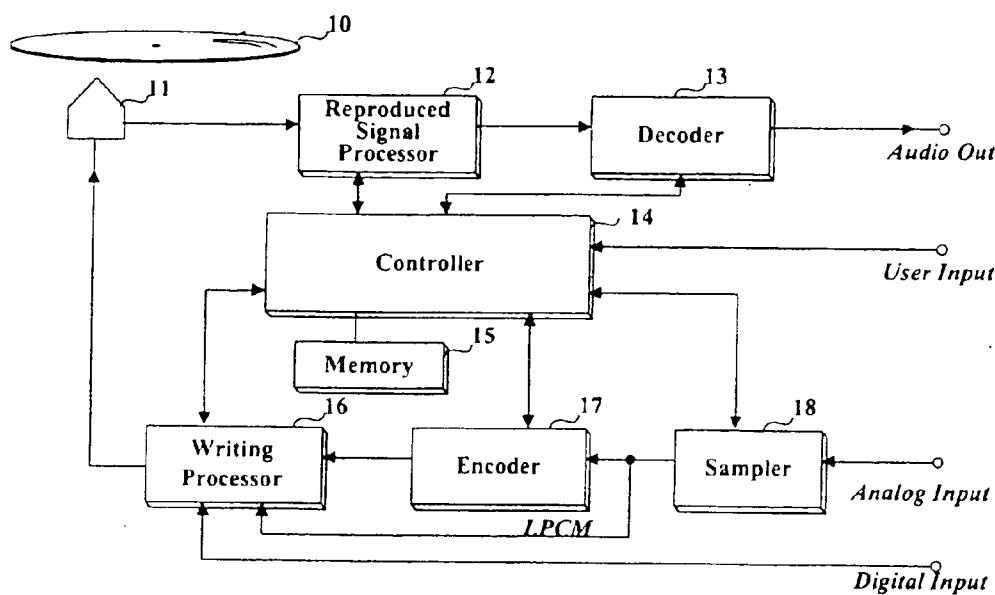



FIG. 2 RELATED ART

*Real Time Record Audio Managemet
(RTR_AMG)*

RTR Audio Manager General Information (RTR_AMGI)
Audio File Information Table (AUDFIT)
Audio Still Video File Information Table (ASVFIT)
Original PGC Information (ORG_PGCI)
User Defined PGC Information Table (UD_PGCIT)
Text Data Manager (TXTDT_MG)
Manufacture's Information Table (MNFIT)

to contain lyrics of recorded songs

FIG. 3

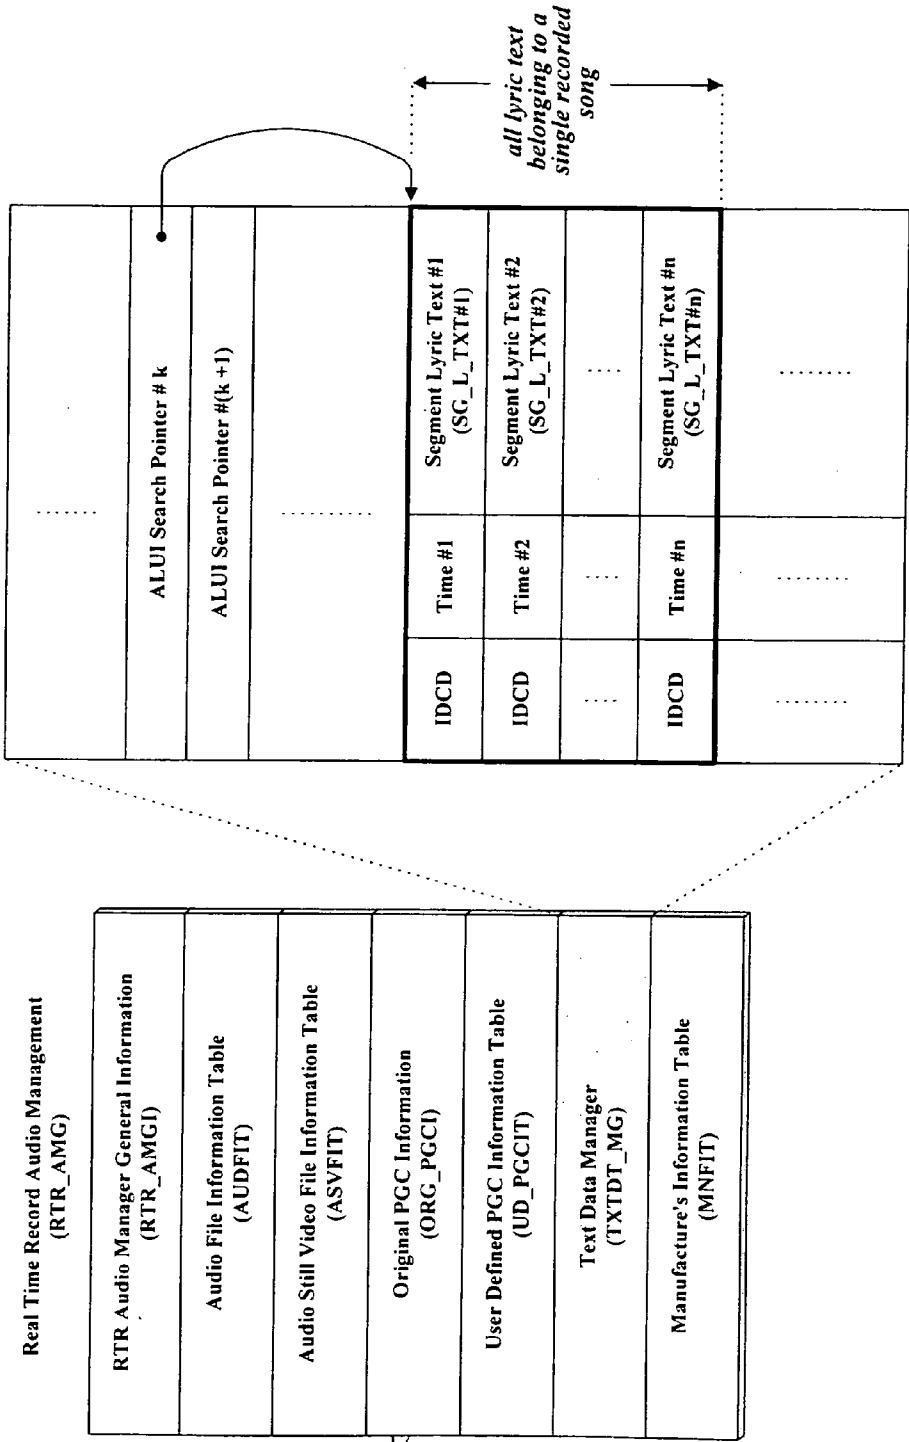

Original Program Chain Information
(ORG_PGCI)

PGC General Information (PGC_GI)
PG Information #1 (PGI #1)
⋮
PG Information #m (PGI #m)
CI Search Pointer #1 (CI_SRP #1)
⋮
CI Search Pointer #n (CI_SRP #n)
Cell Information #1 (CI #1)
⋮
Cell Information #n (CI #n)

FIG. 4

C_TY	Cell Type
PB_INF	Playback Information
AOBI_SRPN	AOBI Search Pointer Number
ASVUI_SRPN	ASVUI Search Pointer Number
ALUI_SRPN	ALUI Search Pointer Number
ASV_DMD	Display Mode of ASV
C_EPI_Ns	Number of C_EPIs
C_A_S_PTM	Audio Start PTM of this Cell
C_A_E_PTM	Audio End PTM of this Cell

FIG. 5

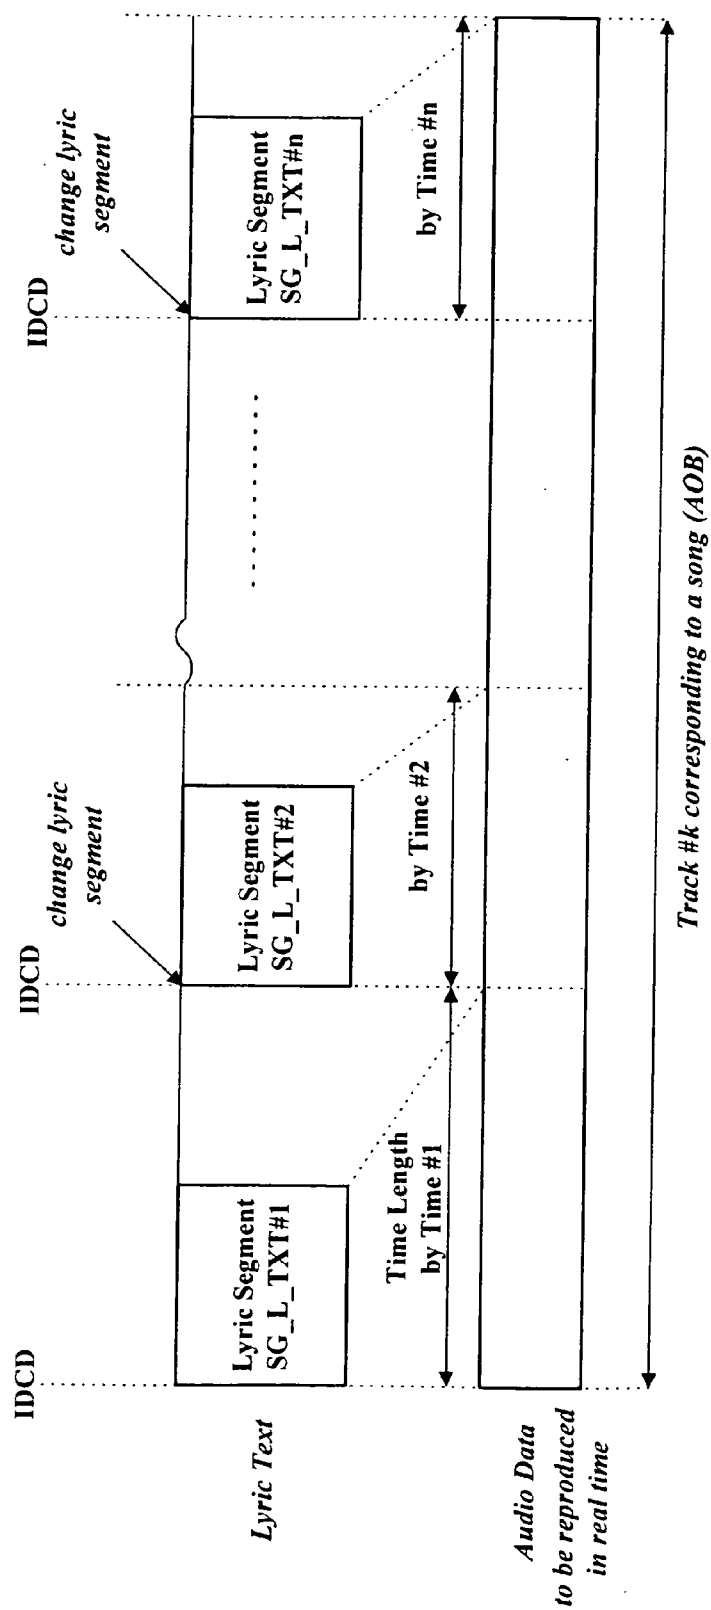


FIG. 6

*Real Time Record Audio Management
(RTR_AMG)*

RTR Audio Manager General Information (RTR_AMGI)
Audio File Information Table (AUDFIT)
Audio Still Video File Information Table (ASVFIT)
Audio Still Video File Information Table (ASVFIT)
Audio Lyric File Information Table (ALFIT)
User Defined PGC Information Table (UD_PGCIT)
Text Data Manager (TXTDT_MG)
Manufacture's Information Table (MNFIT)

FIG. 7*Audio Lyric File Information Table (ALFIT)*

Audio Lyric FIT Information (ALFITI)		ALFI_Ns	Number of ALFIs
		AL_I_Ns	Number of AL_Is
		ALFIT_EA	End Address of ALFIT
Audio Lyric File Information (ALFI)	ALFI Genaral Information (ALFI_GI)	CHRS	Charater Set
		ALUI_SRP_Ns	Number of ALUI_SRPs
		ALU_MG_EA	End Address of ALU_MG
	ALUI Search Pointer #1 (ALUI_SRP #1)	ALU_SA	Start Address of ALU
		ALU_SZ	Size of ALU
		L_ATR	Lyric Attribute
	ALUI Search Pointer #2 (ALUI_SRP #2)	ALU_SA	Start Address of ALU
		ALU_SZ	Size of ALU
		L_ATR	Lyric Attribute
	⋮	⋮	⋮
	ALUI Search Pointer #n (ALUI_SRP #n)	ALUI_SA	Start Address of ALU
		ALUI_SZ	Size of ALU
		L_ATR	Lyric Attribute

file of 'AR_Lyric.ARO'

ALU #1 (ALU #1)	IDCD	Time #1	SG_L_TXT#1	IDCD	Time# k	SG_L_TXT#k
ALU #2 (ALU #2)	IDCD	Time #1	SG_L_TXT#1	IDCD	Time# p	SG_L_TXT#p
	⋮	⋮	⋮	⋮	⋮	⋮	⋮
ALU #n (ALU #n)	IDCD	Time #1	SG_L_TXT#1	IDCD	Time# s	SG_L_TXT#s

METHOD OF ENSURING SYNCHRONOUS PRESENTATION OF ADDITIONAL DATA WITH AUDIO DATA RECORDED ON A REWRITABLE RECORDING MEDIUM

COPENING APPLICATION

[0001] The present application is a divisional application of a copending parent application Ser. No. 10/305,020 filed on Nov. 27, 2002, the contents of which are entirely incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a method of recording additional data such as lyric and user input data to be in synchronization with audio data on a rewritable recording medium, and of reproducing them synchronously therefrom.

[0004] 2. Description of the Related Art

[0005] A disk-type recording medium such as a Compact Disk (CD) can store high-quality digital audio data permanently, so that it is very popular recording medium in these days.

[0006] Recently, a Digital Versatile Disk (called 'DVD' hereinafter) has been developed as a new disk-type recording medium. A DVD can store much more data than a CD, that is, high-quality moving pictures or audio data are recorded on a DVD for much longer time. Therefore, a DVD will be used widely in the near future.

[0007] There are three types of DVDs—DVD-ROM for read-only, DVD-R for write-once, and DVD-RAM or DVD-RW for rewritable. For a rewritable DVD, the standardization of data writing format is in progress.

[0008] **FIG. 1** is a block diagram of an optical disk device that records/reproduces audio data to/from a recording medium.

[0009] The disk device configured as **FIG. 1** comprises an optical pickup **11** reading signals recorded on a rewritable DVD **10** such as a DVD-RW and writing data streams processed into writable signals onto the rewritable DVD **10**; a reproduced signal processor **12** restoring the read signals into compressed digital data; a decoder **13** decoding the compressed digital data to original data; a sampler **18** digitizing an inputted analog signal at a preset sampling rate; an encoder **17** encoding the digitized LPCM data into MPEG-, or AC3-formatted data; a writing processor **16** converting the encoded data from the encoder **17** or LPCM data from the sampler **18** into signals suitable to be written; a controller **14** controlling all elements to conduct user's commands such as playback or record; and a memory **15** for storing data temporally.

[0010] If an analog signal is applied to the disk device of **FIG. 1**, the sampler **18** samples the analog signal at the preset sampling rate. Each sampled signal, which is LPCM data, is applied to the encoder **17** that encodes a block of sampled data into compressed data of pre-specified format, for example, MPEG format. The compressed data are then applied to the writing processor **16**.

[0011] The writing processor **16** converts a series of the compressed data into binary signals which are written in mark/space patterns on the writable DVD **10**. Already-compressed digital data from outside are directly processed by the writing processor **16** to be written onto the writable DVD **10**.

[0012] After recording of audio data, navigation data for the audio data are created and then recorded on the writable DVD **10**.

[0013] **FIG. 2** shows the structure of RTR_AMG (Real Time Record Audio ManaGement) recorded as navigation data on a rewritable disk. The RTR_AMG includes RTR_AMGI (RTR Audio Manager General Information), AUDFIT (AUDio File Information Table), ASVFIT (Audio Still Video File Information Table), ORG_PGCI (ORGiginal PGC (ProGram Chain) Information), UD_PGCI (User Defined PGC Information Table), TXTDT_MG (TeXT DaTa ManaGer), and MNFIT (MaNufacturer's Information Table).

[0014] The TXTDT_MG can include additional data of recorded songs such as lyrics. Therefore, when the controller **14** selects and reproduces a recorded song from the rewritable disk **10**, it is able to present lyric text in characters on a screen by reading it from the TXTDT_MG.

[0015] Consequently, when a user selects a recorded song to play back from the rewritable DVD **10**, he or she is able to view its lyric on a screen.

[0016] However, each of additional data such as a lyric included in the TXTDT_MG is linked with a recorded song wholly. In other words, a lyric in the TXTDT_MG cannot have information to synchronize in detail with a recorded song. Therefore, it is impossible to display lyric data step by step at the same speed that the recorded song is reproduced from a rewritable DVD.

SUMMARY OF THE INVENTION

[0017] It is an object of the present invention to provide a synchronizing method that records additional data such as lyric data and user input data to be synchronized minutely with audio data on a rewritable recording medium.

[0018] It is another object of the present invention to provide a synchronizing method that reproduces synchronously audio data and additional data thereof that have been recorded with minutely-synchronizing information.

[0019] An audio data related information recording method in accordance with the present invention segments additional information related with audio data recorded on a rewritable recording medium, records the information segments, and further records synchronizing information, e.g., time length to keep up presentation of each information segment or start time to present each information segment, in the vicinity of said each information segment in order to present each information segment in synchronization with a corresponding part of the recorded audio data.

[0020] An audio data related information reproducing method in accordance with the present invention reads sequentially a plurality of information segments constituting a piece of additional information related with audio data recorded on a rewritable recording medium, and makes presentation of each information segment based on synchro-

nizing information, e.g., time length to keep up presentation of each information segment or start time to present each information segment, recorded in association with each information segment in order to present each information segment in synchronization with a corresponding part of the recorded audio data.

[0021] These and other objects of the present application will become more readily apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings, which are included to provide a further understanding of the invention, illustrate the preferred embodiments of the invention, and together with the description, serve to explain the principles of the present invention.

[0023] In the drawings:

[0024] **FIG. 1** is a block diagram of an optical disk device that records/reproduces audio data to/from a recording medium according to a related art;

[0025] **FIG. 2** shows the structure of RTR_AMG (Real Time Record Audio ManaGement) recorded as navigation data on a rewritable disk according to a related art;

[0026] **FIG. 3** shows an RTR_AMG in which TXT-DT_MG (TeXT DaTa ManaGer) structured according to an embodiment of the present invention;

[0027] **FIG. 4** shows CI (Cell Information) structured according to an embodiment of the present invention;

[0028] **FIG. 5** illustrates an example of a continuous and synchronous display of a series of lyric segments together with reproduced audio data according to an embodiment of the present invention;

[0029] **FIG. 6** shows an RTR_AMG structured according to another embodiment of the present invention; and

[0030] **FIG. 7** shows ALFIT (Audio Lyric File Information Table) structured according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0031] In order that the invention may be fully understood, a preferred embodiment thereof will now be described with reference to the accompanying drawings.

[0032] In an audio data recording method in accordance with an embodiment of the present invention, lyric or user data related with a song recorded on a rewritable disk such as DVD-RW is segmented into several units. Each segmented unit is linked with each corresponding part of the recorded song through segment synchronizing information for the purpose of minute synchronization of song and additional data.

[0033] **FIG. 3** shows an RTR_AMG in which TXT-DT_MG structured according to an embodiment of the present invention is included.

[0034] As shown in **FIG. 3**, RTR_AMG is composed of RTR_AMGI, AUDFIT, ASVFIT, ORG_PGCI, UD_PGCIT, TXTDT_MG, and MNFIT. The TXTDT_MG in **FIG. 3** is composed of respective ALUI (Audio Lyric Unit Information) search pointers and corresponding pieces of ALUI. Each ALUI includes lyric segments 'SG_L_TXT #i', which is segmented lyric text, and their individual output-time related information 'Time #i'.

[0035] The output-time related information 'Time #i' is time-length, which a corresponding lyric segment is kept displayed for, or instant time when a corresponding lyric segment starts to be displayed. The lyric text may be displayed as subtitles. This time information is also used to differentiate a linked lyric segment from several lyric segments displayed altogether by different color or font for a specified duration.

[0036] Each lyric segment includes an ID code 'IDCD' as shown in **FIG. 3**. The ID code is used to indicate that each segmented unit has output-time related information, that each segmented unit includes lyric or user data, or that the output-time related information is duration or start time.

[0037] Each group of segmented units is linked with a recorded song through each ALUI search pointer in TXT-DT_MG as shown in **FIG. 3**. For example, an ALUI search pointer linked with a recorded song points a start position of the first lyric segment of an associated segment group.

[0038] To link a recorded song with an ALUI search pointer, a piece of CI (Cell Information) related with an AOB (Audio OBject), which corresponds to a single recorded song in general, is structured in the ORG_PGCI as shown in **FIG. 4**.

[0039] Each CI includes an AOBI_SRPN (AOB Information SeaRch Pointer Number) for indexing information location of a related AOB (or song), an ASVUI_SRPN (ASVU (Audio Still Video Unit) Information SeaRch Pointer Number) for indexing information location of still video data linked with an AOB, and an ALUI search pointer number 'ALUI_SRPN' for indexing an ALUI search pointer in the TXTDT_MG that points a segment group containing a full lyric text related with an AOB.

[0040] Thus, if a song, namely, an AOB is chosen, the controller 14 reads the number written in ALUI_SRPN of CI associated with the selected AOB, and reads an address in ALUI search pointer indexed by the read number in the TXTDT_MG. The location of lyric text related with the selected song is found by this read address.

[0041] Then, lyric segments are retrieved sequentially from the addressed location by the reproduced signal processor 12. At this time, the controller 14 examines an ID code preceding each lyric segment. If the ID code is indicative of type of output-time related information, e.g., a time length for which the following lyric segment 'SG_L_TXT #i' is displayed, the controller 14 keeps outputting each lyric segment for a duration specified by the time length and changes current lyric segment with the next one after the time length expires. This operation continues until the end of AOB or stop request is received.

[0042] FIG. 5 illustrates continuous and synchronous display of a series of lyric segments together with reproduced audio data belonging to the selected AOB.

[0043] Referring to FIG. 5, if the ID code is indicative of presentation start time of each lyric segment, the controller 14 outputs each lyric segment the moment an elapsed time after reproducing the chosen AOB (or song) becomes equal to the start time specified by field 'Time'. The currently-outputted lyric segment keeps being outputted until the next segment is outputted at its start time.

[0044] If the ID code is indicative of not the type of output-time related information but the type of additional information, e.g., user data, the controller 14 processes the segmented additional information adequately for the designated type.

[0045] If the ID code indicates that there is no output-time related information in lyric segments, then the lyric segments are sequentially read out irrespective of time. This operation seems to correspond to a conventional lyric data displaying method.

[0046] The lyric segments related with a recorded song may be written in a file other than the RTR_AMG, instead of the TXTDT_MG.

[0047] FIG. 6 shows an RTR_AMG structured according to another embodiment of the present invention. The RTR_AMG of FIG. 6 includes an ALFIT (Audio Lyric File Information Table) for storing in another file the lyric data that are composed of segmented information such as lyrics or user data of all recorded songs.

[0048] FIG. 7 shows the structure of the ALFIT of FIG. 6. The ALFIT is composed of ALFITI (ALFIT Information) and ALFI. The ALFITI includes fields of 'ALFI_Ns' reserved for the number of audio lyric information files, 'AL_I_Ns' for the number of pieces of audio lyric information, and 'ALFIT_EA' for an end address of ALFIT.

[0049] The ALFI is composed of ALFI_GI (ALFI General Information) and a plurality of ALUI (Audio Lyric Unit Information) search pointers, each including 'ALU_SA' for a start address of a lyric unit, 'ALU_SZ' for size of a lyric unit, and 'L_ATTR' for attribute of a lyric.

[0050] The ALU_SA in each ALUI search pointer points to the location of a corresponding ALU (Audio Lyric Unit) in a lyric file named by 'AR_Lyric.ARO' that is not included in the RTR_AMG. Each ALU in the lyric file 'AR_Lyric.ARO' includes a lyric text associated with a single recorded song, and the lyric text is divided into several segments 'SG_L_TXT #i'. Each lyric segment also has output-time related information 'Time' and ID code 'IDCD' as described in the aforementioned embodiment.

[0051] According to this structure of the RTR_AMG, the ALUI_search pointer number contained in CI indexes an ALUI search pointer pointing to a lyric unit in the file 'AR_Lyric.ARO' associated with a recorded AOB, namely a song.

[0052] Thus, if a song, namely, an AOB is chosen, the controller 14 reads the number written in ALUI_SPRN of CI associated with the selected AOB, and reads an address in ALUI search pointer contained in the field 'ALFI' indexed

by the read number. The location of a lyric unit related with the selected song is found in the file 'AR_Lyric.ARO' by this read address.

[0053] Then, lyric segments are retrieved sequentially from the first segment 'SG_L_TXT #1' at the addressed location in the file 'AR_Lyric.ARO' by the reproduced signal processor 12. At this time, the controller 14 examines an ID code preceding each lyric segment.

[0054] If the ID code is indicative of the type of output-time related information, the controller 14 conducts continuous and synchronous display of a series of lyric segments together with reproduced audio data belonging to the selected AOB. In this lyric synchronous display operation, a just-displayed lyric segment can be differentiated by color or font from neighboring lyric segments displayed altogether.

[0055] The above-explained lyric data synchronizing method ensures minutely-synchronous lyric presentation with audio data, e.g., song being reproduced in real time from a rewritable recording medium. Thus, a user is able to enjoy a reproduced song better through the lyric text displayed in synchronization with the song.

[0056] The detailed description of the invention has been directed to certain exemplary embodiments, various modifications of these embodiments, as well as alternative embodiments, will be suggested to those skilled in the art. The invention encompasses any modifications or alternative embodiments that fall within the scope of the claims.

What is claimed is:

1. A method of managing data recorded on a recording medium reproducible by a data reproducing apparatus, the method comprising:

recording main data and additional data on the recording medium, the additional data being segmented into a plurality of predetermined units, each of the predetermined units including time information indicating a presentation start time of a corresponding unit and indication information indicating a type of the additional data; and

recording navigation information on the recording medium that links the main data and the additional data.

2. The method of claim 1, wherein the additional data includes text data associated with the main data.

3. The method of claim 1, wherein the indication information indicates a type of the corresponding unit.

4. The method of claim 1, further comprising:

recording attribute information on the recording medium associated with the additional data.

5. The method of claim 4, wherein the attribute information includes font information associated with the additional data.

6. The method of claim 1, wherein the recording medium is an optical disc.

7. The method of claim 1, further comprising:

reproducing and presenting, from the recording medium, the main data along with the associated additional data.

8. The method of claim 7, wherein the additional data includes text data and the step of reproducing and presenting comprises reproducing the text data as a subtitle.

9. A recording medium on which data reproducible by a reproducing apparatus is recorded, the data recorded on the recording medium comprising:

main data and additional data, the additional data being segmented into a plurality of predetermined units, each of the predetermined units including time information indicating a presentation start time of the corresponding unit and indication information indicating a type of the additional data; and

navigation information that links the main data and the additional data.

10. The recording medium of claim 9, wherein the additional data includes text data associated with the main data.

11. The recording medium of claim 9, wherein the indication information indicates a type of the corresponding unit.

12. The recording medium of claim 9, further comprising attribute information associated with the additional data.

13. The recording medium of claim 12, wherein the attribute information includes font information associated with the additional data.

14. The recording medium of claim 9, wherein the recording medium is an optical disc.

15. An apparatus for managing data recorded on a recording medium, comprising:

a recording part to record main data and additional data on the recording medium, the additional data being segmented into a plurality of predetermined units, each of the predetermined units including time information indicating a presentation start time of the corresponding unit and indication information indicating a type of the additional data; and to record navigation information that links the main data and the additional data.

16. The apparatus of claim 15, wherein the additional data includes text data associated with the main data.

17. The apparatus of claim 15, wherein the indication information indicates a type of the corresponding unit.

18. The apparatus of claim 15, wherein the recording part further records on the recording medium attribute information associated with the additional data.

19. The apparatus of claim 18, wherein the attribute information includes font information associated with the additional data.

20. The apparatus of claim 15, wherein the recording medium is an optical disc.

21. The apparatus of claim 15, further comprising:

a reproducing part to reproduce and present, from the recording medium, the main data along with the associated additional data.

22. The apparatus of claim 21, wherein the additional data includes text data, and wherein the reproducing part reproduces the text data as a subtitle.

23. A method of reproducing data recorded on a recording medium recorded by a data recording apparatus, the method comprising:

reading main data and additional data recorded on the recording medium, the additional data being segmented into a plurality of predetermined units, each of the predetermined units including time information indicating a presentation start time of the corresponding unit;

reading navigation information recorded on the recording medium that links the main data and the additional data; and

reproducing the main data along with the additional data based on the navigation information.

24. The method of claim 23, wherein the additional data includes text data associated with the main data.

25. The method of claim 23, wherein each of the predetermined units further includes type information indicating a type of the additional data.

26. The method of claim 23, further comprising:

reading attribute information recorded on the recording medium associated with the additional data,

wherein the step of reproducing reproduces the additional data based on the attribute information.

27. The method of claim 26, wherein the attribute information includes font information associated with the additional data.

28. The method of claim 23, wherein the recording medium is an optical disc.

29. The method of claim 23, wherein the additional data includes text data and the step of reproducing comprises reproducing the text data as a subtitle.

30. An apparatus for reproducing data recorded on a recording medium, comprising:

a reading part to read main data additional data recorded on the recording medium, the additional data being segmented into a plurality of predetermined units, each of the predetermined units including time information indicating a presentation start time of a corresponding unit, and to read navigation information recorded on the recording medium that links the main data and the additional data; and

an output part to output the main data and the additional data based on the navigation information.

31. The apparatus of claim 30, wherein the additional data includes text data associated with the main data.

32. The apparatus of claim 30, wherein each of the predetermined units further includes type information indicating a type of the additional data.

33. The apparatus of claim 30,

wherein the reading part further reads attribute information recorded on the recording medium associated with the additional data, and

wherein the output part outputs the additional data based on the attribute information.

34. The apparatus of claim 33, wherein the attribute information includes font information associated with the additional data.

35. The apparatus of claim 30, wherein the recording medium is an optical disc.

36. The apparatus of claim 30, wherein the additional data includes text data, and wherein the output part outputs the text data as a subtitle.