




(86) **Date de dépôt PCT/PCT Filing Date:** 2009/02/27
(87) **Date publication PCT/PCT Publication Date:** 2009/09/11
(45) **Date de délivrance/Issue Date:** 2015/11/24
(85) **Entrée phase nationale/National Entry:** 2010/08/27
(86) **N° demande PCT/PCT Application No.:** US 2009/035502
(87) **N° publication PCT/PCT Publication No.:** 2009/111318
(30) **Priorité/Priority:** 2008/02/29 (US61/032,866)

(51) **Cl.Int./Int.Cl.** *G01R 31/02* (2006.01)
(72) **Inventeur/Inventor:**
FEIGHT, LAURENCE V., US
(73) **Propriétaire/Owner:**
SCHWEITZER ENGINEERING LABORATORIES, INC.,
US
(74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre : INDICATEUR DE CIRCUIT DEFECTUEUX AVEC DETECTION ET AFFICHAGE DE CARACTERISTIQUE DE
DEFAILLANCE**

(54) **Title: FAULTED CIRCUIT INDICATOR WITH FAULT CHARACTERISTIC DETECTION AND DISPLAY**

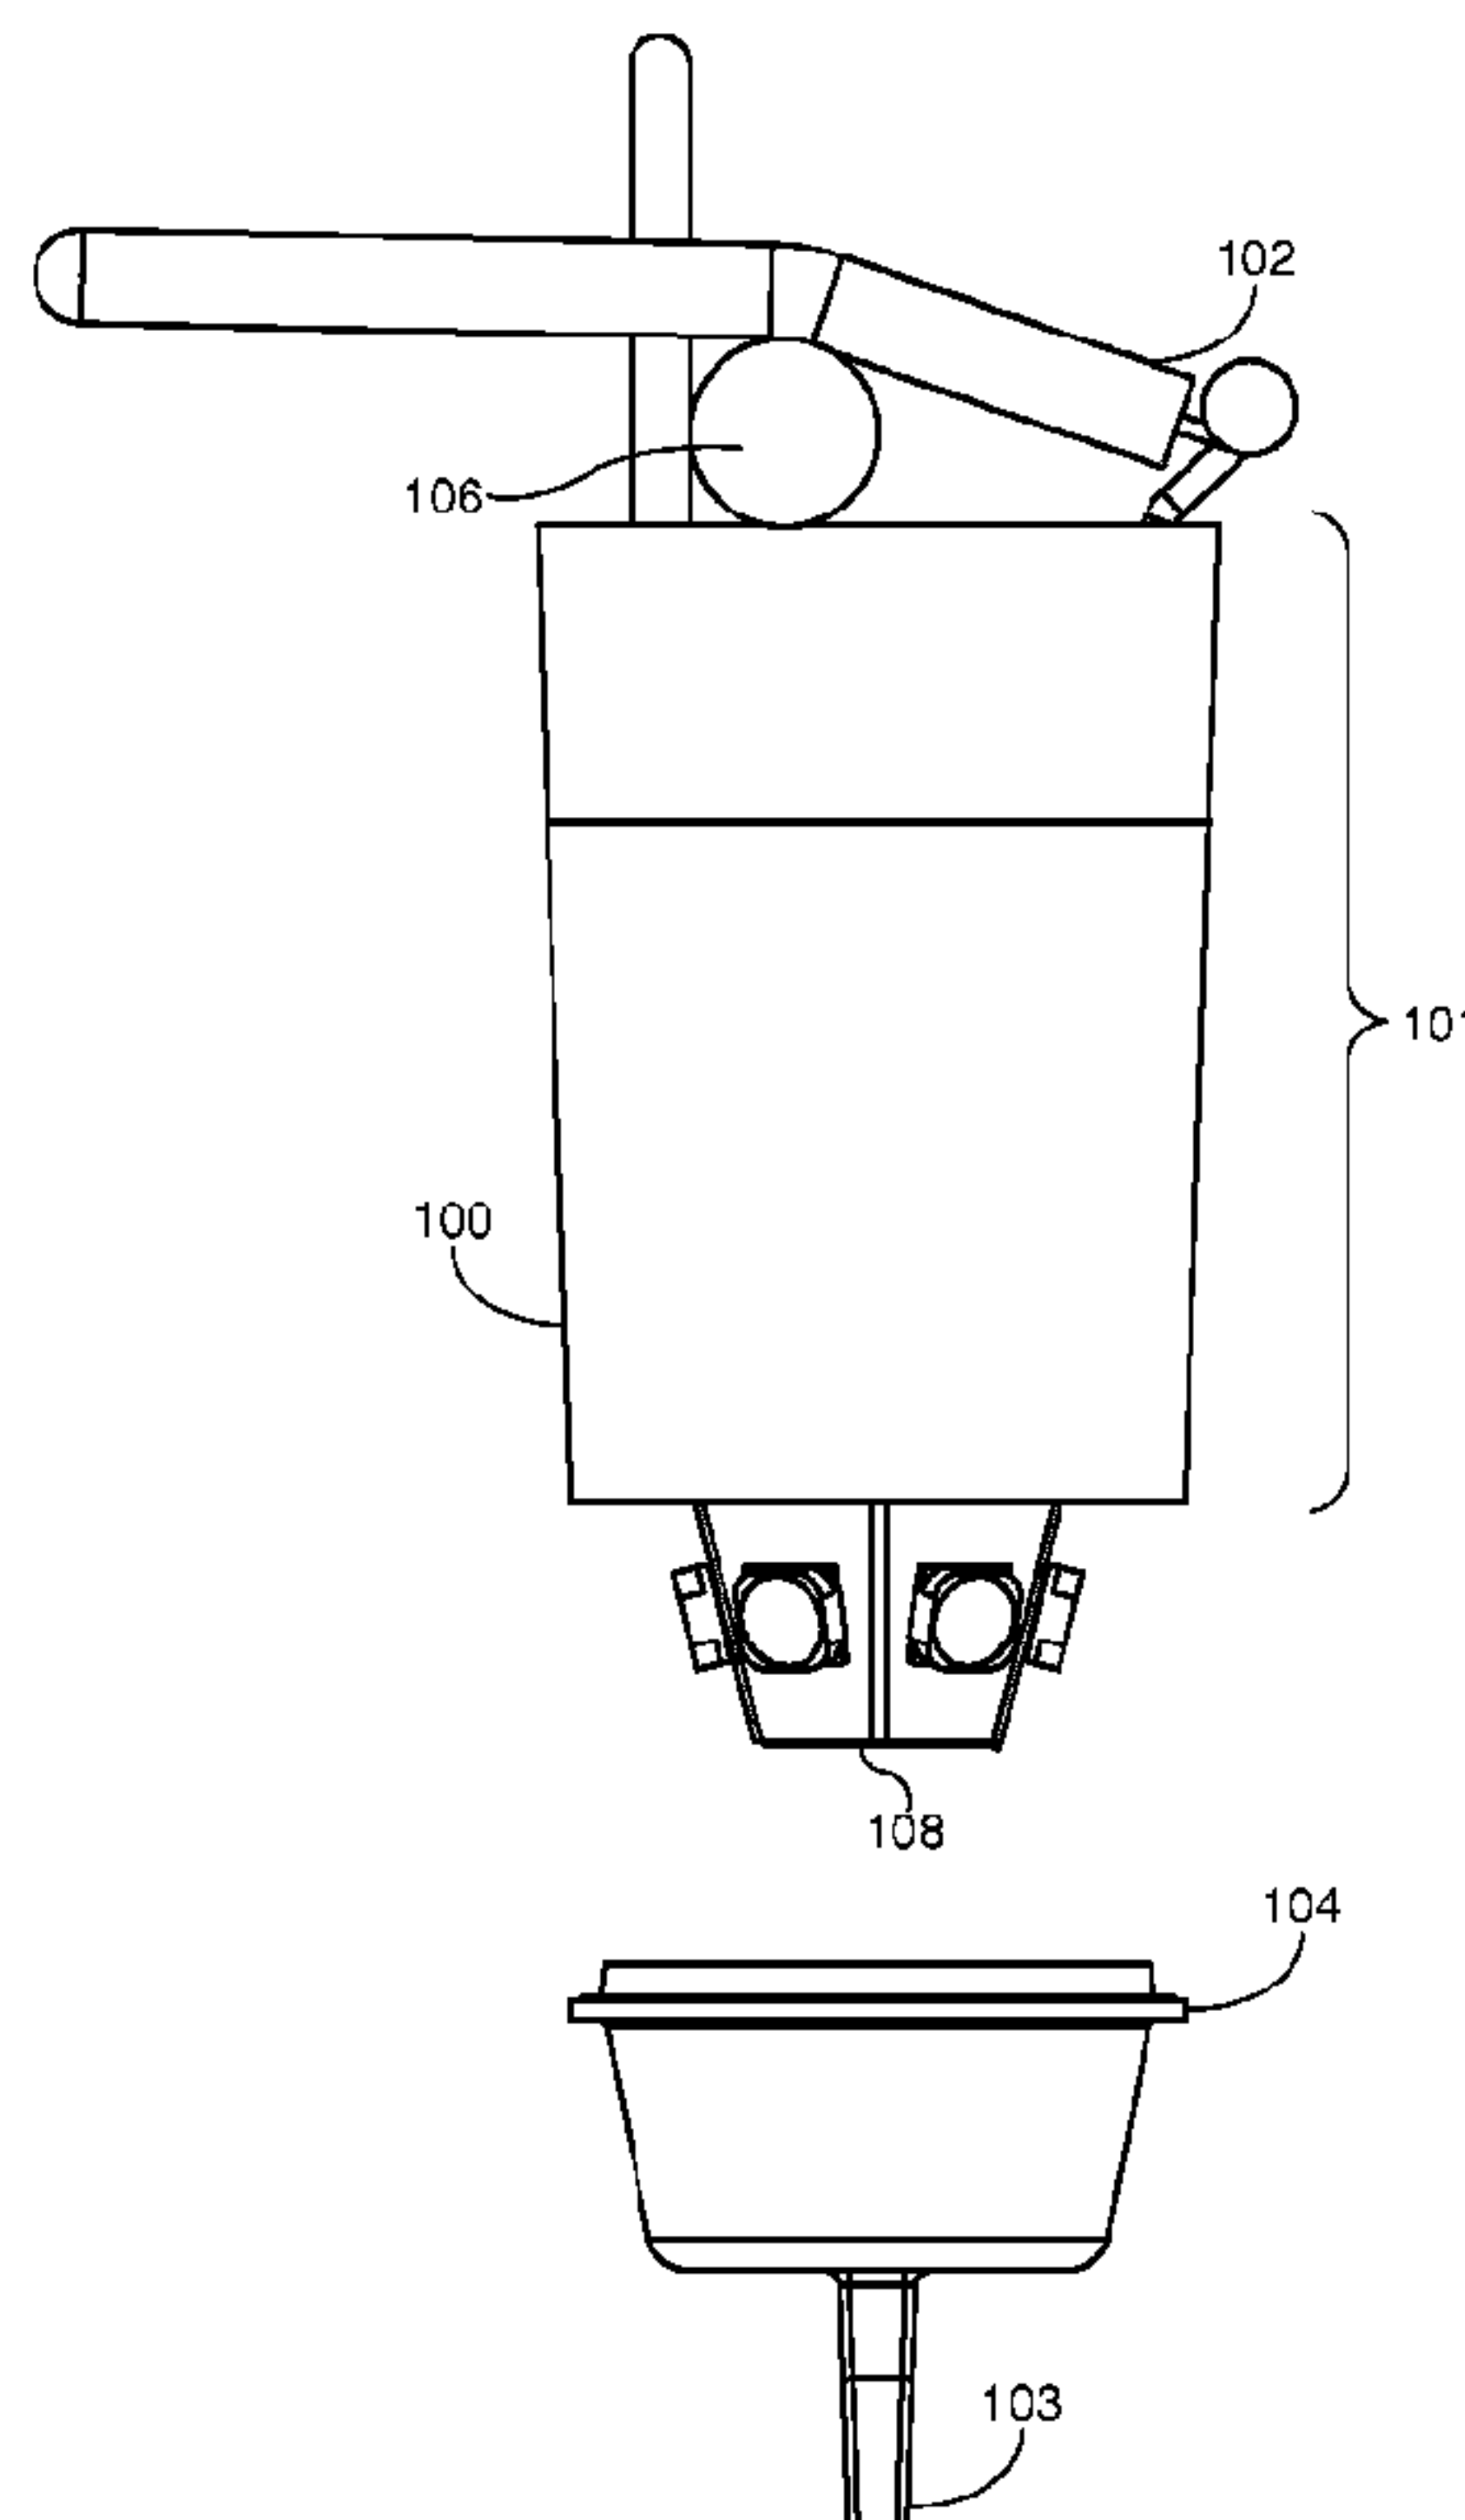

(57) **Abrégé/Abstract:**

A display for a faulted circuit indicator is disclosed. A plurality of light-emitting diodes are arranged so that at least one diode is visible to a person approaching the faulted circuit indicator from a determined angle of approach. When a fault is detected, the faulted circuit indicator flashes the plurality of light-emitting diodes in a predetermined pattern depending on whether a permanent or temporary fault is detected.

