

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2012 (15.03.2012)

PCT

(10) International Publication Number
WO 2012/033283 A2

- (51) International Patent Classification:
G06Q 50/00 (2006.01) H04W 4/26 (2009.01)
- (21) International Application Number:
PCT/KR2011/005287
- (22) International Filing Date:
19 July 2011 (19.07.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10-2010-0087661
27 September 2010 (07.09.2010) KR
- (71) Applicant (for all designated States except US): SAM-
SUNG ELECTRONICS CO., LTD. [KR/KR]; 416,
Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do
442-742 (KR).
- (72) Inventors: KIM, Cheol-Hoi; 30-18 Cheonho 1-dong,
Gangdong-gu, Seoul 134-021 (KR). LEE, Hun; 1st
Floor, 7-7 Yongdap-dong, Seongdong-gu, Seoul 133-170

(KR). CHOI, Ji-Hoon; 113-1004 Doosan Apt., Geumho-
dong 3-ga, Seongdong-gu, Seoul 133-093 (KR). BAE,
Joo-Yoon; 7-308 Sang-a Apt., Ogeum-dong, Songpa-gu,
Seoul 138-738 (KR).

(74) Agent: Y.P.LEE, MOCK & PARTNERS; Koryo Build-
ing, 1575-1 Seocho-dong, Seocho-gu, Seoul 137-875
(KR).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE,
SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR SHARING WIRELESS DATA SERVICE

[Fig. 2]

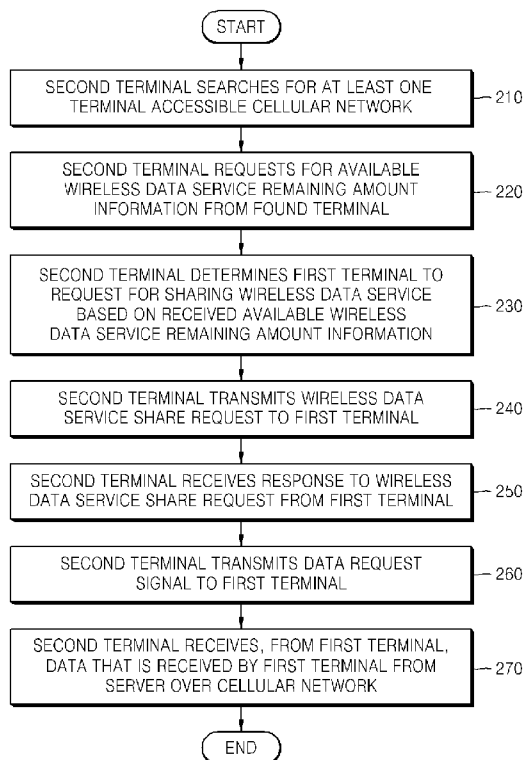

(57) Abstract: A method of sharing a wireless data service, including receiving, by a first terminal, a wireless data service share request from a second terminal, checking, by the first terminal, available wireless data service remaining amount information, and transmitting, by the first terminal, a response to the wireless data service share request to the second terminal based on the checked wireless data service remaining amount information. Another such sharing method includes requesting, by a second terminal, wireless data service remaining amount information available by a first terminal from the first terminal, transmitting, by the second terminal, a wireless data service share request to the first terminal based on the wireless data service remaining amount information received from the first terminal, and receiving, by the second terminal, a response to the wireless data service share request from the first terminal.

WO 2012/033283 A2

ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

Description

Title of Invention: METHOD AND APPARATUS FOR SHARING WIRELESS DATA SERVICE

Technical Field

- [1] The present invention relates generally to a method and apparatus for sharing a wireless data service, and more particularly, to a method and apparatus for sharing a wireless data service accessible by a connected external terminal.

Background Art

- [2] Charges for a wireless data service, such as the Internet, using a cellular phone are generally incurred based on data packets used by users. Fixed billing rates have recently provided an amount of data packets without additional charges. In this case, if an amount of used data packets exceeds a limit, wireless data service providers have charged for additional data packets in a packet unit.
- [3] As Internet services extend, a Wi-Fi Third Generation (3G) dithering technology uses Internet in a Wide Area Network (WAN) environment by connecting devices in which no wireless modem is embedded to a device in which wireless modems are embedded through Wi-Fi interfaces. According to the Wi-Fi 3G dithering technology, when devices in which no wireless modem is embedded attempt to access a wireless network of a service provider, the Internet is accessible by connecting devices in which no wireless modem is embedded to devices in which wireless modems are embedded through Wireless Fidelity (Wi-Fi).
- [4] For example, devices in which no wireless modem is embedded and LAN interfaces are provided, such as an electronic frame, an e-book, or a tablet device, are connected to devices in which wireless modems are embedded through a Local Area Network (LAN), and transmit data packets received through wireless modems through the LAN to use the Internet in the WAN environment.

Disclosure of Invention

Technical Problem

- [5] A problem in the art persists in that a wireless data service is not shared when an amount of remaining data is insufficient to use the wireless data service.

Solution to Problem

- [6] The present invention provides a method and apparatus for sharing a wireless data service accessible by an external terminal by connecting the external terminal capable of accessing the wireless data service to a network if an amount of remaining data is not enough to use the wireless data service.

Brief Description of Drawings

- [7] The above and other features and advantages of the present invention will become more apparent by describing in detail embodiments thereof with reference to the attached drawings, in which:
- [8] FIG. 1 illustrates a method of sharing a wireless data service, according to a first embodiment of the present invention;
- [9] FIG. 2 illustrates a method of sharing a wireless data service, according to a second embodiment of the present invention;
- [10] FIG. 3 illustrates an apparatus for sharing a wireless data service, according to the present invention; and
- [11] FIG. 4 illustrates a scenario according to the present invention.

Best Mode for Carrying out the Invention

- [12] According to an aspect of the present invention, there is provided a method of sharing a wireless data service, the method including receiving, by a first terminal, a wireless data service share request from a second terminal, checking, by the first terminal, available wireless data service remaining amount information, and transmitting, by the first terminal, a response to the wireless data service share request to the second terminal based on the checked wireless data service remaining amount information.
- [13] The method may further include connecting the first terminal and the second terminal through a wireless LAN.
- [14] The method may further include receiving, by the first terminal, a data request from the second terminal, receiving, by the first terminal, the requested data within the available wireless data service remaining amount from the server through the cellular network, and transmitting, by the first terminal, the received data to the second terminal.
- [15] According to another aspect of the present invention, there is provided a method of sharing a wireless data service, including requesting, by a second terminal, wireless data service remaining amount information available by a first terminal from the first terminal, transmitting, by the second terminal, a wireless data service share request to the first terminal based on the wireless data service remaining amount information received from the first terminal, and receiving, by the second terminal, a response to the wireless data service share request from the first terminal.
- [16] The method may further include requesting for, by the second terminal, data from the first terminal, and receiving, by the second terminal, data that is received by the first terminal through the cellular network from the first terminal.
- [17] The method may further include, if the first terminal completely consumes the

available wireless data service remaining amount, transmitting, by the second terminal, the wireless data service share request to a terminal having the greatest available wireless data service remaining amount among the at least one terminal excluding the first terminal.

[18] According to another aspect of the present invention, there is provided an apparatus for sharing a wireless data service, including a controller for receiving a wireless data service share request from an external terminal, and a wireless modem for checking available wireless data service remaining amount information, wherein the controller transmits a response to the wireless data service share request to the external terminal based on the checked wireless data service remaining amount information.

[19] According to another aspect of the present invention, there is provided an apparatus for sharing a wireless data service, including a controller for requesting wireless data service remaining amount information available by an external terminal from the external terminal, transmitting a wireless data service share request to the external terminal based on the available wireless data service remaining amount information received from the external terminal, and receiving a response to the wireless data service share request from the external terminal.

Mode for the Invention

[20] Hereinafter, the present invention will be described in detail by explaining embodiments of the invention with reference to the attached drawings.

[21] FIG. 1 illustrates a method of sharing a wireless data service, according to a first embodiment of the present invention.

[22] Referring to FIG. 1, in step 110, a first terminal receives a wireless data service sharing request from a second terminal. The wireless data service denotes a service that the first terminal or the second terminal uses a data service, such as the Internet, provided by a cellular network via a cellular interface. The cellular network may be configured based on various cellular communication technologies including 3G and Fourth Generation (4G). Communication means is not limited to the cellular network. The first terminal receives a request for the second terminal to use the data service provided by the cellular network through the first terminal, from the second terminal. The wireless data service share request of the present embodiment includes a wireless data service remaining amount information request of the first terminal. Wireless data service remaining amount information will be described later herein.

[23] In step 120, the first terminal requests for available wireless data service remaining amount information to a server existing in an accessible cellular network. The available wireless data service remaining amount information indicates a physical amount of remaining data packets available without an additional charge, excluding an

amount of currently used data packets, with respect to a fixed billing rate of the wireless data service available by a terminal through the cellular network. The available wireless data service remaining amount information may indicate a time available without an additional charge, excluding a currently used time, with respect to the fixed billing rate of the wireless data service available by the terminal through the cellular network. The server existing in the accessible cellular network is of a service provider of the wireless data service.

- [24] In step 130, the first terminal receives the wireless data service remaining amount information from the server.
- [25] In step 140, if the wireless data service remaining amount remains in the first terminal, the first terminal transmits a response to the wireless data service share request to the second terminal. If the second terminal receives the response to the wireless data service share request from the first terminal, the first terminal and the second terminal are connected through a wireless LAN and maintain communication therebetween. The wireless LAN is used to access the Internet within a distance from an Access Point (AP), and may be Wi-Fi. However, connection between the first terminal and the second terminal is not limited to the wireless LAN. The first terminal and the second terminal may maintain connection and communicate data therebetween.
- [26] In step 150, the first terminal receives a data request signal from the second terminal. Requested data indicates data downloadable by the first terminal by using the wireless data service through the cellular network.
- [27] In step 160, the first terminal receives the requested data from the server of the service provider through the cellular network. However, the first terminal may request for the requested data within the remaining wireless data service from the server and receive the requested data from the server.
- [28] In step 170, the first terminal transmits the data received from the server to the second terminal.
- [29] FIG. 2 illustrates a method of sharing a wireless data service, according to a second embodiment of the present invention.
- [30] Referring to FIG. 2, in step 210, a second terminal searches for at least one terminal accessible a cellular network. The second terminal may or may not use the wireless data service through the cellular network. If the second terminal includes a modem accessible the wireless data service through the cellular network, the second terminal may periodically query a server of a service provider about an amount of remaining wireless data service, i.e., service data remaining packets while using the wireless data service. If an amount of currently used data exceeds the limit of a fixed billing rate, the second terminal stops using the wireless data service.
- [31] Thereafter, the second terminal searches for terminals including wireless modems ac-

cessible the cellular network. For example, the second terminal searches for mobile devices including wireless modems that are regarded as having no speed problem for access to the Internet based on a Received Signal Strength Indication (RSSI) reception intensity. The wireless data service and available wireless data service remaining amount information are the same as described with respect to FIG. 1.

- [32] In step 220, the second terminal requests for the available wireless data service remaining amount information from the found terminal. That is, the second terminal requests for an inquiry of remaining data packets accessible the wireless data service from the found terminal.
- [33] In step 230, the second terminal receives the available wireless data service remaining amount information from the found terminal, and determines a first terminal to request for sharing the wireless data service based on the received available wireless data service remaining amount information. In the second embodiment, the second terminal determines a terminal having the greatest amount of remaining wireless data service as the first terminal.
- [34] In step 240, the second terminal transmits a wireless data service share request to the first terminal.
- [35] In step 250, the second terminal receives a response to the wireless data service share request from the first terminal. Thereafter, the first terminal and the second terminal are connected through a wireless LAN and maintain communication therebetween. The description of the wireless LAN is the same as described with respect to FIG. 1.
- [36] In step 260, the second terminal transmits a data request signal to the first terminal. Requested data indicates data downloadable by the first terminal by using the wireless data service through the cellular network.
- [37] In step 270, the second terminal receives, from the first terminal, data that is received by the first terminal from the server of the service provider through the cellular network.
- [38] If the first terminal completely consumes the amount of remaining wireless data service by sharing the wireless data service, the second terminal determines the terminal having the greatest amount of remaining wireless data service as a terminal to share the wireless data service, except the first terminal, among the found terminals, and returns to step 240.
- [39] FIG. 3 illustrates an apparatus for sharing a wireless data service, according to the present invention.
- [40] Referring to FIG. 3, a first terminal 310 includes a wireless modem 312, a wireless LAN network adaptor 314, and a controller 316, and a second terminal 320 includes a wireless modem 322, a wireless LAN network adaptor 324, and a controller 326. The first terminal 310 and the second terminal 320 may use a data service such as the

Internet, provided by a cellular network 340 via respective cellular interfaces, such as the wireless modems 312 and 322. The cellular network 340 may be configured based on various cellular communication technologies including 3G and 4G. In FIG. 3, it is assumed that the first terminal 310 is requested to share the wireless data service, and the second terminal 320 is requesting to share the wireless data service.

[41] The controller 326 of the second terminal 320 searches for at least one terminal accessible the cellular network 340. The second terminal 320 may or may not include the wireless modem 322 and use the wireless data service through the cellular network 340. If the second terminal 320 includes the wireless modem 322 accessible the wireless data service through the cellular network 340, the second terminal 320 may periodically query a server of a service provider about an amount of remaining wireless data service, i.e., service data remaining packets while using the wireless data service. The available wireless data service remaining amount information indicates a physical amount of remaining data packets available without an additional charge, excluding an amount of currently used data packets, with respect to a fixed billing rate of the wireless data service available by the first terminal 310 or the second terminal 320 through the cellular network 340.

[42] The available wireless data service remaining amount information indicates a time available without an additional charge, excluding a currently used time, with respect to the fixed billing rate of the wireless data service available by the first terminal 310 or the second terminal 320 through the cellular network 340. If an amount of currently used data exceeds the limit of a fixed billing rate, the controller 326 of the second terminal 320 stops using the wireless data service. Thereafter, the controller 326 of the second terminal 320 searches for terminals including wireless modems accessible the cellular network 340. For example, the controller 326 of the second terminal 320 searches for mobile devices including wireless modems that are regarded as having no speed problem for access to the Internet based on an RSSI receipt intensity. Thereafter, the controller 326 of the second terminal 320 requests for the available wireless data service remaining amount information from the found terminal. That is, the second terminal 320 requests for an inquiry of remaining data packets accessible the wireless data service from the found terminal.

[43] The controller 326 of the second terminal 320 receives the available wireless data service remaining amount information from the found terminal, and determines the first terminal 310 to request for sharing the wireless data service based on the received available wireless data service remaining amount information. In the first embodiment, the controller 326 of the second terminal 320 determines a terminal having the greatest amount of remaining wireless data service as the first terminal 310, and the controller 326 of the second terminal 320 transmits a wireless data service share request to the

first terminal 310. That is, the controller 326 of the second terminal 320 transmits a request to use the data service provided by the cellular network 340 through the wireless modem 312 of the first terminal 310 to the first terminal 310. Thereafter, the controller 316 of the first terminal 310 transmits a response (permission) to the wireless data service share request to the second terminal 320.

- [44] If the second terminal 320 receives the response to the wireless data service share request from the controller 316 of the first terminal 310, the first terminal 310 and the second terminal 320 are connected through a wireless LAN 330 through the wireless LAN network adaptor 314 of the first terminal 310 and the wireless LAN network adapter 324 of the second terminal 320 and maintain communication therebetween. The wireless LAN 330 is used to access the Internet within a distance from an AP, and may be Wi-Fi. However, connection between the first terminal and the second terminal is not limited to the wireless LAN. The first terminal 310 and the second terminal 320 may maintain connection and communicate data therebetween.
- [45] The controller 326 of the second terminal 320 transmits a data request signal to the controller 316 of the first terminal 310 through the wireless LAN network adapter 324 of the second terminal 320. Thereafter, the controller 316 of the first terminal 310 receives data requested by using the wireless data service of the cellular network 340 through the wireless modem 312 of the first terminal 310. The controller 316 of the first terminal 310 then transmits the received data to the wireless LAN network adapter 324 of the second terminal 320 through the wireless LAN network adaptor 314 of the first terminal 310.
- [46] If the first terminal 310 completely consumes the amount of remaining wireless data service by sharing the wireless data service, the controller 326 of the second terminal 320 requests a terminal having the greatest amount of remaining wireless data service to share the wireless data service, except the first terminal 310, among the found terminals.
- [47] According to the second embodiment, the controller 326 of the second terminal 320 transmits the wireless data service share request including the wireless data service remaining amount information request to the first terminal 310. Thereafter, the wireless modem 312 of the first terminal 310 requests for available wireless data service remaining amount information from a server existing in the cellular network 340. If the available wireless data service remains in the first terminal 310, the controller 316 of the first terminal 310 transmits the response to the wireless data service share request to the second terminal 320. Then, the first terminal 310 and the second terminal 320 are connected through the wireless LAN and maintain communication therebetween, and the first terminal 310 and the second terminal 320 share the wireless data service.

- [48] FIG. 4 illustrates a scenario according to the present invention.
- [49] Referring to FIG. 4, if a mobile device 410 of a user has no remaining data packet accessible a wireless data service through a cellular network, the mobile device 410 of the user searches for devices 420, 430, and 440. The mobile device 410 of the user requests for an amount of remaining data packets from the devices 420, 430, and 440. Thereafter, the mobile device 410 of the user displays the amount of remaining data packets of the devices 420, 430, and 440. For example, if the devices 420, 430, and 440 have remaining data packets of 120 MB, 100 MB, and 50 MB(not shown), the user requests the device 420 having the greatest amount of remaining data packets to share data packets. If a user of the device 420 accepts the data packet share request, the mobile device 410 of the user resumes using the wireless data service through the cellular network by using packets of the device 420.
- [50] The invention can also be embodied as computer-readable codes on a computer-readable recording medium. The computer-readable recording medium is any data storage device that can store data which can be thereafter read by a computer system. Examples of the computer-readable recording medium include Read-Only Memory (ROM), Random-Access Memory (RAM), CD-ROMs, magnetic tapes, floppy disks, and optical data storage devices. The computer-readable recording medium can also be distributed through network-coupled computer systems so that the computer-readable code is stored and executed in a distributed fashion. Also, functional programs, codes, and code segments for accomplishing the present invention can be easily construed by programmers of ordinary skill in the art, to which the present invention pertains.
- [51] While the present invention has been particularly shown and described with reference to embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

Claims

- [Claim 1] A method of sharing a wireless data service, the method including:
receiving, by a first terminal, a wireless data service share request from a second terminal;
checking, by the first terminal, available wireless data service remaining amount information; and
transmitting, by the first terminal, a response to the wireless data service share request to the second terminal based on the checked wireless data service remaining amount information.
- [Claim 2] The method of claim 1, wherein the checking includes:
requesting, by the first terminal, for the available wireless data service remaining amount information to a server existing in an accessible cellular network; and
receiving, by the first terminal, the available wireless data service remaining amount information from the server.
- [Claim 3] The method of claim 2, further including connecting the first terminal and the second terminal through a wireless Local Area Network (LAN).
- [Claim 4] The method of claim 3, further including:
receiving, by the first terminal, a data request from the second terminal;
receiving, by the first terminal, the requested data within the available wireless data service remaining amount from the server through the cellular network; and
transmitting, by the first terminal, the received data to the second terminal.
- [Claim 5] The method of claim 1, wherein the wireless data service remaining amount is a physical data amount received by the first terminal from the server existing in the cellular network accessible through the first terminal, or is a time available by the first terminal accessible the cellular network.
- [Claim 6] A method of sharing a wireless data service, the method including:
requesting, by a second terminal, wireless data service remaining amount information available by a first terminal from the first terminal;
transmitting, by the second terminal, a wireless data service share request to the first terminal based on the wireless data service remaining amount information received from the first terminal; and
receiving, by the second terminal, a response to the wireless data service share request from the first terminal.

- [Claim 7] The method of claim 6, wherein the requesting includes:
searching, by the second terminal, for at least one terminal through which a cellular network is accessible;
requesting, by the second terminal, the available wireless data service remaining amount information from the at least one terminal; and
determining, by the second terminal, the first terminal to request for sharing the wireless data service based on the available wireless data service remaining amount information.
- [Claim 8] The method of claim 7, wherein the determining includes:
determining, by the second terminal, a terminal having a greatest available wireless data service remaining amount as the first terminal, among the at least one terminal that transmits the available wireless data service remaining amount information.
- [Claim 9] The method of claim 8, further including:
requesting, by the second terminal, data from the first terminal; and
receiving, by the second terminal, data that is received by the first terminal through the cellular network from the first terminal.
- [Claim 10] The method of claim 9, further including, when the first terminal completely consumes the available wireless data service remaining amount, transmitting, by the second terminal, the wireless data service share request to a terminal having the greatest available wireless data service remaining amount among the at least one terminal excluding the first terminal.
- [Claim 11] The method of claim 6, wherein the first terminal and the second terminal are connected through a wireless Local Area Network (LAN).
- [Claim 12] The method of claim 6, wherein the wireless data service remaining amount is a physical data amount received by the first terminal from the server existing in the cellular network, or is a time available by the first terminal accessible the cellular network.
- [Claim 13] An apparatus for sharing a wireless data service, the apparatus including:
a controller for receiving a wireless data service share request from an external terminal; and
a wireless modem for checking available wireless data service remaining amount information,
wherein the controller transmits a response to the wireless data service share request to the external terminal based on the checked wireless data service remaining amount information.

- [Claim 14] The apparatus of claim 13, wherein the wireless modem requests for the available wireless data service remaining amount information to a server existing in an accessible cellular network, and receives the available wireless data service remaining amount information from the server.
- [Claim 15] The apparatus of claim 14, further including a wireless Local Area Network (LAN) network adapter for connecting the first terminal and the second terminal through a wireless LAN.
- [Claim 16] The apparatus of claim 15, wherein, when the wireless modem receives a data request from the external terminal, the wireless modem receives the requested data within the available wireless data service remaining amount from the server through the cellular network, and the wireless LAN network adapter transmits the received data to the external terminal.
- [Claim 17] The apparatus of claim 13, wherein the available wireless data service remaining amount is a physical data amount received from the server existing in the accessible cellular network, or is a time accessible the cellular network.
- [Claim 18] An apparatus for sharing a wireless data service, the apparatus including a controller for requesting wireless data service remaining amount information available by an external terminal from the external terminal, transmitting a wireless data service share request to the external terminal based on the available wireless data service remaining amount information received from the external terminal, and receiving a response to the wireless data service share request from the external terminal.
- [Claim 19] The apparatus of claim 18, wherein the controller further searches for at least one terminal accessible a cellular network, requests for the available wireless data service remaining amount information from the at least one terminal, and determines the external terminal to request for sharing the wireless data service based on the available wireless data service remaining amount information.
- [Claim 20] The apparatus of claim 19, wherein the controller requests a terminal having a greatest available wireless data service remaining amount among the at least one terminal that transmits the available wireless data service remaining amount information to share the wireless data service.
- [Claim 21] The apparatus of claim 19, further including a wireless LAN network


adapter for connecting the determined external terminal to a wireless LAN.

[Claim 22] The apparatus of claim 21, wherein the wireless LAN network adapter requests for data from the external terminal, and receives data that is received by the external terminal through the cellular network from the first terminal.


[Claim 23] The apparatus of claim 22, wherein, when the external terminal completely consumes the available wireless data service remaining amount, the controller transmits the wireless data service share request to a terminal having a greatest available wireless data service remaining amount among the at least one terminal excluding the external terminal.

[Claim 24] The apparatus of claim 18, wherein the available wireless data service remaining amount is a physical data amount received from the server existing in the accessible cellular network or is a time accessible the cellular network.


[Fig. 1]

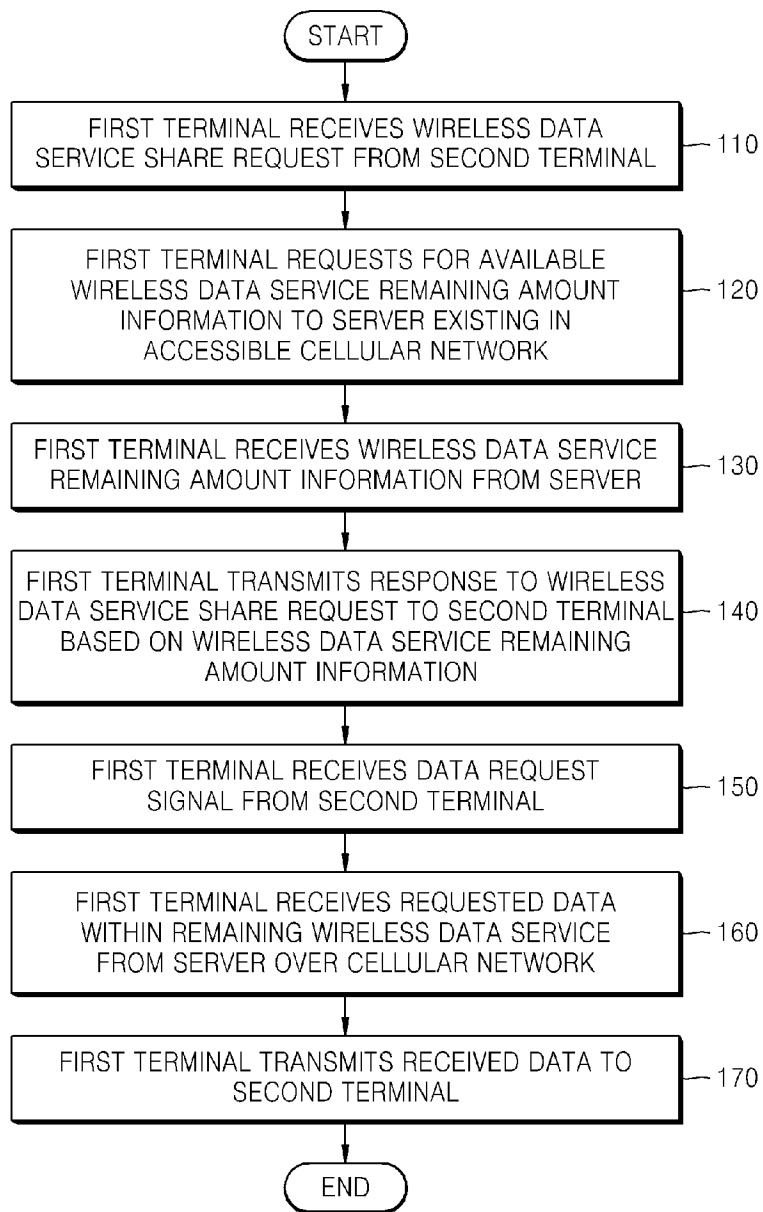

[Fig. 2]

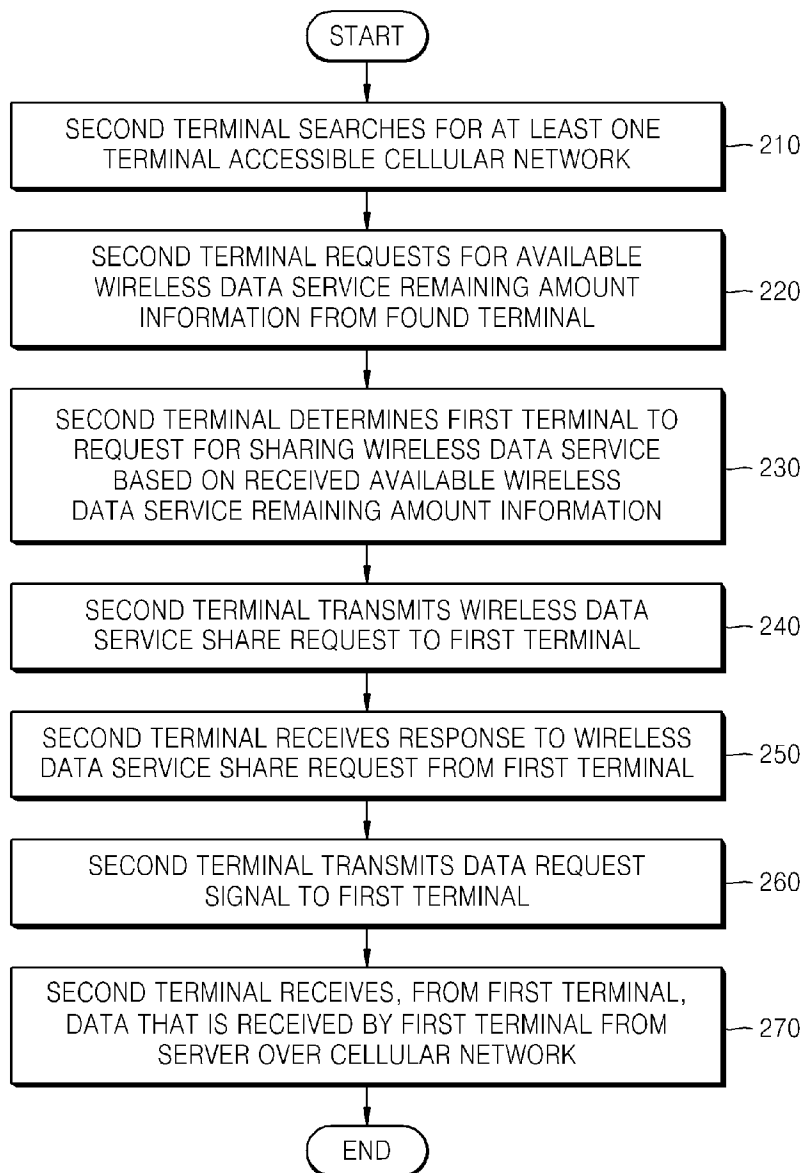

[Fig. 3]

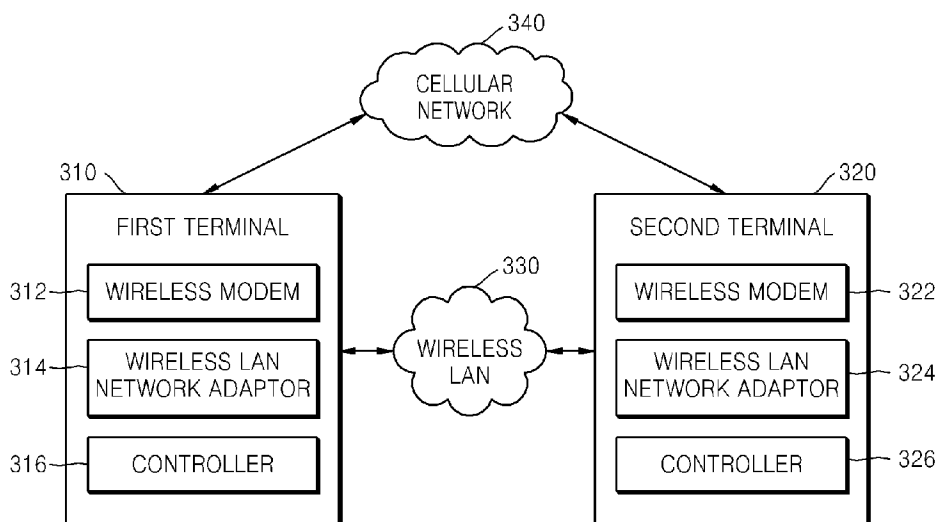

[Fig. 4]

