



(51) International Patent Classification:

A23L 1/307 (2006.01) H01S 3/095 (2006.01)
C01B 13/00 (2006.01) A21D 8/00 (2006.01)

(21) International Application Number:

PCT/US2013/051300

(22) International Filing Date:

19 July 2013 (19.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/556,725 24 July 2012 (24.07.2012) US
13/943,578 16 July 2013 (16.07.2013) US

(71) Applicant: **KSY CORPORATION** [US/US]; 4301 Portales Court, Arlington, TX 76016 (US).

(72) Inventor: **EMANUEL, George**; 4301 Portales Court, Arlington, TX 76016 (US).

(74) Agents: **STORM, Paul, V.** et al.; Gardere Wynne Sewell Llp, 1601 Elm Street, Suite 3000, Dallas, TX 75201-4761 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: GAS ENTRAINMENT IN FLOWABLE FOODS

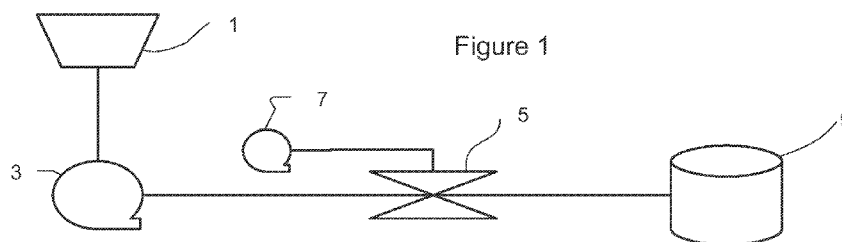

(57) Abstract: A method of entraining gas in a flowable food product comprising the steps of accelerating the flowable food product in a flow direction through a flow channel that includes a ramp. Gas is injected into the flowable food product transverse to the flow direction through a porous surface or plate while the food product traverses the ramp to generate a froth. An apparatus for entraining gas in a food product, comprises a source of flowable food product and a food product pump to accelerate the food product through a flow channel. A ramp is disposed in the flow channel as well as a porous surface forming a wall of the flow channel opposite the ramp. A source of gas is in communication with the porous surface, wherein gas is entrained in the food product as it passes by the ramp and the porous surface.



GAS ENTRAINMENT IN FLOWABLE FOODS

TECHNICAL FIELD

[001] The invention relates generally to methods and apparatus for entraining gas or generating bubbles of the gas in a liquid or semi-liquid food product.

SUMMARY OF THE PRIOR ART

[002] The applicant is the sole inventor of U.S. Patent Nos. 7,116,696; 7,336,689; and 7,397,836, all of which relate to generation of singlet delta oxygen for use in chemical lasers and other applications.

[003] A step in the process of generating singlet delta oxygen is to generate a froth or entrain a gas into a flow of liquid basic hydrogen peroxide. The process is employed to generate singlet delta oxygen for use in chemical lasers.

[004] It is known to entrain air to form bubbles in various food products, such as whipped cream, ice cream, and other substances.

[005] Bubbles are important in many foods, e.g., bread, beer, ice cream, certain wines. In both bread and beer the fermentation process is driven by the air oxygen content in the bubbles. In addition to enhancing fermentation and providing effervescence, bubbles can increase palatability while reducing the mass of harmful substances ingested.

[006] As the “obesity epidemic” in the United States gains more attention, methods of reducing fat, sugar, and salt in foods consumed becomes more and more important. It is known that whipping or entraining air in foods reduces the quantity of food ingested while maintaining the perception of a full meal or snack and also permits reduction in fat, salt, and sugar without reducing the taste perception or “tasteability” of these substances in gas-entrained foods. See Goh, S. M., Leroux, B., Groeneschild, C. A. G., and Busch, J. L. H. C., “On the Effect of Tasant Excluded Fillers on Sweetness and Saltiness of a Model Food,” J. of

Food Sci. 75, No. 4, pp. S245-S249 (2010). Further discussion of the use of bubbles in food products can be found in "Bubbles in Food," edit. by G. M. Campbell, C. Webb, S. S. Pandiella, and K. Niranjana, Eagan Press, St. Paul, Minn., USA, 1999.

[007] It is known to use various devices to add a gas to a flowing liquid. Many of these employ a venturi (converging and diverging nozzles) and inject gas through one or more apertures at the throat (between the converging and diverging sections of the venturi). Examples of such devices can be found in U.S. Patent Nos. 5,520,856 to Garrett; 5,935,490 to Archbold; 7,338,551 to Kozyuk; and U.S. Patent Publications 2002/96,792 to Valela and 2009/123,385 to Bohmer. Archbold discloses an oxygen dissolver for pipelines that injects oxygen through a plurality of straight holes in the converging section of a venturi. Garrett discloses a gas dissolver that injects gas through slots in both the converging and diverging sections of a venturi. Kozyuk discloses a device for generating micro bubbles in a fluid that uses a pair of venturis or baffles in series (one after the other), where gas is injected in the throat of the first venturi and cavitation is induced downstream of both venturis to form bubbles. Valela discloses a device for injecting gas into water that injects gas through a plurality of ports in the throat and divergent sections of a venturi. Bohmer discloses a method of dispersing particles of one fluid in another by injecting the first fluid through a series of holes transverse to the flow of the second fluid. No venturi is employed and the holes are formed in a substrate by etching, as in a semiconductor process.

[008] None of these devices are particularly suited to generating a froth with bubbles with a diameter as small as one micron (1×10^{-6} meter or μ) or less in a food substance that is rendered flowable.

[009] A need exists, therefore, for improved methods and apparatus for entraining air or other gases in food products to enhance their taste and texture while decreasing the presence of fats, sugar, and salt.

SUMMARY OF THE INVENTION

[0010] It is a general object of the present invention to provide an improved method and apparatus for entraining gas into a flowable food product to generate a froth. This and other objects of the invention are achieved by a method of entraining gas in a flowable food product comprising the steps of accelerating the flowable food product in a flow direction through a flow channel that includes a ramp. Gas is injected into the flowable food product transverse to the flow direction through a porous plate while the food product traverses the ramp to generate a froth. An apparatus for entraining gas in a food product, comprises a source of flowable food product and a food product pump to accelerate the food product through a flow channel. A ramp is disposed in the flow channel as well as a porous surface forming a wall of the flow channel opposite the ramp. A source of gas is in communication with the porous surface, wherein gas is entrained in the food product as it passes by the ramp and the porous surface.

[0011] According to one embodiment of the present invention, the ramp follows a flow restriction in a flow channel and the porous surface.

[0012] According to one embodiment of the present invention, the porous plate has a plurality of random, non-linear pores.

[0013] According to one embodiment of the present invention, the pores range in average diameter from about 100 μ to about 1 μ .

[0014] According to one embodiment of the present invention, the gas comprises air.

[0015] According to one embodiment of the present invention, the gas comprises one or more constituents of air.

[0016] Other objects, features and advantages of the invention will become apparent with reference to the drawings and the detailed description, which follow.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] Figure 1 is a schematic view of an apparatus according to preferred embodiment of the present invention.

[0018] Figure 2 is a side view of the froth generator portion of the apparatus according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0019] The apparatus and method of the present invention can be used for efficiently entraining gas or producing gas bubbles in liquid and semi-liquid foods for the purpose of decreasing the salt, sugar, and/or fat content with a limited impact on flavor or palatability. For purposes of this application, the classification of the food product or substance as a “liquid” or “semi-liquid” or “gel” is not material. The food product must merely be flowable. The mixture of food product and entrained gas bubbles is referred to as a froth in which the entrained gas is in the form of small, non-spherical bubbles individually enclosed by a liquid film.

[0020] The gas may consist of any non-toxic gas, including air itself, i.e., nitrogen, oxygen, argon, carbon dioxide, or a mixture of these. The gas may be dry or contain water vapor. The gas may contain a flavorant, preservative, or other active ingredient or may be the active ingredient. The bubbles are produced by injecting the gas through a porous plate into a channel as disclosed herein that generates a near uniform froth across the channel. An average diameter of the near uniform bubbles in the froth can range from about 100 μ (3.94×10^{-3} in) down to as small as about 1 μ (3.94×10^{-5} in). The mass or volume fraction of the gas, relative to the liquid, can be controlled independent of the size of the average bubble diameter. The process is a continuous, efficient flow process. After production, the froth can

be quickly cooled or frozen to maintain the entrained gas, e.g., for ice cream or chocolate, etc. Consequently, the long-term stability of the froth may not be a concern.

[0021] Figure 1 is a schematic depiction of a gas-entrainment apparatus according to an embodiment of the present invention. A food product source 1 is connected to a pump or other pressure source 3 to accelerate the flowable food product to a desirable velocity or pressure as it enters a froth generator 5, which is described in greater detail below. As stated, the food product need only be flowable, not necessarily liquid. Food product can be flowable in its native form, or rendered into a flowable state by agitation, melting, or the like. A gas source 7 is coupled to froth generator 5. In froth generator 5, gas from source 7 is entrained into flowable food product to produce a froth, which then passes from froth generator 5 into a storage vessel 9.

[0022] Figure 2 is a side-view of froth generator 5. It has a two-dimensional flow configuration and can be of any convenient width (the dimension perpendicular to the “paper”). In the proof-of-principle experiment, for visual observation, its side-plates were made of transparent plastic. Its walls can, e.g., be made of stainless steel, and the enclosing walls, as well as the flowable food product and entering gas, can be cooled to any desired temperature(s). Froth generator 5 has an inlet 11, an inlet inclined surface 13, a ramp 15, and an outlet or exit 17. A sintered stainless steel porous plate 19 replaces the wall section, and defines a porous surface directly opposite ramp 15 and has a linear length approximately the same as that of ramp 15 (as indicated by the dashed lines). An exemplary sintered stainless steel porous plate was made by Mott Corp., Farmington, Ct. While sintered stainless steel is the preferred and exemplary material, porous plate 19 may be formed of other materials, such as Hastelloy or Inconel (cobalt and nickel alloys, respectively), or even non-metallic materials having the characteristics of corrosion resistance and the ability to be formed into a

porous plate with sufficient structural integrity and porosity, whether by sintering or otherwise.

[0023] Additionally, the pores produced by the sintering process are useful in the production of froth. Such pores are typically non-circular in cross section, tortured, irregular and random in shape and dimension and generally do not take linear (or even mathematically curved) paths through the plate. Instead, the pores are of essentially random or irregular size, cross-sectional shape, and configuration resulting from the agglomeration of metal or other particles during the sintering process. Therefore, sintered material is preferred to achieve the irregular or random, non-linear pores for a preferred embodiment of the invention, but other processes and materials may produce similar pores. The average pore size (diameter) of the plate can range from about 100 μ (3.94×10^{-3} in) down to about 1 μ (3.94×10^{-5} in). More regularly shaped (e.g. circular cross section, linear holes defining a cylindrical volume) are more likely to produce spherical bubbles. Non-spherical bubbles are preferred because their irregular shape fills a volume more efficiently and permits more of the flowable food product to take the form of a thin film than would spherical bubbles.

[0024] Gas from gas source 7 passes through the pores of porous surface or plate 19 for entrainment in the flowable food product, which is accelerated by the flow restriction produced by surface 13, and accelerates as it flows across ramp 15. While the fluid passes by porous plate 19, gas flowing through the pores or non-linear holes in porous surface or plate 19 is entrained in the food product and forms a froth, foamed, whipped or aerated food product. The gas passing through the porous surface or plate, with its non-linear pores, produces a froth in which the non-spherical enclosed phase (gas) is bordered by a very thin contiguous film of the second phase (flowable food product). Linear and circular or regularly shaped holes in a plate generate monodispersed and more spherical bubbles or particles rather than an amorphous aerated food product.

[0025] For the experiment, the inlet 11 height is $l_1 = 6.35 \times 10^{-3}$ (0.25"), the throat height is (at the intersection of surfaces 13 and 15) $l_2 = 7.5 \times 10^{-4}$ (0.0295"), the exit 17 height is $l_3 = 4 \times 10^{-3}$ (0.157"), and the width is 3.81×10^{-2} (1.5") (not shown), where dimensions are in meters (inches). The length of the porous plate, in the liquid flow direction, is 2.54×10^{-2} (1"). The two Θ angles are 9 degrees. Surrogate tests using water and nitrogen as well as chemical tests using liquid basic hydrogen peroxide and other vapors were performed. Both types of tests, over a wide range of liquid and gas flow rates, by visualization and measured performance, indicated consistent generation of a uniform froth.

[0026] The foregoing test used 40μ (1.56×10^{-3} inch) and 100μ (3.94×10^{-3}) porous plates or surfaces (average pore diameter). Subsequent surrogate testing with 10μ (3.9×10^{-4} inch), 5μ (1.95×10^{-4} inch), and 2μ (7.8×10^{-5} inch), (average pore diameter) porous plates also demonstrated a stable and uniform froth with a bubble size decreasing with the average pore diameter of the plate.

[0027] A simple model was developed by the inventor for assessing froth generator 5. The model utilizes measured values for the liquid flow rate, for the gas flow rate, the known configuration, and measured pressures, p_1 (at inlet 11) and p_3 (at outlet 17). The analysis is based on Bernoulli's equation for state 1 upstream of the throat (where surfaces 13 and 15 intersect), and an approximate force balance for the irreversible flow between state 2 and 3 (at the throat and outlet 17, respectively).

[0028] The flow speed at state 3, w_3 , is given by

$$w_3 = \frac{1}{\dot{m}_f} \left[\frac{1}{l_2} (A_2 + A_3) (p_1 - p_3) + \left(\frac{3A_2 - A_3}{4A_2^2} \right) \frac{\dot{m}_1^2}{\rho_1} \right]$$

where

$$\dot{m}_f = \dot{m}_g + \dot{m}_l$$

$$A_2 = l_2 h$$

$$A_3 = l_3 h$$

ρ_l = liquid density

and an f subscript denotes froth. The speed of sound, a_f , in a froth is much less than in either of its constituents. (See, e.g., Pai, S.-I., *Two-Phase Flows*, Ch. IV, Vieweg, 1977.) The speed of sound and corresponding Mach number, M, are evaluated as follows:

$$\rho_{f3} = \frac{m_f}{A_3 w_3}$$

$$f_3 = \frac{p_1 - p_{f3}}{p_1 - \frac{W_g p_3}{\bar{R} T_1}}$$

$$a_{f3} = \left(\frac{F_3}{f_3 \rho_{f3}} \right)^{1/2}$$

$$M_3 = \frac{w_3}{a_{f3}}$$

where W_g is the molecular weight of the gas, \bar{R} is the universal gas constant, T_1 is the temperature of the entering liquid, and M_3 is an estimated state 3 Mach number. Because of the unusually small speed of sound, M_3 may be transonic or even supersonic. If supersonic, shock waves occur that can destroy the froth. Transonic and supersonic speeds at state 3 are avoided by primarily controlling the throat height l_2 , relative to l_3 , and the liquid flow rate.

[0029] Ramp 15 has several functions. It matches the length of porous plate 19 and, because $l_2 \ll l_3$, insures uniform penetration of the injected gas into the liquid, thus producing a uniform froth throughout the channel by the exit end of the ramp. A second function is to control M_3 to desired subsonic values. While a linear or flat ramp is illustrated, it could also be curved.

[0030] The importance of the ramp was demonstrated in tests at with a 100 μ (3.94×10^{-3} in) porous plate. The first test mixed 14.62 gpm of water with 309 mmole/s of

nitrogen injected through a $100\ \mu$ (3.94×10^{-5} in) porous plate without a ramp. The second test mixed 13.39 gpm of water mixed with 303 mmole/s of nitrogen injected through the same porous plate, but with a ramp 15 opposite the porous plate 19 and of the same length. This testing showed complete mixing with uniform froth generation upstream of the end porous plate 19 when a ramp 15 of equal length was employed. On the other hand, in the absence of a ramp 15 mixing was still incomplete at the end of the porous plate 19. Tests such as this one, demonstrate the importance of using a ramp opposite to the porous surface or plate. As discussed above, care in choosing several design/operating parameters should be exercised to avoid transonic or supersonic froth flow. This possibility is due to the exceptionally low speed of sound in the froth. Further, cavitation in the fluid should be avoided to prevent destruction of the froth. Using the foregoing parameters, a froth having a bubble size on the order of $1\ \mu$ (3.94×10^{-5} inch) can be achieved at high flow rates and volumes.

[0031] In operation, a food product is rendered flowable and stored at least temporarily in source 1. It is then pumped (pump 3) or otherwise delivered to inlet 11 of froth generator 5. The narrowing inlet surface 13 accelerates the flowable food product as it approaches the throat and then expands over ramp 15 while gas is injected from gas source 7 into the food product as it passes porous plate 19. Gas is entrained into the food product and a froth is generated. For food applications, the preferred gas is air, but any of the constituents of air, e.g., nitrogen and oxygen, or other non-toxic gas would be suitable.

[0032] The present invention provides an improved method and apparatus for injecting a gas, in the form of small bubbles, into a liquid or gel food for the purpose of lowering the salt, sugar, and/or fat content of the food. The gas may be air, consist of air constituents, such as oxygen, or other non-toxic gas. The gas is injected into the liquid through a porous plate or surface, made, e.g., of sintered stainless steel. The gas flows through the plate in the non-linear paths defined by the pores and mixes with the passing

flowable food product to form a froth with relatively small, non-spherical bubbles. By opposing the exit surface of the porous plate with a ramp 19, a nearly uniform froth is generated, at least, near the end of the ramp. The froth is believed to consist of non-spherical bubbles, each vapor bubble is believed to be incased in a liquid film. The average bubble size is controlled by the average pore size of the porous plate. Thus, the liquid-to-gas mass or volume ratio can be controlled independent of the average bubble size, which is controlled by the choice of the pore size of the porous plate.

[0033] The invention has the further advantage of scalability, being a two-dimensional flow device. Another advantage is that it is a steady flow process, as compared to a batch process. The hardware and flow constituents are readily heated or cooled to any desired temperature(s).

WHAT IS CLAIMED IS:

1. A method of entraining gas in a flowable food product comprising the steps of:
accelerating the flowable food product in a flow direction through a flow channel, the flow channel including a ramp; and

injecting gas into the flowable food product transverse to the flow direction through a porous surface while the food product traverses the ramp to entrain gas in the flowable food product.

2. The method according to claim 1, wherein the ramp follows a flow restriction in a flow channel and the porous surface.

3. The method according to claim 1, wherein the porous surface is a plate that has a plurality of non-linear pores extending there through.

4. The method according to claim 3, wherein the pores range in average size from about 100 μ to about 1 μ .

5. The method according to claim 1, wherein the gas comprises air.

6. The method according to claim 1, wherein the gas comprises one or more constituents of air.

7. Apparatus for entraining gas in a food product, comprising:
 - a source of flowable food product;
 - a food product pump to accelerate the food product through a flow channel;
 - a ramp in the flow channel;
 - a porous surface forming a wall of the flow channel opposite the ramp;
 - a source of gas in communication with the porous surface, wherein gas is entrained in the food product as it passes by the ramp and the porous plate.
8. The apparatus according to claim 7, wherein the ramp immediately follows a restriction in the flow channel.
9. The apparatus according to claim 7, wherein the porous surface is a sintered plate that has a plurality of non-linear pores extending therethrough.
10. The apparatus according to claim 9, wherein the pores range in average size from about 100 μ to about 1 μ .
11. The apparatus according to claim 7, wherein the gas comprises air.
12. The apparatus according to claim 7, wherein the gas comprises one or more constituents of air.

13. Apparatus for entraining gas in a food product, comprising:
- a source of flowable food product;
 - a food product pump to accelerate the food product through a flow channel;
 - a flow restriction in the flow channel;
 - a ramp in the flow channel immediately after the flow restriction;
 - a porous surface forming a wall of the flow channel opposite the ramp;
 - a source of gas in communication with the porous surface, wherein gas is entrained in the food product as it passes by the ramp and the porous plate.
14. The apparatus according to claim 13, wherein the ramp immediately follows a restriction in the flow channel.
15. The apparatus according to claim 13, wherein the porous surface is a sintered plate that has a plurality of non-linear pores extending therethrough.
16. The apparatus according to claim 15, wherein the pores range in average size from about 100 μ to about 1 μ .
17. The apparatus according to claim 13, wherein the gas comprises air.
18. The apparatus according to claim 13, wherein the gas comprises one or more constituents of air.

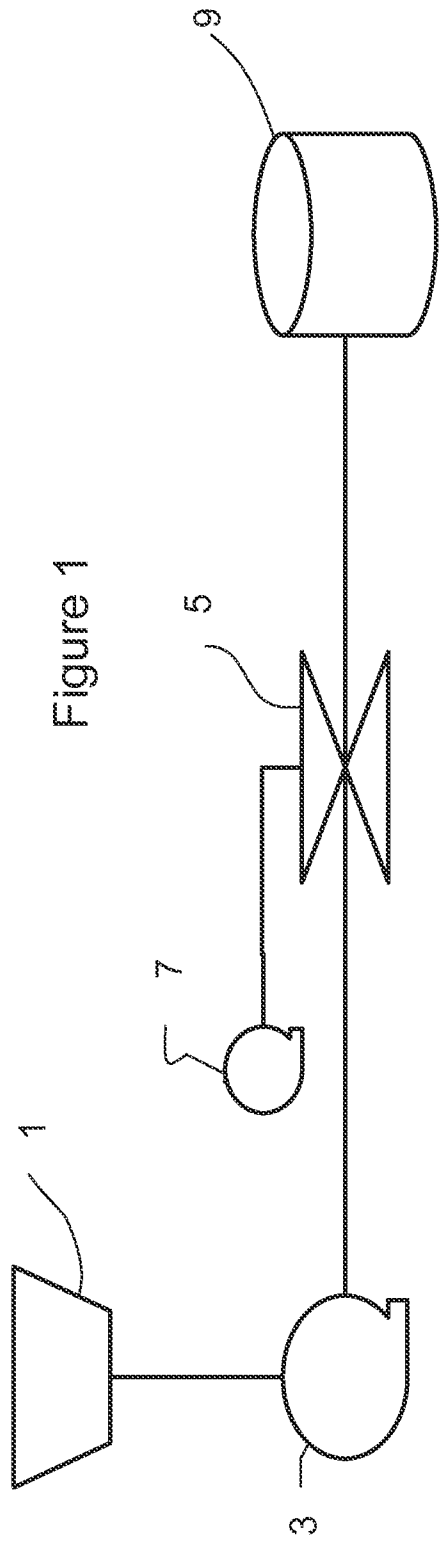


Figure 1

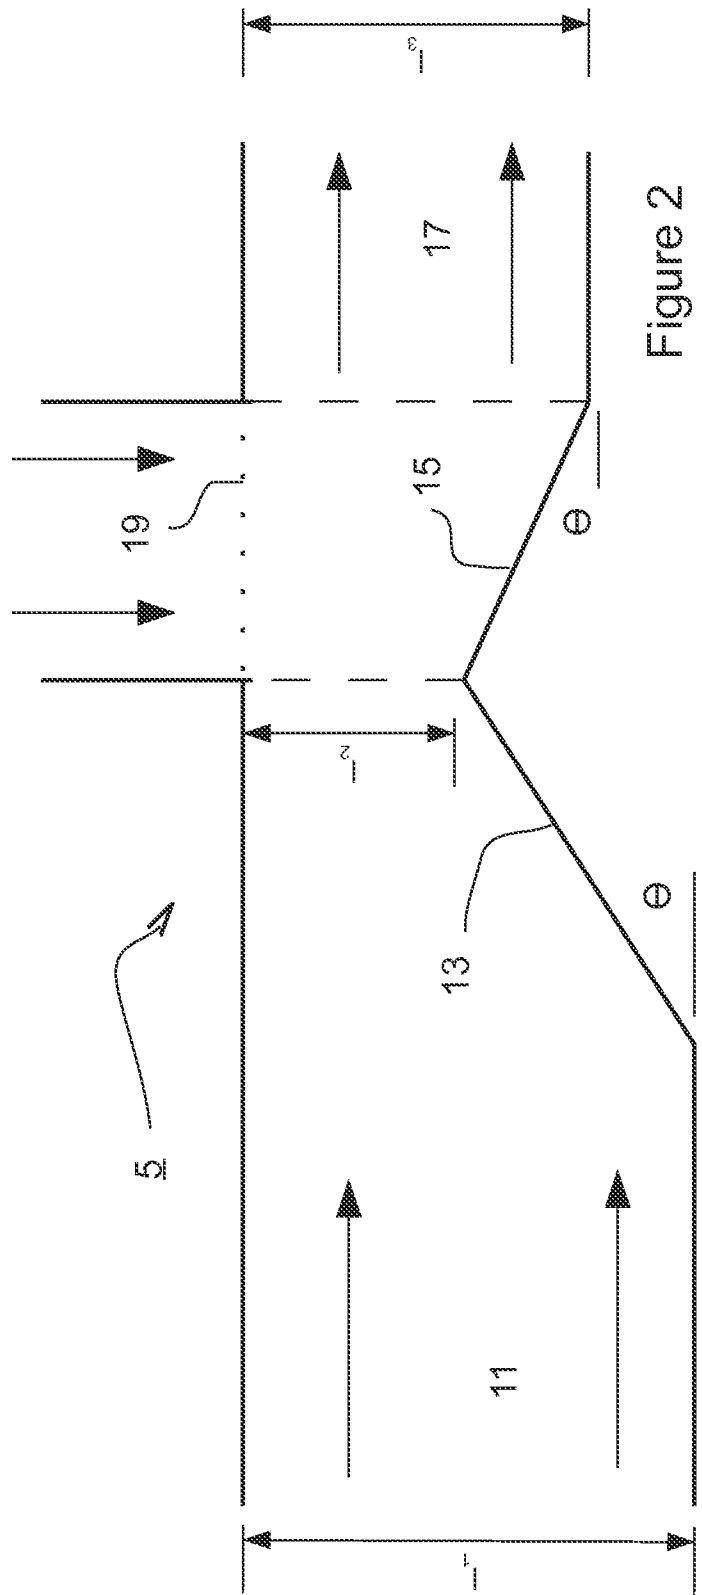


Figure 2

A. CLASSIFICATION OF SUBJECT MATTER

A23L 1/307(2006.01)i, C01B 13/00(2006.01)i, H01S 3/095(2006.01)i, A21D 8/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A23L 1/307; A61B 8/06; B01F 13/00; B01F 3/04; C10K 1/08; A23G 3/52; A23G 3/02; C01B 13/00; H01S 3/095; A21D 8/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: gas, entrainment, flowable food, ramp, porous surface, froth, micro size, bubble, air, injection

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002-0096792 A1 (VALELA, V. et al.) 25 July 2002 See abstract; paragraphs [0008], [0023], [0027], [0030], [0034], [0037]; and claims 1, 2.	1-18
Y	US 2009-0123385 A1 (BOHMER, M. R. et al.) 14 May 2009 See abstract; figures 1, 2; paragraphs [0017], [0066]; and claim 1.	1-18
A	US 5520856 A (GARRETT, M. E. et al.) 28 May 1996 See abstract; figure 2; and claim 1.	1-18
A	US 6557834 B2 (GANAN-CALVO, A.) 6 May 2003 See abstract and claims 1, 2.	1-18
A	US 2011-0052778 A1 (ABYLOV, M. et al.) 3 March 2011 See abstract and claims 1, 2.	1-18

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family


Date of the actual completion of the international search

15 October 2013 (15.10.2013)

Date of mailing of the international search report

15 October 2013 (15.10.2013)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
 189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,
 302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

YANG In Su

Telephone No. +82-42-481-8131



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/051300

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002-0096792 A1	25/07/2002	None	
US 2009-0123385 A1	14/05/2009	CN 101048225 A0 EP 1817098 A1 JP 2008-517997 A WO 2006-046200 A1	03/10/2007 15/08/2007 29/05/2008 04/05/2006
US 05520856 A	28/05/1996	None	
US 6557834 B2	06/05/2003	AU 1999-15726 A1 AU 1999-15726 B2 AU 1999-15727 A1 AU 1999-15727 B2 AU 1999-15728 A1 AU 1999-15728 B2 AU 1999-15729 A1 AU 1999-15729 B2 AU 1999-15730 A1 AU 1999-15730 B2 AU 1999-15731 A1 AU 1999-15731 B2 AU 1999-15732 A1 AU 1999-15732 B2 AU 2001-26056 A1 CA 2254969 A1 CA 2254969 C CA 2314918 A1 CA 2314919 A1 CA 2314920 A1 CA 2314920 C CA 2314979 A1 CA 2315048 A1 CA 2315108 A1 CA 2315121 A1 EP 0899017 A1 EP 0899017 B1 EP 1037711 A1 EP 1037712 A1 EP 1037713 A1 EP 1037713 B1 EP 1037858 A1 EP 1039965 A1 EP 1039971 A1 EP 1039971 B1 EP 1039972 A1 EP 1293259 A2 EP 1293259 A3 JP 03-664404 B2 JP 2000-503591 A	05/07/1999 11/04/2002 05/07/1999 11/04/2002 05/07/1999 11/04/2002 05/07/1999 30/08/2001 05/07/1999 24/01/2002 05/07/1999 11/04/2002 05/07/1999 28/03/2002 03/07/2001 20/11/1997 23/08/2005 24/06/1999 24/06/1999 24/06/1999 14/04/2009 24/06/1999 24/06/1999 24/06/1999 24/06/1999 03/03/1999 07/08/2002 27/09/2000 27/09/2000 27/09/2000 10/07/2002 27/09/2000 04/10/2000 04/10/2000 21/05/2003 04/10/2000 19/03/2003 07/01/2004 29/06/2005 28/03/2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/051300

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2002-508232 A	19/03/2002
		JP 2002-508238 A	19/03/2002
		JP 2002-508242 A	19/03/2002
		JP 2002-508243 A	19/03/2002
		JP 2002-508244 A	19/03/2002
		JP 2002-508250 A	19/03/2002
		JP 2002-508259 A	19/03/2002
		JP 2004-000904 A	08/01/2004
		JP 2004-268037 A	30/09/2004
		US 06116516 A	12/09/2000
		US 06119953 A	19/09/2000
		US 2001-0010338 A1	02/08/2001
		US 2001-0036495 A1	01/11/2001
		US 2001-0042793 A1	22/11/2001
		US 2002-0003312 A1	10/01/2002
		US 2002-0033422 A1	21/03/2002
		US 2002-0153621 A1	24/10/2002
		US 2002-0185550 A1	12/12/2002
		US 2003-0024526 A1	06/02/2003
		US 2003-0183222 A9	02/10/2003
		US 2003-098021 A1	29/05/2003
		US 2004-0065322 A1	08/04/2004
		US 2005-0000512 A1	06/01/2005
		US 2005-0016526 A1	27/01/2005
		US 2006-0102173 A1	18/05/2006
		US 2008-0053431 A1	06/03/2008
		US 2008-0072895 A1	27/03/2008
		US 6174469 B1	16/01/2001
		US 6187214 B1	13/02/2001
		US 6189803 B1	20/02/2001
		US 6196525 B1	06/03/2001
		US 6197835 B1	06/03/2001
		US 6234402 B1	22/05/2001
		US 6248378 B1	19/06/2001
		US 6299145 B1	09/10/2001
		US 6357670 B2	19/03/2002
		US 6386463 B1	14/05/2002
		US 6394429 B2	28/05/2002
		US 6405936 B1	18/06/2002
		US 6432148 B1	13/08/2002
		US 6450189 B1	17/09/2002
		US 6464886 B2	15/10/2002
		US 6554202 B2	29/04/2003
		US 6589579 B2	08/07/2003
		US 6595202 B2	22/07/2003
		US 6792940 B2	21/09/2004
		US 7059319 B2	13/06/2006
		US 7059321 B2	13/06/2006
		US 7293559 B2	13/11/2007
		WO 01-45519 A1	28/06/2001

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/051300

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 97-43048 A1	20/11/1997
		WO 99-30812 A1	24/06/1999
		WO 99-30831 A1	24/06/1999
		WO 99-30832 A1	24/06/1999
		WO 99-30833 A1	24/06/1999
		WO 99-30834 A1	24/06/1999
		WO 99-30835 A1	24/06/1999
		WO 99-31019 A1	24/06/1999
US 2011-0052778 A1	03/03/2011	AR 077996 A1	05/10/2011
		AU 2010-210025 A1	17/03/2011
		BR PI1002729 A2	29/05/2012
		CA 2712852 A1	28/02/2011
		CN 101999561 A	06/04/2011
		EP 2298080 A1	23/03/2011
		IL 207499 D0	30/12/2010
		JP 2011-045367 A	10/03/2011
		NZ 587349 A	30/03/2012
		RU 2010136204 A	10/03/2012