

(43) International Publication Date
12 January 2017 (12.01.2017)


- (51) **International Patent Classification:**
G01N 3/04 (2006.01) *G01N 3/24* (2006.01)
- (21) **International Application Number:**
PCT/CZ2016/050019
- (22) **International Filing Date:**
21 June 2016 (21.06.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2015-486 9 July 2015 (09.07.2015) CZ
- (71) **Applicants:** **CZECH TECHNICAL UNIVERSITY IN PRAGUE, FACULTY OF CIVIL ENGINEERING, DEPARTMENT OF ROAD STRUCTURES [CZ/CZ];** Thakurova 7, 16629 Praha 6 (CZ). **THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US];** 1111 Franklin Street, 12th Floor, Oakland, California 94607-5200 (US).
- (72) **Inventors:** **ZAK, Josef;** Tusarova 1464/20, 17000 Praha 7 (CZ). **HARVEY, John;** 2001 Ghausi Hall, One Shields Ave., Davis, California (US). **SINGORE, James;** 1353 S. 46th St, Bldg 452, Richmond, California 94804 (US).
- (74) **Agent:** **KRATOCHVIL, Vaclav;** P.O. Box 26, 29501 Mnichovo Hradiste (CZ).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:— *of inventorship (Rule 4.17(iv))***Published:**

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

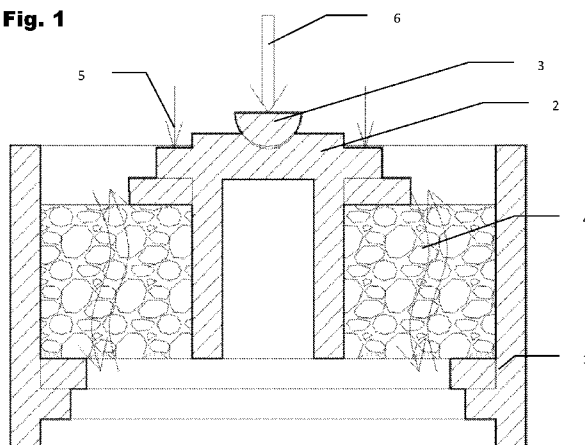(54) **Title:** DEVICE FOR MEASURING SHEAR PROPERTIES OF ASPHALT MIXTURES**Fig. 1**

(57) **Abstract:** A device for measuring shear properties of asphalt mixtures containing a machine for testing the material strength, especially for tests of tensile, compression, flexural and shear strengths, equipped with an operational frame, fixing elements and driving mechanism. It consists of a steel socket (9) equipped at its bottom and/or its top edge with an inner flange (1) to accommodate the testing specimen (4), which is equipped with a central open hole in it, and it also contains a steel insert (2) that can be inserted into the open hole in the testing specimen (4), the steel insert (2) is equipped at it end at the top edge of the steel socket (9) and/or at its end at the bottom of the steel socket (9) with a rim (7), while the size of the clearance between the inner flange (1) and the rim (7) can be adjusted from 5 to 60 mm, and the steel insert (2) is equipped with elements for fixing to the clamping elements (3) of the testing device, and to the steel insert (2) are connected the measuring probes (5).

Device for measuring shear properties of asphalt mixtures

Background of the Invention

The invention deals with a device for measuring shear properties of asphalt mixtures containing a machine for testing the material strength, especially for tests of tensile, compression, flexural and shear strengths, which is equipped with an operational frame, fixing elements and driving mechanism. The device is suitable in particular for determining the roadways asphalt mixtures resistance to the occurrence of permanent deformations in the form of ruts.

Description of Prior Art

When designing a roadway, an important part of the design is to determine the resistance to traffic-induced permanent deformations, such as ruts. A wavy surface decreases the transportation quality and prevents water drainage, which compromises the adhesion of a vehicle's tire to the roadway pavement. This results in lower area involved in braking effect and increases the risk of aquaplaning. The engineering task therefore is to minimize the risk of occurrence of permanently deformed pavement by the most accurate prediction possible and by monitoring of such occurrence, which would allow for proper suggestions or timely actions in reconstructing a roadway.

Permanent deformations of asphalt compacted layers of a roadway pavement caused by the traffic load are attributed to shear tension in the roadway and to the accompanying shear flow. These effects are described in detail for example in Symplectic Engineering Corporation 1999; Deacon et al. 2002; Monismith et al. 1994. Shear properties of materials like asphalt mixtures are measured by two currently known types of devices. The first one is the Superpave Shear Tester /SST/ developed at the University of California, Berkeley, in the nineties. The second device is the Double Shear Tester /DST/, which was developed at the Université de Limoges in 2006.

Tests used at present to estimate the mixture predisposition to fail prematurely are either not very accurate, or they require to purchase expensive testing equipment (SST).

Current practice, except for the U.S.A. and Canada, normally predicts the permanent deformation upon information about the measured change of the material in volume (using so-called Hamburg-Wheel Tracking Device). In case of well-compacted mixture it however was proved that the shear tension has significantly greater impact on forming the permanent deformations than the change in volume. But at present, the shear tension measurement with sufficient accuracy is only possible with the expensive so-called SST equipment, which therefore is unobtainable for many laboratories.

Test methods used at present vary significantly with respect to their extent, ability to predict the pavement performance with sufficient accuracy and the input data they use. Most of these tests are empiric-based and as such they were developed with the presumption of certain traffic and climatic conditions based on experience. One of these methods setbacks is the fact that they cannot be used for the roadways construction design calculations.

There exist a number of relevant patents of Chinese origin (CN203745314 (U), CN203350137 (U), CN103245571 (A), CN103267686 (A), CN103245571 (A)). However no protected solution was found that would be identical to the present one. The topic of measuring properties of compacted asphalt mixtures is discussed also in utility design number 2011-24012 registered at the ÚPV ČR (Industrial Property Office of the Czech Republic). This device however is designed for measuring the friction between the asphalt mixture and steel as the input properties for numeric calculations describing especially in-vitro testing. The device does not allow to measure shear properties of asphalt mixtures.

As the existing solution used for measuring the shear properties in the U.S.A. can be considered the device called SuperPave Shear Tester (SST). Disadvantages of this existing solution may be summarized in the following points. Firstly, the specimen must be glued to two steel bases, which serve for fixing the specimen in the testing device.

Quality of glued joint varies largely, it depends on kind of used glue and experience and meticulousness of technician making the glued joint. It means that not only such process of gluing makes the testing more expensive and longer but since the glued joint quality varies, this process introduces yet another variable quantity into the measured in-vitro results, thus increasing the standard deviation of measurements.

Disadvantages of the present solutions can be summed up into the following points. Many devices require that part of the testing device or the sample itself were glued or bonded. Using glue makes the testing procedure longer and more expensive. Likewise, measured values are affected by the quality of the bond workmanship.

With the current solutions, the shear tension is not applied in the same direction, in which the samples are produced or compacted on a roadway, meaning that the load impact direction does not correspond to the actual conditions on roadways. This fact is critical for determination of parameters that are subsequently used in calculation of the asphalt roadways durability.

Another disadvantage is that the standard UTM equipment cannot be used in the testing procedure plus the preparation of the testing specimens is complex.

Existing solutions do not allow to apply cross-tension or they apply the cross-tension in inadequate values. They further do not allow to measure the cross-tension during testing. Existing solutions do not allow to test specimens obtained by the standard boring technology from the pavements.

For some devices, the measured values are distorted by application of clamping or contact pressures.

Summary of the Invention

Setbacks mentioned above are to a large extent removed by a device for measuring shear properties of asphalt mixtures containing a machine for testing the material strength, especially for tests of tensile, compression, flexural and shear strengths, which is equipped with an operational frame, fixing elements and driving mechanism,

according to this invention. Its principle is that it contains a steel socket equipped at its bottom and/or at its top edge with an inner flange to accommodate the testing specimen that is equipped with a central open hole in it, and further it contains a steel insert that can be inserted into an open hole through the testing specimen, equipped at its end at the top edge of the socket and/or at its end at the socket bottom with a rim. The clearance between the inner flange and the rim is adjustable from 5 to 60 mm and the steel insert is equipped with elements for fixing to the clamping elements of the testing device. Also, measuring probes are connected to the steel insert.

Advantageously, flexible material is inserted below the steel insert rim. In one preferred embodiment the steel socket is formed by at least two parts, between which is located a tension meter for measuring the pressure the material applies to the steel socket. The device may be located in a temperature-controlled chamber. Contact area size between the testing specimen and the inner flange advantageously corresponds to the contact area size between the testing specimen and the steel insert equipped with a rim.

In fact, the testing device is a set-up designed for use in the testing UTMs (Universal Testing Machines), also known as NAT (Nottingham Asphalt Tester). These universal testing devices are commonly used by laboratories focused on roadway materials testing. It means that the set-up is inserted into the UTM and this combination is used to perform the test. The machine contains control and evaluation units, measuring probes, piston driven by the hydraulic or pneumatic unit and temperature-controlled chamber. UST device thus to a certain extent becomes an accessory to the UTM.

Advantages of this device include extremely lower production costs, significantly lower operational costs and approximately half the time needed for preparation of specimens without the need for any other laboratory equipment, i.e. no need for double-edged saw or bonding the specimen to a special base, while it allows to test samples obtained by boring from the roadway as well as in-vitro prepared samples. Another advantage is the simplicity of the testing procedure – without any impacts caused by contact or clamping pressures. Compacted asphalt mixtures are tested in the same direction, in which they are compacted and loaded on the roadway. Using the UST machine for the shear properties testing shows less varied values of some measured

parameters. During testing the material is exposed to side tension, which is given by mechanical properties of the tested material itself. Another substantial advantage is also general safety – if the material breaks under the load pressure, it collapses inside the testing set-up.

The advantage of the solution with double-rimmed insert is the option to apply load in both directions, it means from top downwards and from the bottom upwards. In some layers of non-compact roadway pavements the pressure tension changes to tensile tension as the vehicle's wheel rolls over. Therefore, the shear tension direction changes also. Fixing the specimen from both sides allows to simulate this effect in laboratory. We may presume that this kind of fixing will also allow to perform tests of the material resistance against fatigue.

Preliminary analysis of the situation on market revealed that the solution according to the invention has a great potential for practical applications, especially due to higher accuracy of the permanent deformations resistance determination and also because it is very cost efficient. More accurate data about the tested mixture will help avoid premature faults of the roadways and thanks to them the road transportation network administrators will have higher quality information about the roadways actual condition and functionality, which will help them during the construction designs, selection of suitable materials and repairs planning. The device may also be used for measuring even when there are no applicable industrial standards. Since the device according to the invention uses laboratory equipment laboratories already own as a standard, there is no need to create any extra sources for its procurement.

If the device according to the invention is used, it allows to reduce or eliminate the occurrence of permanent deformations by suitable design. This allows for significant savings for the investor and administrator of transportation constructions.

Most laboratories focused on testing the asphalt properties are at present equipped with so-called UTM (Universal Testing Machine, also known as the Nottingham Asphalt Tester (NAT)). This fact is anticipated by the concept of solution according to the invention. When this solution is used the laboratory measurements give the user

unambiguous results – functional parameters. When these parameters are known, the mixture composition can be optimized to meet specific needs.

Brief Description of the Figures

Fig. 1 illustrated a cross-section of the UST example in accordance with the described embodiments.

The device for measuring shear properties of asphalt mixtures according to this invention will be described in more detail using a specific embodiment examples by means of attached drawings, where Fig. 1 shows the given device in cross-section. Fig. 2 shows the cross-section of another possible embodiment. Fig. 3 shows a view of section of one possible embodiments of the device.

Detailed Description of the Preferred Embodiments

Example embodiment of the device for measuring shear properties of asphalt mixtures consists of a steel socket 9 equipped at its bottom with an inner flange 1 to accommodate the testing specimen 4 with a central open hole in it, and a steel insert 2 that can be inserted into an open hole through the testing specimen 4. The steel insert 2 is equipped with a rim 7 and a clamp 3 for fixing into the testing device. The size of the clearance between the inner flange 1 and the rim 7 can be adjusted from 5 to 60 mm. To the steel insert 2 are connected the measuring probes 5. Below the rim 7 of the steel insert 2 a flexible material 8 is inserted. The device is located in the temperature-controlled chamber.

In another embodiment the steel socket 9 is formed by two parts, between which is located a tension meter measuring the pressure the material applies to the steel socket 9.

The asphalt testing specimen 4, cylindrically shaped with an open hole, is inserted into the steel socket 9 and placed onto its inner flange 1. Inside the testing specimen 4 is inserted the steel insert 2, on which is placed the distribution ball of the clamp 3 of the testing device. To the steel insert 2 are connected the measuring probes 5. Testing

procedure consists in applying controlled load or displacement in direction 6 to the steel insert 2.

Another alternative device for measuring shear properties of asphalt mixtures contains the steel socket 9 equipped at its bottom and the top edge with an inner flange 1 for fixing the testing specimen 4 with the central open hole in it, and the steel insert 2, which can be inserted into the open hole of the testing specimen 4. Steel insert 2 is equipped from both sides with the rim 7 and the place for fixing the loading device. Clearance between the inner flange 1 and the rim 7 can be adjusted from 5 to 60 mm. To the steel insert 2 are connected the measuring probes 5. The device is located in the temperature-controlled chamber.

The asphalt testing specimen 4, cylindrically shaped with an open hole, is inserted into the steel socket 9 and placed onto its inner flange 1. Inside the testing specimen 4 is inserted the steel insert 2. The steel insert 2 is attached to the testing specimen 4 also from the other side than the side it was inserted. Testing specimen 4 is further fixed in the steel socket 9 from the side the steel insert 2 is inserted. Next, the loading device is fixed to the steel insert 2. To the steel insert 2 are connected the measuring probes 5. Testing procedure consists in applying controlled load or displacement in direction 6 to the steel insert 2.

In case of the alternative solution with the testing specimen 4 fixed both from the top and the bottom side, the fixing of testing specimen 4 is double. The testing specimen 4 is at first fixed to the steel socket 9. On the bottom side the testing specimen 4 is placed onto the inner steel flange 1, which can be manufactured as one monolithic piece with the steel socket 9, or fixed to the steel socket 9 by welding. On the top side, the testing specimen 4 is fixed by the upper steel flange 1. This upper steel flange 1 is fixed to the steel socket 9 for instance by bolts or other connecting system in a way that allows for rectification according to the testing specimen 4 height.

Then the steel insert 2 is fixed to the inner open hole of the testing specimen 4. The steel insert 2 consists of three parts. The first, upper part is formed by a shank equipped with threads in its part, and a head. This part is placed together with the upper washer to the inner open hole of the testing specimen 4. The lower part is

formed by the washer and nut. The washer is put on the shank from below and the washer is tightened to the testing specimen 4. In fact, this design uses fixing the testing specimen 4 with the bolt with two washers. In the head of the insert (bolt) there is a hole with threads to allow fixing of the loading rod of the testing device.

The function of the alternative solution with the testing specimen 4 fixed from both the top and bottom sides is the application of load in both directions. It means the controlled load can be applied in vertical direction both downwards and upwards. Load applied in the form of tension or strain causes shear tension in the testing specimen 4 in alternately changing direction. This effect is similar to shear tensions created in pavement when vehicle's wheel rolls over. Loading the testing specimen 4 in both directions thus allows to simulate loading of the roadway pavement structure. Likewise it is possible to apply shear fatigue test without the impact of accumulated permanent deformation caused by load applied in one direction.

Advantageously this alternative design of the testing device allows to apply sinusoid or other harmonic load in both directions. Loading procedure and measurement of results is the same as for the previous versions.

Common dimensions of the testing specimen 4 are: diameter 150 to 100 mm, height of the specimen 40 to 100 mm, often corresponding to the pavement layer thickness. Steel parts of the device are made of steel with wall thickness 10 to 15 mm. Load application consists in application of cycles of loading and unloading, so-called cyclical test of strain with unloading, or in application of usually sinusoid waves of load to the testing specimen 4 with frequencies selected from the range 0.1 to 50 Hz. With this kind of loading the response of material is measured. In case of load by strain, tension is measured. In case of load by tension, strain is measured. Results can be evaluated using principles of elasticity, viscoelasticity or possibly viscoelastoplasticity. Measured results include: shear modulus of elasticity, reversible and irreversible function of compliance in shear, number of cycles needed to reach certain level of permanent strain, parameters of rheological models and parameters of models for use in calculation software applications.

The device was used for testing of asphalt compacted mixtures. These mixtures contained conventional, oxidized and polymer-modified asphalt binders. Tests were performed with asphalt compacted mixtures manufactured in California, U.S.A., and in Europe, the Czech Republic. Part of the research project focused also on asphalt compacted mixtures with the content of rubber manufactured in California, U.S.A. It was proved that based on in-vitro measurements the device allows to discern quality between these kinds of materials.

Exemplary procedure of measurement is procurement of testing sample from the pavement by boring or preparation of the testing specimen 4 using gyrator in laboratory. To such testing specimen 4 the central open hole is subsequently bored. This testing specimen 4 is placed into the steel socket 9 and the steel insert 2 is inserted into the open hole of the testing specimen 4. The set-up is placed to the UTM device where to the steel insert 2 are connected the measuring probes 5 and the rod of the loading device is fixed to it. The whole set-up is tempered until the required temperature of the testing specimen 4 is stabilized. Next, testing is performed, i.e. application of load on the testing specimen 4, and its response is evaluated in the form of physical-mechanical properties of tested material.

Industrial Applicability

Device for measuring shear properties of asphalt mixtures will find application in measuring, determining and designing the roadways load capacity when loaded by freight transportation and in determination of the roadways resistance to permanent deformations forming. It uses standard laboratory equipment.

PATENT CLAIMS

1. Device for measuring shear properties of asphalt mixtures containing a machine for testing the material strength, especially for tests of tensile, compression, flexural and shear strengths, equipped with an operational frame, fixing elements and driving mechanism ***characterized by the fact that*** it consists of a steel socket (9) equipped at its bottom and/or its top edge with an inner flange (1) to accommodate the testing specimen (4), which is equipped with a central open hole in it, and it also contains a steel insert (2) that can be inserted into the open hole in the testing specimen (4), the steel insert (2) is equipped at its end at the top edge of the steel socket (9) and/or at its end at the bottom of the steel socket (9) with a rim (7), while the size of the clearance between the inner flange (1) and the rim (7) can be adjusted from 5 to 60 mm, and the steel insert (2) is equipped with elements for fixing to the clamping elements (3) of the testing device, and to the steel insert (2) are connected the measuring probes (5).
2. Device according to claim 1 ***characterized by the fact that*** below the rim (7) of the steel insert (2) a flexible material (8) is inserted.
3. Device according to claims 1 or 2 ***characterized by the fact that*** the steel socket (2) is formed by at least two parts, between which a tension meter is located for measuring the pressure the material applies to the steel socket (9).
4. Device according to any of the preceding claims ***characterized by the fact that*** the device is located in the temperature-controlled chamber.
5. Device according to any of the preceding claims ***characterized by the fact that*** the contact area size between the testing specimen (4) and the inner flange (1) corresponds to the contact area size between the testing specimen (4) and the steel insert (2) equipped with a rim (7).

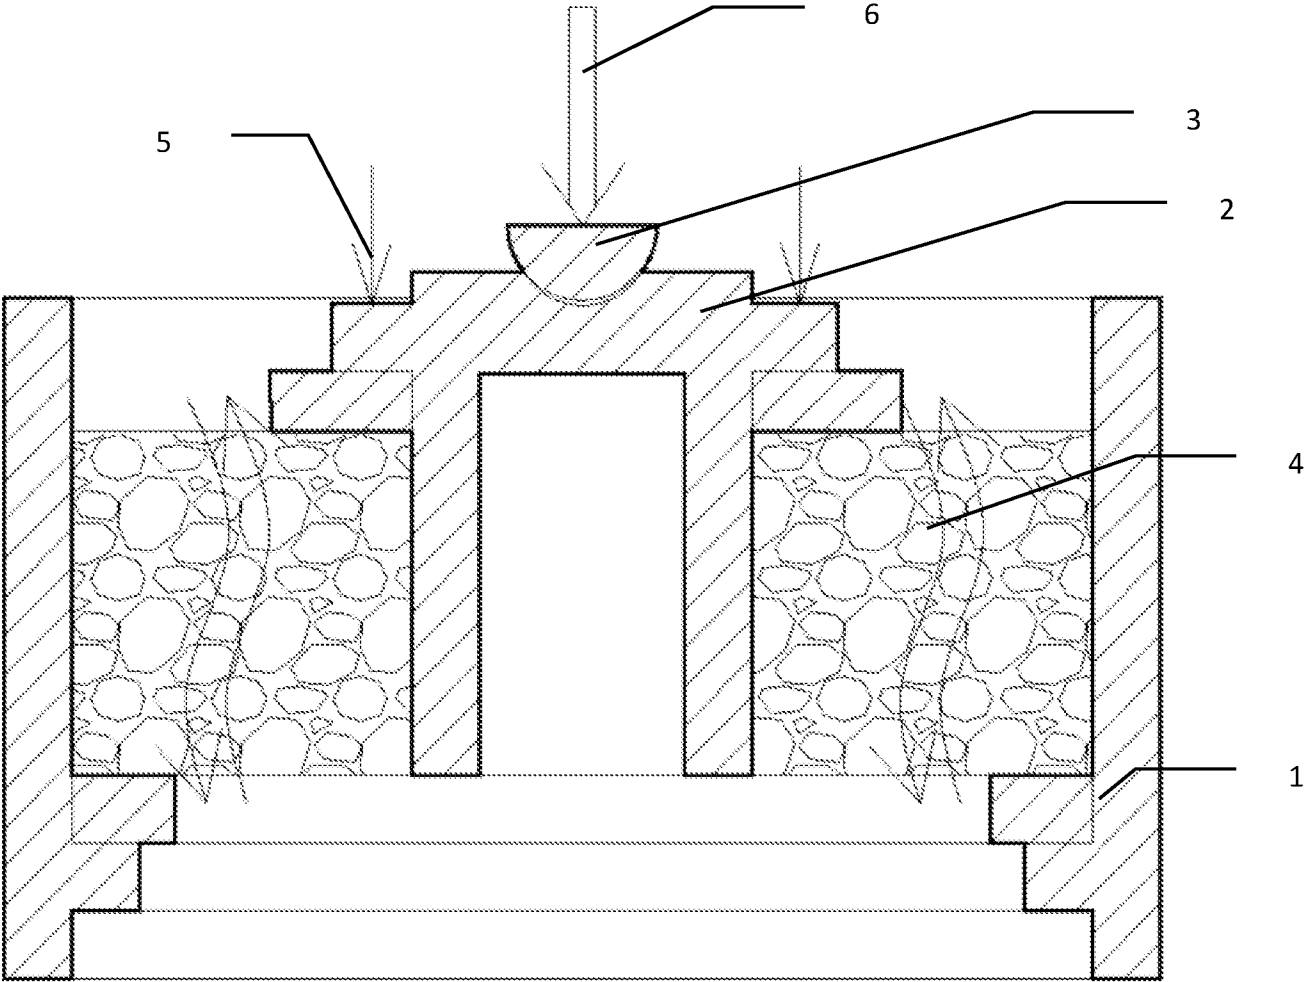


Fig. 1

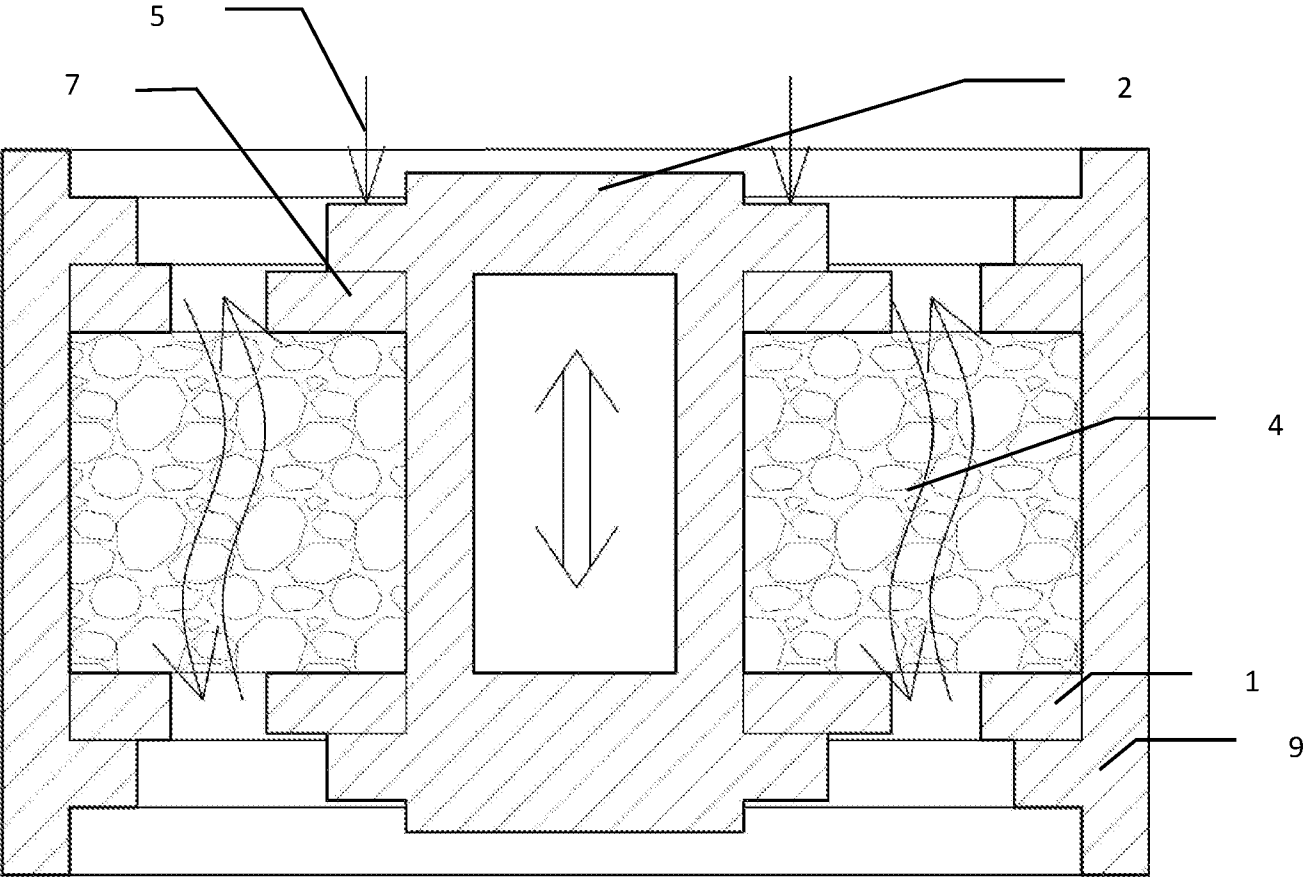
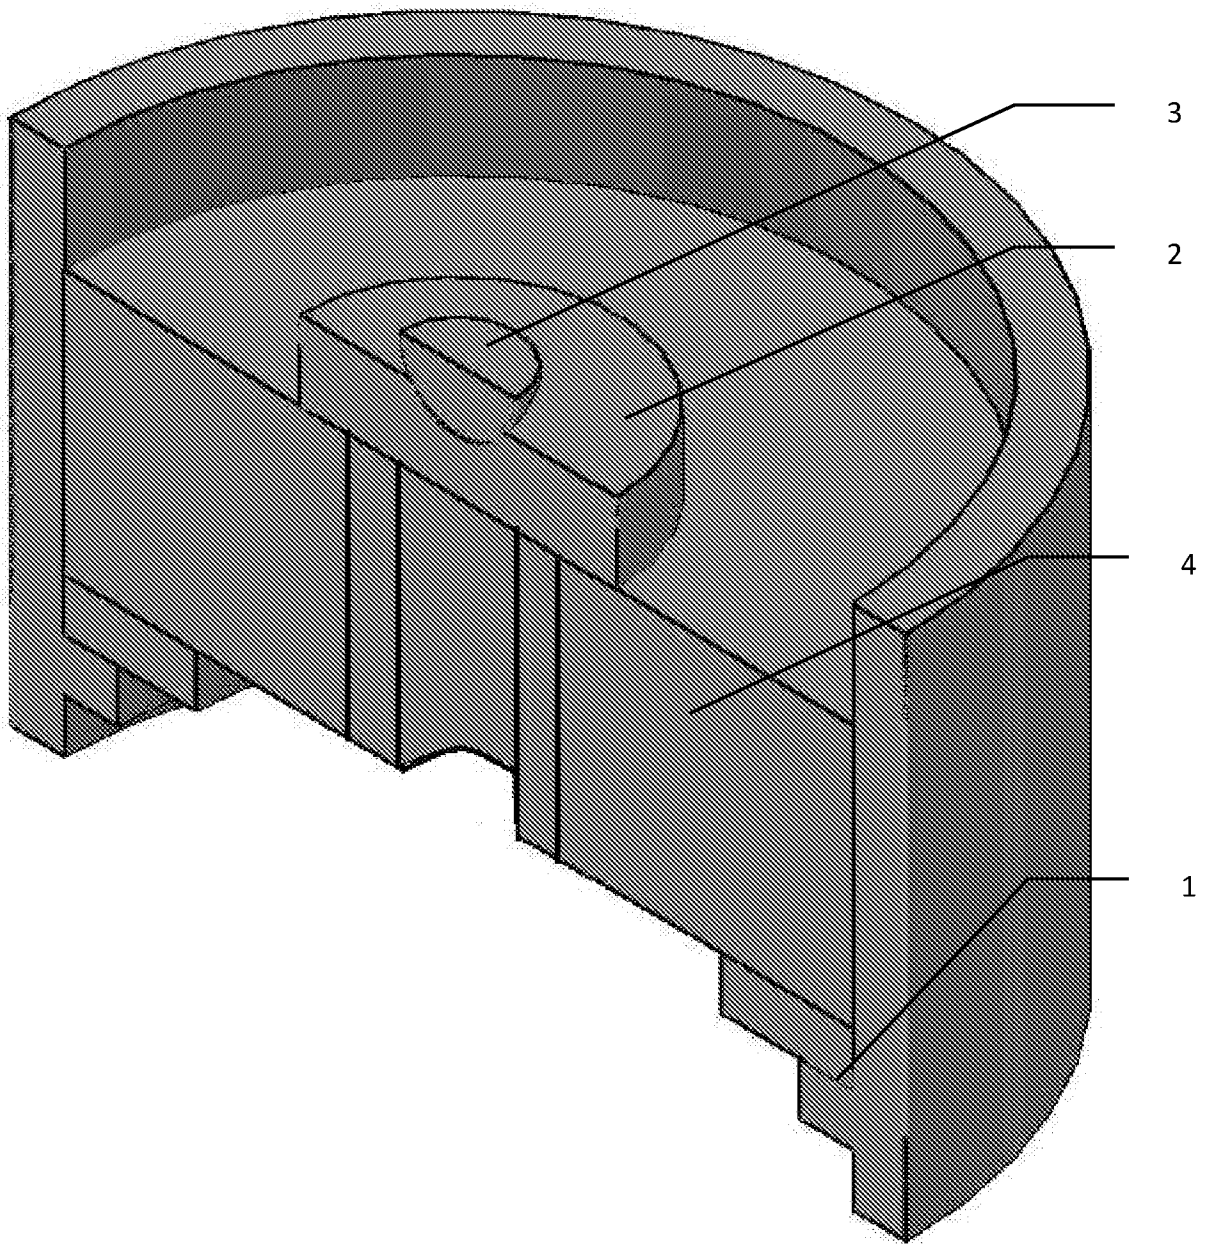


Fig. 2

**Fig. 3**

INTERNATIONAL SEARCH REPORT

International application No

PCT/CZ2016/050019

A. CLASSIFICATION OF SUBJECT MATTER

INV. G01N3/04 G01N3/24
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 557 296 A1 (FRAGEMA FRAMATOME & COGEMA [FR]) 28 June 1985 (1985-06-28) abstract; figure 1 page 4, paragraph 3 -----	1-5
X	US 5 119 681 A (MISZCZAK FRANK [US]) 9 June 1992 (1992-06-09) figures 9-11 column 3, line 26 - line 35 column 7, line 3 - line 14 column 7, line 24 - line 25 column 7, line 30 - line 38 -----	1-5
A	CN 203 025 051 U (UNIV CHANGSHA SCIENCE) 26 June 2013 (2013-06-26) abstract; figure 1 -----	1-5



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 October 2016

Date of mailing of the international search report

04/11/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lefortier, Stéphanie

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/CZ2016/050019

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2557296	A1	28-06-1985	NONE	
US 5119681	A	09-06-1992	NONE	
CN 203025051	U	26-06-2013	NONE	