Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2511455 C 2012/09/04

(11)(21) 2 511 455

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(22) Date de dépôt/Filing Date: 2005/07/05

(41) Mise à la disp. pub./Open to Public Insp.: 2006/03/17

(45) Date de délivrance/Issue Date: 2012/09/04

(30) Priorité/Priority: 2004/09/17 (US10/943,497)

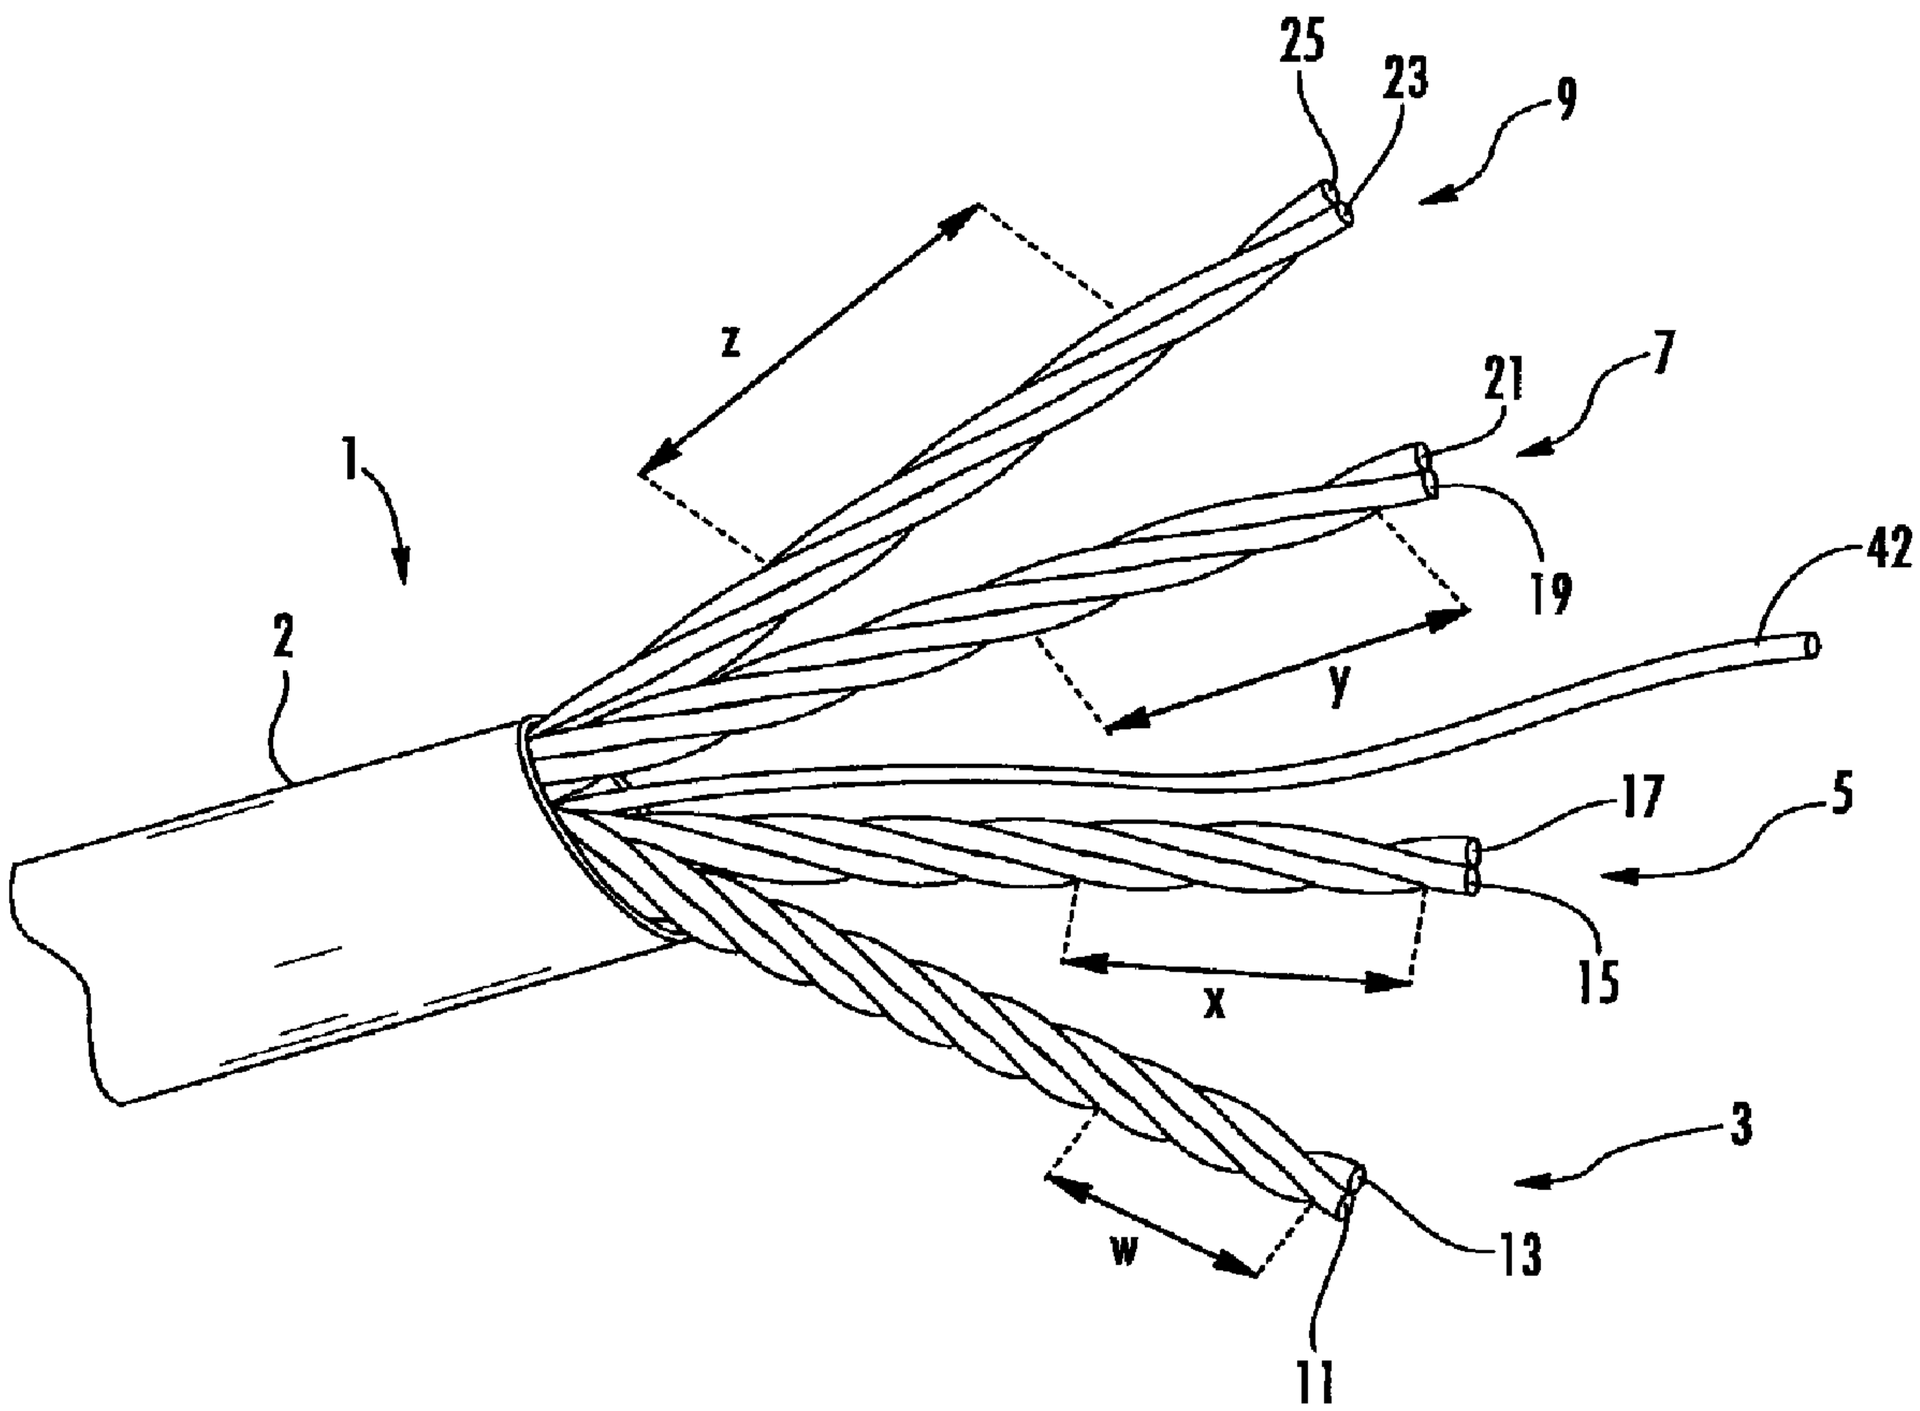
(51) Cl.Int./Int.Cl. *H01B 13/00* (2006.01),
H01B 11/02 (2006.01)

(72) Inventeurs/Inventors:
HOPKINSON, WAYNE, US;
HAYES, TRENT, US;
ANTONIJEVIC, BORIVOJE, AT;
MASTERS, CRAIG, AT;
BEAMES, ROSS, AT;
WYER, EAMONN, IE;
BLACK, ROBERT, IE

(73) Propriétaire/Owner:
COMMSCOPE SOLUTIONS PROPERTIES, LLC, US

(74) Agent: SMART & BIGGAR

(54) Titre : METHODES ET APPAREIL POUR LA FABRICATION D'UN CABLE A PAIRES
(54) Title: METHODS AND APPARATUS FOR FORMING CABLE MEDIA



(57) Abrégé/Abstract:
A method for forming a cabling media includes providing a wire pair including first and second conductor members. Each of the first and second conductor members includes a respective conductor and a respective insulation cover surrounding the conductor

CA 2511455 C 2012/09/04

(11)(21) 2 511 455

(13) C

(57) Abrégé(suite)/Abstract(continued):
thereof. The first and second conductor members are twisted about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair. The method may include: imparting a purposefully varied pretwist to the wire pair using a wire pair twist modulator; and imparting additional twist to the wire pair using a wire pair twisting device downstream of the wire pair twist modulator.

Attorney Docket: 945 .3

METHODS AND APPARATUS FOR FORMING CABLE MEDIA

ABSTRACT

A method for forming a cabling media includes providing a wire pair including first and second conductor members. Each of the first and second conductor members includes a respective conductor and a respective insulation cover surrounding the conductor thereof. The first and second conductor members are twisted about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair. The method may include: imparting a purposefully varied pretwist to the wire pair using a wire pair twist modulator; and imparting additional twist to the wire pair using a wire pair twisting device downstream of the wire pair twist modulator.

77203-100

METHODS AND APPARATUS FOR FORMING CABLE MEDIA

FIELD OF THE INVENTION

The present invention relates to cabling media including twisted wire pairs and, more particularly, to methods and apparatus for forming cabling media including twisted wire pairs.

BACKGROUND OF THE INVENTION

Along with the greatly increased use of computers for homes and offices, there has developed a need for a cabling media, which may be used to connect peripheral equipment to computers and to connect plural computers and peripheral equipment into a common network. Today's computers and peripherals operate at ever increasing data transmission rates. Therefore, there is a continuing need to develop cabling media that can operate substantially error-free at higher bit rates, but that can also satisfy numerous elevated operational performance criteria, such as a reduction in alien crosstalk when the cable is in a high cable density application.

Co-pending, co-owned U.S. Patent No. 6,875,928 issued April 5, 2005, entitled "LOCAL AREA NETWORK CABLING ARRANGEMENT WITH RANDOMIZED VARIATION", discloses cabling media including a plurality of twisted wire pairs housed inside a jacket. Each of the twisted wire pairs has a respective twist length, defined as a distance wherein the wires of the twisted wire pair twist about each other one complete revolution. At least one of the respective twist lengths purposefully varies along a length of the cabling media. In one embodiment, the cabling media includes four twisted wire pairs, with each twisted wire pair having its twist length purposefully varying along the length of the cabling media. Further, the twisted wire pairs may have a core strand length, defined as a distance wherein the twisted wire pairs twist about each other one complete revolution. In a further embodiment, the core strand length is purposefully varied along the length of the cabling media. The cabling media can be designed to meet the requirements of CAT 5, CAT 5e or CAT 6 cabling, and demonstrates low alien and internal crosstalk characteristics even at data bit rates of 10 Gbit/sec.

SUMMARY OF THE INVENTION

According to method embodiments of the present invention, a method for forming a cabling media includes providing a wire pair including first and second conductor members. Each of the first and second conductor members includes a respective conductor and a respective insulation cover surrounding the conductor thereof. The first and second conductor members are twisted about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair. The method may include: imparting a purposefully varied pretwist to the wire pair using a wire pair twist modulator; and imparting additional twist to the wire pair using a wire pair twisting device downstream of the wire pair twist modulator.

According to further method embodiments of the present invention, a method for forming a cabling media includes providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members. Each of the first, second, third and fourth conductor members includes a respective conductor and a respective insulation cover surrounding the conductor thereof. The first and second twisted wire pairs are twisted about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core. The method may include: imparting a purposefully varied pretwist to the first and second twisted wire pairs using a core twist modulator; and imparting additional twist to the first and second twisted wire pairs using a core twisting device downstream of the wire pair twist modulator.

According to further embodiments of the present invention, an apparatus for forming a cabling media using a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the conductor thereof, is provided. The apparatus is adapted to twist the first and second conductor members about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair. The apparatus may include a wire pair twist modulator adapted to impart a purposefully varied pretwist to the wire pair, and a wire pair twisting device downstream of the wire pair twist modulator, wherein the wire pair twisting device is adapted to impart additional twist to the wire pair.

According to further embodiments of the present invention, an apparatus for forming a cabling media using a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the conductor thereof, is provided. The apparatus is adapted to twist the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core. The apparatus may include a core twist modulator adapted to impart a purposefully varied pretwist to the first and second twisted wire pairs, and a core twisting device downstream of the core twist modulator, wherein the core twisting device is adapted to impart additional twist to the first and second twisted wire pairs.

According to further embodiments of the present invention, a wire pair twist modulator for forming a cabling media using a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the conductor thereof, is provided. The wire pair twist modulator is adapted to impart a purposefully varied twist to the wire pair. The wire pair twist modulator may include an engagement member adapted to engage the wire pair and rotationally oscillate about a twist axis.

According to still further embodiments of the present invention, a core twist modulator for forming a cabling media using a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the conductor thereof, is provided. The core twist modulator is adapted to impart a purposefully varied twist to the first and second twisted wire pairs. The core twist modulator may include an engagement member adapted to engage the first and second twisted wire pairs and rotationally oscillate about a twist axis.

77203-100

According to one aspect of the present invention, there is provided a method for forming a cabling media, the method comprising: a) providing a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and b) twisting the first and second conductor members about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair, including: imparting a purposefully varied pretwist to the wire pair using a wire pair twist modulator; and imparting additional twist to the wire pair using a wire pair twisting device downstream of the wire pair twist modulator.

According to another aspect of the present invention, there is provided a method for forming a cabling media, the method comprising: a) providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and b) twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core, including: imparting a purposefully varied pretwist to the first and second twisted wire pairs using a core twist modulator; and imparting additional twist to the first and second twisted wire pairs using a core twisting device downstream of the core twist modulator.

According to still another aspect of the present invention, there is provided an apparatus for forming a cabling media using a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the apparatus is adapted to twist the first and second conductor members about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair, the apparatus

including: a wire pair twist modulator adapted to impart a purposefully varied pretwist to the wire pair; and a wire pair twisting device downstream of the wire pair twist modulator, wherein the wire pair twisting device is adapted to impart additional twist to the wire pair.

According to yet another aspect of the present invention, there is provided an apparatus for forming a cabling media using a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the apparatus is adapted to twist the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core, the apparatus including: a core twist modulator adapted to impart a purposefully varied pretwist to the first and second twisted wire pairs; and a core twisting device downstream of the core twist modulator, wherein the core twisting device is adapted to impart additional twist to the first and second twisted wire pairs.

According to a further aspect of the present invention, there is provided a wire pair twist modulator for forming a cabling media using a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the wire pair twist modulator is adapted to impart a purposefully varied twist to the wire pair.

According to yet a further aspect of the present invention, there is provided a core twist modulator for forming a cabling media using a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the core twist

modulator is adapted to impart a purposefully varied twist to the first and second twisted wire pairs.

According to another aspect of the present invention, there is provided a method for forming a cabling media, the method comprising: providing a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and twisting the first and second conductor members about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair; wherein the twist length purposefully varies across an absolute range of at least 0.5% of a nominal twist length of the twisted pair.

According to still another aspect of the present invention, there is provided a method for forming a cabling media, the method comprising: providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core; wherein the twist length of the twisted core purposefully varies across an absolute range of between about 0.1 and 1.0 twists/inch.

According to yet another aspect of the present invention, there is provided a method for forming a cabling media, the method comprising: providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core; wherein the

twist length of the twisted core purposefully varies over a range of at least 0.5% of a mean twist rate of the twisted core.

According to a further aspect of the present invention, there is provided a method for forming a cabling media, the method comprising: providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core, wherein the twisted core of the cabling media is twisted in only one direction.

Objects of the present invention will be appreciated by those of ordinary skill in the art from a reading of the figures and the detailed description of the illustrative embodiments which follow, such description being merely illustrative of the present invention.

Attorney Docket: 945 3

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate some embodiments of the invention and, together with the description, serve to explain principles of the invention.

Figure 1 is a perspective view of a cable according to embodiments of the present invention, wherein a jacket thereof is partially removed to show four twisted wire pairs and a separator of the cable;

Figure 2 is an enlarged, fragmentary, side view of the cable of **Figure 1** wherein a portion of the jacket is removed to show a twisted core of the cables;

Figure 3 is a schematic view of a wire pair twisting apparatus according to embodiments of the present invention;

Figure 4 is a front perspective view of a wire pair twist modulator forming a part of the apparatus of **Figure 3**;

Figure 5 is a fragmentary, side elevational view of the wire pair twist modulator of **Figure 4**;

Figure 6 is a schematic view of a core twisting apparatus according to embodiments of the present invention;

Figure 7 is a front plan view of a main gear assembly forming a part of a core twist modulator of the apparatus of **Figure 6**;

Figure 8 is a schematic view of a gang twinner apparatus according to embodiments of the present invention;

Figure 9 is a graph illustrating a lay length distribution corresponding to a modulation scheme in accordance with embodiments of the present invention and a lay length distribution corresponding to a wire pair twist scheme in accordance with the prior art; and

Figure 10 is a graph illustrating an exemplary modulation sequence in accordance with embodiments of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which illustrative embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein;

rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

Like numbers refer to like elements throughout the description. It will be understood that, as used herein, the term "comprising" or "comprises" is open-ended, and includes one or more stated elements, steps and/or functions without precluding one or more unstated elements, steps and/or functions. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. Except where noted herein, designations of "first, "second," "third," etc. do not indicate an order or hierarchy of steps or elements.

In the description of the present invention that follows, the term "downstream" is used to indicate that certain material (*e.g.*, a conductor member or twisted wire pair) traveling or being acted upon is farther along in the process than other material. Conversely, the term "upstream" refers to the direction opposite the downstream direction.

Figure 1 illustrates an exemplary cabling media or cable **1** which may be formed using apparatus and/or methods in accordance with the present invention. The end of the cable **1** has a jacket **2** removed to show a plurality of twisted wire pairs. Specifically, the embodiment of **Figure 1** illustrates the cable **1** having a first twisted wire pair **3**, a second twisted wire pair **5**, a third twisted wire pair **7**, and a fourth twisted wire pair **9**. The cable **1** also includes a separator or strength member **42**. The separator **42** may be formed of a flexible, electrically insulative material such as polyethylene, for example.

Each twisted wire pair includes two conductor members. Specifically, the first twisted wire pair **3** includes a first conductor member **11** and a second conductor member **13**. The second twisted wire pair **5** includes a third conductor member **15** and a fourth conductor member **17**. The third twisted wire pair **7** includes a fifth conductor member **19** and a sixth conductor member **21**. The fourth twisted wire pair **9** includes a seventh conductor member **23** and an eighth conductor member **25**.

Each of the conductor members **11, 13, 15, 17, 19, 21, 23, 25** is constructed of an insulation layer or cover surrounding an inner conductor. The outer insulation layer may be formed of a flexible plastic material having flame retardant and smoke suppressing properties. The inner conductor may be formed of a metal, such as copper, aluminum, or alloys thereof. It should be appreciated that the insulation layer and inner conductor may be formed of other suitable materials. The inner conductor

is substantially continuous and elongated. The insulation layer may also be substantially continuous and elongated.

As illustrated in **Figure 1**, each twisted wire pair is formed by having its two conductor members continuously twisted around each other. For the first twisted wire pair **3**, the first conductor member **11** and the second conductor member **13** twist completely about each other, three hundred and sixty degrees, at a first interval ***w*** along the length of the first cable **1**. The first interval ***w*** purposefully varies along the length of the first cable **1**. For example, the first interval ***w*** could purposefully vary randomly within a first range of values along the length of the first cable **1**. Alternatively, the first interval ***w*** could purposefully vary in accordance with an algorithm along the length of the first cable **1**.

For the second twisted wire pair **5**, the third conductor member **15** and the fourth conductor member **17** twist completely about each other, three hundred and sixty degrees, at a second interval ***x*** along the length of the first cable **1**. The second interval ***x*** purposefully varies along the length of the first cable **1**. For example, the second interval ***x*** could purposefully vary randomly within a second range of values along the length of the first cable **1**. Alternatively, the second interval ***x*** could purposefully vary in accordance with an algorithm along the length of the first cable **1**.

For the third twisted wire pair **7**, the fifth conductor member **19** and the sixth conductor member **21** twist completely about each other, three hundred and sixty degrees, at a third interval ***y*** along the length of the first cable **1**. The third interval ***y*** purposefully varies along the length of the first cable **1**. For example, the third interval ***y*** could purposefully vary randomly within a third range of values along the length of the first cable **1**. Alternatively, the third interval ***y*** could purposefully vary in accordance with an algorithm along the length of the first cable **1**.

For the fourth twisted wire pair **9**, the seventh conductor member **23** and the eighth conductor member **25** twist completely about each other, three hundred and sixty degrees, at a fourth interval ***z*** along the length of the first cable **1**. The fourth interval ***z*** purposefully varies along the length of the first cable **1**. For example, the fourth interval ***z*** could purposefully vary randomly within a fourth range of values along the length of the first cable **1**. Alternatively, the fourth interval ***z*** could purposefully vary in accordance with an algorithm along the length of the first cable **1**.

Attorney Docket: 945. .3

Due to the randomness of the twist intervals, it is remarkably unlikely that the twist intervals of an adjacent second cable, even if constructed in the same manner as the cable **1**, would have the same randomness of twists for the twisted wire pairs thereof as the twisted wire pairs **3**, **5**, 7, 9 of the first cable **1**. Alternatively, if the twists of the twisted wire pairs are set by an algorithm, it would remarkably unlikely that a segment of the second cable having the twisted wire pairs would lie alongside a segment of the first cable **1** having the same twist pattern of the twisted wire pairs **3**, **5**, 7, 9.

Each of the twisted wire pairs **3**, **5**, **7**, **9** has a respective second, third and fourth mean value within the respective first, second, third and fourth ranges of values. In one embodiment, each of the first, second, third and fourth mean values of the intervals of twist *w*, *x*, *y*, *z* is unique. For example, in one of many embodiments, the first mean value of the first interval of twist *w* is about 0.44 inches; the second mean value of second interval of twist *x* is about 0.41 inches; the third mean value of the third interval of twist *y* is about 0.59 inches; and the fourth mean of the fourth interval of twist *z* is about 0.67 inches. In one of many embodiments, the first, second, third and fourth ranges of values for the first, second, third and fourth intervals of twisted extend +/- 0.05 inches from the mean value for the respective range, as summarized in the table below:

Pair No.	Mean Twist Length	Lower Limit of Twist Length	Upper Limit of Twist Length
3	0.440	0.390	0.490
5	0.410	0.360	0.460
7	0.596	0.546	0.646
9	0.670	0.620	0.720

By purposefully varying the results of twist *w*, *x*, *y*, *z* along the length of the cabling media **1**, it is possible to reduce internal near end crosstalk (NEXT) and alien near end crosstalk (ANEXT) to an acceptable level, even at high speed data bit transfer rates over the first cable **1**.

By the purposefully varying or modulating the twist intervals *w*, *x*, *y*, *z*, the interference signal coupling between adjacent cables can be randomized. In other

words, assume a first signal passes along a twisted wire pair from one end to another end of a cable, and the twisted wire pair has a randomized, or at least varying, twist pattern. It is highly unlikely that an adjacent second signal, passing along another twisted wire (whether within the same cable or within a different cable), will travel for any significant distance alongside the first signal in a same or similar twist pattern. Because the two adjacent signals are traveling within adjacent twisted wire pairs having different varying twist patterns, any interference coupling between the two adjacent twisted wire patterns can be greatly reduced.

The interference reduction benefits of varying the twist patterns of the twisted wire pairs can be combined with the tight twist intervals. Under such circumstances, the interference reduction benefits of the present invention can be even more greatly enhanced. For example, the first, second, third and fourth mean values for the first, second, third and fourth twist intervals *w*, *x*, *y*, *z* may be set at 0.44 inches, 0.32 inches, 0.41 inches, and 0.35 inches, respectively.

At least one set of ranges for the values of the variable twist intervals *w*, *x*, *y*, *z* has been determined that greatly improves the alien NEXT performance, while maintaining the cable within the specifications of standardized cables and enabling an overall cost-effective production of the cabling media. In the embodiment set forth above, the twist length of each of four pairs is purposefully varied approximately +/- 0.05 inches from the respective twisted pair's twist length's mean value. Therefore, each twist length is set to purposefully vary about +/- (7 to 12) % from the mean value of the twist length. It should be appreciated that this is only one embodiment of the invention. It is within the purview of the present invention that more or fewer twisted wire pairs may be included in the cable **1** (such as two pair, twenty five pair, or one hundred pair type cables). Further, the mean values of the twist lengths of respective pairs may be set higher or lower. Even further, the purposeful variation in the twist length may be set higher or lower (such as +/- 0.15 inches, +/- 0.25 inches, +/- 0.5 inches or even +/- 1.0 inch, or, alternately stated, the ratio of purposeful variation in the twist length to mean twist length could be set a various ratios such as 20%, 50% or even 75%).

Figure 2 is a perspective view of a midsection of the cable **1** of **Figure 1** with the jacket **2** removed. **Figure 2** reveals that the first, second, third and fourth twisted wire pairs **3, 5, 7, 9** are continuously twisted about each other along the length of the first cable **1**. The first, second, third and fourth twisted wire pairs **3, 5, 7, 9** twist completely about each other, three hundred sixty degrees, at a purposefully varied core strand length interval ***v*** along the length of the cable **1**. According to some embodiments, the core strand length interval ***v*** has a mean value of about 4.4 inches, and ranges between 1.4 inches and 7.4 inches along the length of the cabling media. The varying of the core strand length can also be random or based upon an algorithm.

The twisting of the twisted wire pairs **3, 5, 7, 9** about each other may serve to further reduce alien NEXT and improve mechanical cable bending performance. As is understood in the art, the alien NEXT represents the induction of crosstalk between a twisted wire pair of a first cabling media (*e.g.*, the first cable **1**) and another twisted wire pair of a "different" cabling media (*e.g.*, the second cable **44**). Alien crosstalk can become troublesome where multiple cabling media are routed along a common path over a substantial distance. For example, multiple cabling media are often passed through a common conduit in a building. By varying the core strand length interval ***v*** along the length of the cabling media, alien NEXT may be further reduced.

With reference to **Figure 3**, a wire pair twisting apparatus **100** according to embodiments of the present invention is shown therein. The wire pair twisting apparatus **100** may be used to form the twisted wire pair **3**. The same or similar apparatus may be used to form the twisted wire pairs **5, 7, 9**. The wire pair twisting apparatus **100** includes a wire payoff station **110**, a guide plate **120**, a wire pair twist modulator **200**, an encoder **170**, and a twinner station **140**. The conductor members **11, 13** are conveyed (*e.g.*, drawn) from the wire payoff station **110** to the twinner station **140** in the direction **F**.

The payoff station **110** includes reels **111, 113** from which the conductor members **11, 13** are paid off to the guide plate **120**. The payoff station **110** may have a housing **115**. The payoff station **110** may include further mechanisms such as one or more line tensioners, mechanisms to apply a selected constant twist (*e.g.*, a back twist) to the conductor members **11, 13**, or the like. Suitable constructions, modifications, and options to and for the payoff station **110** will be apparent to those of skill in the art. Suitable payoff stations **110** include the DVD 630 from Setic of France.

The guide plate **120** may be a simple fixed plate or the like with one or more eyelets to relatively position and align the conductor members **11, 13**. Suitable guide plates will be apparent to those of skill in the art from the description herein.

With reference to **Figures** 4 and 5, the conductor members **11**, 13 travel from the guide plate **120** to the wire pair twist modulator **200**, where they enter a housing **202** of the modulator **200**. The housing **202** may include a closable lid **202A**. More particularly, the conductor members **11, 13** enter the modulator **200** through passages **211A, 213A** defined in eyelets **211, 213** mounted in a guide plate **210**. The eyelets **211, 213** may be formed of a ceramic material, for example. The conductor members **11, 13** are thereafter routed through eyelets of a first modulator subassembly **230**, a second modulator subassembly **250**, and a third modulator subassembly **270**, as discussed below.

The modulator **200** includes a motor **212** having cables **222** to connect the motor **212** to a controller **290**. According to some embodiments, the motor **212** is a reversible servomotor. The motor **212** has an output shaft with a motor gear **214**. An endless primary drive belt **216** connects the motor gear **214** to a drive shaft **220** via a gear **222** that is affixed to the drive shaft **220**. The drive shaft **220** is rotatably coupled to a base **203** by mounts **224**, which may include bearings.

The first modulator subassembly **230** includes a mount **234** secured to the base **203**. A main gear **238** is mounted on the mount **234** by a bearing **239** for rotation about an axis **A-A** (**Figure 5**). The axis **A-A** may be substantially parallel to the direction **F**. A gear **232** is affixed to the drive shaft **220** and an idler pulley **236** (**Figure 4**) is rotatably mounted on the mount **234**. An endless drive belt **240** extends about the gears **232, 238** and the pulley **236** to enable the motor **212** to drive the main gear **238**.

A lay plate **242** is affixed to the gear **238**. Eyelets **244, 246** (for example, formed of ceramic) are mounted in the lay plate **242** and define passages **244A, 246A**. According to some embodiments, the diameter of the eyelet passages **244A, 246A** is between about 33 and 178% greater than the outer diameter of the conductor members **11, 13**. A through passage **238A** is defined in the gear **238** and a through passage **235** is defined in the mount **234**.

The second modulator subassembly **250** and the third modulator subassembly **270** are constructed in the same manner as the first modulator subassembly **230** except that the drive shaft gear **252** of the second modulator subassembly **250** has a

greater diameter than the gear **232** of the first modulator subassembly **230**, and the gear **272** of the third modulator subassembly **270** has a larger diameter than the gear **252** of the second modulator subassembly **250**. The first, second and third modulator subassemblies **230**, **250**, **270** are arranged in series along the path of the conductor members **11**, **13** as shown.

The conductor members **11, 13** are routed from the passages **211A**, **213A**, through the passages **244A**, **246A**, through the eyelets **264**, **266** (**Figure 4**) of the second modulator subassembly **250**, through the eyelets **284**, **286** (**Figure 4**) of the third modulator subassembly **270**, and out of the modulator **200**.

As the conductor members **11**, **13** are conveyed (*e.g.*, drawn by the twinner station **140**) through the lay plates **242**, **262**, **282**, the lay plates **242**, **262**, **282** are rotated about the axis **A-A**. More particularly, the controller **290** operates the motor **212** to rotate the lay plates **242**, **262**, **282** via the drive shaft **220**, the pulleys **232**, **252**, **272**, and the drive belts **240**, **260**, **280**. The lay plates **242**, **262**, **282** are rotationally reciprocated or oscillated in both a clockwise direction **C** and a counter clockwise direction **D** (**Figure 4**). In doing so, the lay plates **242**, **262**, **282** serve as engagement members to add or remove twist from the pair of conductor members **11**, **13**. That is, the lay plates **242**, **262**, **282** rotate or de-rotate the conductor members **11**, **13** about one another about the axis **A-A**. By varying the rotational positions of the lay plates **242**, **262**, **282** and thereby the conductor members **11, 13** as the conductor members **11, 13** pass through the lay plates, the modulator **200** purposefully varies or modulates the degree of rotation of the conductor members **11**, **13** about one another at the exit of the modulator **200**.

The conductor members **11**, **13** exit the modulator **200** as a pretwisted wire pair **3A**. The pretwist of the pretwisted wire pair **3A** may be positive (*i.e.*, in the same direction as the twist of the twisted pair **3**), zero or negative (*i.e.*, in a direction opposite the twist of the twisted pair **3**). For example, for a first lengthwise segment of the wire pair **3A**, the conductor members may be twisted clockwise about one another, followed by a second segment twisted more tightly clockwise, followed by a third segment twisted clockwise but less tightly, followed by a fourth segment twisted counterclockwise, and so forth. The segments themselves and the transitions between the segments may vary smoothly and continuously. The mean twist of the pretwisted wire pair **3A** may also be positive, zero or negative.

The controller **290** may be programmed with a modulation sequence that dictates the operation of the motor **212**. The controller **290** may be provided with a display and input device (*e.g.*, a touchscreen) **292** to program the controller **290** and to set and review parameters. The modulation sequence may be random or based on an algorithm. According to some embodiments, the positions of the lay plates **242**, **262**, **282** are constantly and continuously varied. In accordance with the modulation sequence, the controller **290** controls the speed and direction of the motor and the angular distance or the number of turns in each direction.

The controller **290** may track the linear speed of the conductor members **11**, **13** (*i.e.*, the line speed) using the encoder **170** which may be a line speed encoder conventionally associated with the twinner station **140** or the payoff station **110**, for example. The controller **290** may also monitor the speed of a motor of the payoff station **110**, the motor **212** and/or a motor of the twinner station **140**. The controller **290** may be programmed to stop or trip off the payoff station **110**, the twinner station **140** and/or the motor **212** if an overtension condition is sensed in the line by appropriate sensors.

The particular modulation sequence employed will depend on the desired twist modulation for the twisted pair **3**. The modulation sequence employed may depend on the operation of the twinner station **140**. In accordance with some embodiments, the mean twist of the pretwisted wire pair **3A** is zero. According to some embodiments, the pretwist imparted to the wire pair to form the pretwisted wire pair **3A** varies across an absolute range of at least 0.5% of the nominal twist length of the finished twisted pair **3**. According to some embodiments, the pretwist imparted to the wire pair to form the pretwisted wire pair **3A** varies across an absolute range of between about 1 and 5% of the nominal twist length of the finished twisted pair **3**.

Figure 9 graphically illustrates the lay length distribution of a modulation scheme in accordance with embodiments of the present invention as compared to that of a conventional wire pair twist scheme. In the case of the conventional wire pair twist scheme, as represented by the curve S_c, the distribution of twist length (*e.g.*, twists per inch) along the length of the cable will vary only slightly from a prescribed mean twist length T_m, such variation resulting unintentionally from tolerances in the apparatus and execution of the process. In the scheme according to embodiments of the present invention, represented by the curve S_{mod}, the distribution of twist length along the length of the cable varies according to a purposefully wide range. The

distribution of the curve S_{mod} varies from a minimum twist length T_{min} to a maximum twist length T_{max}. While the distribution as shown is generally a bell-shaped curve, the distribution may be tailored as desired by appropriately programming and selecting the modulation sequence.

Figure 10 graphically illustrates an exemplary modulation sequence of the lay plate **242** in accordance with embodiments of the present invention. The curve **R** represents the rotational position of the lay plate as a function of the location along the length of the wire pair passing therethrough. The rotational position as illustrated varies between a maximum rotational position P_{max}, which may correspond to the minimum twist length T_{min} of **Figure 9**, and a minimum rotational position P_{min}, which may correspond to the maximum twist length of T_{max} of **Figure 9**. According to some embodiments, the rotational distance from P_{min} to P_{max} is between about 1080 and 2160 degrees. The lay plates **262, 282** are correspondingly positioned as a function of the lengthwise position of the wire pair but their positions are scaled as a result of the different gear ratios (*i.e.*, resulting from the larger diameter gears **252, 272**). According to some embodiments, the midpoint between the rotational positions P_{max} and P_{min} corresponds to the zero twist position of the wire pair (*i.e.*, the position where no twist is present between the guide plate **210** and the lay plate **242**). According to some embodiments, the rotational position P_{min} or the rotational P_{max} corresponds to the zero twist position of the wire pair.

Notably, because the gears **232, 252, 272** have different diameters, the lay plates **242, 262, 282** will rotate at different rates and angular distances and thereby impart different amounts of twist to the wire pair **3A**. In this manner, twist can be imparted increasingly as the conductor members **11, 13** pass through the modulator **200** and/or more gradually than if fewer lay plates were employed to impart the same amount of twist using a faster rate of rotation for a given line speed.

Referring again to **Figure 3**, the pretwisted wire pair **3A** passes from the modulator **200** to the twinner station **140**. The twinner station **140** may be of any suitable construction and may be of conventional design. Suitable twinners are available from Kinrei of Japan.

The twinner station **140** includes a frame or housing **142** and a bow **152** mounted on hubs **146, 148** for rotation in a direction **T**. The pretwisted wire pair **3A** passes through the hub **146**, around a pulley **150**, and along an arm of the bow **152**. As the bow **152** rotates about the pulley **150**, it imparts a twist to the wire pair **3A** in

known manner thereby converting the pretwisted wire pair **3A** to a twisted wire pair **3B**. The twisted wire pair **3B** continues around a second pulley **156** and onto a reel **158**. As the bow **152** rotates about the pulley **156**, it imparts a second twist to the twisted wire pair **3B**, thereby converting the twisted wire pair **3B** to the wire pair **3**.

According to some embodiments, the twinner station **140** (and, more particularly, the bow **152** and the pulleys **150, 156**) imparts twist to the pretwisted wire pair **3A** at a rate of at least two twists/inch. According to some embodiments, the twinner station **140** imparts twist to the pretwisted wire pair **3A** at a rate (which may be constant) in the range of from about two to three twists/inch. According to some embodiments, the rate of twist per unit length (*e.g.*, twists/inch) provided by the twinner station **140** is substantially constant.

Notably, the twist imparted by the bow **152** and the pulleys **150, 156** is merely additive to the twist (positive and/or negative) in the pretwisted wire pair **3A**. Therefore, the twist modulation present in the pretwisted wire pair **3A** carries through to the twisted wire pair **3B** and the ultimate twisted wire pair **3**.

The twisted wire pair **3** may thereafter be incorporated into a multi-pair cable, jacketed and/or otherwise used or processed in conventional or other suitable manner.

With reference to **Figure 6**, a core twisting apparatus **300** according to embodiments of the present invention is shown therein. The core twisting apparatus **300** may be used to form the core **40** having modulated strand core length. The core twisting apparatus **300** includes a wire pair payoff station **310**, guide plates **321, 323**, a core twist modulator **400**, and a buncher or stranding station **360**.

The payoff station **310** includes reels **301, 303, 305, 307, 309** from which the separator **42** and the twisted wire pairs **3, 5, 7, 9**, respectively, are paid off. The twisted wire pairs **3, 5, 7, 9**, and the separator **42** are directed through the guide plates **321, 323** and to the core twist modulator **400**.

The core twist modulator **400** may be constructed in substantially the same manner as the wire pair twist modulator **200** with suitable modifications to accommodate the more numerous and larger diameter twisted wire pairs **3, 5, 7, 9**, and the separator **42**. Referring to **Figure 7**, a main gear assembly **431** of the modulator **400** is shown therein. The main gear assembly **431** includes a gear **438** corresponding to the gear **238** and a modified lay plate **442**. The main gear assembly **431** includes eyelets **441, 444, 445, 446, 447** (*e.g.*, formed of ceramic) defining eyelet passages **441A, 444A, 445A, 446A, 447A** adapted to receive the separator **42** and the twisted

wire pairs **3**, **5**, **7**, **9**, respectively, therethrough. According to some embodiments, the diameters of the eyelet passages **444A**, **445A**, **446A**, **447A** are between about 11 and 177% greater than the outer diameters of the twisted wire pairs **3**, **5**, **7**, **9**. The lay plate **442** is used in the modulator **400** in place of the lay plates **242**, **262**, **282**. Other suitable modifications may be made as necessary to accommodate the increased number and/or sizes of the lines to be handled by the modulator **400**.

The modulator **400** may be operated by a controller in accordance with a suitable modulation sequence to produce a pretwisted strand or core **40A** in the same manner as described above with respect to the wire pair twist modulator **200**. As discussed above, the modulator sequence may be random or based on an algorithm. According to some embodiments, the positions of the lay plates **442** are constantly and continually varied.

According to some embodiments, the pretwist imparted to the wire pair to form the pretwisted core **40A** varies across an absolute range of at least 0.1 twists/inch. According to some embodiments, the pretwist imparted to the wire pair to form the pretwisted core **40A** varies across an absolute range of between about 0.1 and 1.0 twists/inch. According to some embodiments, the range of variation of twist rate in the pretwisted core **40A** is at least 0.5% of the mean twist rate of the core **40**, and according to some embodiments, between about 1 and 10%.

The pretwisted core **40A** thereafter passes to the buncher station **360**. At the buncher station **360**, the pretwisted core **40A** is converted to a twisted core **40B** by a rotating bow **364** and a first pulley **362**. More particularly, the twisted pairs **3**, **5**, **7**, **9** are twisted about one another in a manner commonly referred to as "bunching". The twisted core **40B** is thereafter converted (by further twisting/bunching) to the ultimate twisted core **40** by the bow **364** and a second pulley **366** and taken up onto a reel **368**.

According to some embodiments, the buncher station **360** (and, more particularly, the bow **364** and the pulleys **352**, **366**) imparts twist to the pretwisted core **40A** at a rate of at least 3 inches/twist. According to some embodiments, the buncher stations **360** imparts twist to the pretwisted core **40A** at a rate in the range from about 2 to 8 inches/twist. According to some embodiments, the rate of twist per unit length (*e.g.*, twists/inch) provided by the buncher station **360** is substantially constant.

Notably, the twist imparted by the bow **364** and the pulleys **362**, **366** is merely additive to the twist (positive and/or negative) in the pretwisted core **40A**. Therefore,

the twist modulation present in the pretwisted core **40A** carries through to the twisted core **40B** and the twisted core **40**.

The stranded core **40** may thereafter be jacketed or otherwise used or processed in conventional or other suitable manner.

With reference to **Figure 8**, a gang twinner apparatus **500** according to embodiments of the present invention is shown therein, the gang twinner apparatus **500** may be used to form the cable **1**, for example. The gang twinner apparatus **500** incorporates the wire pair twist modulation, twinning, core twist modulation, and stranding operations of both the wire pair twisting apparatus **100** and the core twisting apparatus **300**.

The gang twinner apparatus **500** includes wire payoff stations **510** corresponding to the wire payoff station **110**. The conductor members **11, 13, 15, 17, 19, 21, 23, 25** are routed through respective guide plates **520** and to a respective wire pair twist modulator **200** as shown. The wire pair twist modulators **200** pretwist the respective wire pairs in modulated fashion as described above to convert the wire pairs to pretwisted wire pairs **3A, 5A, 7A, 9A**. The pretwisted wire pairs **3A, 5A, 7A, 9A** thereafter pass to respective twinner stations **540** corresponding generally to the twinner station **140**, which convert the wire pairs **3A, 5A, 7A, 9A** to the twisted wire pairs **3, 5, 7, 9** having modulated twist lengths as described herein.

The separator **42** is paid off from a payoff station **501**. The separator **42** and the twisted wire pairs **3, 5, 7, 9** are routed through guide plates **521, 523** and to the core twist modulator **400**. The core twist modulator **400** converts the separator **42** and the twisted wire pairs **3, 5, 7, 9** to the modulated pretwisted core **40**. The pretwisted core **40A** is passed through a buncher **560** corresponding to the buncher station **360**, which converts the pretwisted core **40A** to the core **40**.

The core **40** is thereafter passed through a jacketing station **570** where the jacket **2** is applied over the core **40**. The jacketing station **570** may be, for example, an extrusion production line. Suitable jacketing lines include those available from Rosendahl of Australia. The jacketed cable **1** may thereafter be taken up on a reel **575**.

The various components of the apparatus **500** may form a continuous line process. Alternatively, some of the operations and/or components may be separated from others. For example, the jacketing station may be a separate apparatus not in line with the remainder of the apparatus **500.**

Various modifications may be made to the apparatus and methods described above. For example, other or additional modulation devices may be employed. The modulator **200** and/or the modulator **400** may use more or fewer modulator subassemblies and lay plates. The modulator subassemblies **230**, **250**, **270** may be independently controlled and the rotation rates thereof may not be scaled proportionally. The methods and apparatus for modulating the twist of the twisted wire pairs and the methods and apparatus for modulating the twist of the core may be used separately.

The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. Therefore, it is to be understood that the foregoing is illustrative of the present invention and is not to be construed as limited to the specific embodiments disclosed, and that modifications to the disclosed embodiments, as well as other embodiments, are intended to be included within the scope of the appended claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

77203-100

CLAIMS:

1. A method for forming a cabling media, the method comprising:

a) providing a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and

b) twisting the first and second conductor members about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair, including:

imparting a purposefully varied pretwist to the wire pair using a wire pair twist modulator; and

imparting additional twist to the wire pair using a wire pair twisting device downstream of the wire pair twist modulator.

2. The method of Claim 1 wherein the pretwist imparted by the wire pair twist modulator to the wire pair varies across an absolute range of at least 0.5% of a nominal twist length of the twisted wire pair.

3. The method of Claim 1 including imparting each of a positive twist and a negative twist to the wire pair.

4. The method of Claim 1 including engaging the wire pair with an engagement member and rotationally oscillating the engagement member about a twist axis.

5. The method of Claim 4 including engaging the wire pair with a plurality of serially arranged engagement members and rotationally oscillating each of the engagement members about a respective twist axis.

77203-100

6. The method of Claim 5 including rotationally oscillating each of the engagement members a different angular distance.

7. The method of Claim 1 including imparting a substantially constant rate of twist per unit length to the wire pair using the wire pair twisting device.

8. The method of Claim 1 including substantially randomly varying the twist length of the wire pair.

9. The method of Claim 1 including varying the twist length of the wire pair in accordance with an algorithm.

10. The method of Claim 1, wherein the twisted wire pair is a first twisted wire pair, further including twisting the first twisted wire pair and a second twisted wire pair about one another to form a twisted core having a length such that a twist length of the twisted core purposefully varies along the length of the twisted core.

11. The method of Claim 10 including:

a) imparting a purposefully varied pretwist to the first and second twisted wire pairs using a core twist modulator; and

b) imparting additional twist to the first and second twisted wire pairs using a core twisting device downstream of the core twist modulator.

12. The method of Claim 11 including imparting a substantially constant rate of twist per unit length to the first and second twisted wire pairs using the core twisting device.

13. The method of Claim 1 including applying a jacket about the twisted wire pair.

77203-100

14. A method for forming a cabling media, the method comprising:

a) providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and

b) twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core, including:

imparting a purposefully varied pretwist to the first and second twisted wire pairs using a core twist modulator; and

imparting additional twist to the first and second twisted wire pairs using a core twisting device downstream of the core twist modulator.

15. The method of Claim 14 wherein the pretwist imparted by the core twist modulator to the first and second twisted wire pairs varies across an absolute range of at least 0.1 twists/inch.

16. The method of Claim 14 including imparting each of a positive twist and a negative twist to the first and second twisted wire pairs.

17. The method of Claim 14 including engaging the first and second twisted wire pairs with an engagement member and rotationally oscillating the engagement member about a twist axis.

18. The method of Claim 17 including engaging the first and second twisted wire pairs with a plurality of serially arranged engagement members and rotationally oscillating each of the engagement members about a respective twist axis.

19. The method of Claim 18 including rotationally oscillating each of the engagement members a different angular distance.

20. The method of Claim 14 including imparting a substantially constant rate of twist per unit length to the first and second twisted wire pairs using the core twisting device.

21. The method of Claim 14 including substantially randomly varying the twist length of the core.

22. The method of Claim 14 including varying the twist length of the core in accordance with an algorithm.

23. The method of Claim 14 including applying a jacket about the twisted core.

24. An apparatus for forming a cabling media using a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the apparatus is adapted to twist the first and second conductor members about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair, the apparatus including:

a wire pair twist modulator adapted to impart a purposefully varied pretwist to the wire pair; and

a wire pair twisting device downstream of the wire pair twist modulator, wherein the wire pair twisting device is adapted to impart additional twist to the wire pair.

25. The apparatus of Claim 24 wherein the pretwist imparted by the wire pair twist modulator to the wire pair varies across an absolute range of at least 0.5% of a nominal twist length of the twisted wire pair.

26. The apparatus of Claim 24 wherein the wire pair twist modulator is adapted to impart each of a positive twist and a negative twist to the wire pair.

27. The apparatus of Claim 24 including an engagement member adapted to engage the wire pair and rotationally oscillate about a twist axis.

28. The apparatus of Claim 27 wherein the engagement member includes at least one eyelet to receive the first and second conductor members.

29. The apparatus of Claim 27 including a first eyelet to receive the first conductor member and a second eyelet to receive the second conductor member.

30. The apparatus of Claim 27 including a plurality of serially arranged engagement members, wherein each of the engagement members is adapted to engage the wire pair and rotationally oscillate about a respective twist axis.

31. The apparatus of Claim 30 wherein the wire pair twist modulator is adapted to rotationally oscillate the plurality of engagement members different distances.

32. The apparatus of Claim 24 wherein the wire pair twisting device is adapted to impart a substantially constant rate of twist per unit length to the wire pair.

33. The apparatus of Claim 24 including a controller that substantially randomly varies the twist length of the wire pair.

34. The apparatus of Claim 24 including a controller that varies the twist length of the wire pair in accordance with an algorithm.

35. The apparatus of Claim 24 including a supply of the first and second conductor members.

36. The apparatus of Claim 24, wherein the twisted wire pair is a first twisted wire pair, further adapted to twist the first twisted wire pair and a second twisted wire pair about one another to form a twisted core having a length such that a

twist length of the twisted core purposefully varies along the length of the twisted core.

37. The apparatus of Claim 36 including:

a) a core twist modulator adapted to impart a purposefully varied pretwist to the first and second twisted wire pairs; and

b) a core twisting device downstream of the core twist modulator, wherein the core twisting device is adapted to impart additional twist to the first and second twisted wire pairs.

38. The apparatus of Claim 37 wherein the core twisting device is adapted to impart a substantially constant rate of twist per unit length to the first and second twisted wire pairs.

39. The apparatus of Claim 24 including a jacketing device adapted to apply a jacket about the twisted wire pair.

40. The apparatus of Claim 24, wherein the twisted wire pair is a first twisted wire pair, further adapted to twist the first twisted wire pair and a second twisted wire pair about one another to form a twisted core having a length such that a twist length of the twisted core purposefully varies along the length of the twisted core, and further including:

a) a wire pair twist modulator adapted to impart a purposefully varied pretwist to the wire pair, the wire twist modulator including an engagement member adapted to engage the wire pair and rotationally oscillate about a twist axis and a controller to control the oscillation of the engagement member;

b) a wire pair twisting device downstream of the wire pair twist modulator, wherein the wire pair twisting device is adapted to impart additional twist to the wire pair, and wherein the wire pair twisting device is adapted to impart a substantially constant rate of twist per unit length to the wire pair;

c) a core twist modulator adapted to impart a purposefully varied pretwist to the first and second twisted wire pairs; and

d) a core twisting device downstream of the core twist modulator, wherein the core twisting device is adapted to impart additional twist to the first and second twisted wire pairs, and wherein the core twisting device is adapted to impart a substantially constant rate of twist per unit length to the first and second twisted wire pairs.

41. An apparatus for forming a cabling media using a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the apparatus is adapted to twist the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core, the apparatus including:

a core twist modulator adapted to impart a purposefully varied pretwist to the first and second twisted wire pairs; and

a core twisting device downstream of the core twist modulator, wherein the core twisting device is adapted to impart additional twist to the first and second twisted wire pairs.

42. The apparatus of Claim 41 wherein the pretwist imparted by the core twist modulator to the first and second twisted wire pairs varies across an absolute range of at least 0.1 twists/inch.

43. The apparatus of Claim 41 wherein the core twist modulator is adapted to impart each of a positive twist and a negative twist to the first and second twisted wire pairs.

44. The apparatus of Claim 41 including an engagement member adapted to engage the first and second twisted wire pairs and rotationally oscillate about a twist axis.

45. The apparatus of Claim 44 wherein the engagement member includes at least one eyelet to receive the first and second twisted wire pairs.

46. The apparatus of Claim 44 including a first eyelet to receive the first wire pair and a second eyelet to receive the second wire pair.

47. The apparatus of Claim 44 including a plurality of serially arranged engagement members, wherein each of the engagement members is adapted to engage the first and second twisted wire pairs and rotationally oscillate about a respective twist axis.

48. The apparatus of Claim 47 wherein the core twist modulator is adapted to rotationally oscillate the plurality of engagement members different angular distances.

49. The apparatus of Claim 41 wherein the core twisting device is adapted to impart a substantially constant rate of twist per unit length to the first and second twisted wire pairs.

50. The apparatus of Claim 41 including a controller that substantially randomly varies the twist length of the core.

51. The apparatus of Claim 41 including a controller that varies the twist length of the core in accordance with an algorithm.

52. The apparatus of Claim 41 including a supply of the first and second twisted wire pairs.

53. The apparatus of Claim 41 including a jacketing device adapted to apply a jacket about the twisted core.

54. A wire pair twist modulator for forming a cabling media using a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the wire pair twist modulator is adapted to impart a purposefully varied twist to the wire pair.

55. The wire pair twist modulator of Claim 54 including an engagement member adapted to engage the wire pair and rotationally oscillate about a twist axis.

56. A core twist modulator for forming a cabling media using a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor, wherein the core twist modulator is adapted to impart a purposefully varied twist to the first and second twisted wire pairs.

57. The core twist modulator of Claim 56 including an engagement member adapted to engage the first and second twisted wire pairs and rotationally oscillate about a twist axis.

58. A method for forming a cabling media, the method comprising:

providing a wire pair including first and second conductor members, each of the first and second conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and

twisting the first and second conductor members about one another to form a twisted wire pair having a twist length that purposefully varies along a length of the twisted wire pair;

wherein the twist length purposefully varies across an absolute range of at least 0.5% of a nominal twist length of the twisted pair.

77203-100

59. The method of claim 58 wherein the twist length purposefully varies across an absolute range of between about 1 and 5% of a nominal twist length of the twisted pair.

60. A method for forming a cabling media, the method comprising:

providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and

twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core;

wherein the twist length of the twisted core purposefully varies across an absolute range of between about 0.1 and 1.0 twists/inch.

61. A method for forming a cabling media, the method comprising:

providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and

twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core;

wherein the twist length of the twisted core purposefully varies over a range of at least 0.5% of a mean twist rate of the twisted core.

62. The method of claim 61 wherein the twist length of the twisted core purposefully varies over a range of between about 1 and 10% of the mean twist rate of the twisted core.

63. A method for forming a cabling media, the method comprising:

providing a first twisted wire pair including first and second conductor members and a second twisted wire pair including third and fourth conductor members, each of the first, second, third and fourth conductor members including a respective conductor and a respective insulation cover surrounding the respective conductor; and

twisting the first and second twisted wire pairs about one another to form a twisted core having a twist length that purposefully varies along a length of the twisted core, wherein the twisted core of the cabling media is twisted in only one direction.

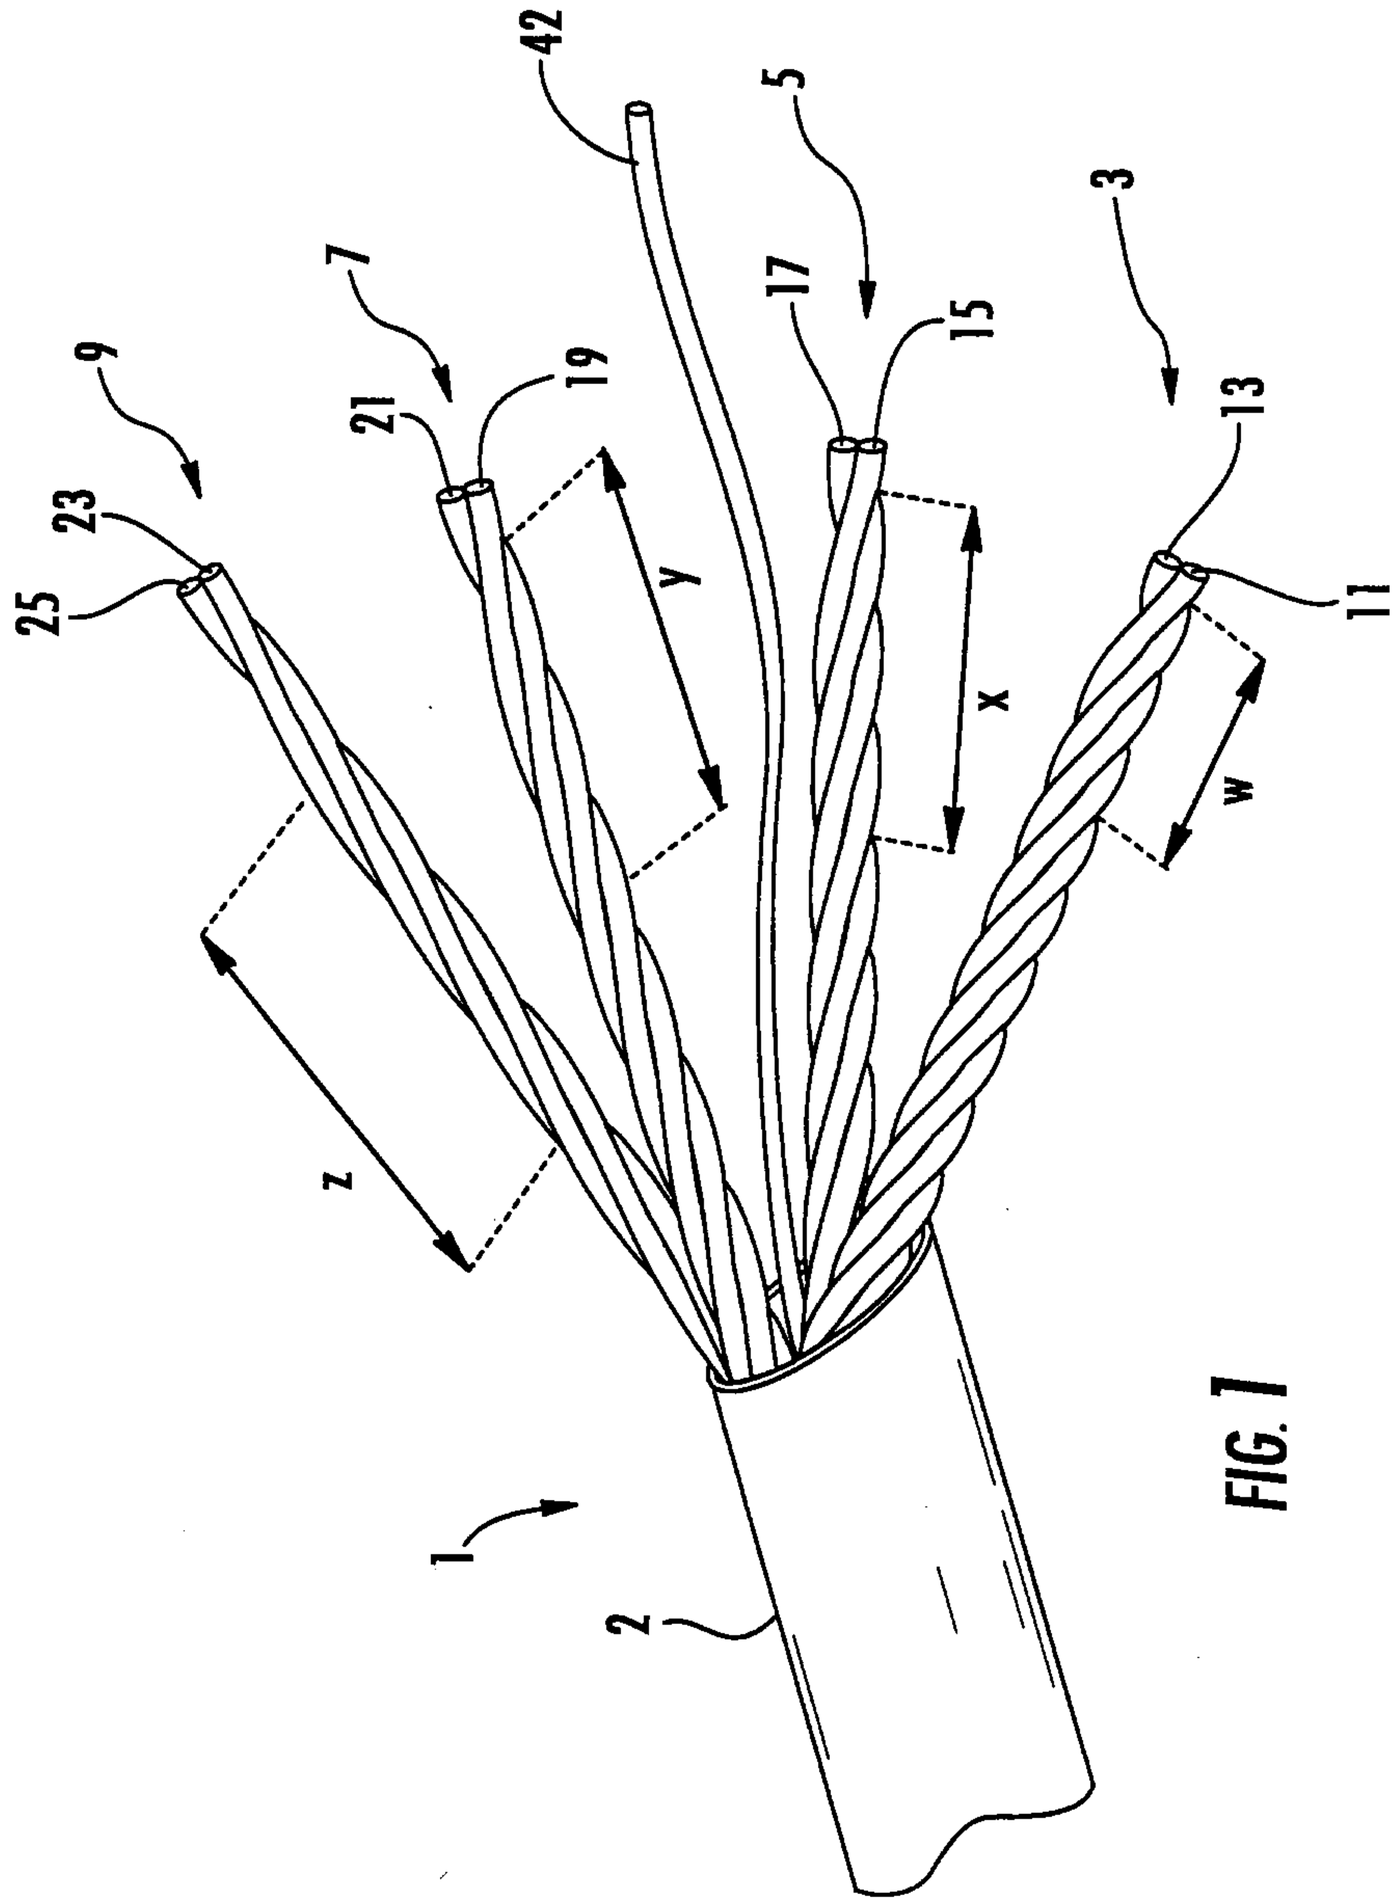


FIG. 1

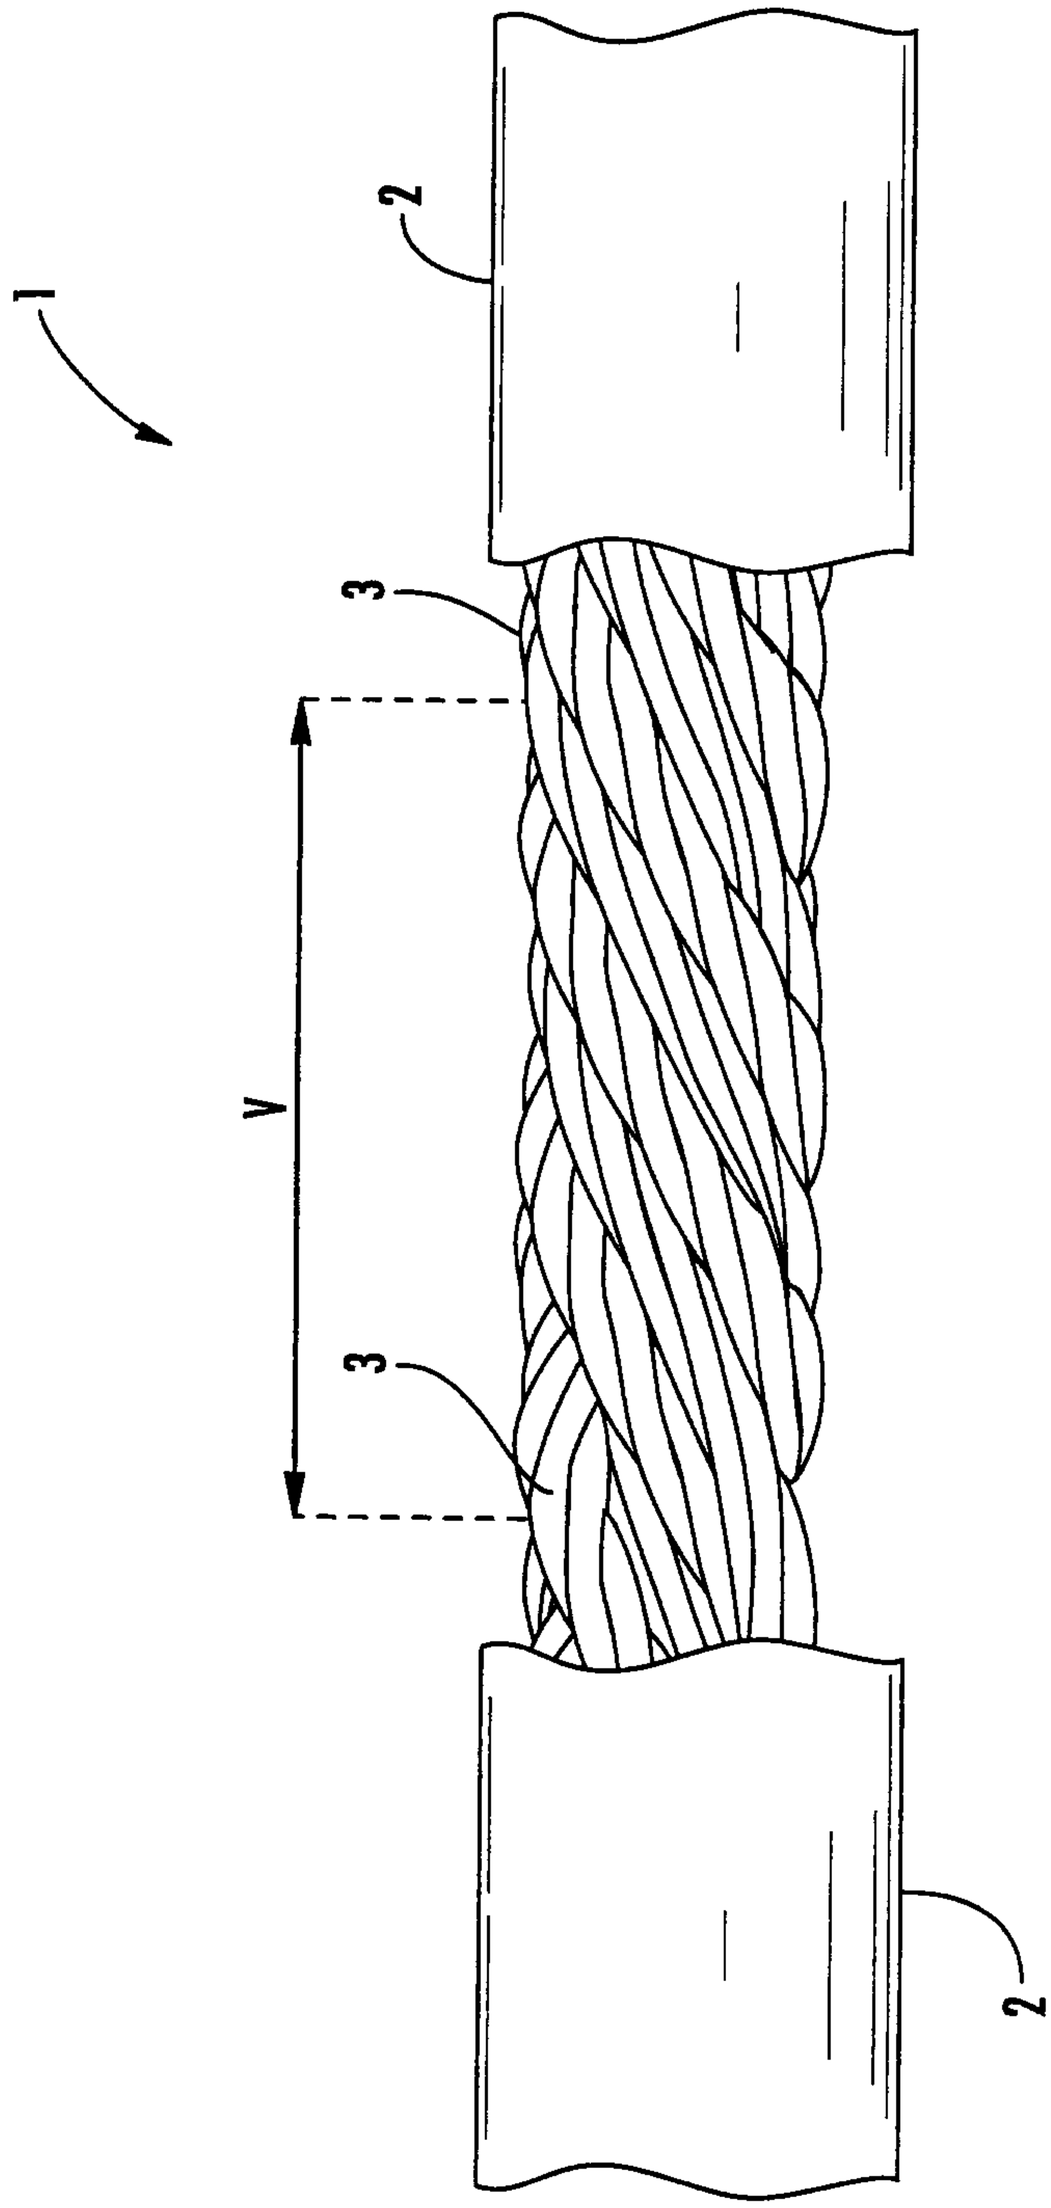


FIG. 2

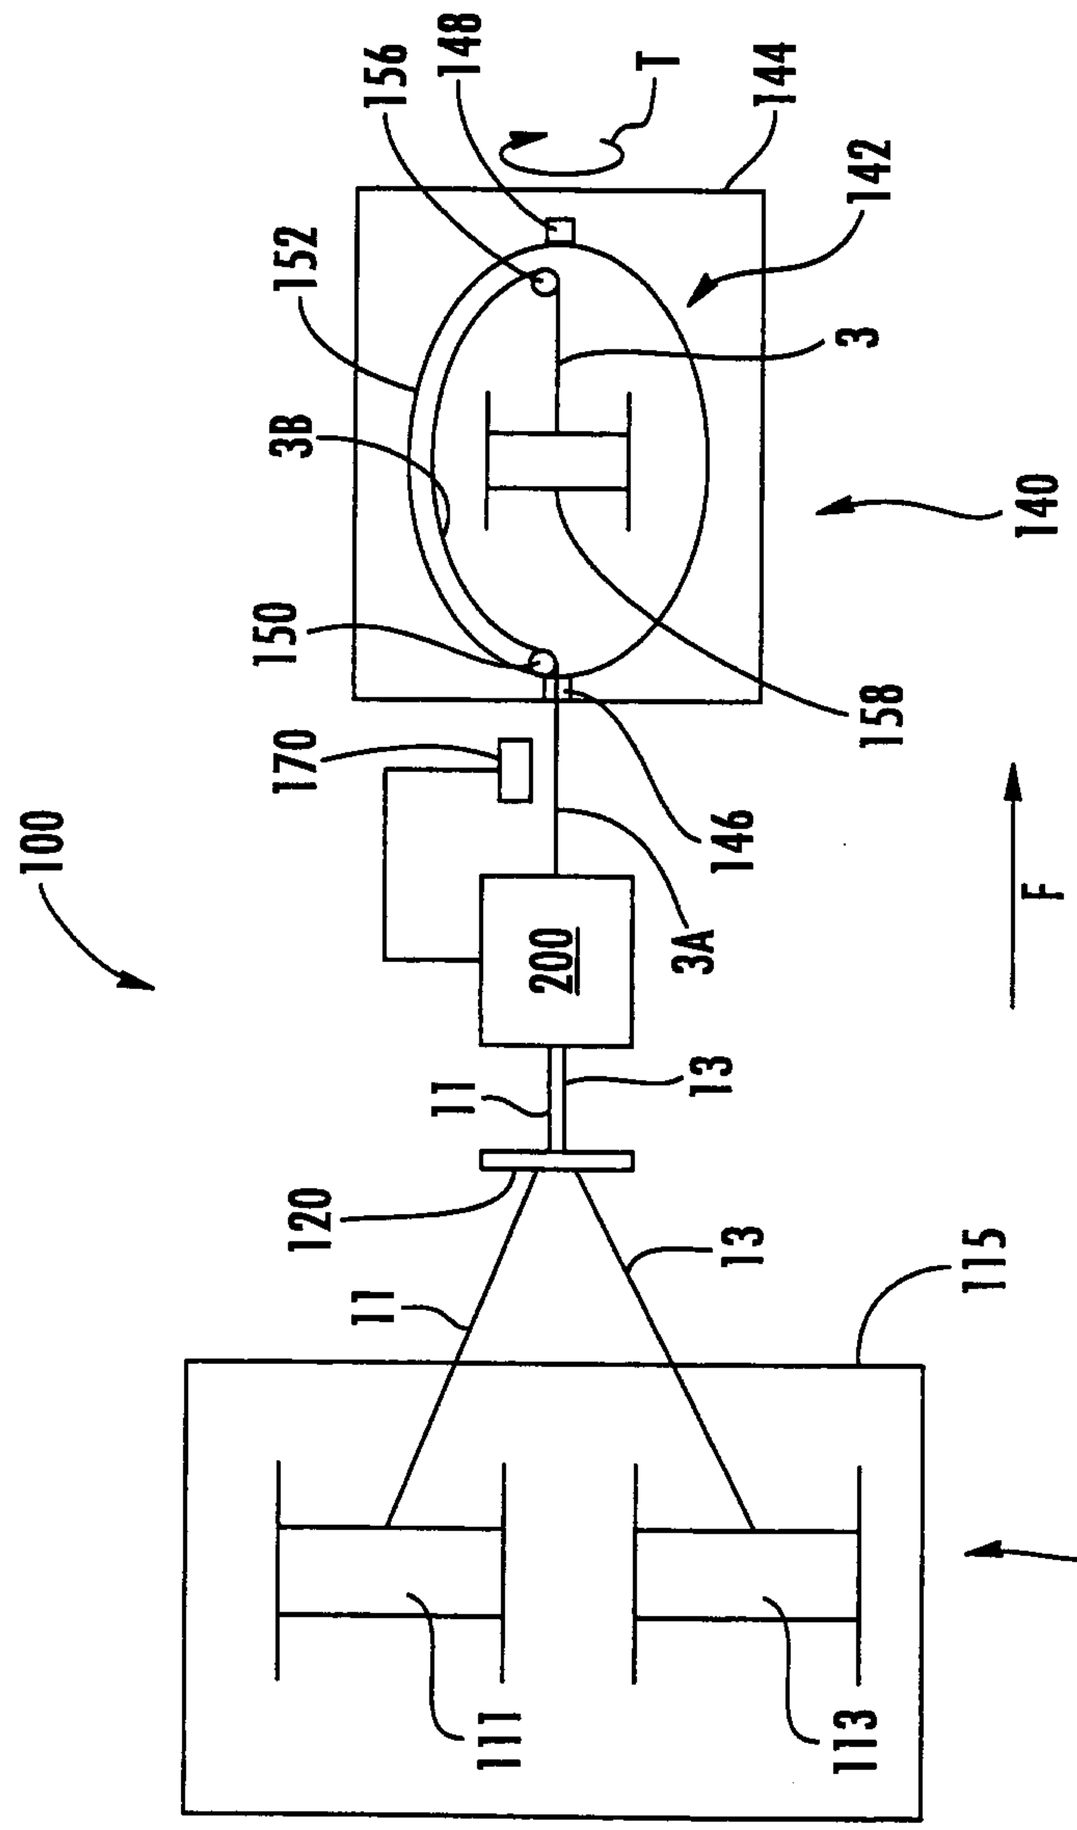

100
110
111
113
115
120
11
13
140
142
144
146
148
150
152
156
158
170
200
3
3A
3B
T
F

FIG. 3

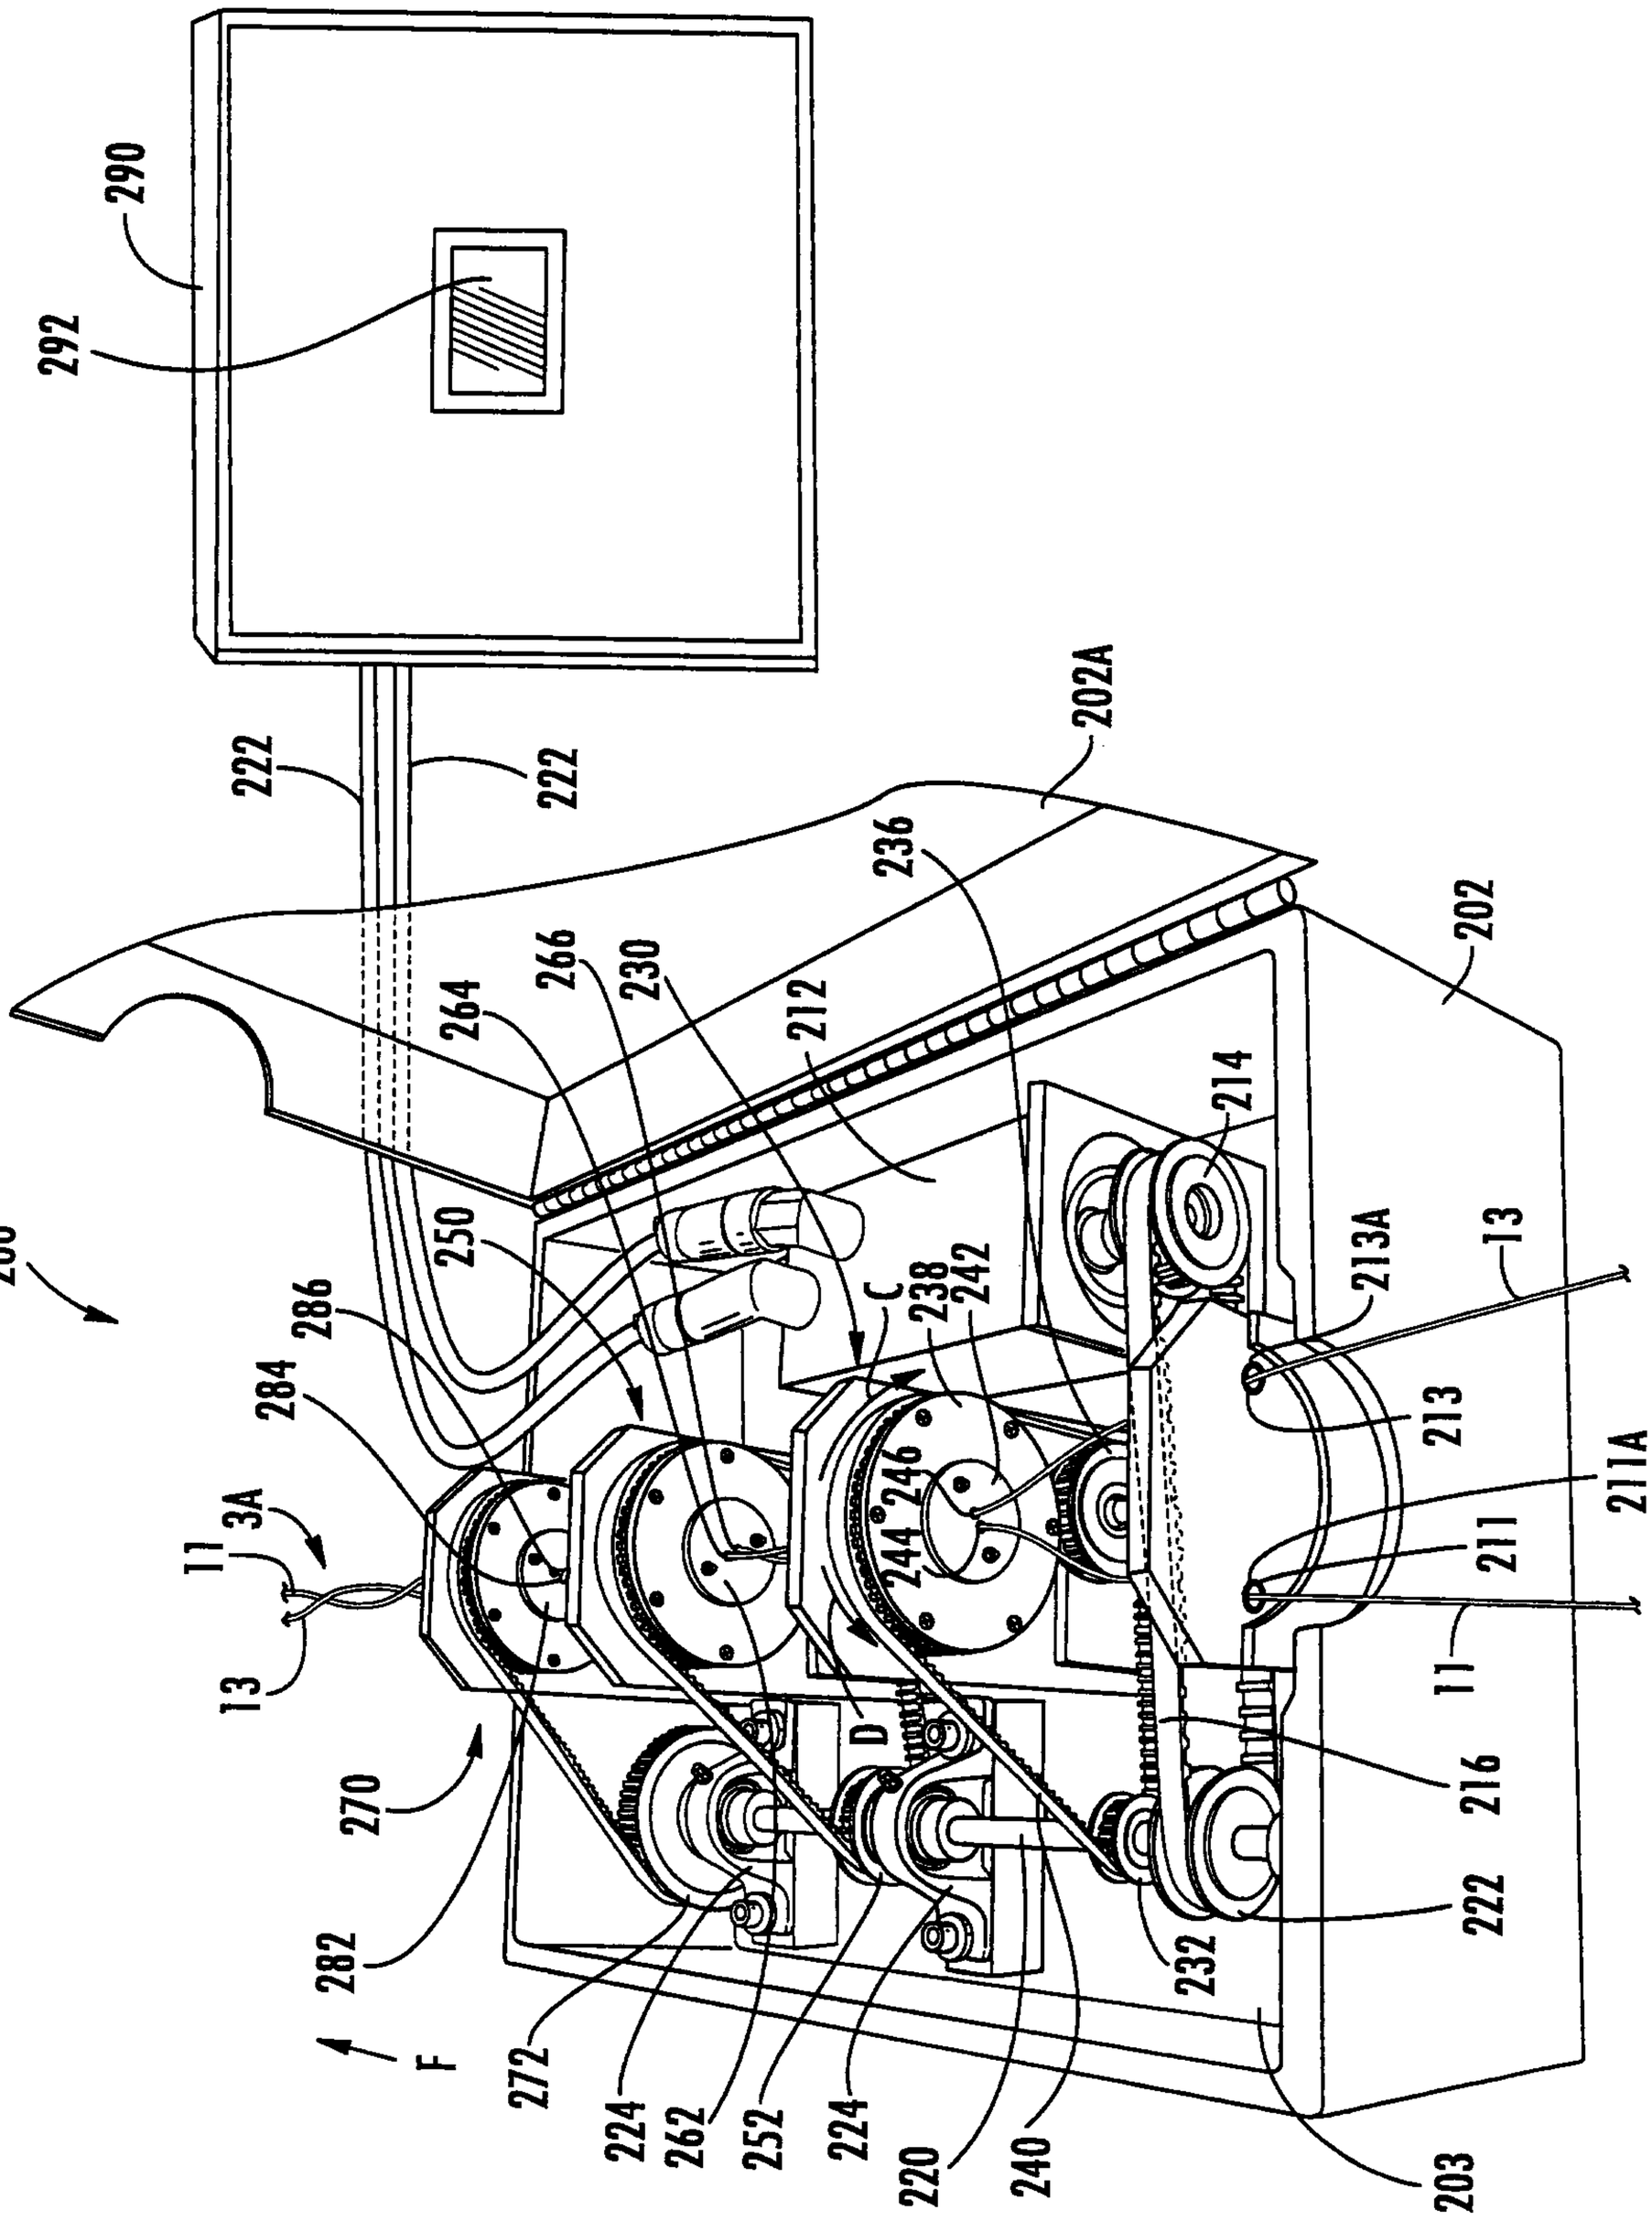

290
292
222
222
202A
236
202
266
230
264
212
214
250
238
242
213A
13
286
C
284
213
246
244
211A
3A
11
211
13
D
270
216
11
282
222
232
F
272
224
262
252
224
220
240
203
200

FIG. 4

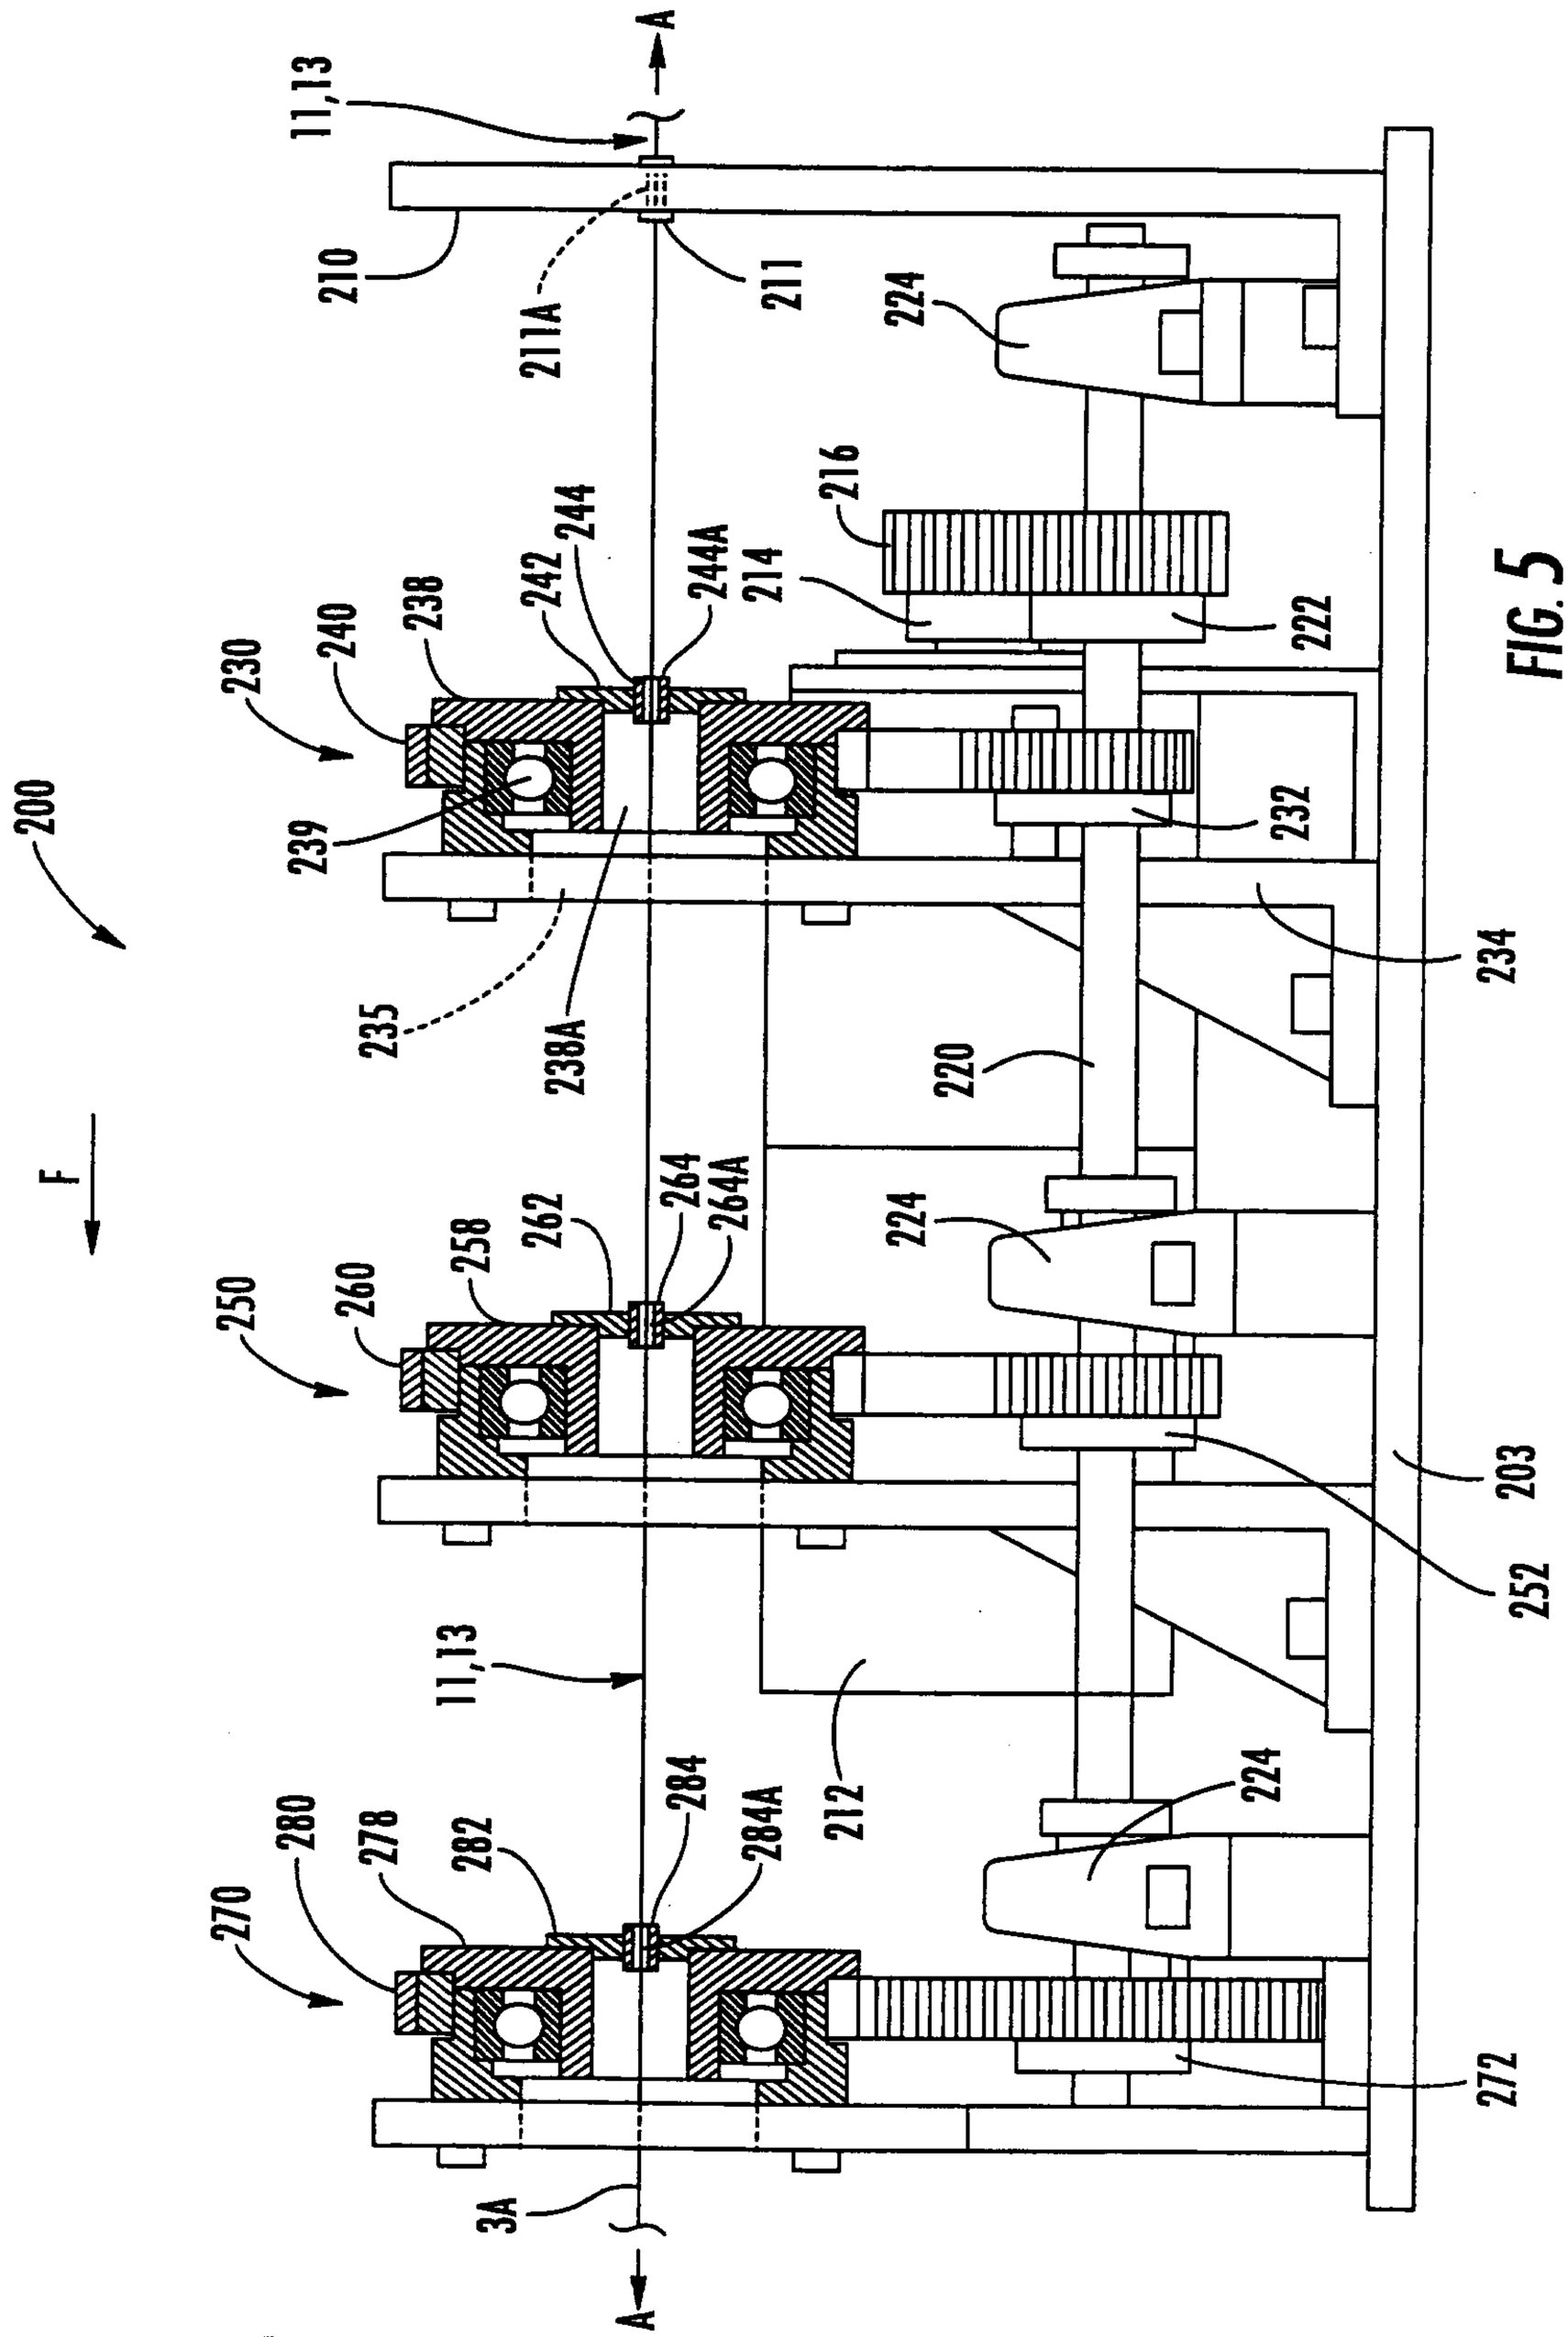

11,13
A
210
211A
211
224
216
244
242
244A
214
238
240
230
222
200
239
232
235
238A
234
220
F
224
250
260
258
262
264
264A
203
252
11,13
212
284
284A
224
280
278
282
270
272
3A
A

FIG. 5

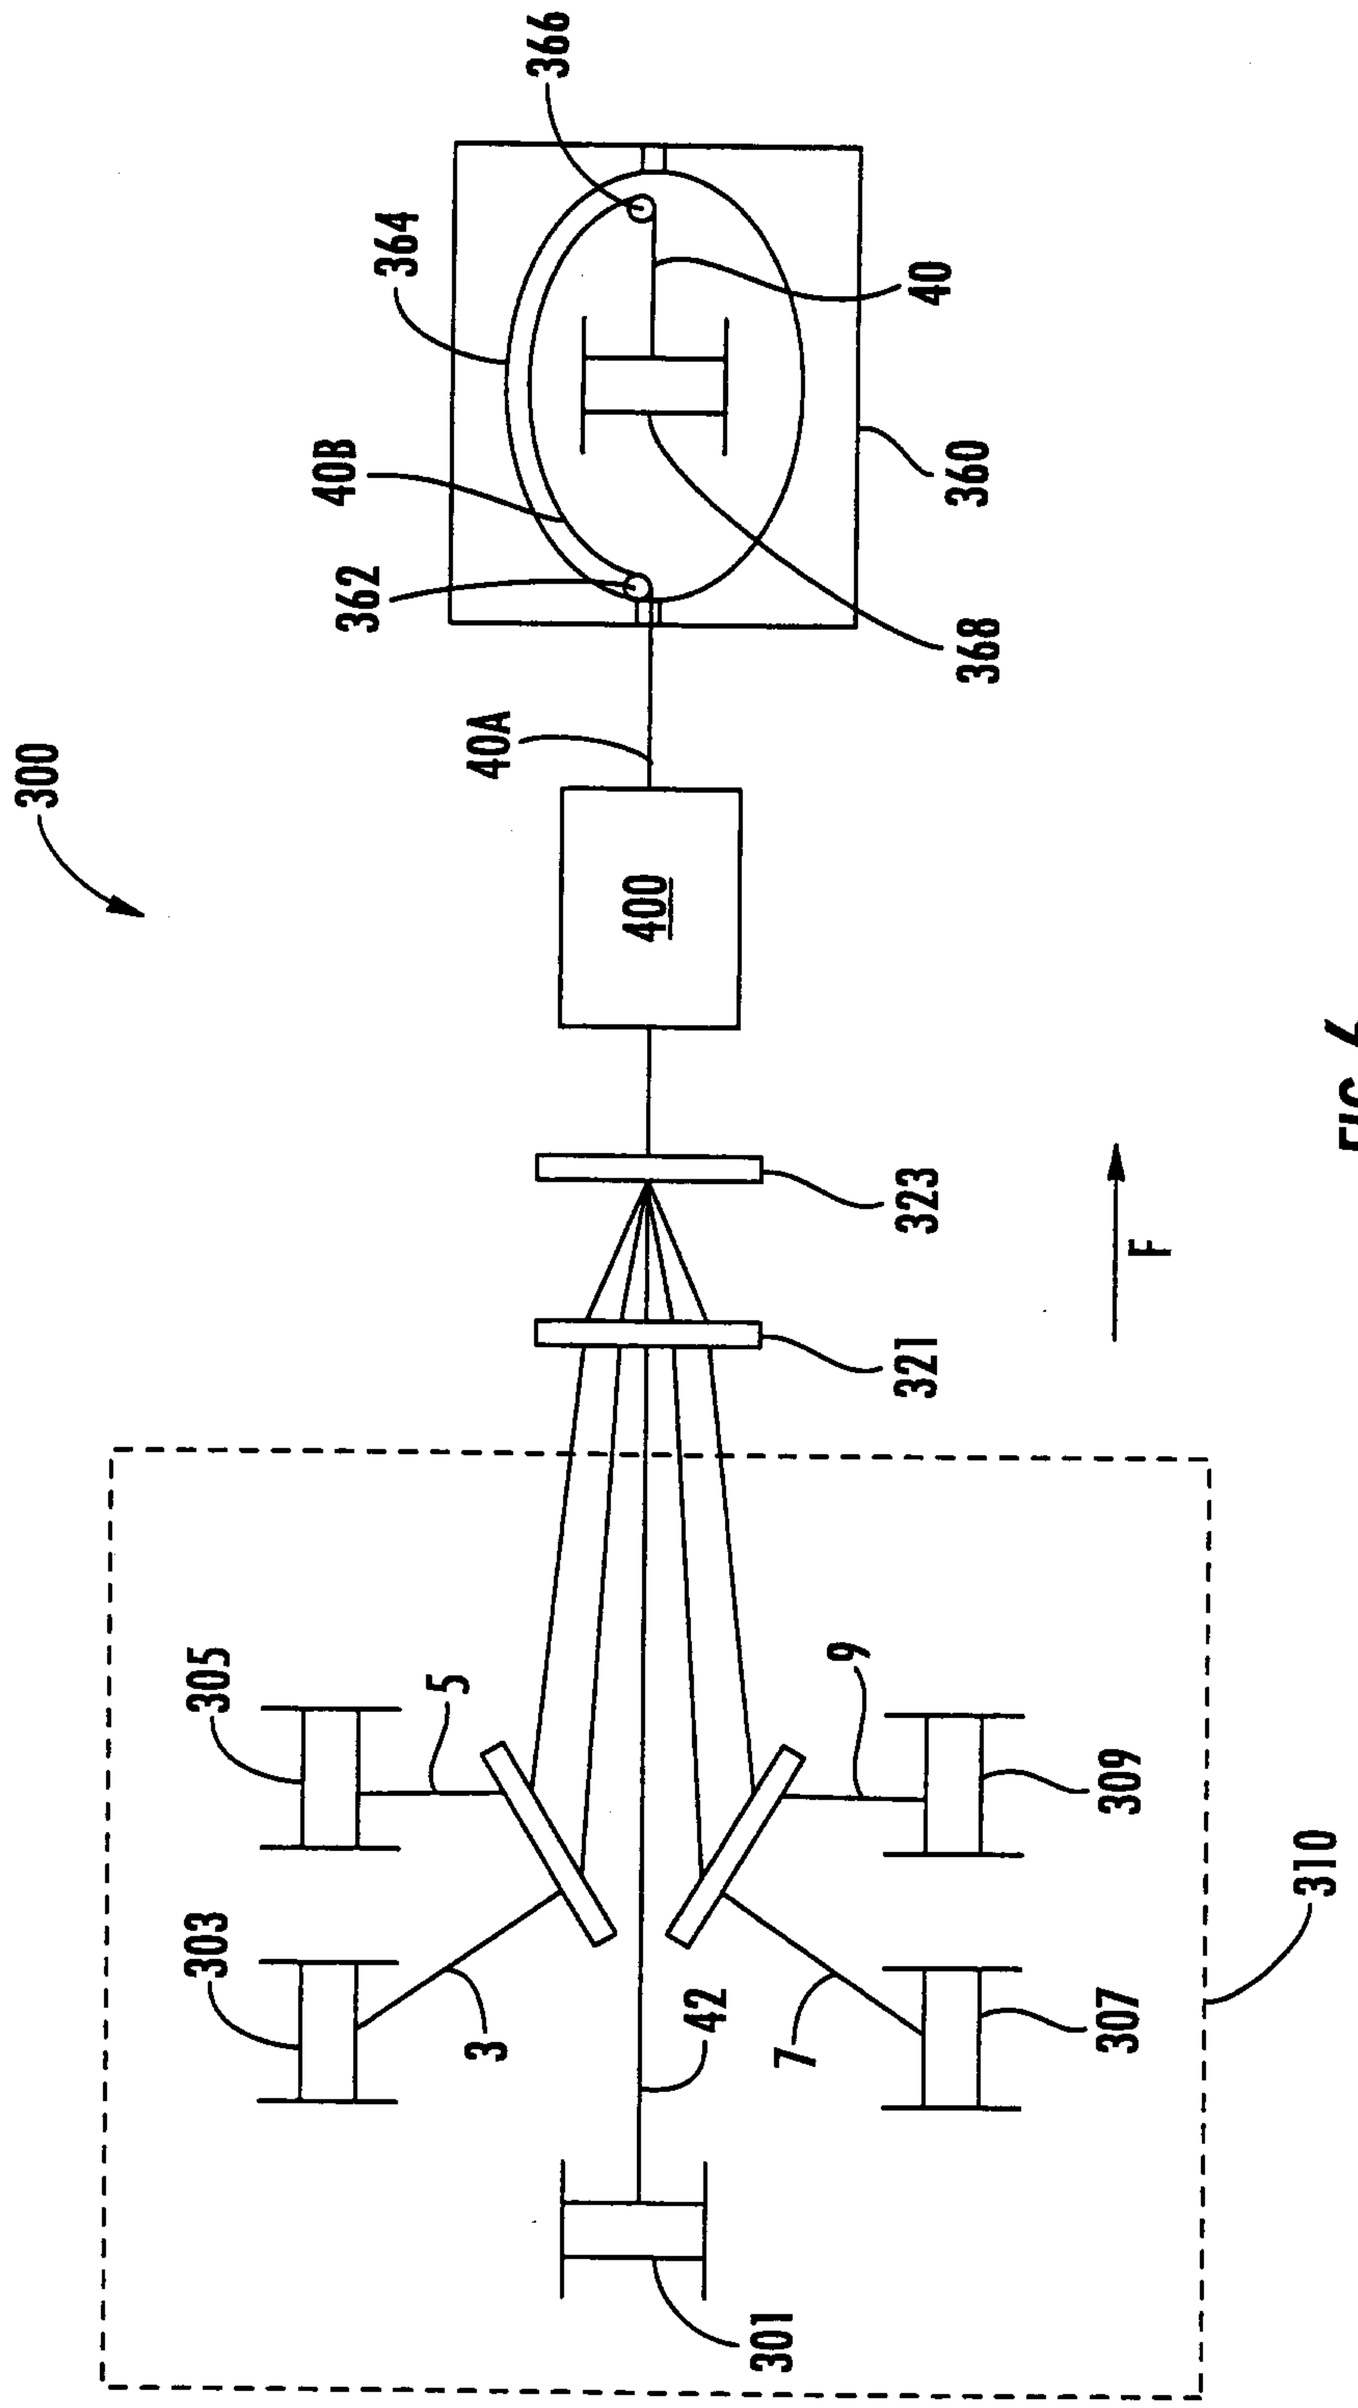

300
366
364
40
40B
360
362
368
40A
400
323
321
F
305
5
9
309
303
3
42
7
307
310
301

FIG. 6

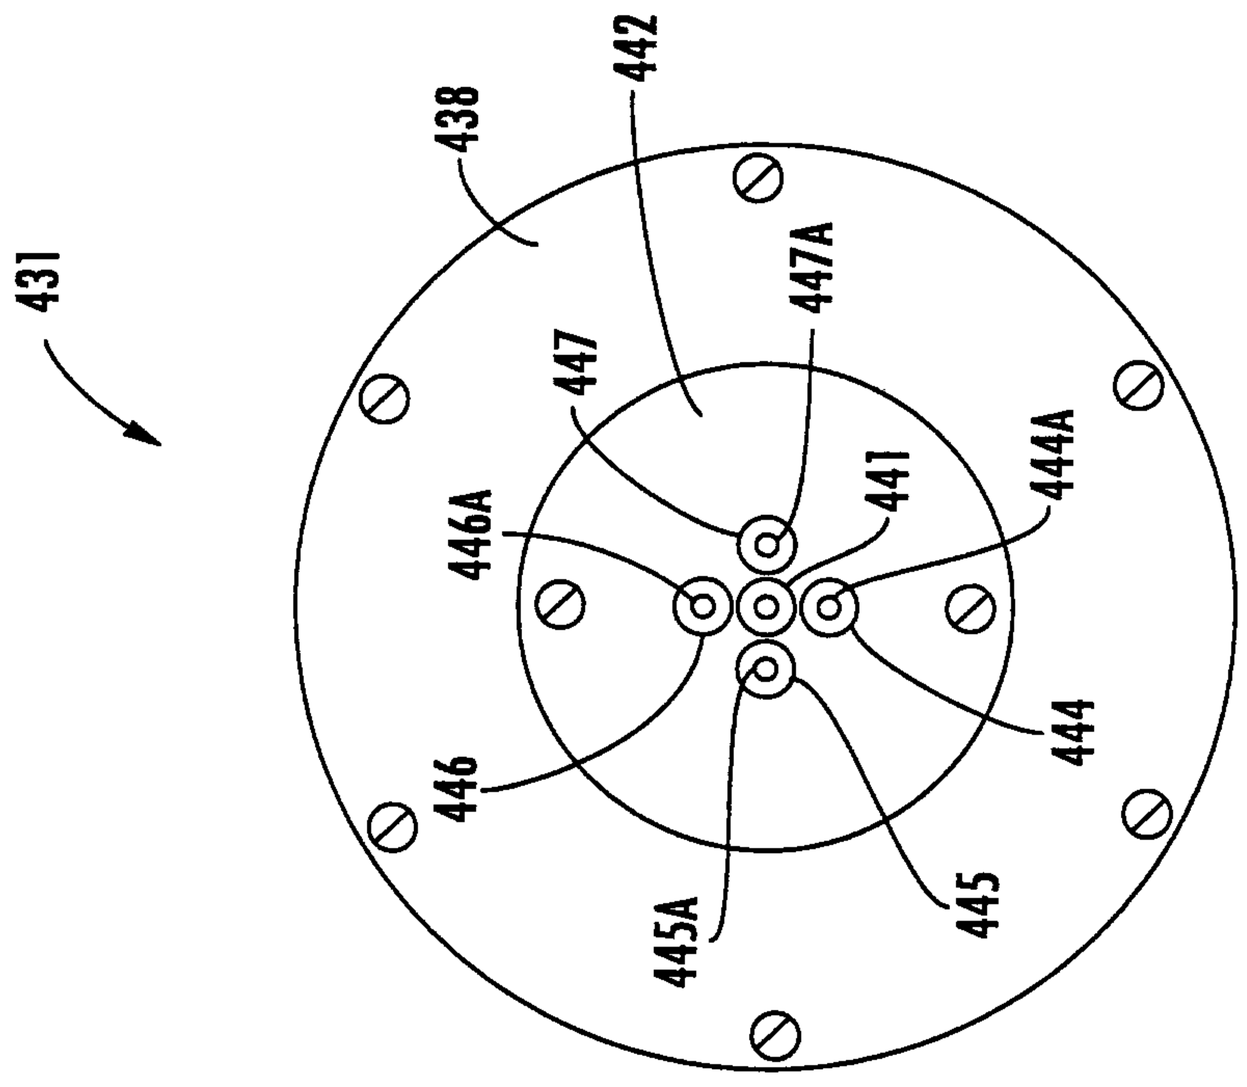


FIG. 7

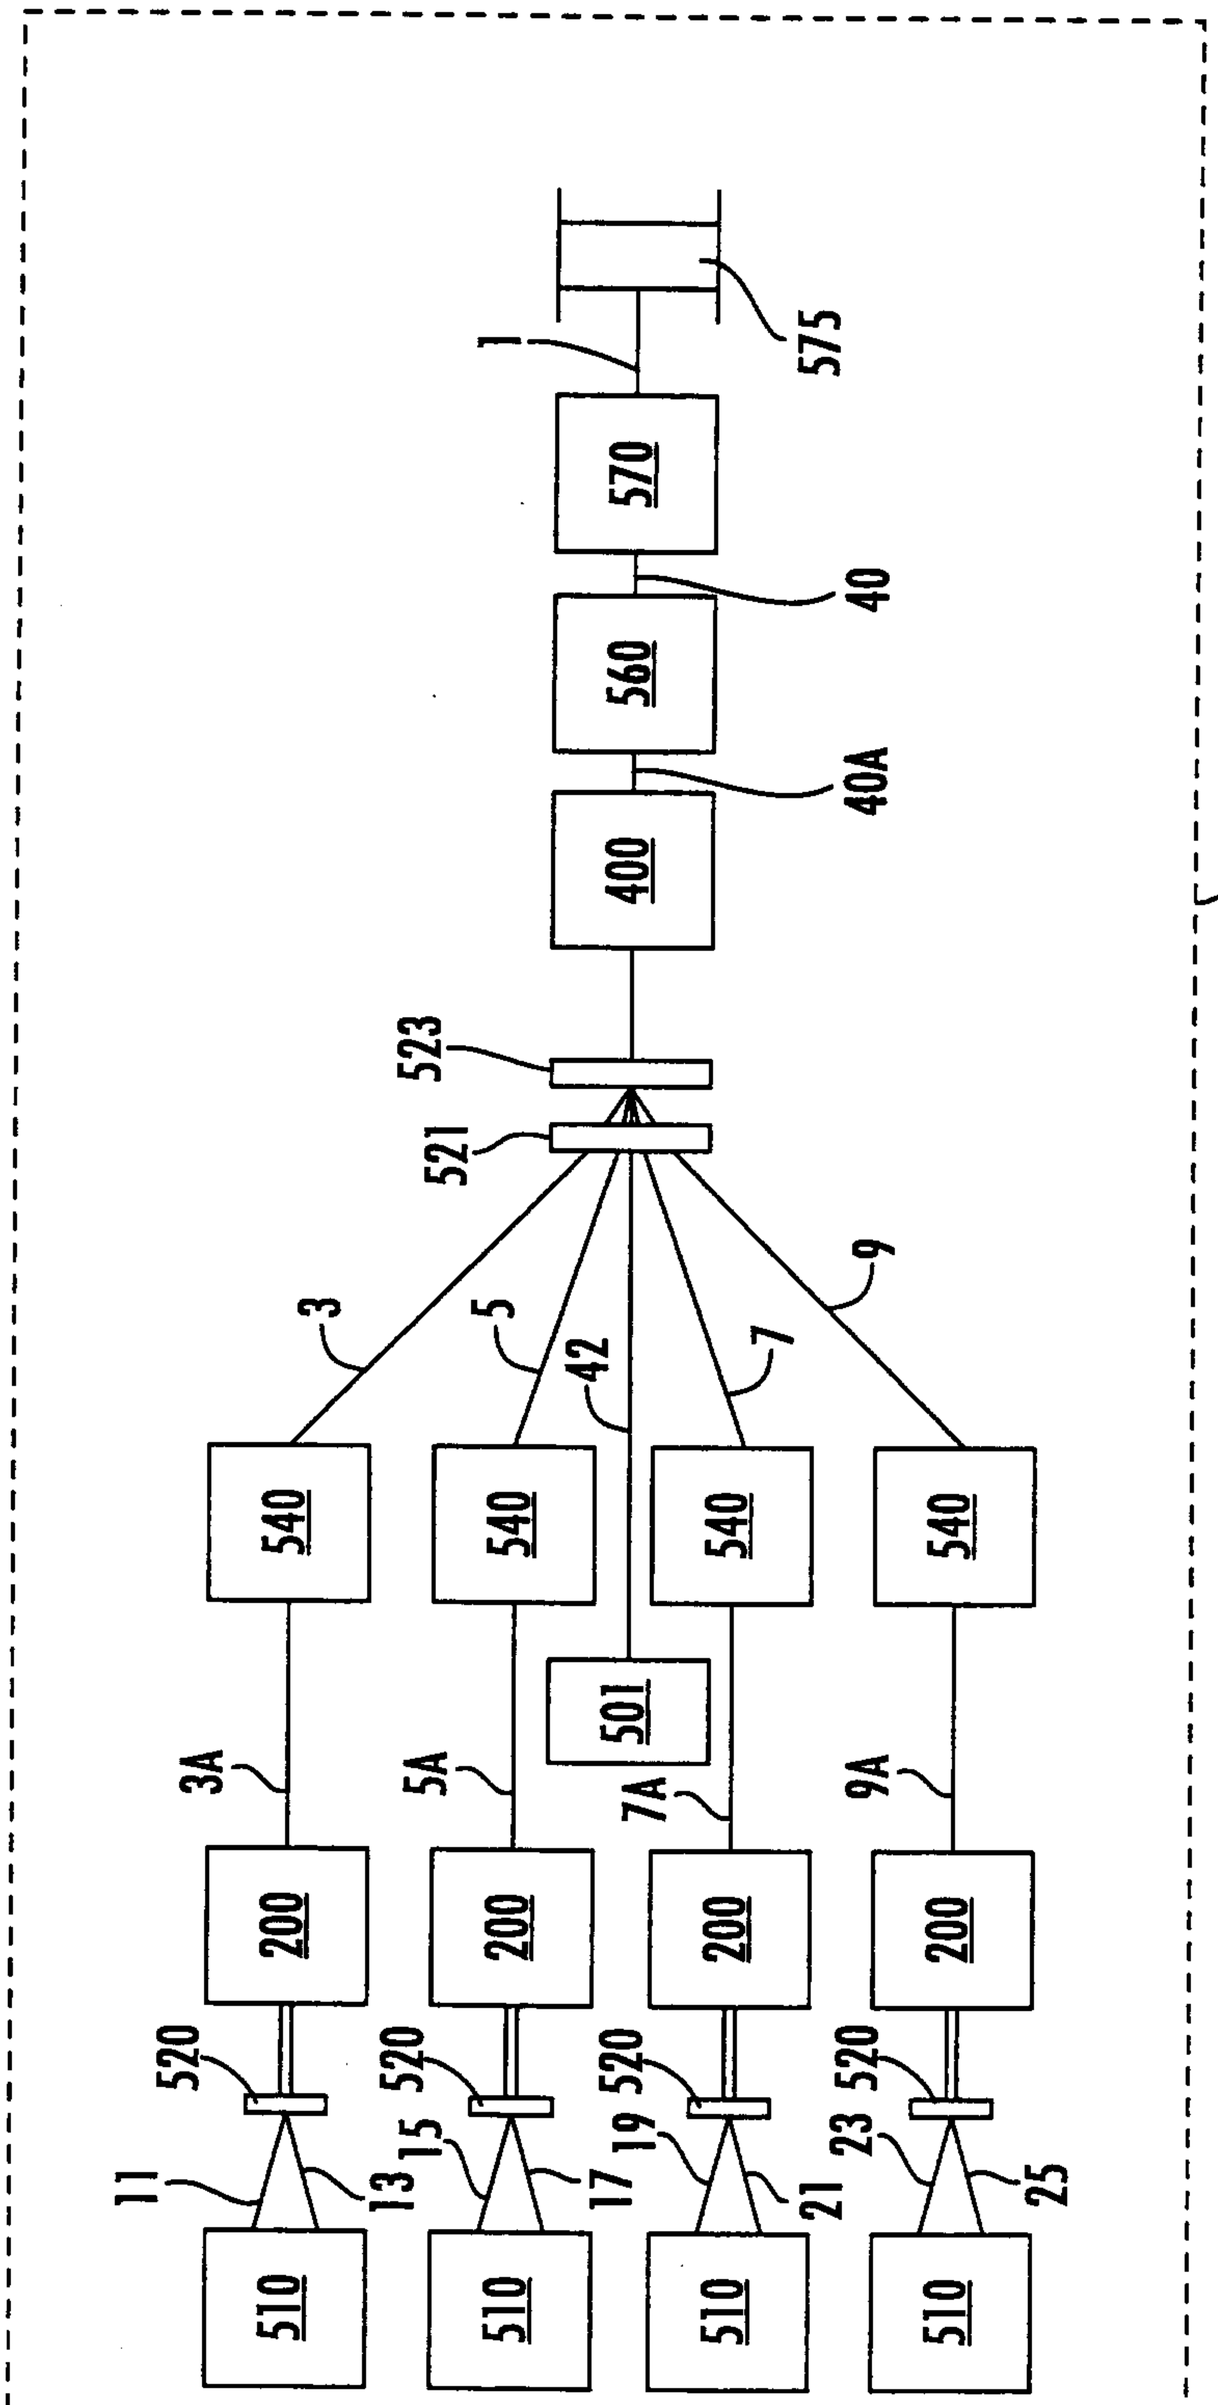

575
570
40
560
40A
400
523
521
3
5
42
7
9
540
540
540
540
501
3A
5A
7A
9A
200
200
200
200
520
520
520
520
11
13
15
17
19
21
23
25
510
510
510
510
500
F

FIG. 8

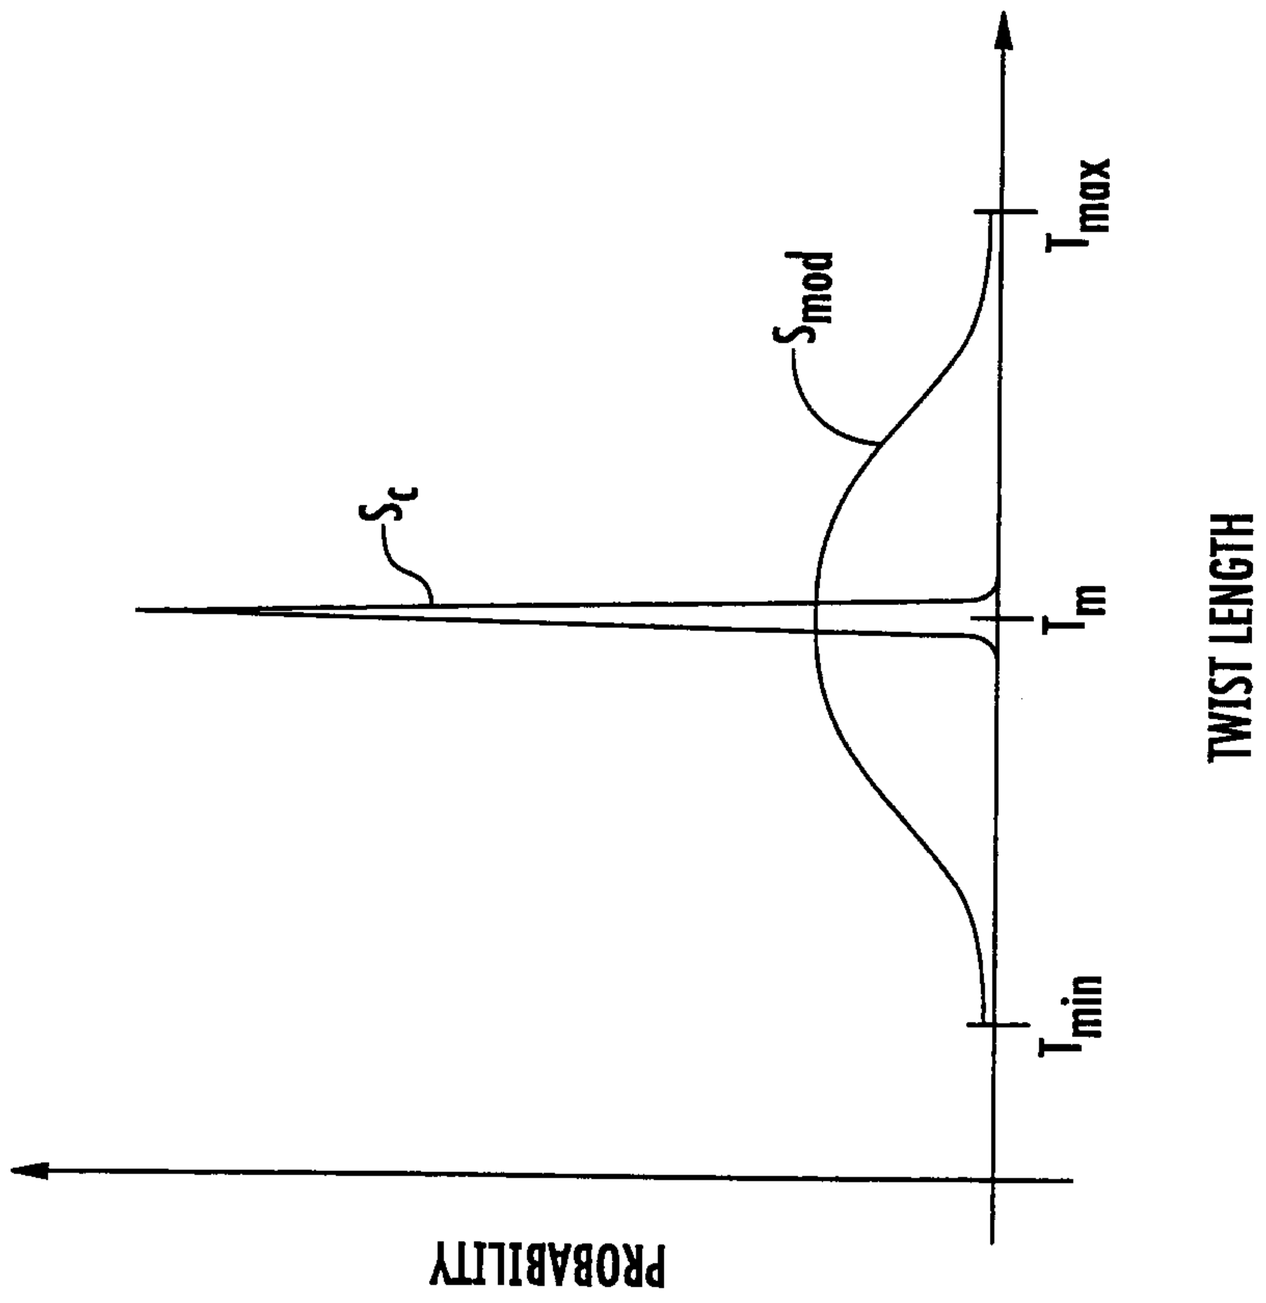


FIG. 9

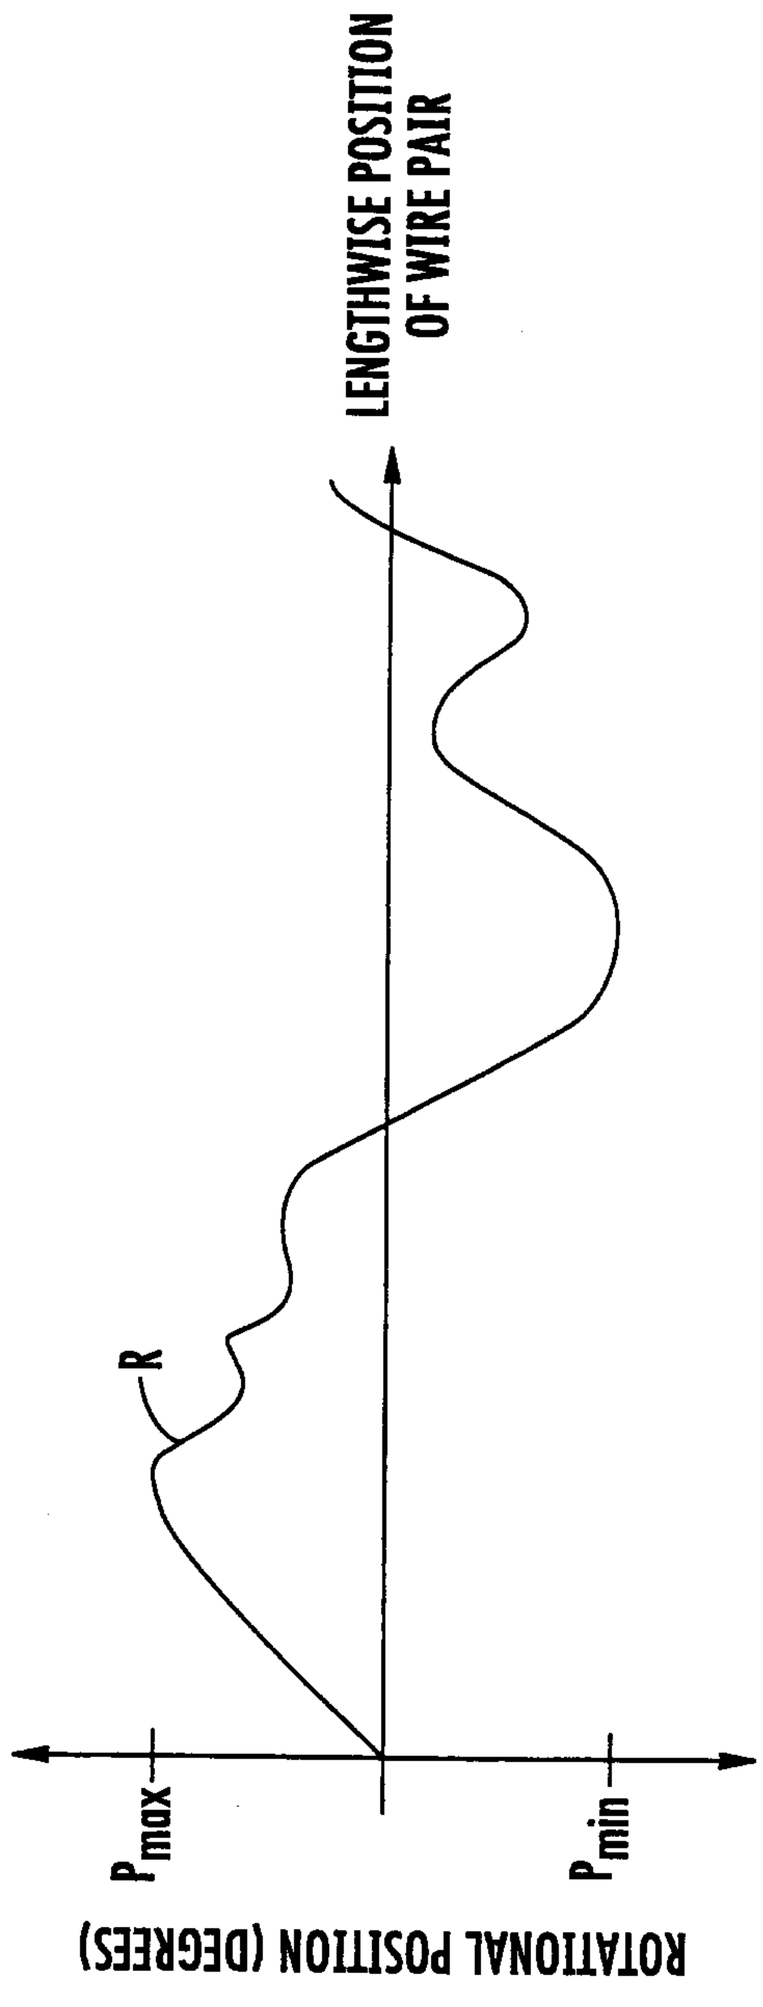
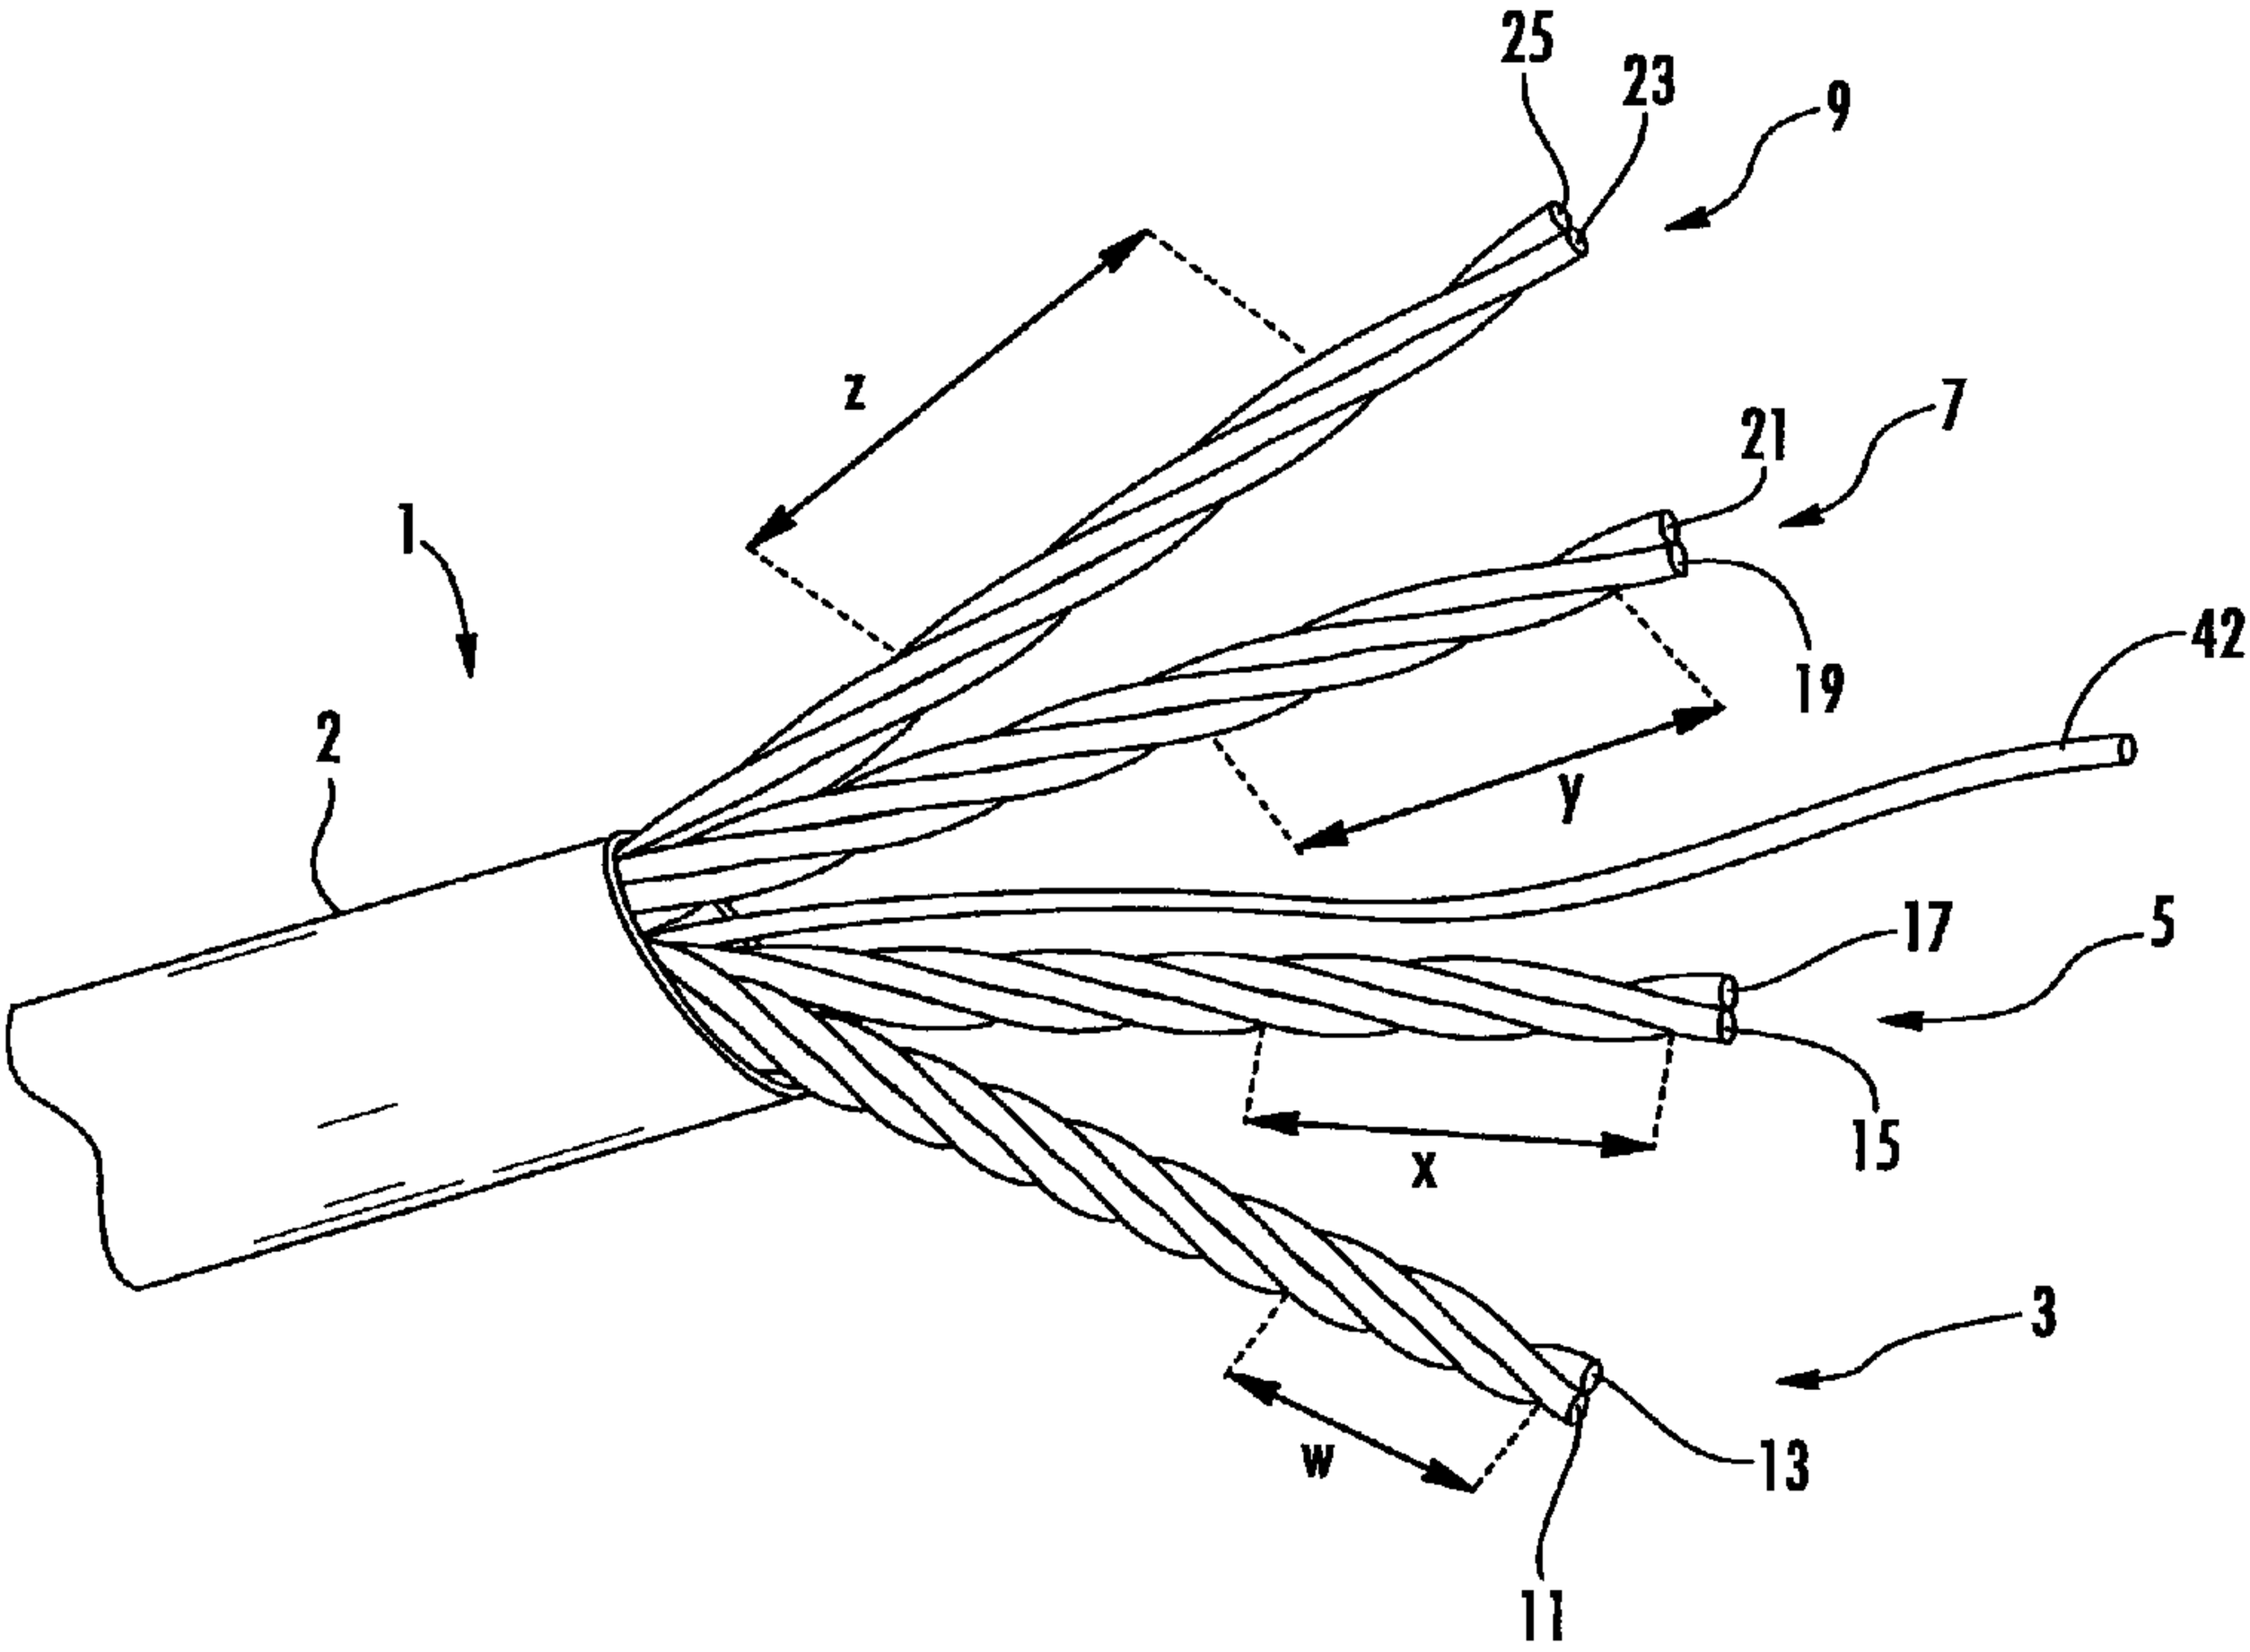

LENGTHWISE POSITION
OF WIRE PAIR
R
P_{max}
P_{min}
ROTATIONAL POSITION (DEGREES)

FIG. 10


25
23
9
z
7
21
1
19
42
2
y
17
5
x
15
3
w
13
11