



(51) International Patent Classification:

E21B 21/10 (2006.01) E21B 34/10 (2006.01)
E21B 21/08 (2006.01)

(21) International Application Number:

PCT/US2012/036941

(22) International Filing Date:

8 May 2012 (08.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US];
2601 Beltline Road, Carrollton, TX 75006 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GANO, John, Charles** [US/US]; 2015 White Ash Road, Carrollton, TX 75007 (US). **FRIPP, Michael, Linley** [US/US]; 3826 Cemetery Hill Road, Carrollton, TX 75007 (US).

(74) Agent: **YOUST, Lawrence, R.**; Lawrence Youst PLLC, One Waterway Court, Suite 3B, The Woodlands, TX 77380 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: DOWNHOLE FLUID FLOW CONTROL SYSTEM AND METHOD HAVING AUTONOMOUS CLOSURE

Fig.9

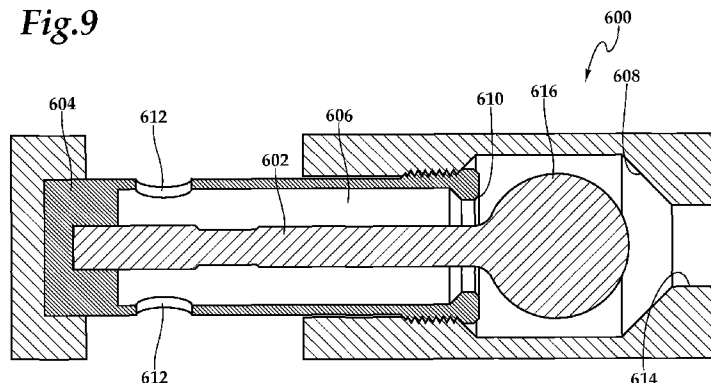

(57) Abstract: A downhole fluid flow control system for autonomously controlling the inflow of production fluids. The fluid flow control system includes a flow control assembly having a fluid flow path through which a fluid flows. A support structure is positioned in the fluid flow path. A plug is releasably coupled to the support structure such that when fluid flow through the fluid flow path induces sufficient movement in the support structure, the movement causes release of the plug from the support structure into the fluid flow path, thereby restricting subsequent fluid flow in at least one direction through the fluid flow path.

DOWNHOLE FLUID FLOW CONTROL SYSTEM AND METHOD HAVING AUTONOMOUS CLOSURE

5

TECHNICAL FIELD OF THE INVENTION

[0001] This invention relates, in general, to equipment utilized in conjunction with operations performed in subterranean wells and, in particular, to a downhole fluid flow control system and method having autonomous closure for controlling the inflow of an undesired production fluid.

10

BACKGROUND OF THE INVENTION

[0002] Without limiting the scope of the present invention, its background will be described with reference to producing fluid from a hydrocarbon bearing subterranean formation, as an example.

15

[0003] During the completion of a well that traverses a hydrocarbon bearing subterranean formation, production tubing and various completion equipment are installed in the well to enable safe and efficient production of the formation fluids. For example, to prevent the production of particulate material from an unconsolidated or loosely consolidated subterranean formation, certain completions include one or more sand control screen assemblies positioned proximate the desired production interval or intervals. In other completions, to control the flowrate and/or composition of production fluids into the production tubing, it is common practice to install one or more flow control devices within the tubing string.

20

[0004] Attempts have been made to utilize fluid flow control devices within completions requiring sand control. For example, in certain sand control screen assemblies, after production fluids flow through the filter medium, the fluids are directed into a flow control section. The flow control section may include one or more flow control components such as flow tubes, nozzles, labyrinths or the like. Typically, the production flowrate through these flow control screens is fixed prior to installation by the number and design of the flow control components.

25

30

[0005] It has been found, however, that due to changes in formation pressure and changes in formation fluid composition over the life of the well, it may be desirable to adjust the flow control characteristics of the flow control sections. In addition, for certain

completions, such as long horizontal completions having numerous production intervals, it may be desirable to independently control the inflow of production fluids into each of the production intervals. Further, in some completions, it would be desirable to adjust the flow control characteristics of the flow control sections without the requirement for well intervention.

[0006] Accordingly, a need has arisen for a flow control screen that is operable to control the inflow of formation fluids in a completion requiring sand control. A need has also arisen for flow control screens that are operable to independently control the inflow of production fluids from multiple production intervals. Further, a need has arisen for such flow control screens that are operable to control the inflow of production fluids without the requirement for well intervention as the composition of the fluids produced into specific intervals changes over time.

SUMMARY OF THE INVENTION

[0007] The present invention disclosed herein comprises a downhole fluid flow control system that may be embodied in a flow control screen that is operable for controlling the inflow of production fluids. In addition, the downhole fluid flow control system of the present invention is operable to independently control the inflow of production fluids into multiple production intervals without the requirement for well intervention as the composition of the fluids produced into specific intervals changes over time.

[0008] In one aspect, the present invention is directed to a downhole fluid flow control system. The downhole fluid flow control system includes a flow control assembly having a fluid flow path through which a fluid flows. A support structure is positioned in the fluid flow path. A plug is releasably coupled to the support structure such that when fluid flow through the fluid flow path induces sufficient movement in the support structure, the movement causes release of the plug from the support structure into the fluid flow path, which prevents subsequent fluid flow in at least one direction through the fluid flow path.

[0009] In one embodiment, the plug may be in the form of a spherical or spheroidal plug. In another embodiment, the plug may be a dart. In some embodiments, a temporary stabilizer may be operably associated with the plug to prevent premature release of the plug into the fluid flow path. In certain embodiments, one or more turbulizing elements may be positioned in the fluid flow path upstream of the plug. In one embodiment, movement of the support structure results in oscillation of the support structure. In certain embodiments, movement of the support structure causes the support structure to fatigue. In other

embodiments, movement of the support structure causes the support structure to break. In one embodiment, movement of the support structure increases responsive to an increase in fluid velocity. In some embodiments, movement of the support structure increases responsive to an increase in a ratio of an undesired fluid to a desired fluid.

5 [0010] In another aspect, the present invention is directed to a flow control screen. The flow control screen includes a base pipe with an internal passageway. A filter medium is positioned around the base pipe. A housing is positioned around the base pipe defining a fluid passageway between the filter medium and the internal passageway. A flow control assembly is positioned in the fluid passageway. The flow control assembly has a fluid flow
10 path through which a fluid flows. A support structure is positioned in the fluid flow path. A plug is releasably coupled to the support structure such that when fluid flow through the fluid flow path induces sufficient movement in the support structure, the movement causes release of the plug from the support structure into the fluid flow path, which prevents subsequent fluid flow in at least one direction through the fluid flow path.

15 [0011] In a further aspect, the present invention is directed to a downhole fluid flow control method. The method includes positioning a fluid flow control system at a target location downhole, the fluid flow control system including a flow control assembly having a fluid flow path through which a fluid flows, a support structure positioned in the fluid flow path and a plug releasably coupled to the support structure; producing a desired fluid through
20 the fluid flow path of the flow control assembly past the support structure; producing an undesired fluid through the fluid flow path of the flow control assembly past the support structure; inducing movement in the support structure responsive to fluid flow; and releasing of the plug into the fluid flow path responsive to the movement of the support structure, thereby restricting fluid flow in at least one direction through the fluid flow path.

25 [0012] The method may also include increasing a ratio of the undesired fluid to the desired fluid to induce movement in the support structure, increasing fluid velocity in the fluid flow path to induce movement in the support structure, inducing oscillation of the support structure, fatiguing the support structure and/or breaking the support structure.

30 BRIEF DESCRIPTION OF THE DRAWINGS

[0013] For a more complete understanding of the features and advantages of the present invention, reference is now made to the detailed description of the invention along with the accompanying figures in which corresponding numerals in the different figures refer to corresponding parts and in which:

[0014] Figure 1 is a schematic illustration of a well system operating a plurality of flow control screens according to an embodiment of the present invention;

[0015] Figures 2A-2B are quarter sectional views of successive axial sections of a downhole fluid flow control system embodied in a flow control screen according to an embodiment of the present invention;

[0016] Figure 3 is a top view of a downhole fluid flow control system according to an embodiment of the present invention;

[0017] Figures 4A-4B are cross sectional views of a downhole fluid flow control system according to an embodiment of the present invention in its open and closed configurations, respectively;

[0018] Figures 5A-5B are cross sectional views of a downhole fluid flow control system according to an embodiment of the present invention in its open and closed configurations, respectively;

[0019] Figure 6 is cross sectional view of a support structure and temporary stabilizer for a plug of a downhole fluid flow control system according to an embodiment of the present invention;

[0020] Figure 7 is cross sectional view of a support structure and temporary stabilizer for a plug of a downhole fluid flow control system according to an embodiment of the present invention;

[0021] Figure 8 is cross sectional view of a support structure and a plug of a downhole fluid flow control system including turbulizing elements according to an embodiment of the present invention; and

[0022] Figure 9 is cross sectional view of a support structure and a plug of a downhole fluid flow control system including a dual seat according to an embodiment of the present invention

DETAILED DESCRIPTION OF THE INVENTION

[0023] While the making and using of various embodiments of the present invention are discussed in detail below, it should be appreciated that the present invention provides many applicable inventive concepts, which can be embodied in a wide variety of specific contexts. The specific embodiments discussed herein are merely illustrative of specific ways to make and use the invention and do not delimit the scope of the present invention.

[0024] Referring initially to figure 1, therein is depicted a well system including a plurality of downhole fluid flow control systems positioned in flow control screens

embodying principles of the present invention that is schematically illustrated and generally designated 10. In the illustrated embodiment, a wellbore 12 extends through the various earth strata. Wellbore 12 has a substantially vertical section 14, the upper portion of which has cemented therein a casing string 16. Wellbore 12 also has a substantially horizontal section 18 that extends through a hydrocarbon bearing subterranean formation 20. As illustrated, substantially horizontal section 18 of wellbore 12 is open hole.

[0025] Positioned within wellbore 12 and extending from the surface is a tubing string 22. Tubing string 22 provides a conduit for formation fluids to travel from formation 20 to the surface and for injection fluids to travel from the surface to formation 20. At its lower end, tubing string 22 is coupled to a completions string that has been installed in wellbore 12 and divides the completion interval into various production intervals adjacent to formation 20. The completion string includes a plurality of flow control screens 24, each of which is positioned between a pair of annular barriers depicted as packers 26 that provides a fluid seal between the completion string and wellbore 12, thereby defining the production intervals. In the illustrated embodiment, flow control screens 24 serve the function of filtering particulate matter out of the production fluid stream. Each flow control screens 24 also has a flow control section that is operable to control fluid flow therethrough including shutting off production therethrough.

[0026] In certain embodiments, the flow control sections may be operable to control the inflow of a production fluid stream during the production phase of well operations. Alternatively or additionally, the flow control sections may be operable to control the outflow of an injection fluid stream during a treatment phase of well operations. As explained in greater detail below, the flow control sections are operable to control the inflow of production fluids into each production interval over the life of the well without the requirement for well intervention as the composition of the fluids produced into specific intervals changes over time in order to maximize production of a desired fluid such as oil and minimize production of an undesired fluid such as water and/or gas.

[0027] Even though figure 1 depicts the flow control screens of the present invention in an open whole environment, it should be understood by those skilled in the art that the present invention is equally well suited for use in cased wells. Also, even though figure 1 depicts one flow control screen in each production interval, it should be understood by those skilled in the art that any number of flow control screens of the present invention may be deployed within a production interval without departing from the principles of the present invention. In addition, even though figure 1 depicts the flow control screens of the present

invention in a horizontal section of the wellbore, it should be understood by those skilled in the art that the present invention is equally well suited for use in wells having other directional configurations including vertical wells, deviated wells, slanted wells, multilateral wells and the like. Accordingly, it should be understood by those skilled in the art that the use of directional terms such as above, below, upper, lower, upward, downward, left, right, uphole, downhole and the like are used in relation to the illustrative embodiments as they are depicted in the figures, the upward direction being toward the top of the corresponding figure and the downward direction being toward the bottom of the corresponding figure, the uphole direction being toward the surface of the well and the downhole direction being toward the toe of the well. Further, even though figure 1 depicts the flow control components associated with flow control screens in a tubular string, it should be understood by those skilled in the art that the flow control components of the present invention need not be associated with a flow control screen or be deployed as part of the tubular string. For example, one or more flow control components may be deployed and removably inserted into the center of the tubing string or side pockets of the tubing string.

[0028] Referring next to figures 2A-2B, therein is depicted successive axial sections of a flow control screen according to an embodiment of the present invention that is representatively illustrated and generally designated 100. Flow control screen 100 may be suitably coupled to other similar flow control screens, production packers, locating nipples, production tubulars or other downhole tools to form a completions string as described above. Flow control screen 100 includes a base pipe 102 that has a blank pipe section 104 and a perforated section 106 including one or more production ports or openings 108. Positioned around an uphole portion of blank pipe section 104 is a screen element or filter medium 112, such as a wire wrap screen, a woven wire mesh screen, a prepacked screen or the like, with or without an outer shroud positioned therearound, designed to allow fluids to flow therethrough but prevent particulate matter of a predetermined size from flowing therethrough. It will be understood, however, by those skilled in the art that the present invention does not need to have a filter medium associated therewith, accordingly, the exact design of the filter medium is not critical to the present invention.

[0029] Positioned downhole of filter medium 112 is a screen interface housing 114 that forms an annulus 116 with base pipe 102. Securably connected to the downhole end of screen interface housing 114 is a flow control housing 118. At its downhole end, flow control housing 118 is securably connected to a flow control assembly 120 which is securably coupled to base pipe 102. The various connections of the components of flow

control screen 100 may be made in any suitable fashion including welding, threading and the like as well as through the use of fasteners such as pins, set screws and the like. In the illustrated embodiment, flow control assembly 120 includes one or more fluidic modules 122 and one or more autonomous closure mechanisms 124 both of which are designed to control the inflow of production fluid and particularly, the inflow of undesired production fluid.

[0030] Even though a single fluidic module 122 has been depicted, it should be understood by those skilled in the art that any number of fluidic modules having a variety of configurations relative to flow control assembly 120 may be used. For example, any number of fluidic modules 122 may be circumferentially or longitudinally distributed at uniform or nonuniform intervals about flow control assembly 120. Likewise, even though a single autonomous closure mechanism 124 has been depicted, it should be understood by those skilled in the art that any number of autonomous closure mechanisms may be operated as part of flow control assembly 120, such autonomous closure mechanisms being circumferentially or longitudinally distributed at uniform or nonuniform intervals about flow control assembly 120. In addition, it should be noted that even though autonomous closure mechanism 124 is positioned upstream of fluidic module 122, those skilled in the art will recognize that autonomous closure mechanism 124 could alternatively be positioned downstream of fluidic module 122.

[0031] As discussed in greater detail below, autonomous closure mechanism 124 and fluidic module 122 are operable to control the inflow of fluid during a production operation. In this scenario, fluid flows from the formation into the production tubing through fluid flow control screen 100. The production fluid, after being filtered by filter medium 112, if present, flows into annulus 116. The fluid then travels into an annular region 126 between base pipe 102 and flow control housing 118 before entering the flow control section. The fluid then passes autonomous closure mechanism 124 where the desired flow control operation occurs depending upon the composition and/or velocity of the produced fluid. If flow is not shut off by autonomous closure mechanism 124, the fluid enters annular region 144 and then one or more inlets of fluidic module 122 where another desired flow control operation occurs depending upon the composition and/or velocity of the produced fluid. Thereafter, fluid produced through fluidic module 122 is discharged through opening 108 to interior flow path 128 of base pipe 102 for production to the surface.

[0032] Referring additionally now to figure 3, a flow control section of flow control screen 100 is representatively illustrated. It is noted that flow control housing 118, an outer fluidic element of fluidic module 122 and an outer portion of autonomous closure mechanism

124 have been removed from figure 3 to aid in the description of the present invention. In the illustrated embodiment, flow control assembly 120 includes an autonomous closure mechanism 124 in series with fluidic module 122. The illustrated fluidic module 122 includes an inner flow control element 130 and an outer flow control element 132 (see figure 2B) forming a fluid flow path 134 therebetween including a pair of fluid ports 136, a vortex chamber 138 and an opening 140. In production mode, fluid ports 136 are inlet ports and opening 140 is an outlet or discharge port. In addition, fluidic module 122 has a plurality of fluid guides 142 in vortex chamber 138. Flow control assembly 120 is positioned about base pipe 102 such that opening 140 will be circumferentially and longitudinally aligned with an opening 108 of base pipe 102 (see figure 2B). Flow control assembly 120 includes a plurality of channels for directing fluid flow into fluidic module 122 from an annular region 144. Specifically, flow control assembly 120 includes a plurality of circumferential channels 146.

[0033] The illustrated autonomous closure mechanism 124 includes a support structure 150 positioned in a fluid flow path 152 having a valve seat 154. A plug 156 is releasably coupled to a downstream end of support structure 150. As described below, plug 156 is sized to be sealingly received in seat 154 to selectively prevent fluid flow from fluid flow path 152 to annulus 144. Plug 156 may include a resilient outer surface 158 such as a rubber layer to aid in sealing against seat 154, as best seen in figures 4A-4B. As illustrated, fluid flow path 152 has a pair of inlet ports 160 and an outlet port 162. Together, inlet ports 160, fluid flow path 152, outlet port 162, annular region 144, circumferential channels 146, fluid ports 136, vortex chamber 138 and opening 140 form a fluid flow path through flow control assembly 120, as best seen in figure 3.

[0034] In operation, during the production phase of well operations, fluid flows from the formation into the production tubing through flow control screen 100. The production fluid, after being filtered by filter medium 112, if present, flows into annulus 116 between screen interface housing 114 and base pipe 102. The fluid then travels into annular region 126 between base pipe 102 and flow control housing 118 before entering the flow control section. The fluid then enters fluid ports 160 of flow control assembly 120. The fluid travels in fluid flow path 152 past support structure 150 and plug 156 before being discharged into annular region 144 via outlet port 162. The fluid then travels in circumferential channels 146 and enters fluid ports 136 of fluidic module 122 and passes through vortex chamber 138 where the desired flow resistance is applied to the fluid flow achieving the desired pressure drop and flowrate therethrough. In the illustrated example, in the case of a relatively low velocity

and/or high viscosity fluid composition containing predominately oil, flow through vortex chamber 138 may progress relatively unimpeded from fluid ports 136 to opening 140. On the other hand, in the case of a relatively high velocity and/or low viscosity fluid composition containing predominately water and/or gas, the fluids entering vortex chamber 138 will travel primarily in a tangentially direction and will spiral around vortex chamber 138 with the aid of fluid guides 142 before eventually exiting through opening 140. Fluid spiraling around vortex chamber 138 will suffer from frictional losses. Further, the tangential velocity produces centrifugal force that impedes radial flow. Consequently, spiraling fluids passing through fluidic module 122 encounter significant resistance. Fluid discharged through opening 140 passes through opening 108 and enters interior flow path 128 of base pipe 102 for production to the surface.

[0035] As should be understood by those skilled in the art, the more circuitous the flow path taken by the relatively high velocity and/or low viscosity fluid composition the greater the amount of energy consumed. This can be compared with the more direct flow path taken by the relatively low velocity and/or high viscosity fluid composition in which a lower amount of energy consumed. In this example, if oil is a desired fluid and water and/or gas are undesired fluids, then it will be appreciated that fluidic module 122 will provide less resistance to fluid flow when the fluid composition has a relatively low ratio of undesired fluid to desired fluid therein, and will provide progressively greater resistance as the ratio of the undesired fluid to the desired fluid increases. Even though a fluidic module 122 having a particular fluid flow path 134 including a vortex chamber 138 has been depicted and described, those skilled in the art will recognize that the fluid flow path within a fluidic module 122 could have an alternate design based upon factors such as the desired flowrate, the desired pressure drop, the type and composition of the production fluids and the like without departing from the principles of the present invention. In addition, it should be noted that a fluidic module without variable flow resistance based upon fluid velocity and/or fluid viscosity could also be used in association with the present invention.

[0036] In addition to having increased resistance to the production of the undesired fluid as compared to the desired fluid, responsive to certain flow conditions, the present invention is operable to shut off production entirely. This is accomplished, in the illustrated embodiment, with the autonomous closure mechanism 124. As illustrated, support structure 150 of autonomous closure mechanism 124 is securably attached to flow control assembly 120 at its upstream base and is depicted as a relatively long and slender cylindrical element that extends within fluid flow path 152. Plug 156 is releasably attached to the downstream

end of support structure 120 by, for example, adhesion, welding, threading or similar technique. As plug 156 and support structure 150 are positioned within fluid flow path 152, fluid-structure interaction occurs when fluid travels in fluid flow path 152 past support structure 150 and plug 156.

5 [0037] In the case of a relatively low velocity and/or high viscosity fluid composition containing predominately oil, the effects of fluid-structure interaction are relatively weak or stable resulting in small movements or displacements of support structure 150 and/or plug 156 on an intermittent basis. On the other hand, in the case of a relatively high velocity and/or low viscosity fluid composition containing predominately water and/or gas, the effects
10 of the fluid-structure interaction become stronger. For example, the fluid-structure interaction may induce movement of support structure 150 and/or plug 156 such as oscillatory motion including fluttering or galloping of support structure 150 and/or plug 156 resulting from divergent flow, vortex shedding or the like. In the case of vortex shedding, as fluid 164 passes plug 156 vortices are created at the back of plug 156 and detach periodically
15 from either side of plug 156 creating alternating low-pressure vortices 166 on the downstream side of plug 156, as best seen in figure 4A. As plug 156 moves toward the alternating low-pressure zones, support structure 150 and/or plug 156 oscillates. When the frequency of vortex shedding matches a natural or resonance frequency or harmonic of support structure 150 and/or plug 156, the oscillation can become self-sustaining. In this
20 mode, the coupling between plug 156 and support structure 150 will break enabling plug 156 to flow downstream and seal against valve seat 154 of fluid flow path 152, as best seen in figure 4B, thereby restricting further flow of production fluids from fluid flow path 152 to annulus 144.

[0038] As should be understood by those skilled in the art, support structure 150 and/or
25 plug 156 may be designed to have specific natural or resonance frequencies such that the desired fluid-structure interaction occurs responsive to the flow of relatively low velocity and/or high viscosity fluid compositions containing predominately oil as well as the flow of relatively high velocity and/or low viscosity fluid compositions containing predominately water and/or gas. In this example, if oil is a desired fluid and water and/or gas are undesired
30 fluids, then it will be appreciated that the desired fluid-structure interaction will be relatively weak when the fluid composition has a relatively low ratio of water/gas to oil therein and will be progressively stronger as the ratio of water/gas to oil increases.

[0039] Once plug 156 has sealed against valve seat 154 of fluid flow path 152, plug 156 will remain sealed against valve seat 154 as long as there is a sufficient differential pressure

thereacross. In the illustrated embodiment, if sufficient differential pressure is applied to plug 156 in the opposite direction, for example in the case of reverse flow through flow control screen 100, plug 156 will release from valve seat 154, allowing such reverse flow. Fluid flow path 152 may be designed to retain plug 156 therein such that a return to production flow will cause plug 156 to reseal against valve seat 154, as best seen in figure 4B, thereby restricting further flow of production fluids from fluid flow path 152 to annulus 144. Alternatively, fluid flow path 152 and flow control screen 100 may be designed such that if plug 156 releases from valve seat 154 responsive to reverse flow through flow control screen 100, plug 156 is displaced from fluid flow path 152 or otherwise retained, preventing plug 156 from resealing against valve seat 154 even after production flow recommences.

[0040] Referring next to figures 5A-5B, therein is depicted another embodiment of a autonomous closure mechanism that is generally designated 200. Autonomous closure mechanism 200 includes support structure 202 that is securably attached to a flow control assembly at its upstream base. As illustrated, support structure 202 is a relatively long and slender cylindrical element that extends within a fluid flow path 204 that includes a valve seat 206. A plug depicted as dart 208 is releasably attached to a downstream end of support structure 202. Dart 208 may have a resilient outer surface 210, such as a rubber layer, to aid in sealing against valve seat 206. As illustrated, fluid flow path 204 includes inlet ports 212 and a discharge port 214. As dart 208 and support structure 202 are positioned within fluid flow path 204, fluid-structure interaction occurs when fluid 216 travels in fluid flow path 204 past support structure 202 and dart 208.

[0041] In the case of a relatively low velocity and/or high viscosity fluid composition containing predominately oil, the effects of fluid-structure interaction are relatively weak or stable. On the other hand, in the case of a relatively high velocity and/or low viscosity fluid composition containing predominately water and/or gas, the effects of the fluid-structure interaction become stronger. For example, the fluid-structure interaction may induce movements including oscillatory motion of support structure 202 and/or dart 208 resulting from divergent flow, vortex shedding or the like. In the case of vortex shedding, as fluid 216 passes dart 208 vortices are created at the back of dart 208 and detach periodically from either side of dart 208 creating alternating low-pressure vortices 218 on the downstream side of dart 208, as best seen in figure 5A. As dart 208 moves toward the alternating low-pressure , dart 208 oscillates relative to or together with support structure 202. When the frequency of vortex shedding matches a natural or resonance frequency of support structure 202 and/or dart 208, the oscillation can become self-sustaining. In this mode, due to fatigue, for

example, dart 208 will release from support structure 202 at the preferential breaking location denoted as 220. Dart 208 will then flow downstream and seal against valve seat 206 of fluid flow path 204, as best seen in figure 5B, thereby restricting further flow of production fluids downstream of fluid flow path 204.

5 [0042] As should be understood by those skilled in the art, support structure 202 and/or dart 208 may be designed to have specific natural or resonance frequencies such that the desired fluid-structure interaction occurs responsive to the flow of relatively low velocity and/or high viscosity fluid compositions containing predominately oil and relatively high velocity and/or low viscosity fluid compositions containing predominately water and/or gas.

10 In this example, if oil is a desired fluid and water and/or gas are undesired fluids, then it will be appreciated that the desired fluid-structure interaction will be relatively weak when the fluid composition has a relatively low ratio of water/gas to oil therein and will be progressively stronger as the ratio of water/gas to oil increases.

[0043] Referring next to figure 6, therein is depicted another embodiment of a

15 autonomous closure mechanism that is generally designated 300. Autonomous closure mechanism 300 includes support structure 302 that is securably attached to a flow control assembly at its upstream base. As illustrated, support structure 302 is a relatively long and slender cylindrical element that extends within fluid flow path 304. A plug 306, depicted as spherical or spheroidal plug, is releasably attached to a downstream end of support structure

20 302. In the illustrated embodiment, a temporary stabilizer assembly 308 extends from the flow control assembly to plug 306. Temporary stabilizer assembly 308 may be a single cylindrical element or may be multiple spaced apart elements. In either case, temporary stabilizer assembly 308 prevents the premature release of plug 306 from support structure 302. Preferably, temporary stabilizer assembly 308 is formed from a material that will

25 initially retain plug 306 in a relatively secure orientation during transportation and installation to prevent release of plug 306 from support structure 302. After installation, however, temporary stabilizer assembly 308 may be designed to degrade responsive to exposure to downhole conditions. For example, temporary stabilizer assembly 308 may be made of a material, such as cobalt, that corrodes relatively quickly when contacted by a

30 particular undesired fluid, such as salt water. As another example, temporary stabilizer assembly 308 may be made of a material, such as aluminum, that erodes relatively quickly when a high velocity fluid impinges on the material or when exposed to a chemical treatment such as acid. As a further example, temporary stabilizer assembly 308 may be made of a material, such as a polymer, that melts or dissolved relatively quickly when exposed to

elevated temperature. It should be understood by those skilled in the art, however, that any material suitable for temporary stabilization may be used for temporary stabilizer assembly 308 in keeping with the principles of the present invention. After temporary stabilizer assembly 308 has sufficiently degraded, the release of plug 306 from support structure 302 may proceed in a manner similar to the release of plug 156 from support structure 150 described above.

[0044] Referring next to figure 7, therein is depicted another embodiment of a autonomous closure mechanism that is generally designated 400. Autonomous closure mechanism 400 includes support structure 402 that is securably attached to a flow control assembly at its upstream base. As illustrated, support structure 402 is a relatively long and slender cylindrical element that extends within fluid flow path 404. A plug depicted as dart 406 is releasably attached to a downstream end of support structure 402. In the illustrated embodiment, one or more temporary stabilizer elements 408 extend from the head of dart 406 to the inner surface of fluid flow path 404. Temporary stabilizer elements 408 prevent premature release of dart 406 from support structure 402. Preferably, temporary stabilizer elements 408 are formed from a material that will initially retain dart 406 in a relatively secure orientation during transportation and installation to prevent release of dart 406 from support structure 402. After installation, however, temporary stabilizer elements 408 will degrade responsive to exposure to predetermined downhole conditions. After temporary stabilizer assembly 308 has sufficiently degraded, the release of dart 406 from support structure 402 may proceed in a manner similar to the release of dart 208 from support structure 202 described above.

[0045] Referring next to figure 8, therein is depicted another embodiment of a autonomous closure mechanism that is generally designated 500. Autonomous closure mechanism 500 includes support structure 502 that is securably attached to a flow control assembly at its upstream base. As illustrated, support structure 502 is a relatively long and slender cylindrical element that extends within fluid flow path 504. A plug 506 is releasably attached to a downstream end of support structure 502. In the illustrated embodiment, one or more turbulizing elements 508 extend into fluid flow path 504 upstream of plug 506. In the illustrated embodiment, turbulizing elements 508 create turbulence in the fluid 510 as it flows through turbulizing elements 508 as indicated by arrow 512. The turbulent flow of fluid downstream of turbulizing elements 508 tends to reduce the required fluid velocity that induces oscillation of support structure 502 and/or plug 506. As such, it should be understood by those skilled in the art, that the system could be tuned to have specific

characteristics based upon the expected production fluid composition/velocity and changes therein over time. For example, factors such as the use or non use of turbulizing elements, the length, shape, cross section, diameter and material of the support structure, the shape, size and orientation of the plug, the method by which the plug is attached to the support structure, the inclusion or non inclusion of a preferential breaking location in the support structure and the like may be used for system tuning.

[0046] Referring next to figure 9, therein is depicted another embodiment of a autonomous closure mechanism that is generally designated 600. Autonomous closure mechanism 600 includes support structure 602 that is securably attached to a seat assembly 604 at its upstream base. Seat assembly 604 is securably attached to a flow control assembly at its upstream base. As illustrated, support structure 602 is a relatively long and slender cylindrical element that extends within a fluid flow path 606 that includes a downstream valve seat 608 and an upstream valve seat 610. In the illustrated embodiment, upstream valve seat 610 is formed on a downstream end of seat assembly 604. Fluid flow path 606 includes inlet ports 212 formed in seat assembly 604 and a discharge port 614. A plug 616 is releasably attached to a downstream end of support structure 602. As plug 616 and support structure 602 are positioned within fluid flow path 606, fluid-structure interaction occurs when fluid travels in fluid flow path 606 past support structure 602 and plug 616.

[0047] In the case of a relatively low velocity and/or high viscosity fluid composition containing predominately oil, the effects of fluid-structure interaction are relatively weak or stable. On the other hand, in the case of a relatively high velocity and/or low viscosity fluid composition containing predominately water and/or gas, the effects of the fluid-structure interaction become stronger. For example, the fluid-structure interaction may induce movements including oscillatory motion of support structure 602 and/or plug 616 resulting from divergent flow, vortex shedding or the like. In the case of vortex shedding, as the fluid passes plug 616 vortices are created at the back of plug 616 and detach periodically from either side of plug 616 creating alternating low-pressure vortices on the downstream side thereof. As plug 616 moves toward the alternating low-pressure zones, plug 616 oscillates relative to or together with support structure 602. When the frequency of vortex shedding matches a natural or resonance frequency of support structure 602 and/or plug 616, the oscillation can become self-sustaining. In this mode, due to fatigue, for example, plug 616 will release from support structure 602 and flow downstream to seal against valve seat 608 of fluid flow path 606, thereby restricting further flow of production fluids downstream of fluid flow path 606.

[0048] Once plug 616 has sealed against valve seat 608 of fluid flow path 606, plug 616 will remain sealed against valve seat 608 as long as there is a sufficient differential pressure thereacross. In the illustrated embodiment, if sufficient differential pressure is applied to plug 616 in the opposite direction, for example in the case of reverse flow, plug 616 will release from valve seat 608, flow upstream to seal against valve seat 610 of fluid flow path 606 to disallow reverse flow through fluid flow path 606. Thereafter, depending upon the direction of the differential pressure, plug 616 provides a seal against either valve seat 608 or valve seat 610, thereby restricting further flow of fluids either upstream or downstream through fluid flow path 606.

[0049] While this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications and combinations of the illustrative embodiments as well as other embodiments of the invention will be apparent to persons skilled in the art upon reference to the description. It is, therefore, intended that the appended claims encompass any such modifications or embodiments.

What is claimed is:

1. A downhole fluid flow control system comprising:

a flow control assembly having a fluid flow path through which a fluid flows;

a support structure positioned in the fluid flow path; and

5 a plug releasably coupled to the support structure,

wherein, fluid flow through the fluid flow path past the support structure induces movement in the support structure; and

wherein, movement of the support structure causes release of the plug into the fluid flow path, thereby restricting fluid flow in at least one direction through the fluid flow path.

10

2. The downhole fluid flow control system as recited in claim 1 wherein the plug further comprises one of a spherical plug, a spheroidal plug and a dart plug.

3. The downhole fluid flow control system as recited in claim 1 wherein the movement of the support structure further comprises oscillation of the support structure.

15

4. The downhole fluid flow control system as recited in claim 1 wherein the movement of the support structure causes the support structure to fatigue.

5. The downhole fluid flow control system as recited in claim 1 wherein the movement of the support structure causes the support structure to break.

20

6. The downhole fluid flow control system as recited in claim 1 wherein movement of the support structure increases responsive to an increase in fluid velocity.

25

7. The downhole fluid flow control system as recited in claim 1 wherein movement of the support structure increases responsive to an increase in a ratio of an undesired fluid to a desired fluid.

8. The downhole fluid flow control system as recited in claim 1 further comprising a temporary stabilizer operably associated with the plug that prevents premature release of the plug into the fluid flow path.

30

9. The downhole fluid flow control system as recited in claim 1 further comprising at least one turbulizing element positioned in the fluid flow path upstream of the plug.

5 10. A flow control screen comprising:
a base pipe with an internal passageway;
a filter medium positioned around the base pipe;
a housing positioned around the base pipe defining a fluid passageway between the
filter medium and the internal passageway;
10 a flow control assembly positioned in the fluid passageway, the flow control assembly
having a fluid flow path through which a fluid flows;
a support structure positioned in the fluid flow path; and
a plug releasably coupled to the support structure,
wherein, fluid flow through the fluid flow path past the support structure induces
15 movement in the support structure; and
wherein, movement of the support structure causes release of the plug into the fluid
flow path, thereby restricting fluid flow in at least one direction through the fluid flow path.

20 11. The flow control screen as recited in claim 10 wherein the plug further
comprises one of a spherical plug, a spheroidal plug and a dart plug.

12. The flow control screen as recited in claim 10 wherein the movement of the
support structure further comprises oscillation of the support structure.

25 13. The flow control screen as recited in claim 10 wherein the movement of the
support structure causes the support structure to fatigue.

14. The flow control screen as recited in claim 10 wherein the movement of the
support structure causes the support structure to break.

30 15. The flow control screen as recited in claim 10 wherein movement of the
support structure increases responsive to an increase in fluid flow velocity.

16. The flow control screen as recited in claim 10 wherein movement of the support structure increases responsive to an increase in a ratio of an undesired fluid to a desired fluid.

5 17. The flow control screen as recited in claim 10 further comprising a temporary stabilizer operably associated with the plug that prevents premature release of the plug from the support structure.

10 18. A downhole fluid flow control method comprising:
positioning a fluid flow control system at a target location downhole, the fluid flow control system including a flow control assembly having a fluid flow path through which a fluid flows, a support structure positioned in the fluid flow path and a plug releasably coupled to the support structure;

15 producing a desired fluid through the fluid flow path of the flow control assembly past the support structure;

producing an undesired fluid through the fluid flow path of the flow control assembly past the support structure;

inducing movement in the support structure responsive to fluid flow; and

20 releasing of the plug into the fluid flow path responsive to the movement of the support structure, thereby restricting fluid flow in at least one direction through the fluid flow path.

25 19. The method as recited in claim 18 wherein producing an undesired fluid through the fluid flow path of the flow control assembly past the support structure further comprises increasing a ratio of the undesired fluid to the desired fluid.

30 20. The method as recited in claim 18 wherein producing an undesired fluid through the fluid flow path of the flow control assembly past the support structure further comprises increasing fluid velocity in the fluid flow path.

21. The method as recited in claim 18 wherein inducing movement in the support structure responsive to the flow of the fluids further comprises inducing oscillation of the support structure.

22. The method as recited in claim 18 wherein inducing movement in the support structure responsive to the flow of the fluids further comprises fatiguing the support structure.

23. The method as recited in claim 18 wherein inducing movement in the support
5 structure responsive to the flow of the fluids further comprises breaking the support structure.

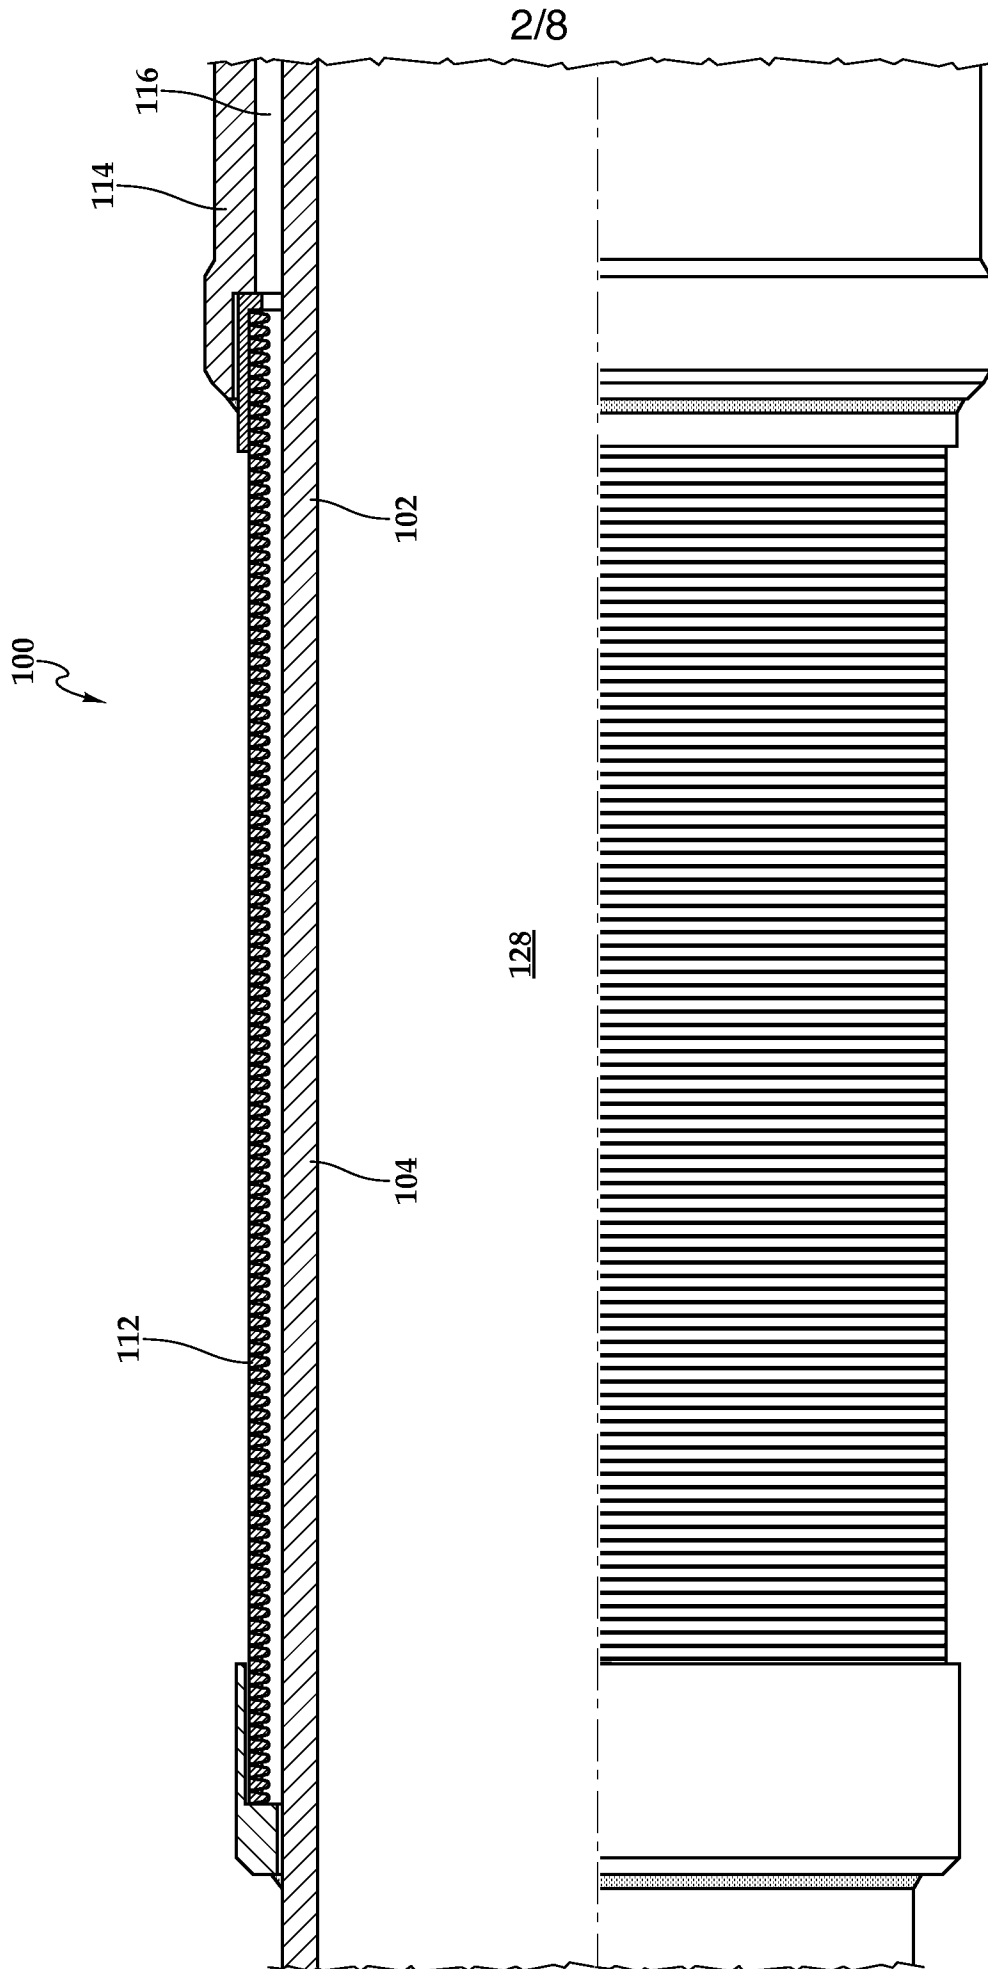


Fig.2A

3/8

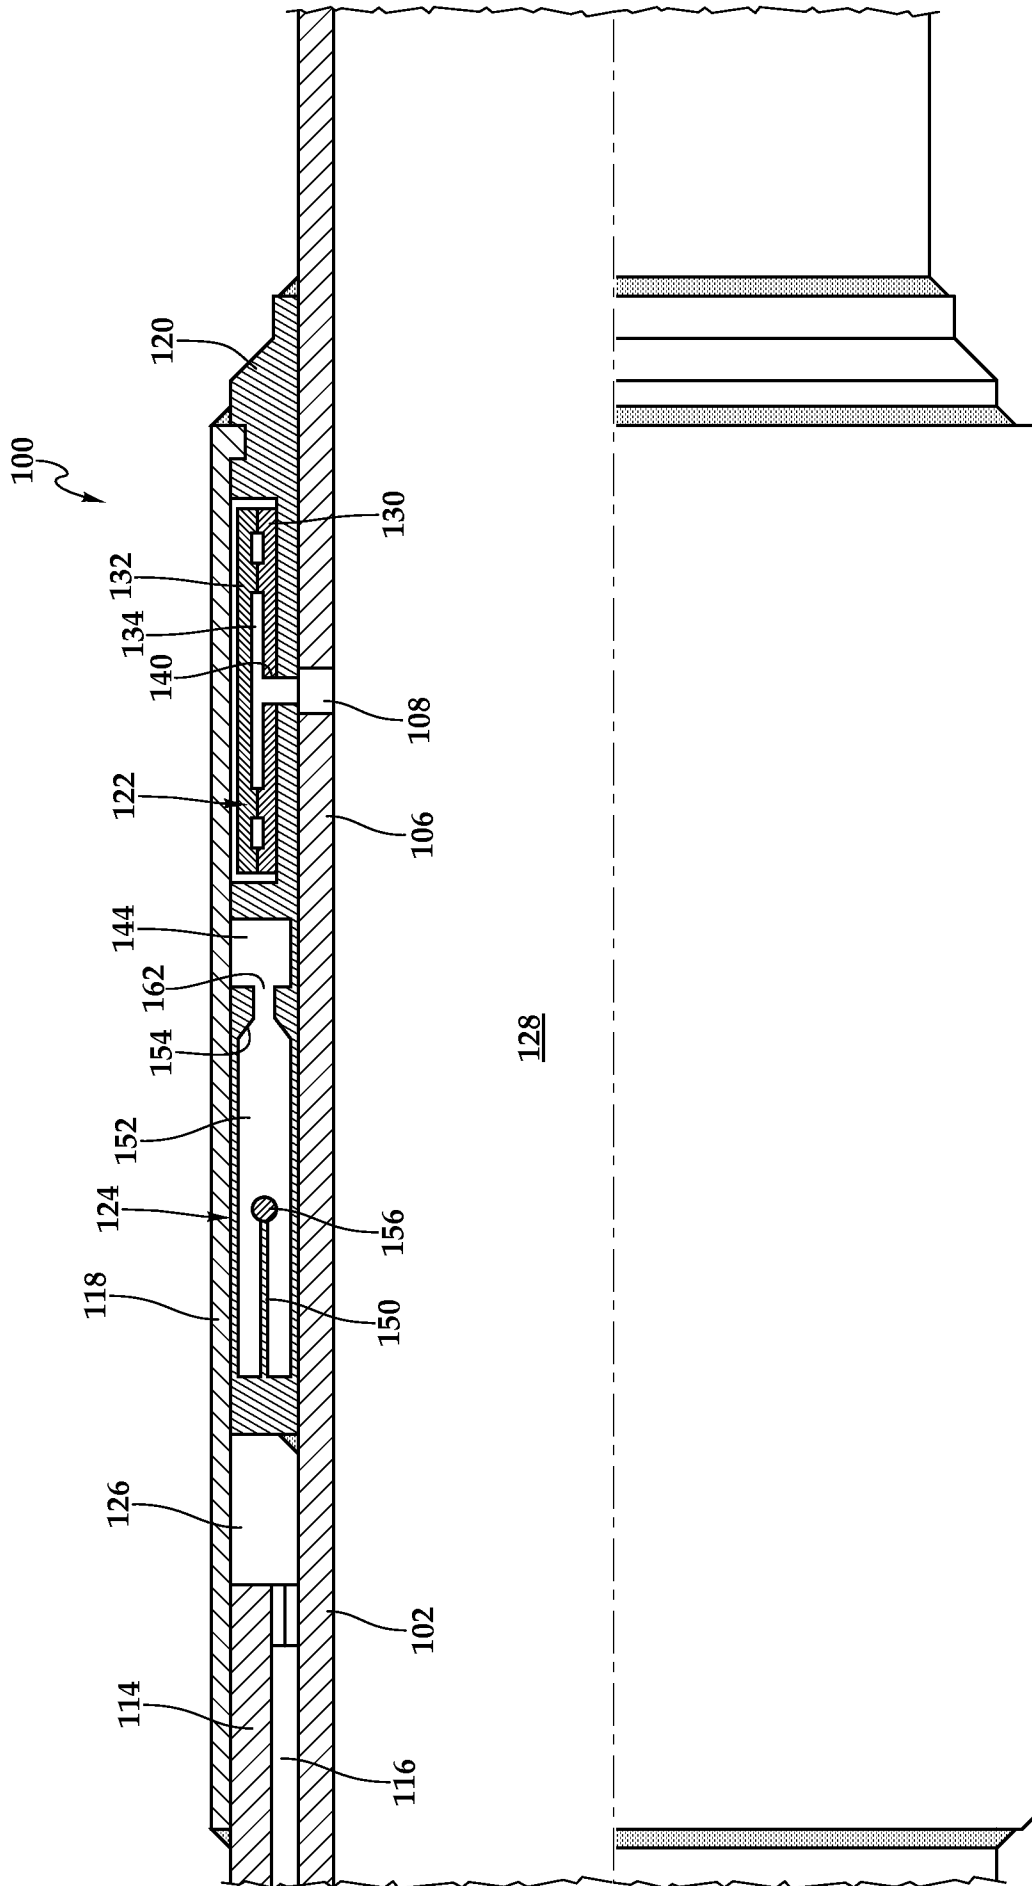


Fig.2B





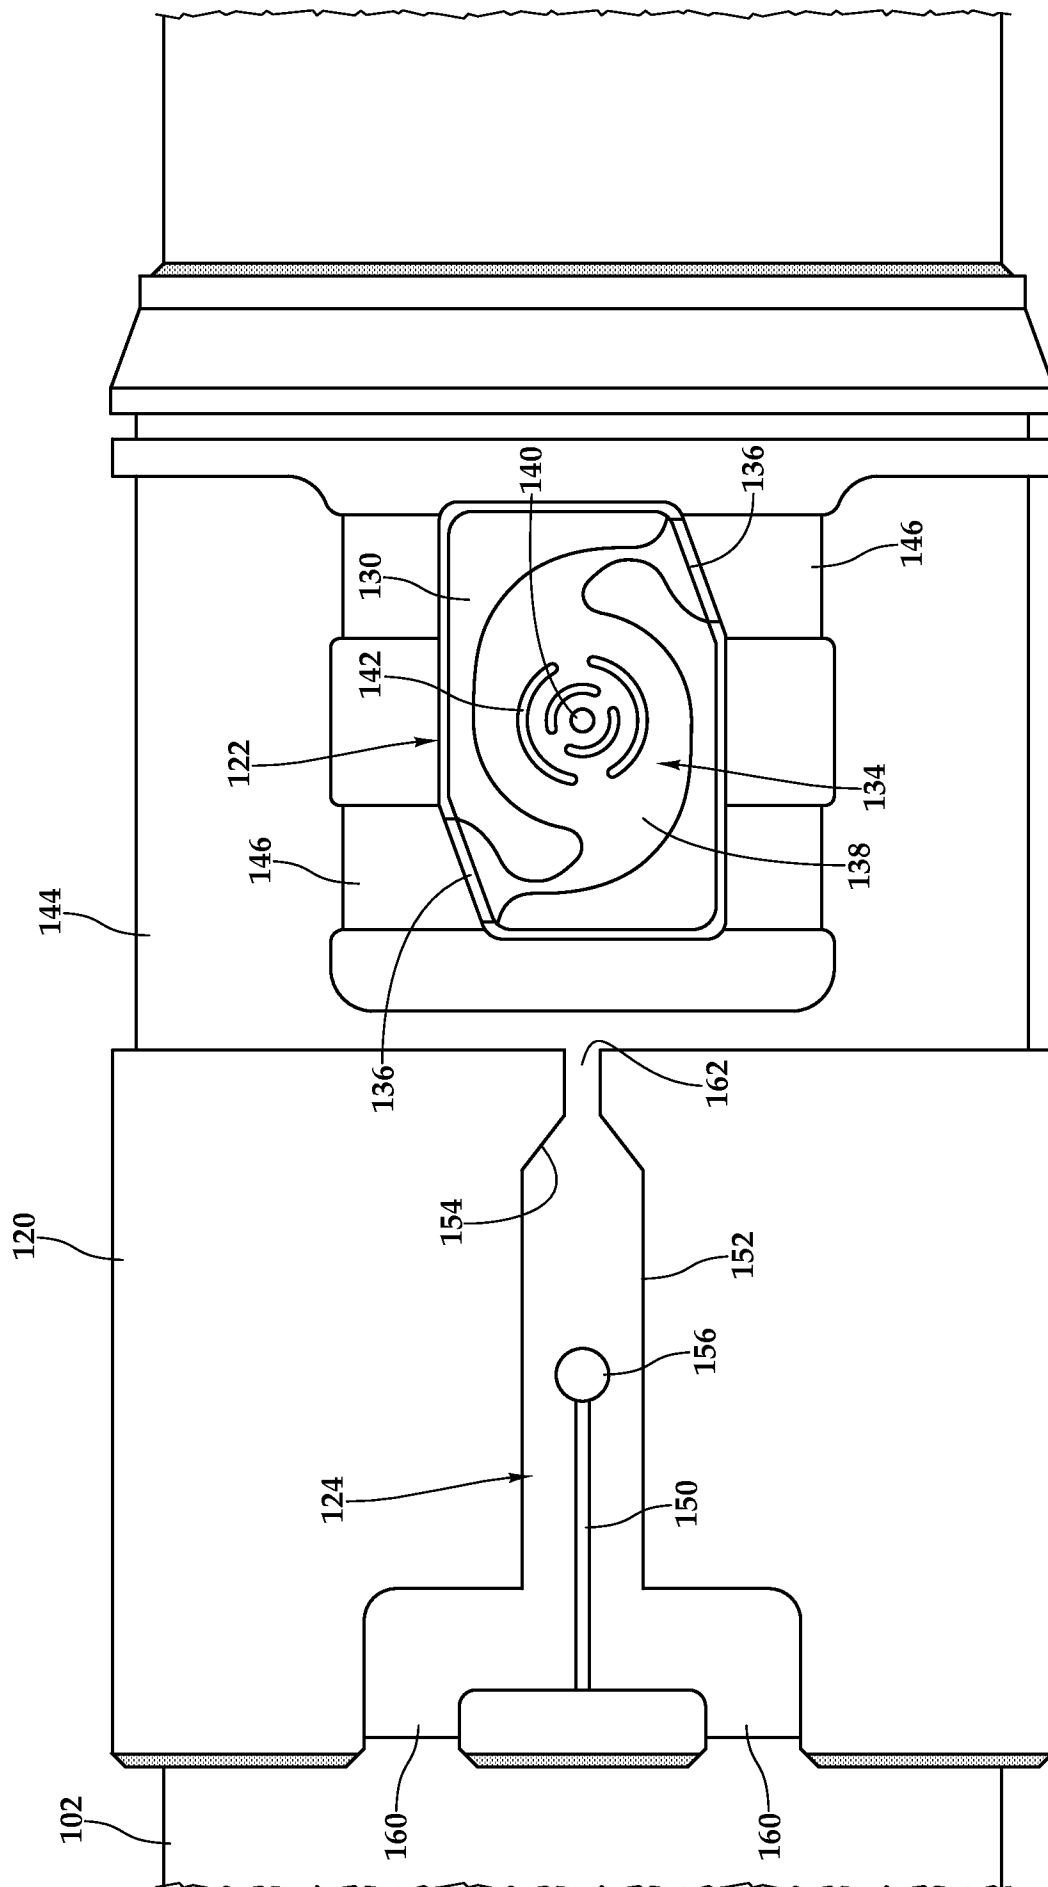


Fig.3

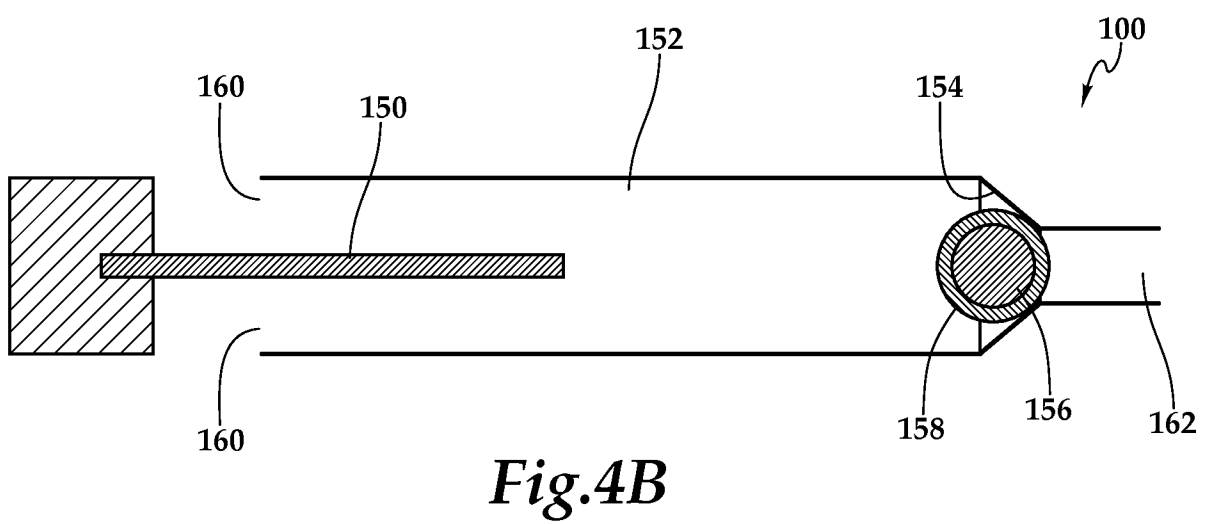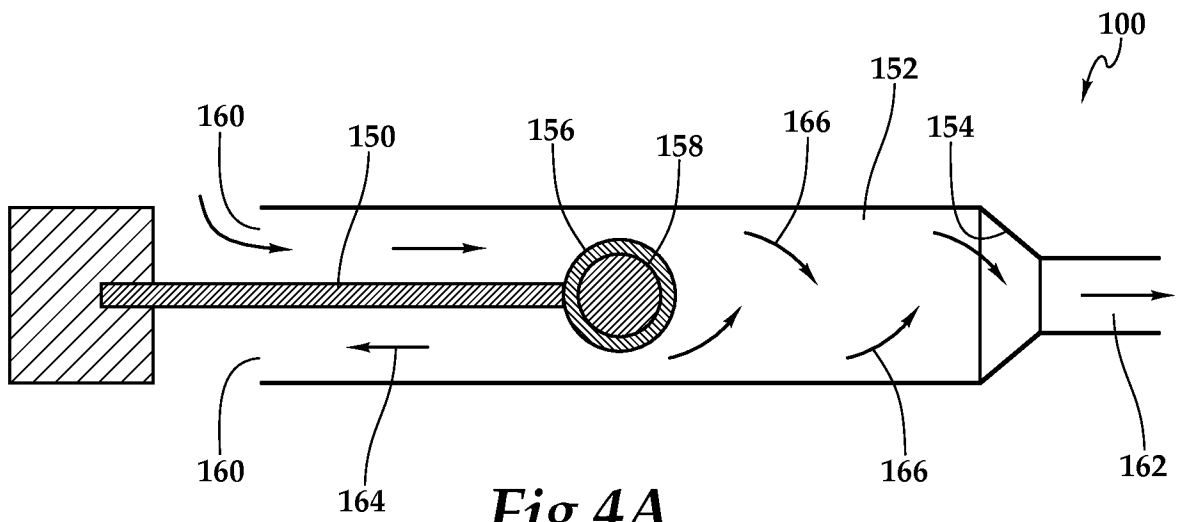

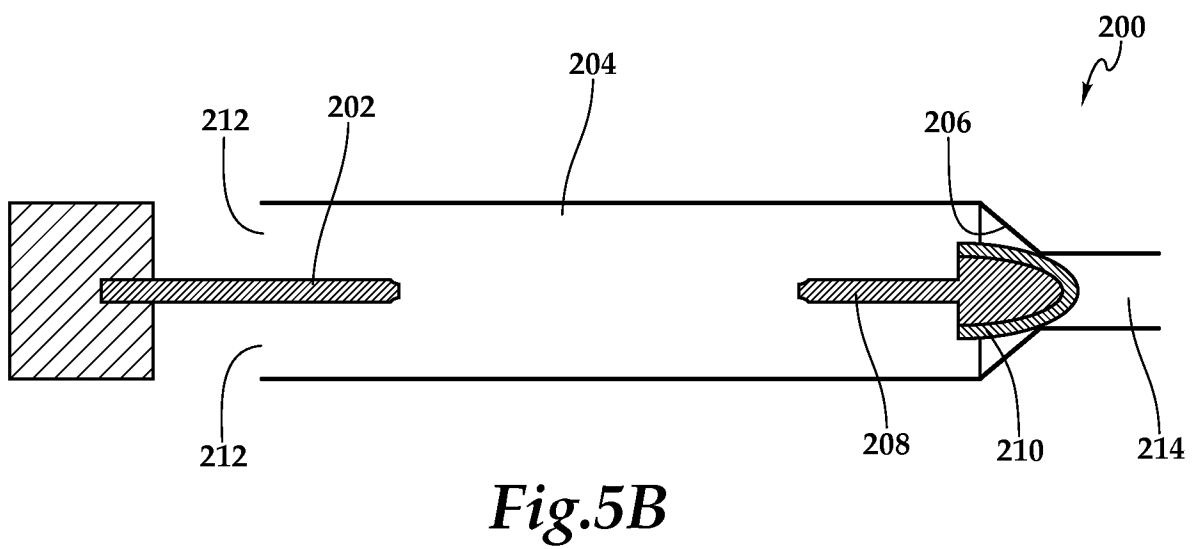

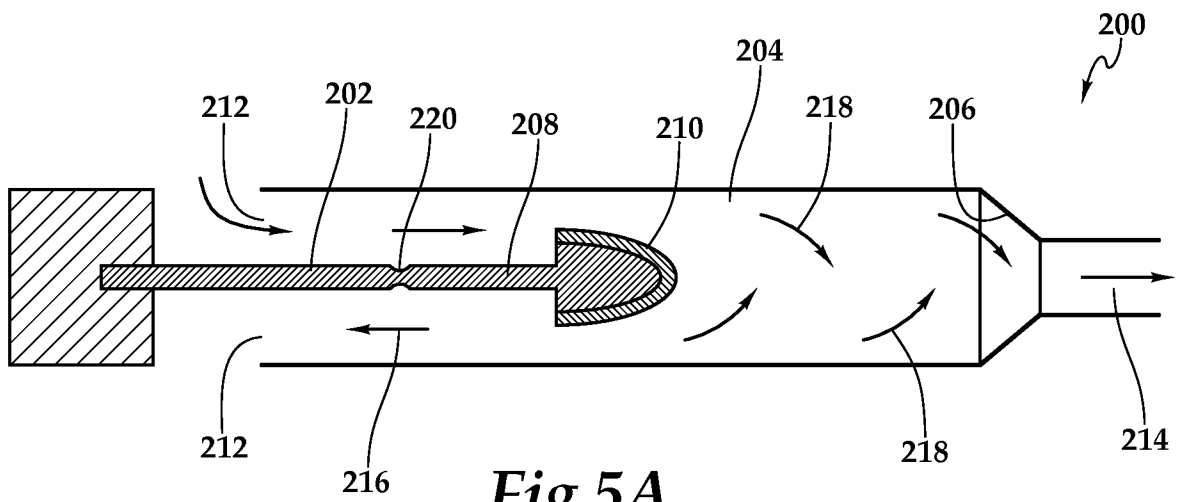

7/8

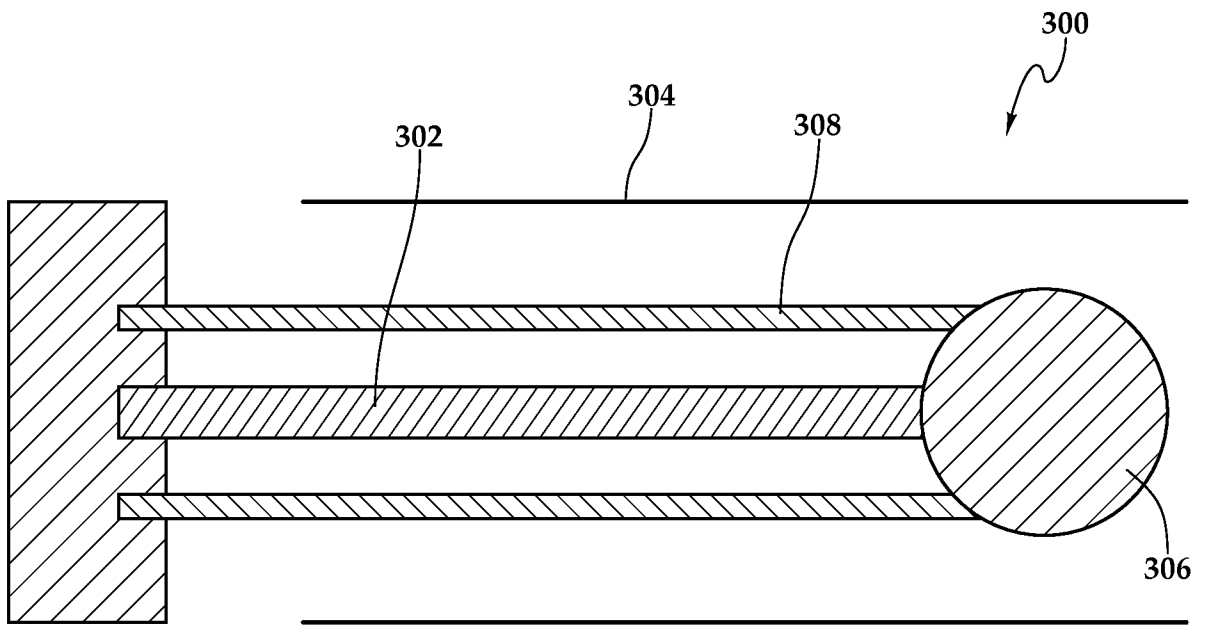


Fig. 6



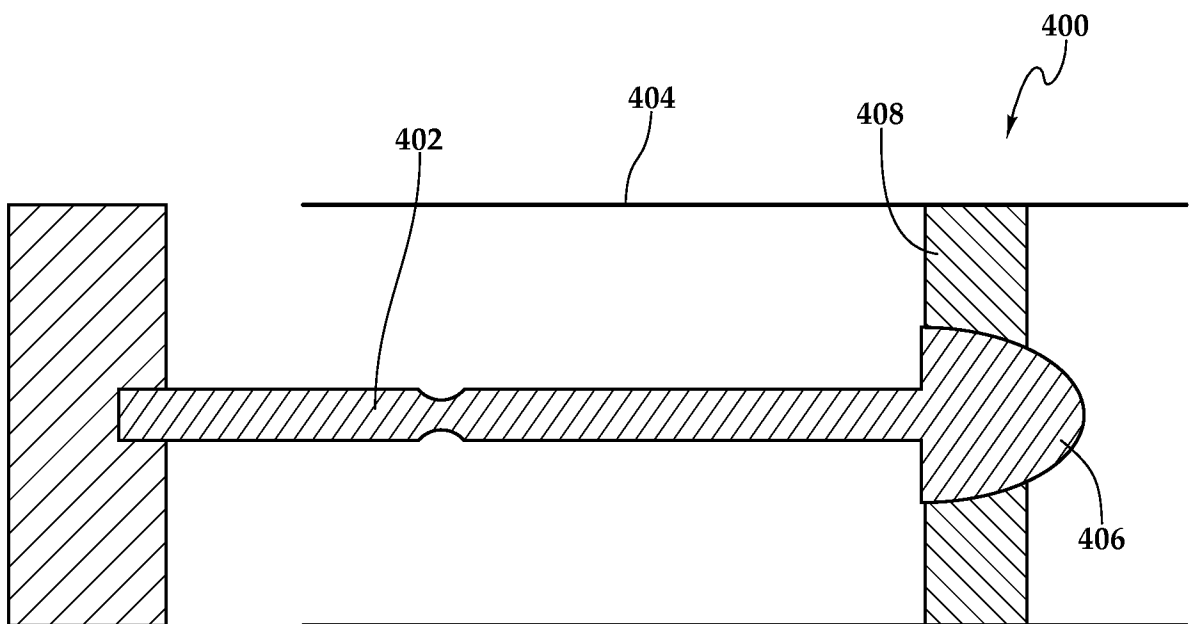


Fig. 7

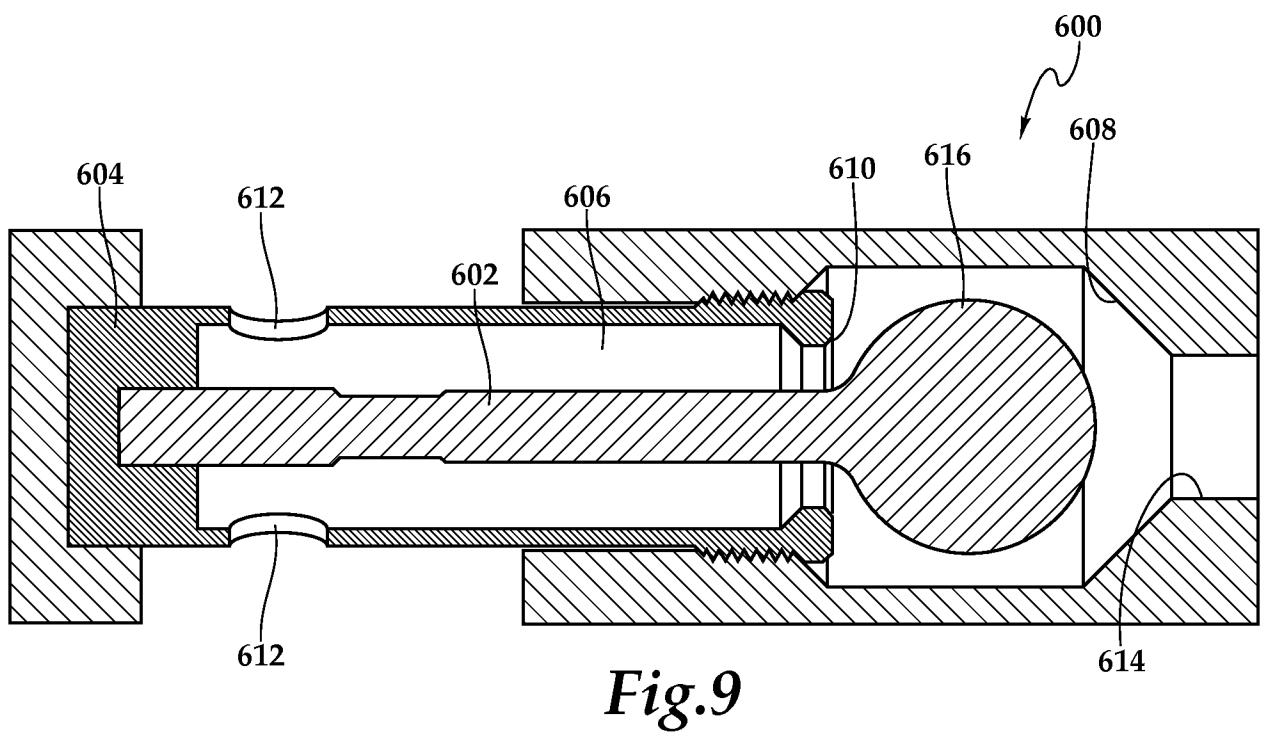

8/8

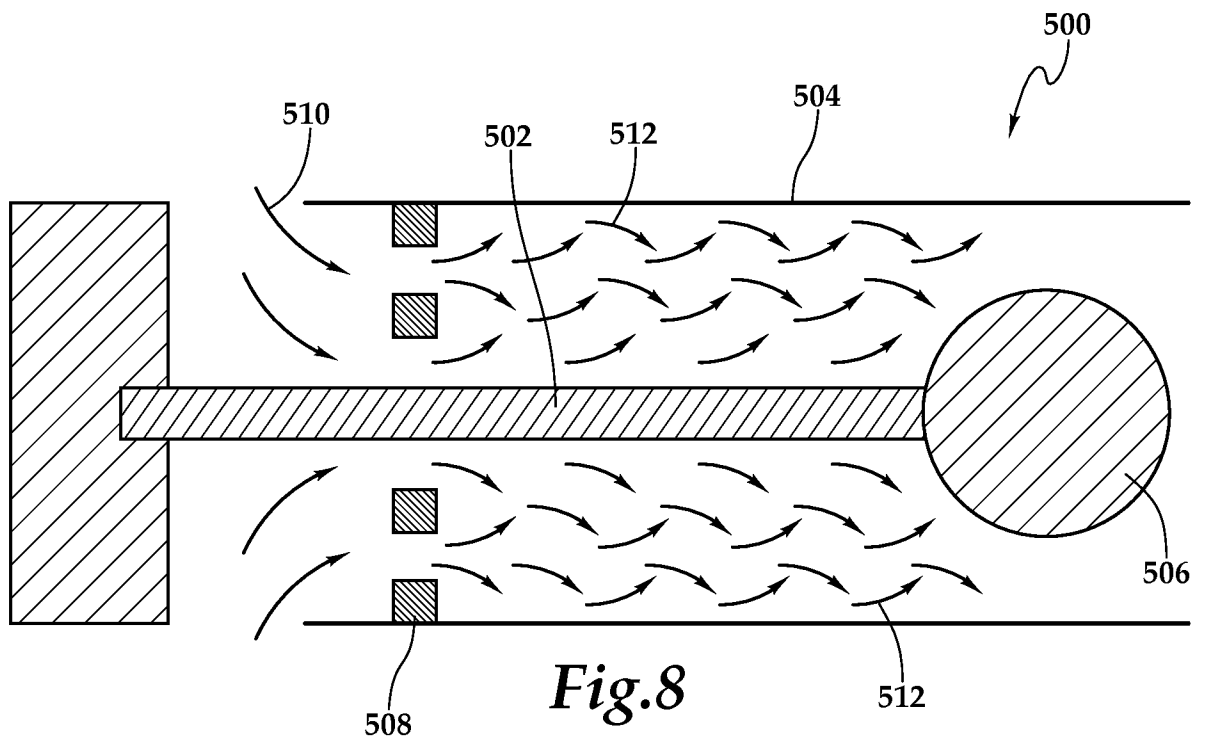

A. CLASSIFICATION OF SUBJECT MATTER***E21B 21/10(2006.01)i, E21B 21/08(2006.01)i, E21B 34/10(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 21/10; E21B 23/06; B01D 21/26; E21B 33/12; E21B 43/08; E21B 43/10; E21B 34/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: flow control assembly, support structure, plug, filter medium

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012-036917 A2 (HALLIBURTON ENERGY SERVICES, INC. et al.) 22 March 2012 See abstract, page 7 lines 15-31 - page 13 lines 23-31 - page 14 lines 3-29 and figures 2, 5A, 5B	1-7, 10-16, 18-23
Y	See abstract and figures 2, 5A, 5B	8, 9, 17
Y	US 2009-0255686 A1 (RICHARD BENNETT M. et al.) 15 October 2009 See abstract, paragraph 0029 and figure 1	8, 17
Y	US 05771922A A (FISHER; RAYMOND E.) 30 June 1998 See abstract, column 3 lines 27-29 and figure 1	9
A	US 2009-0151925 A1 (RICHARDS WILLIAM M. et al.) 18 June 2009 See abstract, paragraphs 0061-0063 and figure 7	1-23



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 FEBRUARY 2013 (07.02.2013)

Date of mailing of the international search report

08 FEBRUARY 2013 (08.02.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Won Jae

Telephone No. 82-42-481-8416



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/036941

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012-036917 A2	22.03.2012	US 2012-0061088 A1 WO 2012-036917 A3	15.03.2012 22.03.2012
US 2009-0255686 A1	15.10.2009	AU 2004-286216 A1 AU 2004-286216 B2 AU 2010-270958 A1 AU 2010-270958 A1 CA 2543408 A1 CA 2543408 C CA 2765401 A1 CN 100564792 C CN 1882759 A CN 1882759 C0 EP 2446111 A2 GB 2423325 A US 2005-0092363 A1 US 2009-0078408 A1 US 7461699 B2 US 7762342 B2 US 8342240 B2 WO 2005-042915 A1 WO 2011-005460 A2 WO 2011-005460 A3 WO 2011-005460 A3	12.05.2005 10.06.2010 15.12.2011 13.01.2011 12.05.2005 30.12.2008 13.01.2011 02.12.2009 20.12.2006 20.12.2006 02.05.2012 23.08.2006 05.05.2005 26.03.2009 09.12.2008 27.07.2010 01.01.2013 12.05.2005 13.01.2011 07.04.2011 13.01.2011
US 05771922A A	30.06.1998	None	
US 2009-0151925 A1	18.06.2009	AU 2008-338356 A1 AU 2008-338356 A1 CN 101903603 A GB 201009610 D0 GB 2470489 A WO 2009-079612 A1	25.06.2009 25.06.2009 01.12.2010 21.07.2010 24.11.2010 25.06.2009