



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ :

A63G 31/16

A1

(11) International Publication Number:

WO 92/17256

(43) International Publication Date:

15 October 1992 (15.10.92)

(21) International Application Number: PCT/US92/01882

(22) International Filing Date: 10 March 1992 (10.03.92)

(30) Priority data:

675,662

27 March 1991 (27.03.91)

US

(71) Applicant: UNIVERSAL CITY STUDIOS, INC. [US/US]; 5161 Lankershim Boulevard, North Hollywood, CA 91601 (US).


(72) Inventors: BARR, Craig, K. ; 6301 Honolulu #11, Tujunga, CA 91042 (US). ALEXANDER, Peter, N. ; 1741 Via Genoa, Winter Park, FL 32789 (US).

(74) Agents: OHRINER, Kenneth, H. et al.; 611 West Sixth Street, 34th Floor, Los Angeles, CA 90017 (US).

(81) Designated States: AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), MC (European patent), NL (European patent), SE (European patent).

Published*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: RIDE ATTRACTION

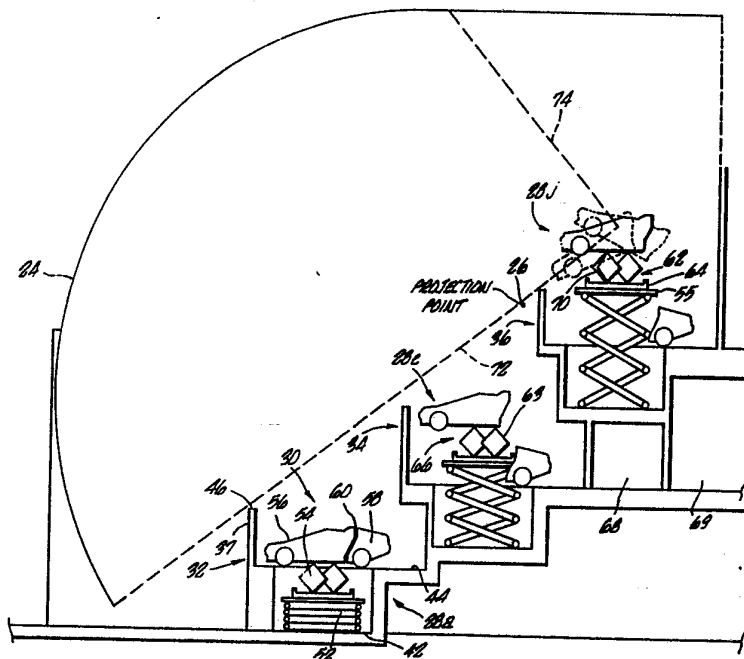

(57) Abstract

A ride attraction has a stationary domed projection screen (24) and a stationary projector, a plurality of motion bases (62) with each supporting a viewer platform (55) or vehicle (56). An elevator (52) is provided for lifting the vehicle out of a staging room (44) to a viewing position (46). The motion bases are mutually arranged with respect to each other such that a passenger in any vehicle can view substantially the entire screen but not any other vehicle within the theater. Actuators beneath each vehicle move the vehicle in three dimensions in coordination with the projected motion picture.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
DE	Germany	MC	Monaco	TG	Togo
DK	Denmark			US	United States of America

DESCRIPTIONRide AttractionField of the Invention

The field of the present invention is ride attractions.

Various ride attractions having a moving viewer
5 platform and a motion picture or video display have been
developed for use in various amusement and educational
applications. For example, Heilig, U.S. Patent No.
3,469,837, discloses an experience theatre having a
concave hemispherical projection screen covering
10 substantially the entire normal field of vision of a
spectator viewing the screen from a seated position. The
viewing chair in which the viewer is seated is
mechanically articulated by applying controlled movement
to the chair to promote awareness of body position
15 conforming to body attitude portrayed by a particular
motion picture scene. The viewer seats are arranged in a
plurality of stacked levels all facing the hemispherical
screen.

Manabe, U.S. Patent No. 4,478,407, describes a
20 monitor game machine having a cockpit or driver cabin in
which a player is seated. A video monitor is positioned
at the front of the cockpit and a steering device is
intended to be operated by the player in response to
pictures displayed on the screen of the monitor. The
25 driver or player seat is inclined backward and forward,
and right and left, in response to the movement of the
steering device.

Trumbull, U.S. Patent No. 4,066,256, discloses an
amusement ride having a passenger holding frame which is
30 supported at three locations on hydraulic rams that can
tilt the frame or move it up and down. A film projector
and viewing screen are connected to the frame and move
with it. When the motion picture projected onto to the

viewing screen simulates the view from a vehicle that is turning, the rams operate to tilt the vehicle to simulate the centrifugal forces that would typically result from such a turn. Correspondingly, the passenger holding frame
5 is moved by the rams rapidly up or down to correspond to vertical accelerations perceived by the passenger.

Fogerty, U.S. Patent No. 4,251,140, discloses a ride assembly for simulating travel having a housing on a moveable base which carries seated passengers. A motion
10 picture film projector in combination with a sound system are disposed on the base and a motion picture is projected on a spherical inner surface of the housing. Motors independently drive carriage members as determined by a control circuit in order to move the base in synchronism
15 with movement in the projected motion picture. The motion of the base is controlled to simulate a scene moving relative to and exteriorally to the housing as viewed by the passengers.

Browning, et al., U.S. Patent No. 4,642,945,
20 describes an entertainment structure intended to serve as a cinematic auditorium. Theatre style seating is provided on a decking support plate which may be tilted and rotated. In the presentation of a cinematic program, the viewers' perception of the action projected onto the
25 screen is enhanced by such rotation and tilting being synchronized with the visual and sound track of the program. A control computer block can be used to effect rotation and/or tilting of the support plate.

While these and other ride attractions may offer
30 various advantages and features, they are typically accompanied by distractions such as the presence of and movement and noise or voices from other audience members. In addition, although these known ride apparatus may have met with varying degrees of success, so far as is known,
35 no presently available ride attraction offers the rider or passenger a unique multisensory experience with a highly

realistic program due to a novel composition and combination of ride elements.

It is therefore an object of the invention to provide a novel ride attraction wherein several of the passengers' senses are simultaneously stimulated to create a realistic sensation of motion.

It is a further object of the invention to provide such a ride attraction which is capable of handling a relatively large number of passengers simultaneously.

It is yet another object of the invention to provide such a ride attraction wherein the passengers perceive only the vehicle in which they are seated and none of the other vehicles in the ride attraction theatre.

Summary Of The Invention

To this end, a ride attraction includes a theatre containing a projection screen, a stationary projector for projecting moving images on the screen and a motion base supporting a viewer platform. Actuators are provided for elevating the viewer platform from a staging room to a viewing position with the screen viewable from the viewer platform in the viewing position. Actuators linked to a controller move the viewer platform in coordination with the moving images projected by the stationary projector such that a sensation of movement in three dimensions in space and acceleration in these directions is perceived by the passengers.

Preferably, the viewer platform is a vehicle having an audio/video monitor. An emitter for dispersing an effects vapor such as Nitrogen gas (for a fog or cloud effect) or scented air (e.g., simulating a beach, forest, etc.) may be provided forward of the firewall and dash of the vehicle. Most desirably, the projection screen is generally spherically shaped with a high resolution image projected onto the concave viewing surface of the screen facing the passengers. A motion controller is provided for independently controlling pitch and front/back

actuators or hydraulic cylinders. The motion bases are mutually arranged with respect to each other such that a passenger can view the screen but not any other vehicle in the theatre, to enhance the realism of the viewer
5 experience.

Preferably, a plurality of ride units are arranged on three tiers within the theatre with each ride unit having a staging room having an entrance, floor, walls, and an open ceiling. A pit or trench in the floor contains a
10 lift joined to the motion base supporting a vehicle. The lift is actuatable to elevate the motion base from a loading position where the vehicle is substantially aligned with the floor to a viewing position where the vehicle is above and outside of the staging room. With
15 the vehicle in the viewing position, substantially the entire screen is within the line of sight of each passenger but the other vehicles are screened from the passengers' line of sight. The distraction of the other vehicles is thereby eliminated.

20 A method for operating a ride attraction includes the steps of seating passengers in a plurality of vehicles on ride units arranged so that no viewer can see any other ride unit. A motion picture is projected by a stationary projector onto a stationary domed screen facing the ride
25 units. The vehicles are moved in coordination with the projected motion picture such that the passengers perception of pitch, roll and front/back movement of the motion picture is substantially matched by the movement of the vehicle.

30 Brief Description Of The Drawings

Other objects and features of the present invention will become apparent from the following detailed description taken in connection with the accompanying drawings which disclose one embodiment of the invention.
35 It is to be understood, however, that the drawings are

designed for the purpose of illustration only and are not intended as a definition of the limits of the invention.

In the drawings, wherein similar reference characters denote similar elements through the several views:

5 Figure 1 is a schematic plan view of the ride attraction theatre of the invention;

 Figure 2 is a schematic front view of the theatre;

 Figure 3 is schematic side view of the ride attraction of Figures 1 and 2;

10 Figure 4 is a schematic fragment front view of a ride unit;

 Figure 5 is a schematic side view of the vehicle of the ride unit of Figure 4;

 Figure 6 is a front view of the vehicle shown in
15 Figure 5;

 Figure 7 is a top view thereof; and

 Figures 8a-c are schematic interconnect diagrams for the present ride attraction.

Detailed Description Of The Preferred Embodiment

20 Referring now in detail to the drawings, as shown in Figure 1, the present ride attraction 20 is contained within a building or theatre 22 having a domed screen 24. A projector 27 is located at a predetermined projection point 26. The projector runs extra large (70 mm./15 p.)
25 film using an OMNIMAX or IMAX system and projects motion pictures onto the approximately 80 foot domed screen 24. In a preferred embodiment, two theatres 22 are constructed side by side in a single building.

 Referring to Figures 1 and 2, ride units 28a-1 are
30 arranged in a vertically and horizontally staggered plan with the ride units aligned to face the center of the domed screen 24. The ride units 28a-1 are arranged on a first tier 32 (containing ride units 28a-c), a second tier 36 (containing ride units 28d-h) and a third tier 36
35 (containing ride units 28i-1).

As shown in Figures 3 and 4, each ride unit 28a-1 has a 3-level construction 30 having a first or base level 42, a second or staging level 44, and a third or viewing level 46. A front wall 37 and exterior ride unit walls 38 define a staging room 40 at the staging level 44. A ceiling or roof 50 partially covers the top of the staging room 40 with an opening 48 in the roof 50 centrally located over the staging room 40. A lift 52 is secured on the first or ground level 42 and supports a platform 55 having a rotator 64. A motion base 62 comprising three spaced apart linear actuators or hydraulic cylinders 63 extends from the platform 55 to a vehicle 56. Each ride unit 28a-1 also is associated with a waiting room 68 joined to a hallway 69 so that passengers may orderly enter into the staging room 40.

Referring to Figures 5 and 7, a vehicle frame 76 substantially underneath the vehicle 56 provides jacking points for attachment of the actuators 63 in a three-point triangular configuration (front jacking points 84 and 86 and rear jacking point 88). The vehicle frame 76 also supports a fiberglass vehicle body 78 representative of a sports car.

To facilitate movement of the vehicle 56, the vehicle body 78 and vehicle frame 76 have a separable back or rear portion 58 configured to match with the forward section of the vehicle 56 along a separation line 60. The separation line 60 is designed so that it is not readily perceptible or visible.

As shown in Figures 5-7, the vehicle 56 includes gull-wing doors 58 and a dash 90 having an audio/video monitor 92. The passengers 80 are seated four across within the vehicle 56 with the rear passengers at an elevated seating level 96 in comparison to the front passengers seating level 94. An effects generator 98 is provided on the vehicle 56 just forward of the dash 90 and provides special effects such as a Nitrogen fog, "smellovision" or scents, as well as a blower or fan to

provide for "wind", to augment the passengers' ride attraction experience.

Figures 8a-c illustrate a preferred embodiment for controlling the ride attraction 20. As shown in Figure 8a, a pre-show equipment room 100 contains a pre-show control cabinet 102 having power controls 104, animation controls 106, and video equipment 108. A video cable 110 connects the video equipment 108 to the pre-show video monitors located in the waiting rooms 68. Similarly, audio and accessory cables 116 extend to the waiting room 68. In the embodiment having two complete ride attractions 20 within adjoining theatres 22, the controls and cables are duplicated.

As shown in Figure 8b, an audio control room 118 contains an audio system 120, public address systems 122 and an intercom system 124, connected to the waiting room 68 and ride units 28a-1. An operation control booth 126 is provided within the theatre 22 to house the primary ride attraction controls. A hydraulic equipment room 128 having hydraulic power units 130, an N₂ equipment room having an N₂ monitor 134 and a projection equipment room 136 having a projection controller 138, are all linked to the operations control booth and to the ride units 28a-1. A dimmer room 140 has lighting equipment 141 and a lighting controller 142. Video disc players 146 are linked to the operations control booth 126 and the ride units 28a-1, as are floor greeters 148a-c and floor loaders 150a-e.

In operation, passengers walk through hallway 69 into the waiting room 68 associated with each ride unit 28a-1. The waiting room 68 includes audio/visual presentations to entertain the passengers prior to experiencing the ride attraction. Passengers move, eight at a time, into the staging room 40 and are seated in the vehicle 56 while the monitors 92 within the vehicle continue with e.g. a ride related audio/visual presentation.

The staging room 40 is configured to represent a garage with the inside walls 39 of the staging room 40 having, for example, garage equipment thereon. Due to the control of the lighting and the configuration of the staging room 40, the passengers do not perceive the top opening 48, but rather perceive that the vehicle 56 is within a completely enclosed space. After the passengers 80 are seated and the doors 82 are closed, the lift 52 is activated to elevate the vehicle 56 and motion base 62 up through the opening 48 to the viewing level 46. This may be performed slowly and smoothly such that the passengers are generally unaware of the elevation of the vehicle 56.

Once at the viewing level 46, the motion picture begins and the vehicle is moved in space in coordination with the images projected onto the screen 24. Due to the configuration of the ride units 28a-1 within the theatre 22, the passengers 80 within the various vehicles 56 cannot see any of the other vehicles within the theatre 22. As best shown in Figure 3, the line of sight of any passenger with the vehicle 56 at the viewing level 46 is limited to the solid angle defined by the line of sight decline 72, the line of sight elevation 74, and the sidewalls 38 of the ride units 28a-1. The effects generator 98 emits chilled nitrogen (N_2) gas and/or scents or creates "wind" in timed sequence with the projected motion pictures. A sound system is provided within the vehicle to augment the physical feeling as well as audio component of the ride experience.

To create a fog effect, nitrogen (N_2) gas is delivered from an insulated pressurized liquid nitrogen piping system to a fog effect manifold positioned in the hood of the vehicle in front of the passenger compartment. The manifold 98, in timed sequence, sprays a fog layer around and over the passengers' heads. The fog layer is adjustable by exchanging the manifold nozzles or adjusting the system pressure. The manifold 98 has 8 or more

digitally (on/off) controlled valves for releasing a fog burst.

The computer controls, as shown in Figure 8, actuate the hydraulic cylinders 63 attached to the jacking points 84, 86 and 88. By this actuation of the hydraulic cylinders 63, the vehicle 56 may be simultaneously pitched towards the front or rear (i.e., nose up or nose down) and canted or rolled from side to side. The rotator 64 similarly provides for angular sweep or yaw movement, all in preprogrammed coordination with the projected motion pictures. As the motion picture plays, the vehicle, controlled by the motion base system, moves with the ever changing horizon line of the film. The motion bases are designed to move the vehicles in a roll of plus or minus 15 degrees and also in a pitch of plus or minus 15 degrees. At the conclusion of the ride, the lift 52 lowers the vehicle 56 back to the staging level 44. The passengers then exit through an exit hallway and the next group of passengers enters.

Thus, while only a single embodiment of the present invention has been shown and described, it will be obvious that many changes and modifications may be made thereunto, without departing from the spirit and scope of the invention.

Claims

1. A ride attraction comprising:
a projection screen;
a stationary projector for projecting moving images on said screen;
at least one motion base supporting a viewer platform;
means for elevating said motion base and viewer platform from a staging room to a viewing position with said screen viewable from said viewer platform in said viewing position;
means for moving said viewer platform in coordination with moving images projected by said stationary projector.
2. The ride attraction of claim 1 wherein said viewer platform is a vehicle having viewer seating.
3. The ride attraction of claim 2 further comprising an audio/video monitor within said vehicle.
4. The ride attraction of claim 2 further comprising means for emitting an effects vapor disposed in between said screen and viewer seating.
5. The ride attraction of claim 1 wherein said screen is domed and has a concave viewing surface, and

said projector is disposed to project onto said concave viewing surface.

6. The ride attraction of claim 1 wherein means for moving is disposed on said motion base and comprises actuators for producing pitch, roll and front-to-back movements of said platform.

7. The ride attraction of claim 6 wherein said means for moving further comprises a motion controller for independently controlling said pitch, roll and front-to-back actuators.

8. The ride attraction of claim 7 wherein said actuators are hydraulic cylinders.

9. A ride attraction comprising:
a projection screen;
a stationary projector for projecting motion pictures on said screen;
a plurality of motion bases, each motion base supporting a viewer platform;
means for elevating each motion viewer vehicle out of a staging room to a viewing position, said motion bases mutually arranged with respect to each other such that a viewer on any motion base can view the screen but not any other viewer platform; and

means for moving each viewer vehicle on its respective motion base in coordination with the motion pictures.

10. The ride attraction of claim 9 wherein said plurality of motion bases are disposed on three tiers.

11. The ride attraction of claim 10 wherein three motion bases are disposed on a first tier, five motion bases are disposed on a second tier and four motion bases are disposed on a third tier.

12. The ride attraction of claim 11, wherein said first tier is nearest to and said third tier furthest from, said screen.

13. The ride attraction of claim 9 wherein each viewer entry room shares at least one interior wall with another viewer entry room.

14. The ride attraction of claim 12 wherein said motion bases are symmetrically disposed on either side of said projector.

15. The ride attraction of claim 9 further comprising a waiting room disposed adjacent to each staging room.

16. A ride attraction comprising
- a plurality of ride units arranged on at least two tiers within a ride attraction structure;
 - a domed viewing screen;
 - a stationary projector;
 - each ride unit comprising a staging room having an entrance, floor, walls, and an at least partially openable ceiling, a pit disposed underneath the floor, a lift disposed in the pit and joined to a motion base supporting a vehicle, said lift actuatable to elevate the motion base from a loading position wherein the vehicle is substantially aligned with the floor, to a viewing position wherein said vehicle is disposed above and outside of said staging room, said motion base having means for moving the vehicle in coordination with motion pictures projected on the screen;
 - said ride units arranged within said structure such that with the vehicles in their viewing positions, substantially the entire screen is within a line of sight of each vehicle and no vehicle is within a line-of-sight of any other vehicle.

17. The ride attraction of claim 16 further comprising a frame showing three spaced apart jacking points attached beneath said vehicle.

18. The ride attraction of claim 16 wherein said means for moving comprises a controller electrically

linked to said projector and to first, second, third and fourth actuator drives, said first, second and third actuator drivers driving first, second and third linear elevational actuators attached to a frame supporting said vehicle in a triangular pattern thereon, for producing pitch and roll movement of said vehicle, said fourth actuator driver driving a fourth rotational actuator for producing yaw movement of said vehicle, said controller simultaneously controller said actuator drivers such that said vehicle is rotationally moved in three axes in synchronicity with the relative camera movement used to produce the motion picture.


19. A method for operating a ride attraction comprising the steps of:

seating viewers in a plurality of vehicles on ride units arranged such that no viewer can see any other ride unit;

projecting a motion picture onto a screen facing said ride units;

moving the vehicles in coordination with the projected motion picture such that a viewer's perception of pitch, roll and yaw movement of the motion picture is substantially matched by pitch, roll and yaw movement of said vehicle.

20. The method of claim 19 further comprising the step of releasing a vapor in between the viewers and the screen.

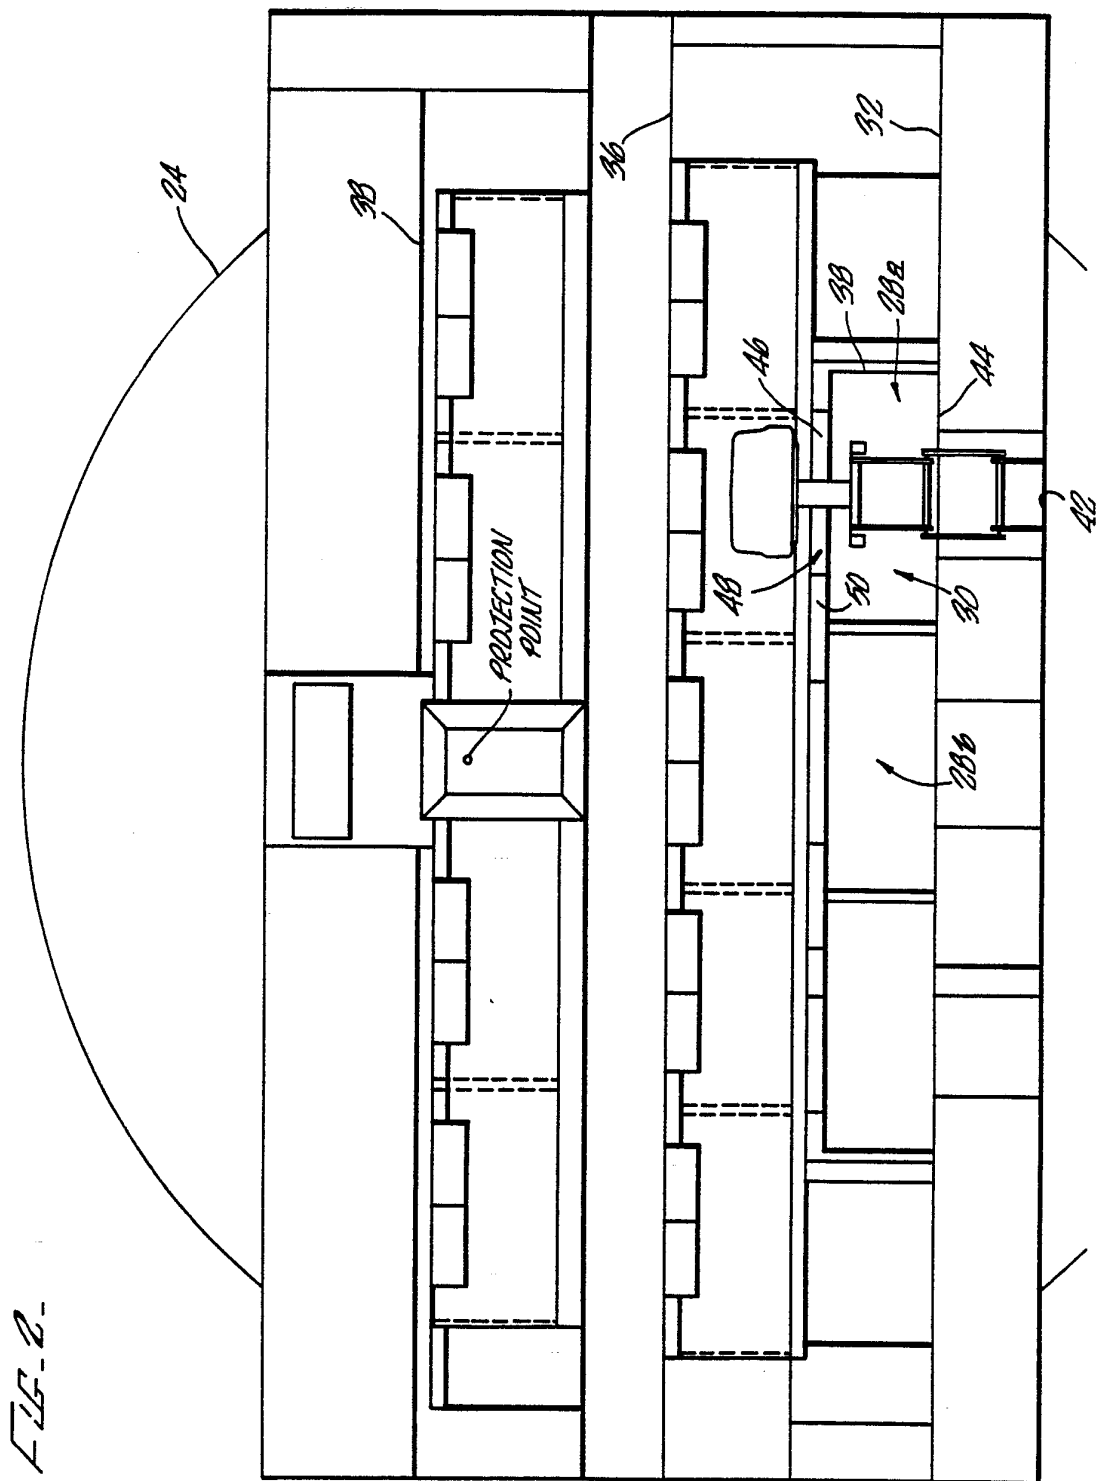

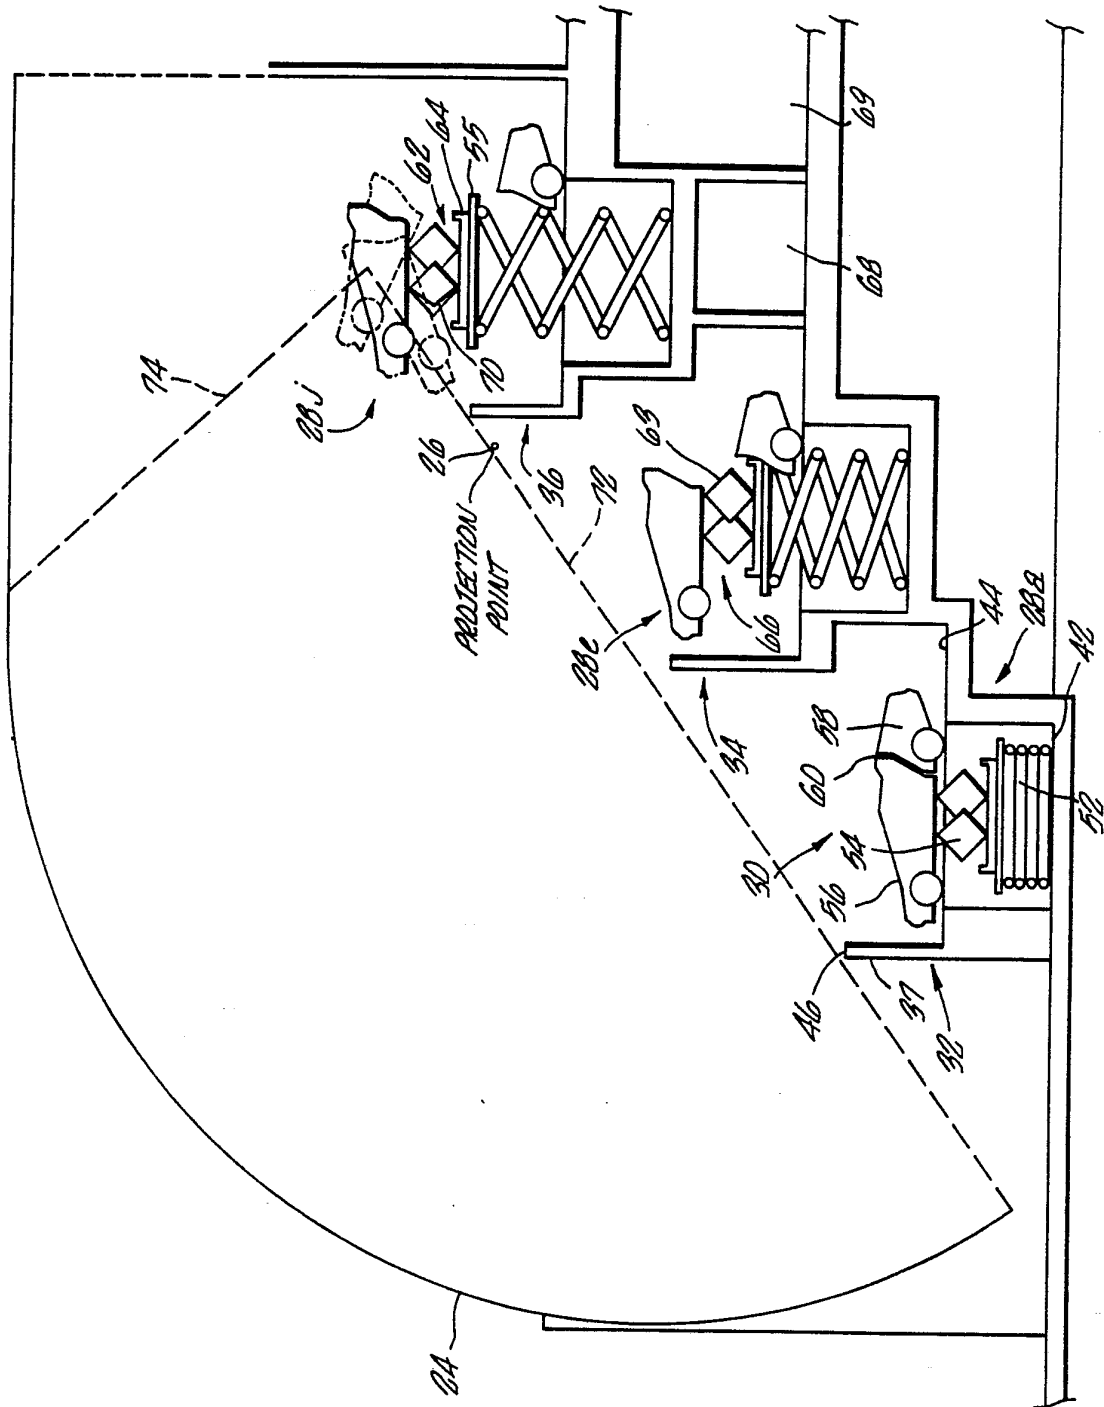


FIG. 3.

FIG. 4.

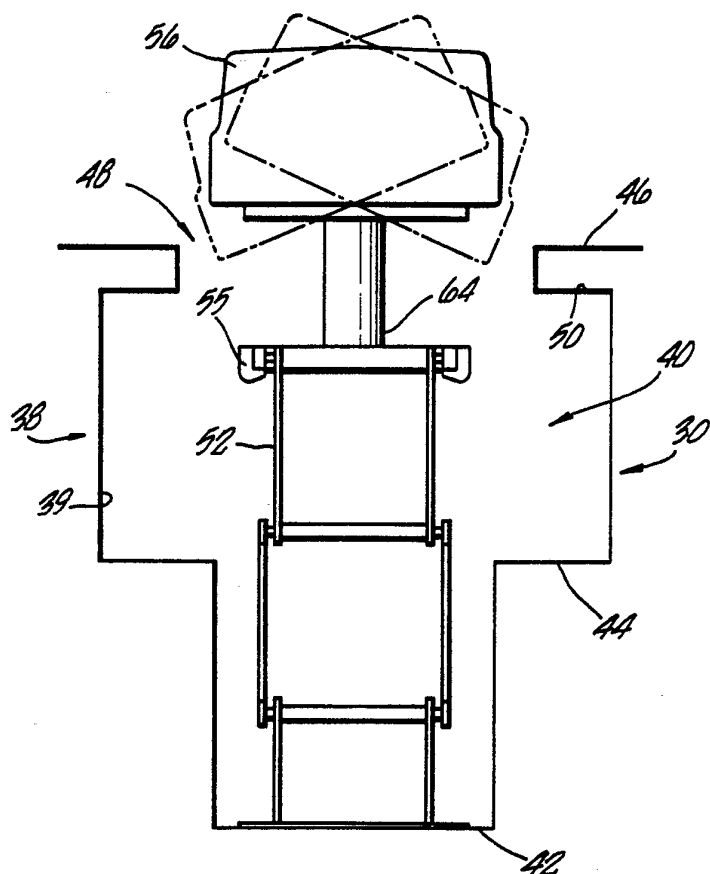
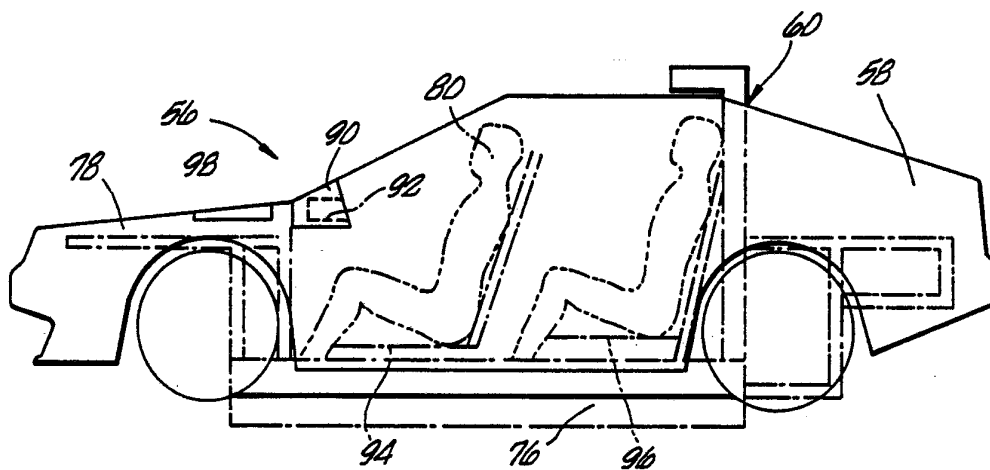


FIG. 5.





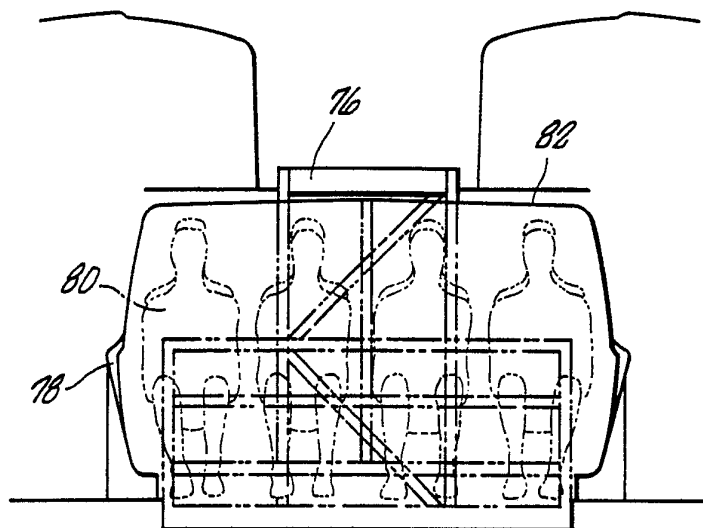


FIG. 6.

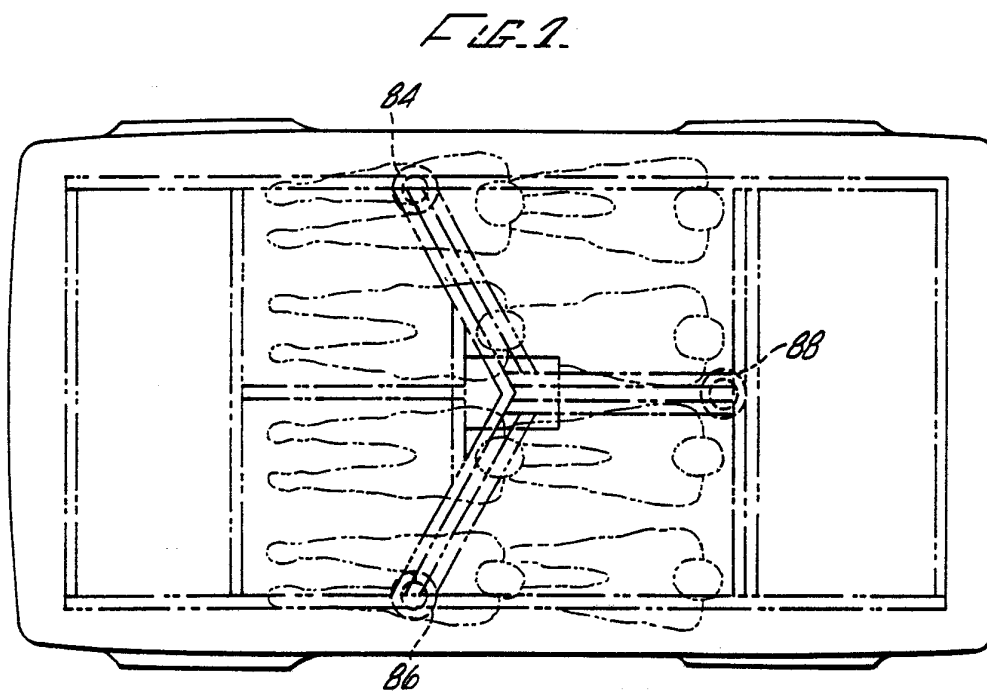

6/8

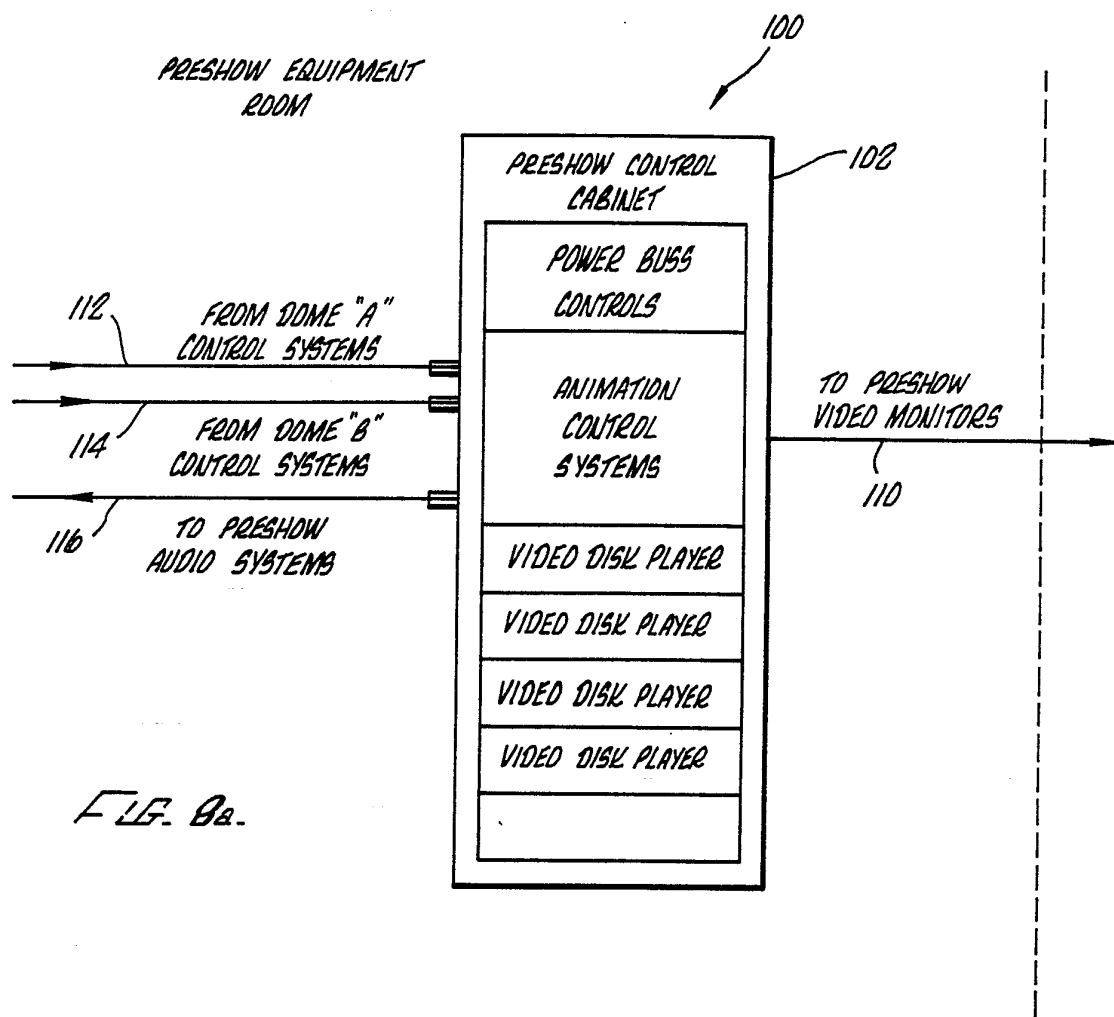

SUBSTITUTE SHEET


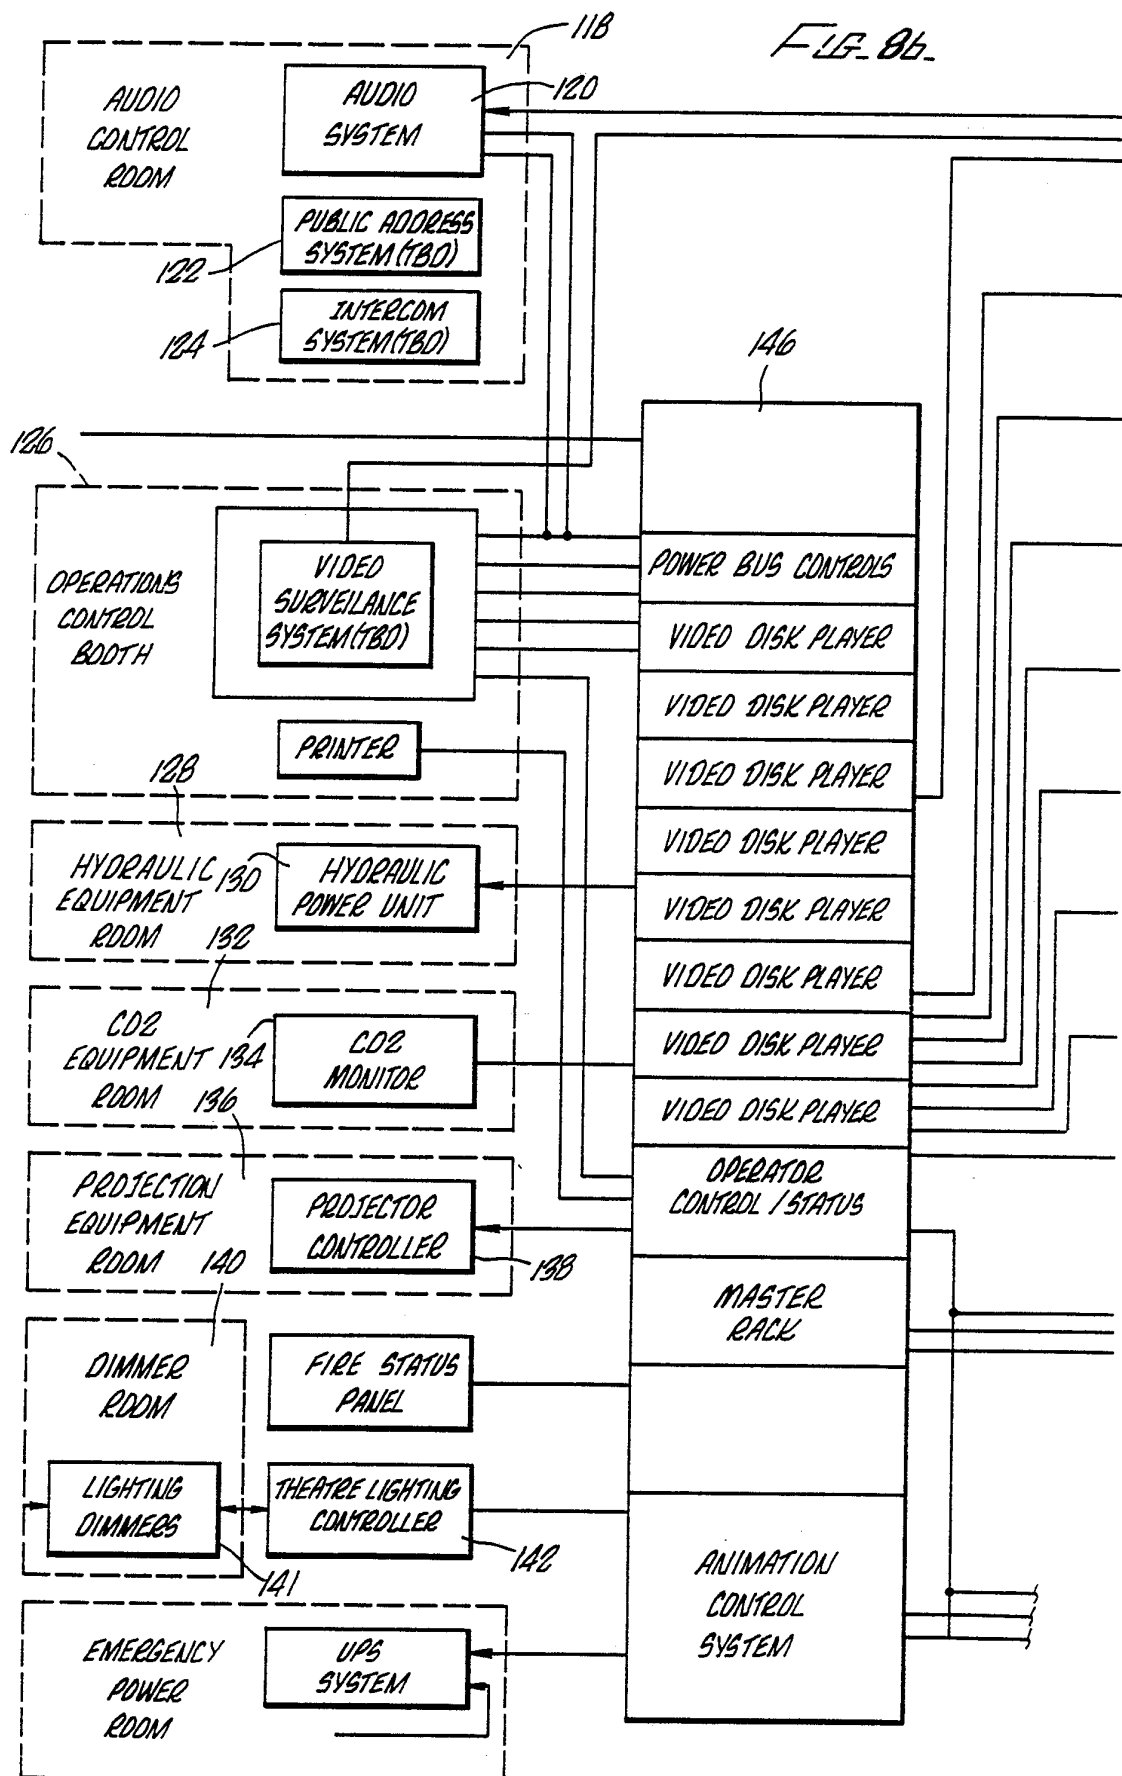


FIG. 8c.

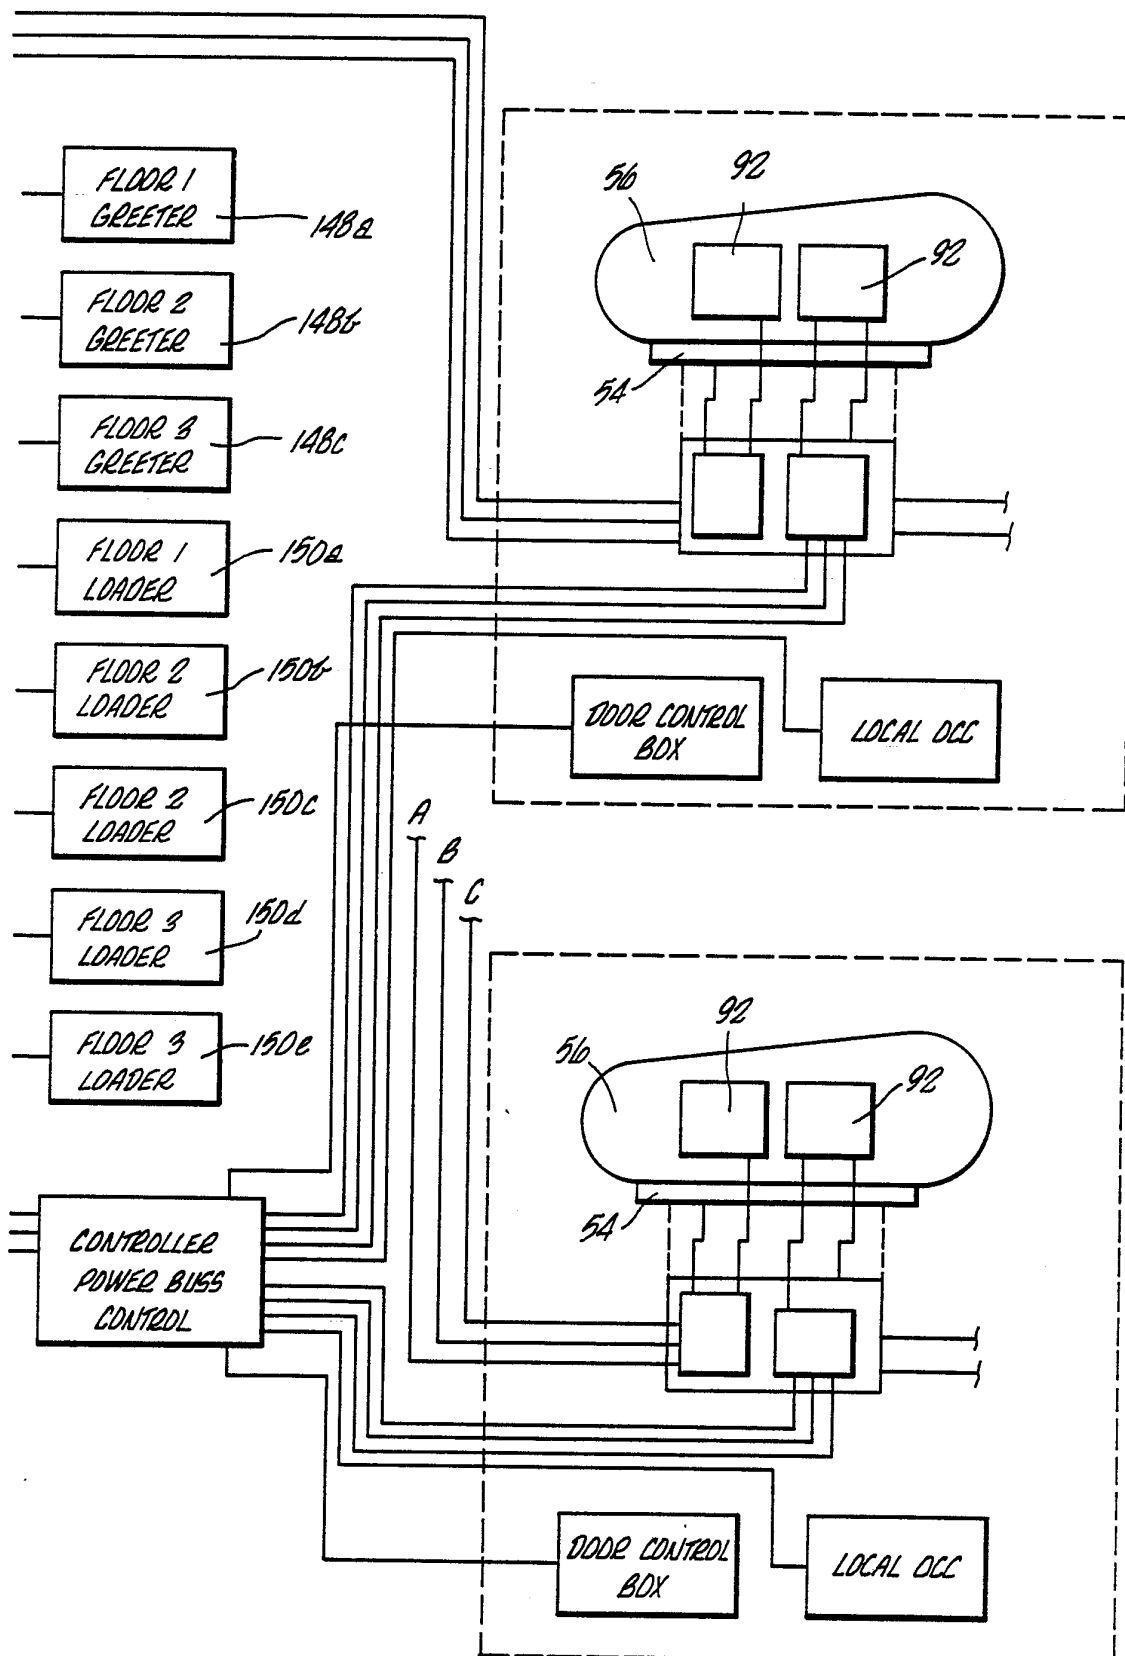

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/01882

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :A63G 31/16

US CL :472/60

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 472/59,61,57

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,798,376 (TRUMBULL ET AL.) 17 January 1989, See the entire document.	1-20
A	US, A, 4,897,849 (HILLINGSWORTH, III, ET AL.) 14 November 1989, See the entire document.	1-20

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 21 JULY 1992	Date of mailing of the international search report 10 AUG 1992
Name and mailing address of the ISA/ Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer RICHARD E. CHILCOT, JR.
Facsimile No. NOT APPLICABLE	Telephone No. (703) 308-2487