



(51) International Patent Classification:
H04B 7/06 (2006.01)

(21) International Application Number:
PCT/US2016/040430

(22) International Filing Date:
30 June 2016 (30.06.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/193,243 16 July 2015 (16.07.2015) US
15/019,084 9 February 2016 (09.02.2016) US

(71) Applicant (for all designated States except US): **TYCO FIRE & SECURITY GMBH** [CH/CH]; Victor Von Bruns-Strasse 21, 8212 Neuhausen Am Rheinfall (CH).

(72) Inventors; and

(71) Applicants (for US only): **SANSUR, Michael** [US/US]; 17342 Harding Canyon Rd., Modjeska, CA 92676 (US).
SIMON, Pierre-Michel, G. [FR/FR]; 9 Rue Marie Espelette, Gradignan (FR).

(74) Agents: **SAAR, Leah, C.** et al.; Tyco International, 6600 Congress Avenue, Boca Raton, FL 33487 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: OPTICAL LOCATING SYSTEM

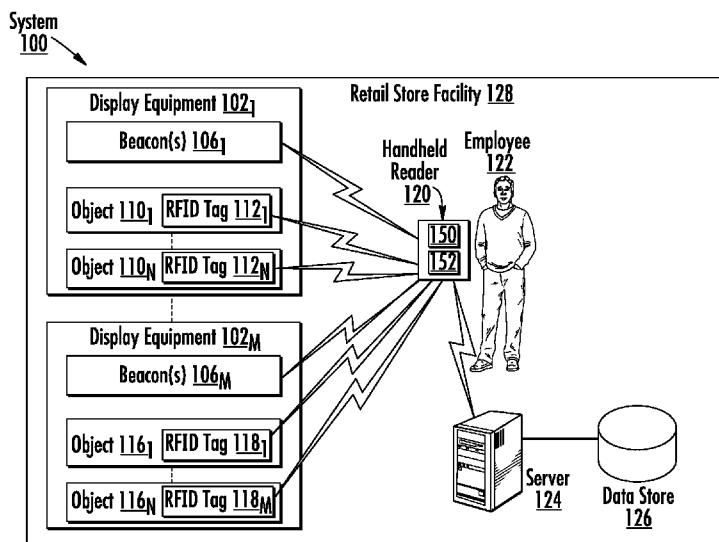


FIG. 1

(57) Abstract: Systems and methods for uniquely identifying areas within a facility for location services. The methods involve: operating a plurality of beacons disposed within the facility; emitting, from a first beacon of the plurality of beacons, a first beam having a first beamwidth in a manner so as to communicate at least a unique identification code associated with a first physical area of the facility; changing a value for a beamwidth parameter to modify an area of coverage for the first beacon; and emitting, from the first beacon, a second beam having a second beamwidth in a manner so as to communicate at least the unique identification code associated with the first area of the facility, where the second beamwidth is different from the first beamwidth. The changing is performed autonomously by the first beacon or in response to the first beacon's reception of a command from a remote beacon receiver.

OPTICAL LOCATING SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Patent Application No. 62/193,243, filed July 16, 2015. The content of the above application is incorporated by reference in its entirety.

FIELD OF THE INVENTION

[0002] This document relates generally to wireless based systems. More particularly, this document relates to optical systems and methods for locating people and/or items within a facility.

BACKGROUND OF THE INVENTION

[0003] The ability to accurately determine the location of a person or item within a building is a desirable objective. RFID technology has conventionally been used in the identification and tracking of products, equipment, and even people. For example, RFID systems are commonly used in Electronic Article Surveillance (“EAS”) and in logistical and inventory systems for monitoring goods and equipment and recording information on the target item. An RFID system typically includes an RFID reader and an RFID device such as a tag or label. The RFID reader may transmit a Radio-Frequency (“RF”) carrier signal to the RFID device. The RFID device may respond to the RF carrier signal (or interrogator signal) with a data response signal (or authentication reply signal) encoded with information stored on the RFID device. RFID devices may store information such as a unique identifier or an Electronic Product Code (“EPC”) associated with an article or item.

[0004] The RFID technology allows retailers to rapidly and/or continuously identify products, count products and track product locations. As such, the RFID technology offers significant benefits over a physical inventory counting process. By leveraging the RFID technology to increase inventory accuracy, retailers are better able to perform replenishment, service customer requests, manage product recalls or any other activities that rely on inventory data. With this level of inventory visibility, retailers must also take on the additional burden of being able to locate specific products easily and quickly so that they can service the above-listed use cases. Products on the market today to aid in determining a product’s location are either too expensive or not accurate enough to serve this need.

[0005] Indoor proximity systems are well known in the art. One conventional indoor proximity system is known as iBeacon®. iBeacon® employs Bluetooth communication technology to connect to mobile communication devices (e.g., cellular phones). Upon establishment of such connection, the iBeacon® requests and receives first information from each Mobile Communication Device (“MCD”). The first information includes information which has been agreed upon by the cell user for provision to the iBeacon®. The iBeacon® can also push second information to the MCD. The Bluetooth communication technology is based on a 2.45 GHz transmission, and its data rate ranges from 1 Mbit to 24 Mbit.

SUMMARY OF THE INVENTION

[0006] The present disclosure concerns systems and methods for uniquely identifying areas within a facility for location services. The methods involve: operating a plurality of beacons disposed within the facility; emitting, from at least a first beacon of the plurality of beacons, a first beam having a first beamwidth in a manner so as to communicate at least a unique identification code associated with a first physical area of the facility; changing a value for a beamwidth parameter to modify an area of coverage for the first beacon; and emitting, from the first beacon, a second beam having a second beamwidth in a manner so as to communicate at least the unique identification code associated with the first area of the facility. The changing is performed autonomously by the first beacon or in response to the first beacon’s reception of a command from a remote beacon receiver. The second beamwidth is different from the first beamwidth.

[0007] In some scenarios, the value for the beamwidth parameter is changed so that at least two of the beacons have an overlapping area of coverage. Additionally or alternatively, the information specifying the first beamwidth is communicated from the first beacon via the first beam and information specifying the second beamwidth is communicated from the first beacon via the second beam. Also, interference may be minimized between the first beacon and an adjacent second beacon of the plurality of beacons by communicating error correction codes from the first beacon via the first and second beams. Randomized transit timing may be used to minimize interference between the first beacon and an adjacent second beacon of the plurality of beacons.

[0008] In those or other scenarios, each of the plurality of beacons has a known directional emission pattern. Additionally or alternatively, the remote beacon receiver is worn by a person or carried by the person as an accessory of a mobile tag reader.

[0009] In those or yet other scenarios, the methods further involve: determining an inaccurate location of a mobile tag in the facility using a mobile tag reader to read a fixed tag with a known location; and increasing an accuracy of the inaccurate location using the first beacon's known physical location which is associated with the unique identification code emitted from the first beacon via the first or second beam. The mobile tag is considered as being located in a Zone Of Interest ("ZOI") of the first beacon for which the unique identifier has been received by the mobile tag reader and if existing in a vicinity of the fixed tag in close time proximity. A map may be generated and/or displayed that shows at least one of a location of the mobile tag reader relative to the first beacon in multi-dimensional space and a location of the fixed tag relative to the first beacon in multi-dimensional space.

DESCRIPTION OF THE DRAWINGS

[0010] Embodiments will be described with reference to the following drawing figures, in which like numerals represent like items throughout the figures, and in which:

[0011] FIG. 1 is a schematic illustration of an exemplary system that is useful for understanding the present invention.

[0012] FIG. 2 is a block diagram of an exemplary architecture for an optical beacon.

[0013] FIG. 3 is a block diagram of an exemplary architecture for a handheld reader.

[0014] FIG. 4 is a block diagram of an exemplary architecture for a beacon receiver.

[0015] FIG. 5 is a block diagram of an exemplary architecture for a server.

[0016] FIG. 6 is an illustration showing a cross-sectional view of two adjacent beacons each with three different beamwidths and a receiver in motion encountering different beacon zones.

[0017] FIGS. 7A-7B (collectively referred to herein as "FIG. 7") provide a flow diagram of an exemplary method for determining a location of a RFID tags within a facility.

DETAILED DESCRIPTION

[0018] It will be readily understood that the components of the embodiments as generally described herein and illustrated in the appended figures could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of various embodiments, as represented in the figures, is not intended to limit the scope of the present disclosure, but is merely representative of various embodiments. While the various aspects of the embodiments are presented in drawings, the drawings are not necessarily drawn to scale unless specifically indicated.

[0019] The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by this detailed description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

[0020] Reference throughout this specification to features, advantages, or similar language does not imply that all of the features and advantages that may be realized with the present invention should be or are in any single embodiment of the invention. Rather, language referring to the features and advantages is understood to mean that a specific feature, advantage, or characteristic described in connection with an embodiment is included in at least one embodiment of the present invention. Thus, discussions of the features and advantages, and similar language, throughout the specification may, but do not necessarily, refer to the same embodiment.

[0021] Furthermore, the described features, advantages and characteristics of the invention may be combined in any suitable manner in one or more embodiments. One skilled in the relevant art will recognize, in light of the description herein, that the invention can be practiced without one or more of the specific features or advantages of a particular embodiment. In other instances, additional features and advantages may be recognized in certain embodiments that may not be present in all embodiments of the invention.

[0022] Reference throughout this specification to “one embodiment”, “an embodiment”, or similar language means that a particular feature, structure, or characteristic described in connection with the indicated embodiment is included in at least one embodiment of the

present invention. Thus, the phrases “in one embodiment”, “in an embodiment”, and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

[0023] As used in this document, the singular form “a”, “an”, and “the” include plural references unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. As used in this document, the term “comprising” means “including, but not limited to”.

[0024] The present disclosure concerns low cost systems and methods for uniquely identifying areas within a facility for location services including inventory systems. Each system comprises a plurality of beacons and a beacon receiver. The beacons operate in terms of having a variable beamwidth control to change the area of coverage and to allow for varying installations (e.g., different ceiling heights). The beacon beamwidths can be tuned such that they have the same area of coverage regardless of the respective distances between the beacons and objects of interest (e.g., a floor or shelf). Information is communicated from the beacons to the beacon receiver specifying which beamwidth is being used thereby at a particular time. Error correction codes can also be embedded in the signals sent from the beacons so that any interference between adjacent beacons can be detected. Additionally or alternatively, the beacons employ randomized transit timing for minimizing interference between adjacent beacons.

[0025] During operation, the beacons each broadcast a unique identification code that illuminates an area to form an association between a physical location and the unique identification code. The beacons may be positioned on ceilings, walls and furniture to form Zones OF Interest (“ZOI”). The beacons are designed to be inexpensive, small, lightweight, autonomous, simple to install, long lasting, and energy efficient. In some scenarios, the beacons implement energy harvesting circuits. The beacon receiver (when positioned within a zone) determines its physical location by decoding the unique identification code. The beacon receiver’s physical location may then be used to determine the location of tags through association.

[0026] Notably, the present solution preserves inventory time and accuracy with no additional staff training and minimal infrastructure. For example, stationary tags (that are

read by a mobile RFID reader) are considered as being located within the facility. However, this knowledge does not provide an accurate enough location of the fixed tags for certain applications. As such, additional operations are performed to increase the accuracy of the fixed tag's locations. Therefore, once these relatively inaccurate locations of the fixed tags are obtained, additional information can be used to obtain a more accurate determination of the fixed tags' locations within the facility. Also, operations are performed to determine an accurate location of the beacon receiver which is attached to a mobile RFID reader being used to read the fixed tags. Thereafter, a three dimensional map is generated and presented to the user showing the location of the handheld reader and/or the locations of the fixed tags relative to the beacon receiver in three dimensional space.

[0027] This location information is useful for many purposes. For example, the location information can be used to micro-locate items during an inventory process. Knowing accurate locations of items within a facility would be a tremendous feature for warehouse, retailer, hospitals and other applications where tracking items is needed.

[0028] The basic idea of this disclosure can be easily understood in a small retail store context. Let's assume that eight fixed beacons are placed around the walls of the retail store at known locations. Alternatively or additionally, fixed tags (e.g., locator tags) are placed around the retail store. In the beacon scenarios, each beacon transmits a unique identification code and has a known directional emission pattern. A beacon receiver reads the unique identification codes of the fixed beacons while also reading tags coupled to items. The beacon receiver can be worn by a person or carried by the person as an accessory of a handheld tag reader. The tags that are read by the handheld reader are considered as being located in the ZOI of one of the fixed beacons for which a unique identifier has been received by the handheld reader (or an accessory of the handheld reader) and if existing in the vicinity of the fixed tag read in close time proximity.

[0029] The orientation of the beacon receiver can also be determined based on sensor data generated by sensors (e.g., gyroscopes, accelerometers and/or magnetometers) internal to the beacon receiver. The orientation can then be used to align the beacon receiver's optical detector with the beacon's optical emitter.

[0030] Notably, the more RFID tags read by the handheld reader, the more information is obtained to determine how far the handheld reader is from a fixed beacon and/or tag. The

handheld reader can vary its RFID read power and use an averaging technique to improve its location determinations. Once the RFID tag's locations have been determined, the three dimensional map can be updated to show the same.

[0031] Exemplary Systems

[0032] Referring now to FIG. 1, there is provided a schematic illustration of an exemplary system **100** that is useful for understanding the present invention. The present invention is described herein in relation to a retail store environment. The present invention is not limited in this regard, and can be used in other environments. For example, the present invention can be used in distribution centers, factories and other commercial environments. Notably, the present invention can be employed in any environment in which objects and/or items need to be located and/or tracked.

[0033] The system **100** is generally configured to allow improved person and/or item locating within a facility using beacon technology. As shown in FIG. 1, system **100** comprises a Retail Store Facility ("RSF") **128** in which display equipment **102₁, . . . , 102_M** is disposed. The display equipment is provided for displaying objects (or items) **110₁-110_N, 116₁-116_N** to customers of the retail store. The display equipment can include, but is not limited to, shelves, article display cabinets, promotional displays, fixtures and/or equipment securing areas of the RSF **128**. The RSF can also include emergency equipment (not shown), checkout counters and an EAS system (not shown). Emergency equipment, checkout counters, and EAS systems are well known in the art, and therefore will not be described herein.

[0034] Beacons **106₁, . . . , 106_M** are located at strategic locations within the RSF **128**. In some scenarios, the beacons are disposed on display equipment **102₁, . . . , 102_M**, as shown in FIG. 1. Additionally or alternatively, the beacons are disposed on emergency equipment, checkout counters, walls, ceilings, furniture and/or EAS system equipment (e.g., pedestals near an entrance/exit of the RSF). Beacons are well known in the art, and therefore will be described briefly below in relation to FIG. 2. The beacons are generally configured to facilitate a periodic or continuous determination of physical locations of a beacon receiver **150** and/or the objects within the RSF **128**. In some scenarios, the beacons are incorporated into a flexible tape or other flexible structure (e.g., circuit board) with pre-defined spacing

therebetween (e.g., 1-N feet). The flexible structure enables relatively easy installation of the beacons.

[0035] The beacons **106₁**, . . . , **106_M** rely on highly directional signals (such as optical signals) in order to illuminate a well-defined zone (e.g., a shelf). Accordingly, the beacons can include, but are not limited to, optical beacons. A block diagram of an exemplary architecture for an optical beacon **200** is provided in FIG. 2.

[0036] As shown in FIG. 2, the optical beacon **200** comprises at least one optical emitter circuit **208**, a logic controller **210**, a memory **204**, a battery **212** and an optional activation detector **214**. The logic controller **210** modulates an optical emitter to send a unique identification code. In addition to the unique identification code, emitted or transmitted beacon data may include, but is not limited to, beam power, beamwidth, system status (e.g., battery level, temperature, etc.), and/or an error detection code. Multiple optical emitter circuits may be employed by the optical beacon **200** to create multiple beams for better area coverage. These beams may share a common unique identification code or some combination of unique identification codes. The optional activation detector **214** is used to locally activate the beacon **200** from a command sent by the beacon receiver **150**. This serves to reduce beacon power consumption and limit potential signal jamming between adjacent beacons.

[0037] The beacons **106₁**, . . . , **106_M** are positioned so that beams are emitted toward locations where items are stored (e.g., shelves). For example, the beacons may be mounted overhead emitting downward to limit operator body shielding and avoid blocking obstacles. In some scenarios, the beacons would not emit vertically but with certain angles. The coverage of a beacon is the field in which the beacon receiver is able to receive and decode the beacon signals. This field is called the “Zone-Of-Interest” or “ZOI”. The locations of the ZOIs are known. Each ZOI is identified by the unique identification code communicated from a respective beacon. The beacons can be arranged so that their ZOIs do or do not overlap. Overlapping ZOIs provide a means to compensate shadowing from an operator body or obstacles.

[0038] Each ZOI contains the items to be inventoried and located. The size of the ZOI depends on the location accuracy. In some exemplary cases, the ZOI is less than a one (1)

meter radius. The RSF **128** has a plurality of ZOIs. A single ZOI could encompass a single shelf, rack or table. The present invention is not limited to the particulars of this example.

[0039] By correlating RFID tag reads and the location ID received from the beacon, it is possible to determine the location of objects **110₁, . . . , 110_N, 116₁, . . . , 116_N** within the RSF **128**. In this regard, it should be understood that information is stored in a data store **126** that specifies the known locations of the beacons in three dimensional space. This information can be stored in the data store **126** using a server **124**. Server **124** will be described in more detail below in relation to FIG. 5.

[0040] The beacons **106₁, . . . , 106_M** are designed to be inexpensive, light, small, autonomous, easy to mount, long lasting and energy efficient. In this regard, the beacons may comprise an energy harvesting circuit. The energy harvesting circuit can include, but is not limited to, a solar cell array, a rechargeable battery, a super capacitor and/or a voltage converter.

[0041] A beacon receiver **150** is provided for communicating with the beacons **106₁, . . . , 106_M**. In this regard, the beacon receiver **150** is designed to receive beacon signals from the beacons when placed within the ZOIs, respectively. The beacon receiver **150** may be provided as an accessory to a handheld reader **120**, or alternatively worn by an operator of the handheld reader **120** to optimize reception and to avoid the obstruction of beacon signals by the operator's body. The shoulders, head or arms of the operator are relatively good placements to receive highly directional signals from the beacons **106₁, . . . , 106_M**.

[0042] The beacon receiver **150** may use broad and/or multiple sensors pointing at different directions to maximize reception and compensate the operator's movement and motion. The beacon receiver **150** could use the fusion of inertial sensors (e.g., a gyroscope, an accelerometer and/or a magnetometer) to identify the spatial position of the beacon receiver, and therefore the direction of the inertial sensor. In some scenarios, only location IDs received from the sensor pointing up is used. In this case, the inertial sensors are used to determine which sensor is pointing up and therefore which sensor to listen.

[0043] As noted above, the handheld reader **120** is generally configured to read RFID tags **112₁, . . . , 112_N, 118₁, . . . , 118_N**. The RFID tags **112₁-112_N, 118₁-118_N** are respectively coupled to the objects **110₁-110_N, 116₁-116_N**. The RFID and locator tags are described herein as comprising single-technology tags that are only RFID enabled. The present invention is

not limited in this regard. The RFID and locator tags can alternatively or additionally comprise dual-technology tags that have both EAS and RFID capabilities.

[0044] In some scenarios, the handheld reader **120** operates in a static configuration. The operator sets the power and other RFID parameters before reading tags to inventorying the same. The whole inventory of tags is performed with the configuration set at the start of the inventorying process.

[0045] In other scenarios, the handheld reader **120** operates in a dynamic configuration. The handheld reader **120** dynamically adapts its parameters based on whether or not it is present within a ZOI. When the handheld reader **120** is not present within a ZOI, the handheld reader **120** operates in a default mode, i.e., using a maximum power and reading RFID tags only once to ensure inventory accuracy in a timely manner. When the handheld reader **120** is within a ZOI, the handheld reader **120** operates in a location mode, i.e., it toggles between reads at high power and reads at low power. The power used to read an RFID tag is inversely proportional to a tag location confidence factor. That is, the lower the power used to read an RFID tag, the higher the tag location confidence. High power reads ensure inventory accuracy, while low power reads allow location accuracy. In location mode, an RFID tag can be read multiple times to allow the correlation logic to re-allocate an RFID tag from one location to another. The power can be dynamically adjusted depending on the RFID tag density being read. As inventory accuracy has to be maintained, the power applied in location mode can be reduced in case of dense tag population, and vice versa.

[0046] During operation of system **100**, RFID tag location is performed by allocating a ZOI to each RFID tag. The ZOI is identified by the unique identification code received from a beacon when the RFID tags' are being read by the handheld reader **120**. As the beacon position is known and associated with a unique identification code, the physical location of the beacon receiver **150** and/or RFID tag is deduced and located as being within the ZOI of the beacon.

[0047] Notably, the unique identification code is not constantly received while the beacon receiver is in the ZOI. Accordingly, the mode of the handheld reader is maintained for a certain period of time ("latch time") and renewed each time a unique identification code is received. The latch time does not exceed a few seconds as the operator can physically move from one ZOI to another ZOI within a few seconds. For each unique identification code

received, a time window is defined in which occurred tag reads are associated with the location.

[0048] In some scenarios, two or more ZOIs overlap or RFID tags may be read from an adjacent ZOI, which causes cross-reads to occur. A cross-read is a tag read from a first ZOI to a second ZOI. Cross-reads cause location conflicts and may reduce location accuracy. In order to resolve location conflicts, a location confidence is computed for each unique identification code and for each tag involved. The location confidence is computed based on the number of reads, an average Received Signal Strength Indicator (“RSSI”), a max RSSI and the handheld reader’s power level at the time of a tag read. The tag location is deduced from the unique identification code having the highest location confidence value. An RFID tag can be declared between multiple locations if there is no clear winner based on the location confidences.

[0049] In other scenarios, simple logic is employed to determine tag locations. For example, the handheld reader records a time window centered on a timestamp of each received unique identification code. Then for each RFID tag, the timestamp of the read having the highest RSSI is used to retrieve the associated unique identification code if it is included in a recorded time window. The location is deduced from the unique identification code.

[0050] The ZOI coverage has to be known to enable beacon receiver location and/or tag location. This mapping can be done by taking physical measurements. Additionally or alternatively, a fingerprint technique is employed. Using the handheld reader **120** with a touch screen, a user records received unique identification codes while pinpointing (his)her position on a map displayed on the touch screen. By doing so, the ZOIs are mapped to physical locations and maintained in a database.

[0051] The field emitted by a beacon **106₁, . . . , 106_M** could be shaped in order to guarantee that its emitting signals cover the corresponding ZOI. Beacons may contain a control system allowing the beacon receiver to remotely change the beacon beamwidth and range (e.g., by controlling power delivered to an optical emitter circuit **208** of FIG. 2). The beacon receiver would provide a feedback to the operator (visual, audible or vibration) indicating the receiving of unique identification code. Using the feedback and the beamwidth/power remote control, the operator can adjust the beacon to confine the field to

the corresponding ZOI. This operation may be performed once during installation or at least once during operation of the beacon receiver to determine its physical location within a facility. As the beams are highly directional, the beacon receiver **150** would only receive signals from the beacon pointing to its location whatever its position in space. Accordingly, the beacon receiver can more accurately determine its physical location between adjacent beacons by commanding nearby beacons to vary their beamwidths and correlating received optical data with the receiver position.

[0052] Alternatively, beacons may autonomously vary beamwidth and encode beamwidth data into the transmitted data packet to simplify the design of the system **100**. The beamwidths employed can be pre-defined and pre-stored in a data store of the beacons (e.g., at installation time so as to compensate for differences in ceiling heights). An order in which the beamwidths should be used can be pre-defined as well (e.g., at installation time). A change in beamwidth can occur at a pre-defined or pre-specified time (e.g., change the beamwidth after transmission of 2 signals or upon expiration of defined time period).

[0053] A more complex implementation could use multiple beacons emitting in multiple directions from various placements (e.g., ceilings, walls, furniture, etc.). The beacon receiver receives multiple unique location codes from multiple beacons at a time. Knowing the coverage of each beacon, a geometric computation is performed to deduce the beacon receiver's position in space. The position can also be retrieved from a database previously populated by a site survey (beacons fingerprint). The combination of unique location codes is the key to access the location entry of the database. Knowing the beacon receiver's position in space, the location mode of the handheld reader **120** could be applied if detected nearby item storage. The item locations are deduced from the handheld reader's position at the time reads occurred. Additionally, a beacon receiver equipped with directional sensors pointing in various directions can deduce its approximate position in space (roll, pitch and yaw) and location as it would receive specific unique location codes from specific sensors at specific positions. A sampling of those position and location combinations can be stored in a database using the fingerprint method and retrieved later.

[0054] A further useful beacon feature is randomized transmission timing to limit jamming between nearby beacons. Knowing the size of data packets and the associated transmission time, the start of transmission may be scheduled with a randomized timing factor to limit jamming between nearby beacons. Should jamming occur, the error detection

code within data packets permit faulty data to be ignored by the receiver unit. This requires no synchronization between beacons, thus simplifying the system design and reducing cost.

[0055] The placement pattern of beacons can be tailored to a variety of applications. For example, beacons may be deployed to form scattered zones of interest for product displays and inventory shelves. When placed in a regular grid pattern on a ceiling, beacons may be used to determine the location of a beacon receiver within a room with a high degree of accuracy.

[0056] Referring now to FIG. 3, there is provided a detailed block diagram of an exemplary architecture for a handheld reader **300**. Handheld reader **120** of FIG. 1 is the same as or similar to handheld reader **300**. As such, the discussion of handheld reader **300** is sufficient for understanding handheld reader **120**.

[0057] Handheld reader **300** may include more or less components that shown in FIG. 3. However, the components shown are sufficient to disclose an illustrative embodiment implementing the present invention. Some or all of the components of the handheld reader **300** can be implemented in hardware, software and/or a combination of hardware and software. The hardware includes, but is not limited to, one or more electronic circuits. The electronic circuit may comprise passive components (e.g., capacitors and resistors) and active components (e.g., processors) arranged and/or programmed to implement the methods disclosed herein.

[0058] The hardware architecture of FIG. 3 represents an embodiment of a representative handheld reader **300** configured to facilitate improved object locating within an RSF (e.g., RSF **128** of FIG. 1). In this regard, the handheld reader **300** comprises an RF enabled device **350** for allowing data to be exchanged with an external device (e.g., RFID tags **112₁**, ..., **112_N**, **118₁**, ..., **118_N** of FIG. 1) via RF technology. The components **304-316** shown in FIG. 3 may be collectively referred to herein as the RF enabled device **350**, and include a power source **312** (e.g., a battery).

[0059] The RF enabled device **350** comprises an antenna **302** for allowing data to be exchanged with the external device via RF technology (e.g., RFID technology or other RF based technology). The external device may comprise RFID tags **112₁**, ..., **112_N**, **118₁**, ..., **118_N** of FIG. 1. In this case, the antenna **302** is configured to transmit RF carrier signals (e.g., interrogation signals) to the listed external devices, and/or transmit data response

signals (e.g., authentication reply signals) generated by the RF enabled device **350**. In this regard, the RF enabled device **350** comprises an RF transceiver **308**. RFID transceivers are well known in the art, and therefore will not be described herein. However, it should be understood that the RF transceiver **308** receives RF signals including information from the transmitting device, and forwards the same to a logic controller **310** for extracting the information therefrom.

[0060] The extracted information can be used to determine the location of the handheld reader **300** within a facility (e.g., RSF **128** of FIG. 1). Accordingly, the logic controller **310** can store the extracted information in memory **304**, and execute algorithms using the extracted information. For example, the logic controller **310** can perform correlate tag reads with beacon reads to determine the location of the RFID tags within the facility.

[0061] Notably, memory **304** may be a volatile memory and/or a non-volatile memory. For example, the memory **304** can include, but is not limited to, a Random Access Memory (“RAM”), a Dynamic Random Access Memory (“DRAM”), a Static Random Access Memory (“SRAM”), a Read-Only Memory (“ROM”) and a flash memory. The memory **304** may also comprise unsecure memory and/or secure memory. The phrase “unsecure memory”, as used herein, refers to memory configured to store data in a plain text form. The phrase “secure memory”, as used herein, refers to memory configured to store data in an encrypted form and/or memory having or being disposed in a secure or tamper-proof enclosure.

[0062] Instructions **322** are stored in memory for execution by the RF enabled device **350** and that cause the RF enabled device **350** to perform any one or more of the methodologies of the present disclosure. The instructions **322** are generally operative to facilitate determinations as to where RFID tags are located within a facility. Other functions of the RF enabled device **350** will become apparent as the discussion progresses.

[0063] The handheld reader **300** may also comprise a beacon receiver **360**. The beacon receiver **360** is generally configured to: receive a command signal from the RF enabled device **350** to obtain unique identification codes from beacons; send signals to the beacons (e.g., beacons **106₁**, . . . , **106_M** of FIG. 1) requesting that unique identification codes be communicated therefrom; and receiving signals communicated from the beacons; parsing unique identification codes from the received signals; and communicating the unique

identification codes to the RF enabled device **350**. The command signal can be generated by and sent from the RF enabled device **350** in response to an operator's depression of a trigger **370**.

[0064] A more detailed block diagram of the beacon receiver **360** is provided in FIG. 4. As shown in FIG. 4, the beacon receiver **360** comprises at least one optical detector demodulator circuit **402**, a controller **404** and an activation emitter **406**. The controller **404** decodes beacon data. The activation emitter **406** command nearby beacons to transmit beacon data. A lens or multiple optical detector demodulator circuits **402** may be employed to create a wider field of view for receiving optical beacon data. This can be useful for compensating for hand tilt and roll when the beacon receiver is combined with a handheld reader. The beacon receiver can be positioned in various ways to improve reception of beacon data. For example, the beacon receiver could be mounted on the handheld reader. Alternatively, the beacon receiver could be mounted on a hat worn by the operator conducting an inventory scan or mounted on a robotic platform.

[0065] Referring again to FIG. 3, the handheld reader **300** may further comprise an optional sensor **362** (e.g., an acoustic sensor or infrared sensor). The sensor **362** detects the distance from the handheld reader **300** to the RFID tags being read (e.g., RFID tags **112₁, . . . , 112_N, 118₁, . . . , 118_N** of FIG. 1). A distance threshold value can be applied to trigger the location mode. The distance can be used to adjust the read power of the handheld reader. The distance can be used to compute more precise tag locations.

[0066] Referring now to FIG. 5, there is provided a detailed block diagram of an exemplary architecture for a server **500**. Server **124** of FIG. 1 is the same as or substantially similar to server **500**. As such, the following discussion of server **500** is sufficient for understanding server **124**.

[0067] Notably, the server **500** may include more or less components than those shown in FIG. 5. However, the components shown are sufficient to disclose an illustrative embodiment implementing the present invention. The hardware architecture of FIG. 5 represents one embodiment of a representative server configured to facilitate the provision of a three dimensional map showing locations of RFID tags (e.g., RFID tags **112₁, . . . , 112_N, 118₁, . . . , 118_N** of FIG. 1) within an RSF (e.g., RSF **128** of FIG. 1). As such, the server **500** of FIG. 5 implements at least a portion of a method for providing such beacon reader and tag

locations in accordance with embodiments of the present invention. Some or all the components of the server **500** can be implemented as hardware, software and/or a combination of hardware and software. The hardware includes, but is not limited to, one or more electronic circuits. The electronic circuits can include, but are not limited to, passive components (e.g., resistors and capacitors) and/or active components (e.g., amplifiers and/or microprocessors). The passive and/or active components can be adapted to, arranged to and/or programmed to perform one or more of the methodologies, procedures, or functions described herein.

[0068] As shown in FIG. 5, the server **500** comprises a user interface **502**, a Central Processing Unit ("CPU") **506**, a system bus **510**, a memory **512** connected to and accessible by other portions of server **500** through system bus **510**, and hardware entities **514** connected to system bus **510**. The user interface can include input devices (e.g., a keypad **550**) and output devices (e.g., speaker **552**, a display **554**, and/or light emitting diodes **556**), which facilitate user-software interactions for controlling operations of the server **500**.

[0069] At least some of the hardware entities **514** perform actions involving access to and use of memory **512**, which can be a Random Access Memory ("RAM"), a disk driver and/or a Compact Disc Read Only Memory ("CD-ROM"). Hardware entities **514** can include a disk drive unit **516** comprising a computer-readable storage medium **518** on which is stored one or more sets of instructions **520** (e.g., software code) configured to implement one or more of the methodologies, procedures, or functions described herein. The instructions **520** can also reside, completely or at least partially, within the memory **512** and/or within the CPU **506** during execution thereof by the server **500**. The memory **512** and the CPU **506** also can constitute machine-readable media. The term "machine-readable media", as used here, refers to a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more sets of instructions **520**. The term "machine-readable media", as used here, also refers to any medium that is capable of storing, encoding or carrying a set of instructions **520** for execution by the server **500** and that cause the server **500** to perform any one or more of the methodologies of the present disclosure.

[0070] In some embodiments of the present invention, the hardware entities **514** include an electronic circuit (e.g., a processor) programmed for facilitating the provision of a three dimensional map showing locations of RFID tags within a facility. In this regard, it should be understood that the electronic circuit can access and run a location determining application

524 installed on the server **500**. The software application **524** is generally operative to facilitate: the determination of beacon reader and/or RFID tag locations within a facility; and the mapping of the beacon reader location and/or RFID tag locations in a virtual three dimensional space. Other functions of the software application **524** will become apparent as the discussion progresses.

[0071] Referring now to FIG. 6, there is provided an illustration showing a cross-sectional view of two adjacent beacons **602**, **604** and a receiver **606**. Each beacon has three different beamwidths. The receiver **606** is in motion so as to encounter different beacon zones.

[0072] Exemplary Methods For Locating A Device In A Facility

[0073] Referring now to FIG. 7, there is provided a flow diagram of an exemplary method **700** for locating RFID tags (e.g., RFID tags **112₁**, . . . , **112_N**, **118₁**, . . . , **118_N** of FIG. 1) within a facility (e.g., RSF **128** of FIG. 1). Method **700** begins with step **702** and continues with step **704**. In step **704**, a plurality of beacons (e.g., beacons **106₁**, . . . , **106_M** of FIG. 1) are strategically placed around the facility. In some scenarios, the beacons are disposed on ceilings, walls, display equipment (e.g., display equipment **102₁**, . . . , **102_M** of FIG. 1), emergency equipment, checkout counters and/or EAS system equipment. Notably, each beacon has a known directional emission pattern and location within the facility. First information specifying the beacons' locations with the facility is stored in a data store (e.g., data store **126** of FIG. 1) for later use in an RFID tag locating process. The beacons can be arranged such that their antenna patterns do or do not overlap.

[0074] Next in step **708**, a beam or signal is emitted from each of the beacons so as to illuminate a ZOI including objects to be inventoried and/or located. For example, a beam is emitted from a beacon to illuminate a particular shelving unit or other piece of display equipment (e.g., a table).

[0075] Upon completing step **708**, step **710** is performed where a handheld reader (e.g., handheld reader **120** of FIG. 1) is carried around the facility. At this time, the handheld reader is operating in a default mode, i.e., using a maximum power and reading RFID tags (e.g., RFID tags **112₁**, . . . , **112_N**, **118₁**, . . . , **118_N** of FIG. 1) only once to ensure inventory accuracy in a timely manner.

[0076] In some scenarios, the mode of the handheld reader is automatically changed when a detection is made that the handheld reader is in a beacon's ZOI or near and object/obstacle, as shown by optional steps **712** and **714**. For example, the handheld reader is transitioned from its default mode to its location mode when a detection is made that the handheld reader is in a beacon's ZOI. In the location mode, the handheld reader toggles between reads at high power and reads at low power to allow location accuracy. In location mode, an RFID tag can be read multiple times to allow the correlation logic to re-allocate an RFID tag from one location to another. The power can be dynamically adjusted depending on the RFID tag density being read. As inventory accuracy has to be maintained, the power applied in location mode can be reduced in case of dense tag population, and vice versa.

[0077] A beacon receiver (e.g., beacon receiver **150** of FIG. 1) may be provided as an accessory for the handheld reader or as a separate standalone device worn by an operator of the handheld reader. The beacon receiver is provided for communicating with the beacons disposed around the facility while the handheld reader is reading RFID tags. As such, step **716** is performed where the beacon receiver's optical detector is aligned with a beacon's emitter based on sensor data generated by inertial sensors (e.g., inertial sensors **152** of FIG. 1) located internal to the beacon reader.

[0078] After completing step **716**, step **718** is performed where a detection is made. More particularly, depression of a trigger (e.g., trigger **370** of FIG. 3) is detected by the handheld reader. The trigger is depressed by an operator when (s)he wants the handheld reader to read RFID tags. In response to this detection, method **700** continues with step **720** and steps **722-730**, which are performed concurrently. Step **720** involves performing operations by the handheld reader to read the following RFID enabled devices one or more times: (a) a plurality of RFID tags attached to a plurality of objects (e.g., objects **110₁**, . . . , **110_N**, **116₁**, . . . , **116_N** of FIG. 1) located within the facility; and/or (b) at least one optional locator tag.

[0079] While step **720** is being performed, steps **722-730** are performed. These steps involve: generating and sending a command signal from the handheld reader to a beacon receiver for causing the beacon signal to obtain a location identifier from at least one beacon; generating and sending an interrogation signal from the beacon receiver to a beacon when placed in the respective ZOI; generating and sending a locator signal from the beacon to the beacon receiver including a location identifier; processing the locator signal to parse the

location identifier therefrom; and communicating the location identifier and a first timestamp from the beacon receiver to the handheld receiver.

[0080] Upon completing steps **720** and **730**, the method **700** continues with step **732** of FIG. 7B. In step **732**, third information is stored in the data store. The third information includes the location identifier of the beacon, the first time stamp indicating when the location identifier was received at the beacon receiver, unique identifiers of the RFID tags, and/or second timestamps indicating when the RFID tags were respectively read by the handheld reader. The third information is then processed in step **734** to identify RFID tags which were read by the handheld reader in time proximity with the beacon receiver's reception of a signal from a given beacon.

[0081] The first information is also processed in step **736** to obtain the beacon's location within the facility. The RFID tags (identified in previous step **734**) are assigned to the approximate same location as the beacon's location (e.g., a particular piece of display equipment within the facility), as shown by step **738**.

[0082] The RFID tags' locations are then stored in the data store, as shown by step **746**. A three dimensional map is generated in step **748** which shows the locations of the RFID tags in a three dimensional space. The location of the handheld reader, beacons, locator tags, and/or beacon receiver may also be shown in the three dimensional map. The three dimensional map is then presented to an operator of the handheld reader and/or other electronic device, as shown by step **750**. Subsequently, step **752** is performed where method **700** ends or other processing is performed.

[0083] All of the apparatus, methods, and algorithms disclosed and claimed herein can be made and executed without undue experimentation in light of the present disclosure. While the invention has been described in terms of preferred embodiments, it will be apparent to those having ordinary skill in the art that variations may be applied to the apparatus, methods and sequence of steps of the method without departing from the concept, spirit and scope of the invention. More specifically, it will be apparent that certain components may be added to, combined with, or substituted for the components described herein while the same or similar results would be achieved. All such similar substitutes and modifications apparent to those having ordinary skill in the art are deemed to be within the spirit, scope and concept of the invention as defined.

[0084] The features and functions disclosed above, as well as alternatives, may be combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations or improvements may be made by those skilled in the art, each of which is also intended to be encompassed by the disclosed embodiments.

CLAIMS

We claim:

1. A method for uniquely identifying areas within a facility for location services, comprising:
 - operating a plurality of beacons disposed within the facility;
 - emitting, from at least a first beacon of the plurality of beacons, a first beam having a first beamwidth in a manner so as to communicate at least a unique identification code associated with a first physical area of the facility;
 - changing a value for a beamwidth parameter to modify an area of coverage for the first beacon, where said changing is performed autonomously by the first beacon or in response to the first beacon's reception of a command from a remote beacon receiver; and
 - emitting, from the first beacon, a second beam having a second beamwidth in a manner so as to communicate at least the unique identification code associated with the first area of the facility, where the second beamwidth is different from the first beamwidth.
2. The method according to claim 1, wherein the value for the beamwidth parameter is changed so that at least two of the beacons have an overlapping area of coverage.
3. The method according to claim 1, wherein information specifying the first beamwidth is communicated from the first beacon via the first beam and information specifying the second beamwidth is communicated from the first beacon via the second beam.
4. The method according to claim 1, further comprising minimizing interference between the first beacon and an adjacent second beacon of the plurality of beacons by communicating error correction codes from the first beacon via the first and second beams.
5. The method according claim 1, further comprising using randomized transit timing to minimize interference between the first beacon and an adjacent second beacon of the plurality of beacons.
6. The method according to claim 5, wherein each of the plurality of beacons has a known directional emission pattern.

7. The method according to claim 1, wherein the remote beacon receiver is worn by a person or carried by the person as an accessory of a mobile tag reader.
8. The method according to claim 1, further comprising:
 - determining an inaccurate location of a mobile tag in the facility using a mobile tag reader to read a fixed tag with a known location; and
 - increasing an accuracy of the inaccurate location using the first beacon's known physical location which is associated with the unique identification code emitted from the first beacon via the first or second beam.
9. The method according to claim 8, further comprising considering the mobile tag as being located in a Zone Of Interest ("ZOI") of the first beacon for which the unique identifier has been received by the mobile tag reader and if existing in a vicinity of the fixed tag in close time proximity.
10. The method according to claim 9, further comprising generating a map showing at least one of a location of the mobile tag reader relative to the first beacon in multi-dimensional space and a location of the fixed tag relative to the first beacon in multi-dimensional space.
11. A system, comprising:
 - a plurality of beacons disposed within a facility and comprising a first beacon that
 - emits a first beam having a first beamwidth in a manner so as to communicate at least a unique identification code associated with a first physical area of the facility,
 - has a value for a beamwidth parameter which is changed to modify an area of coverage for the first beacon autonomously by the first beacon or in response to the first beacon's reception of a command from a remote beacon receiver, and
 - emits a second beam having a second beamwidth in a manner so as to communicate at least the unique identification code associated with the first area of the facility, where the second beamwidth is different from the first beamwidth.

12. The system according to claim 11, wherein the value for the beamwidth parameter is changed so that at least two of the beacons have an overlapping area of coverage.
13. The system according to claim 11, wherein information specifying the first beamwidth is communicated from the first beacon via the first beam and information specifying the second beamwidth is communicated from the first beacon via the second beam.
14. The system according to claim 11, further comprising minimizing interference between the first beacon and an adjacent second beacon of the plurality of beacons by communicating error correction codes from the first beacon via the first and second beams.
15. The system according claim 11, wherein randomized transit timing is used to minimize interference between the first beacon and an adjacent second beacon of the plurality of beacons.
16. The system according to claim 15, wherein each of the plurality of beacons has a known directional emission pattern.
17. The system according to claim 11, wherein the remote beacon receiver is worn by a person or carried by the person as an accessory of a mobile tag reader.
18. The system according to claim 11, further comprising a mobile tag reader that:
reads a fixed tag with a known location to facilitate a determination of an inaccurate location of a mobile tag in the facility; and
receives the unique identification code emitted from the first beacon via the first or second beam, where the unique identification code is used to increases an accuracy of the inaccurate location.
19. The system according to claim 18, wherein the mobile tag is considered as being located in a Zone Of Interest ("ZOI") of the first beacon for which the unique identifier has

been received by the mobile tag reader and if existing in a vicinity of the fixed tag in close time proximity.

20. The system according to claim 19, wherein a map is generated by the mobile tag reader that shows at least one of a location of the mobile tag reader relative to the first beacon in multi-dimensional space and a location of the fixed tag relative to the first beacon in multi-dimensional space.

1/8

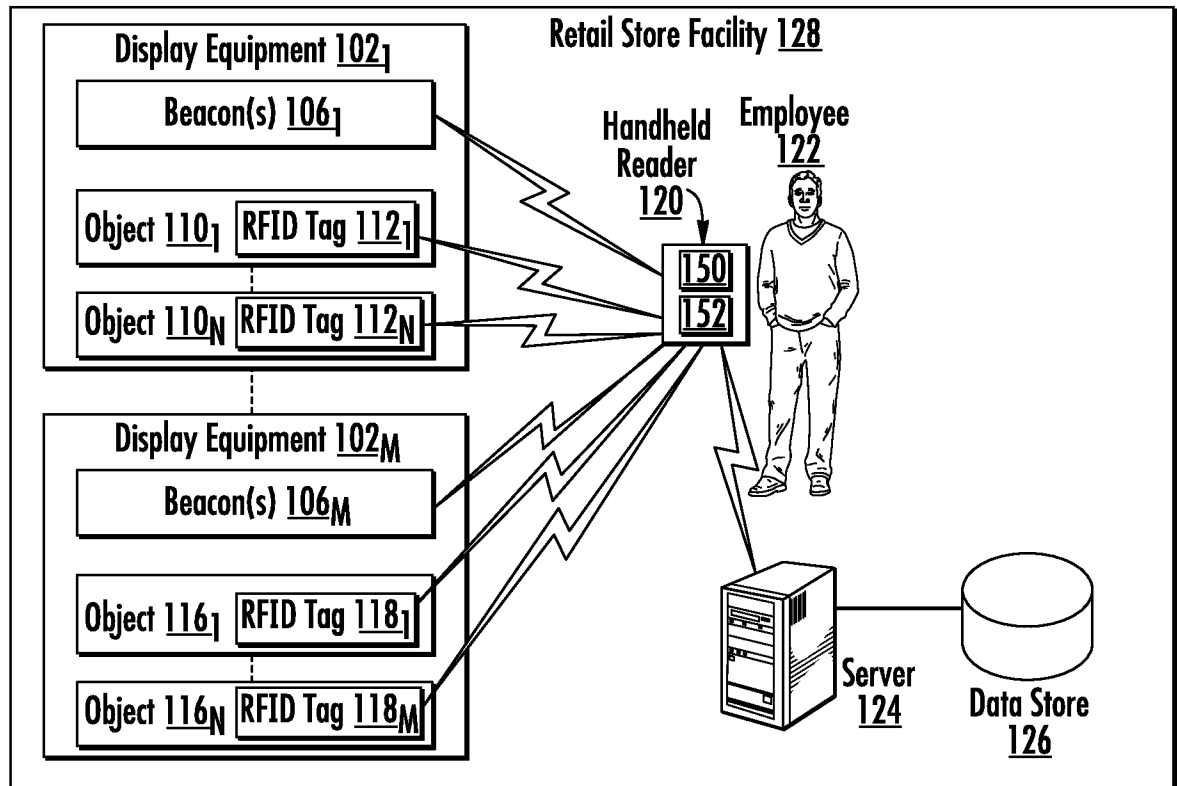
System
100

FIG. 1

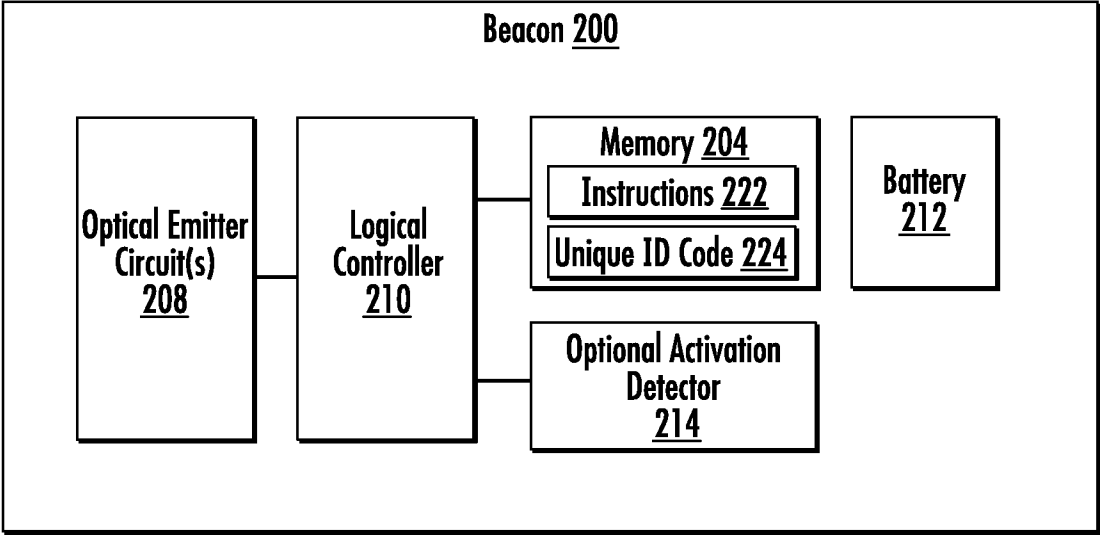


FIG. 2

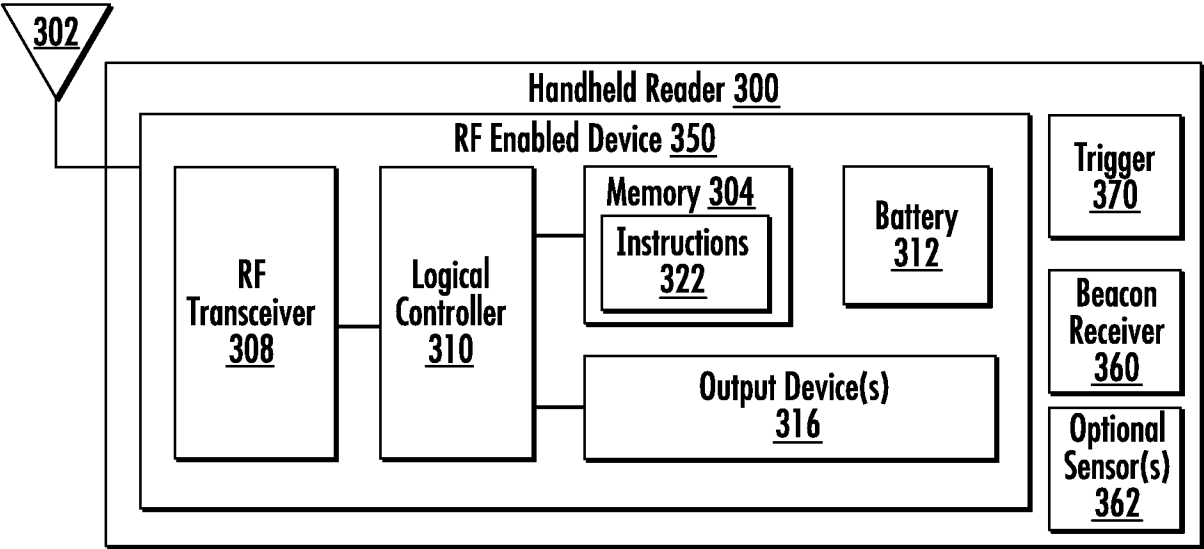


FIG. 3

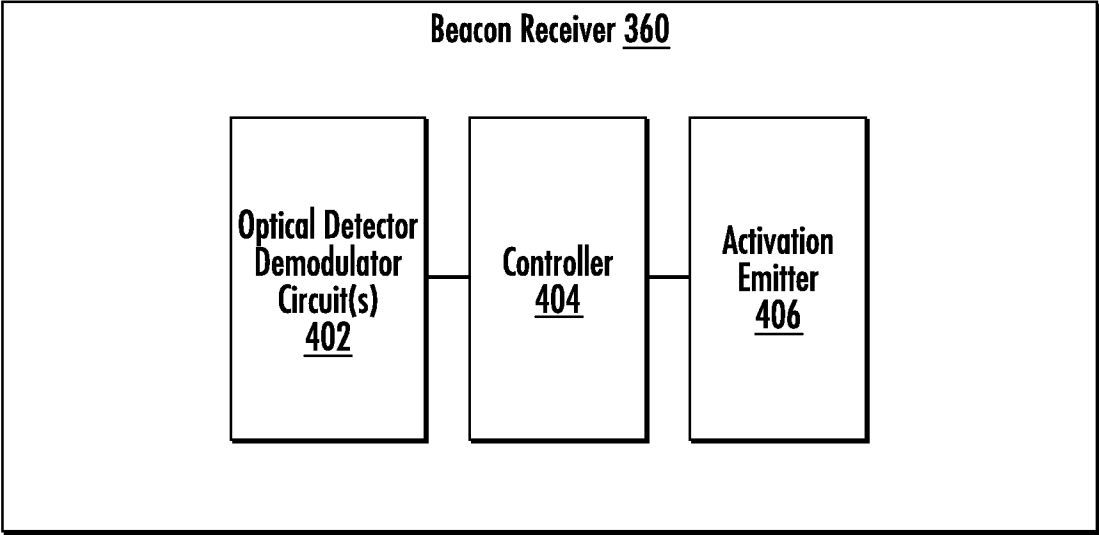


FIG. 4

5/8



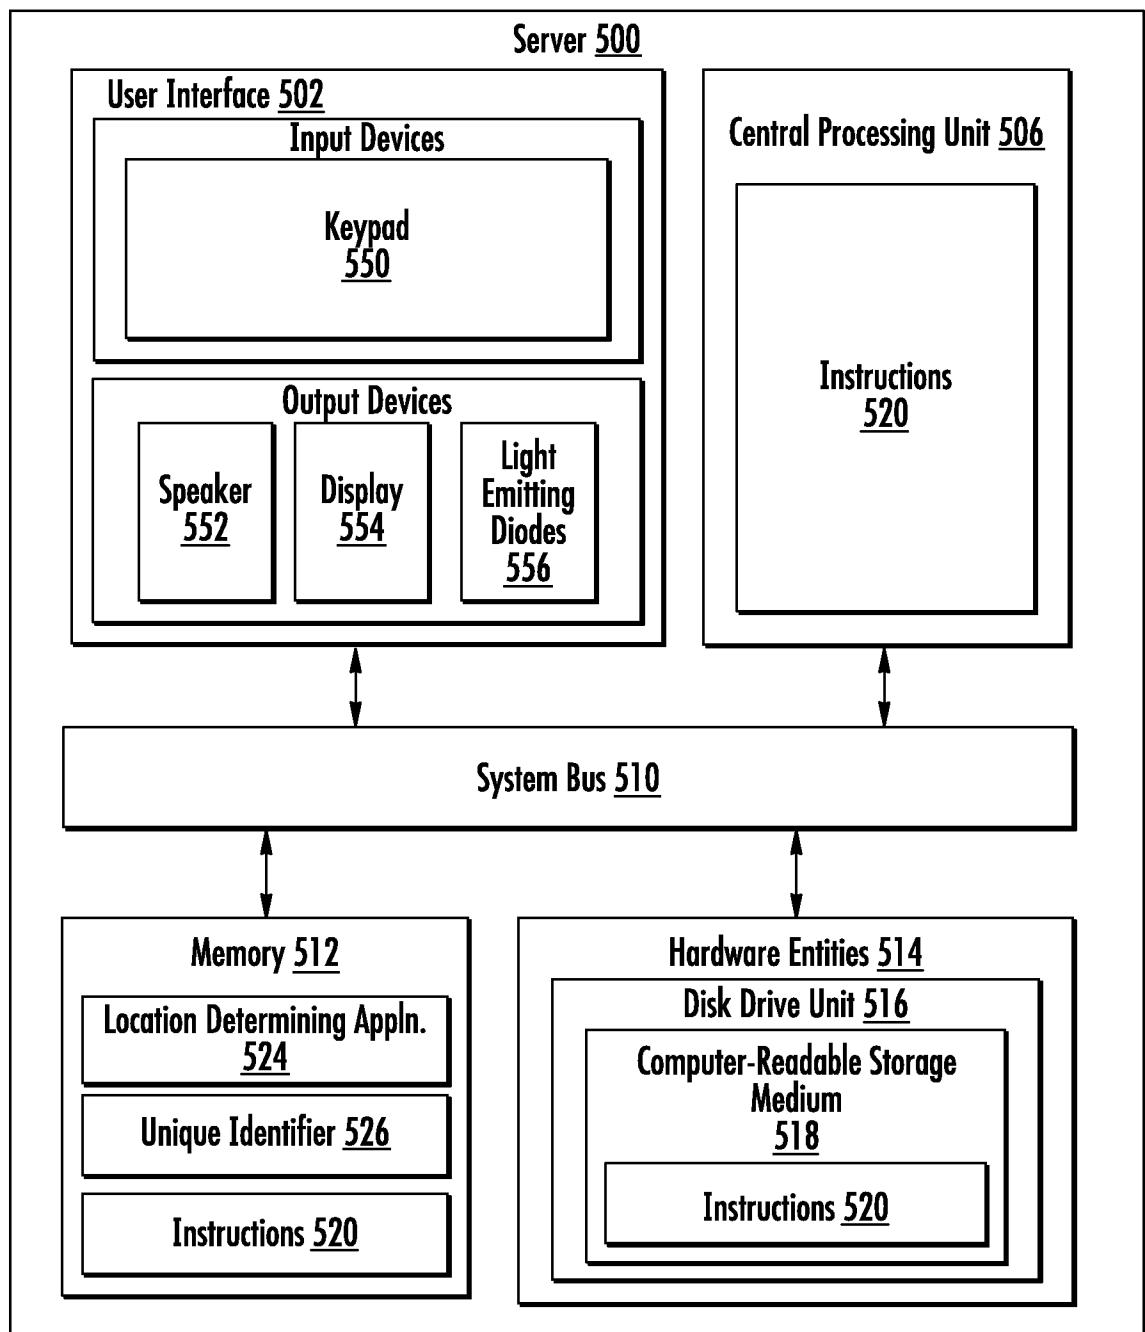


FIG. 5


6/8

**FIG. 6**

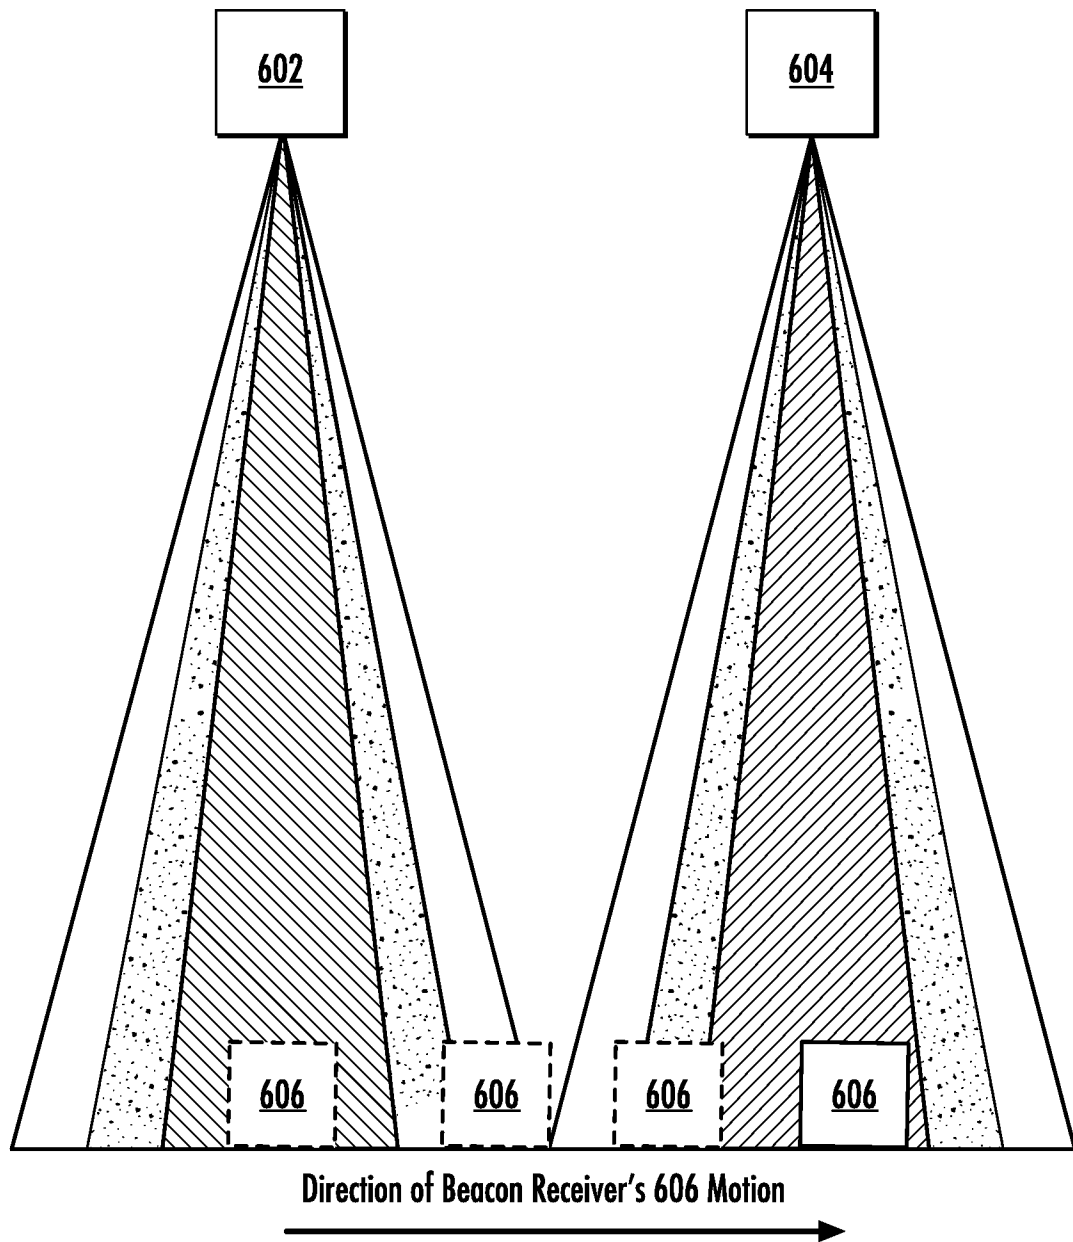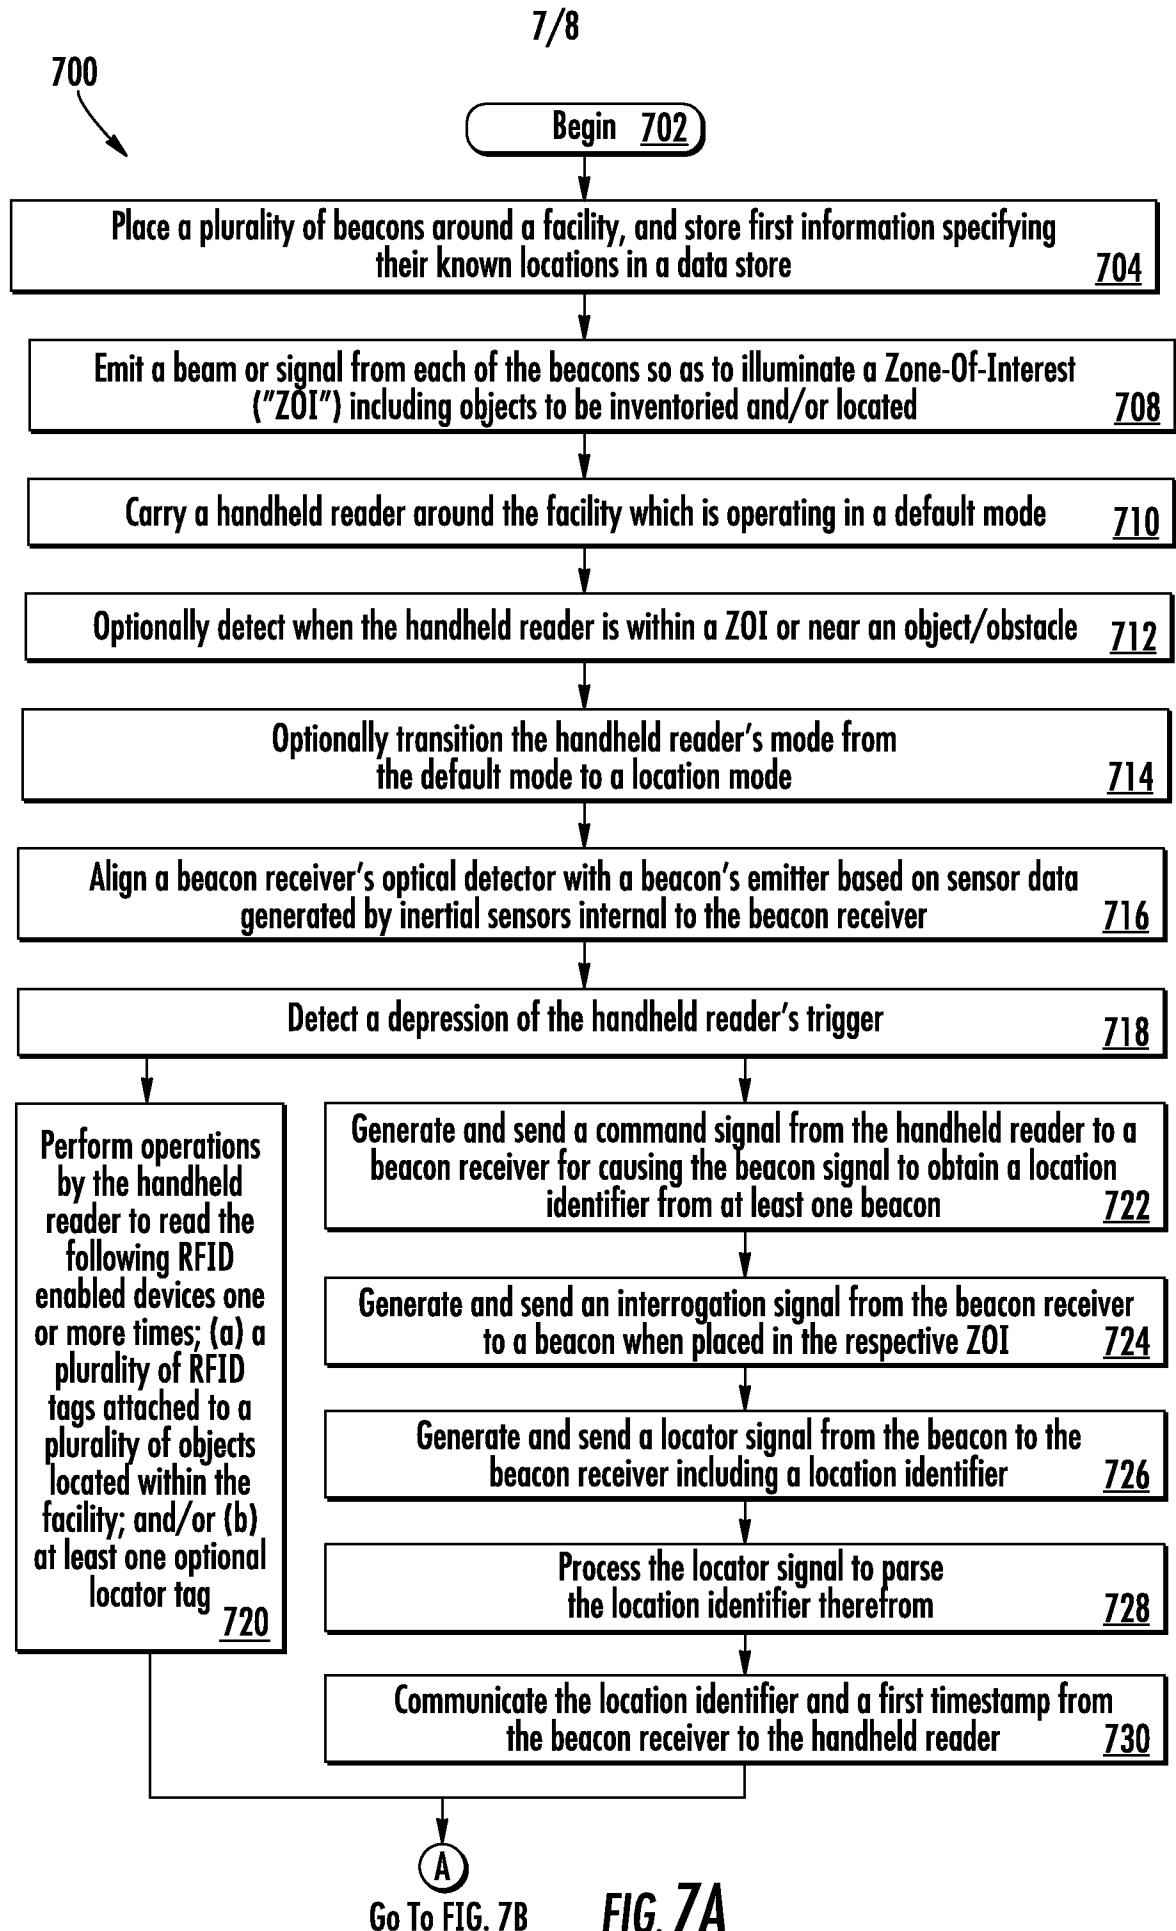

8/8

From FIG. 7A

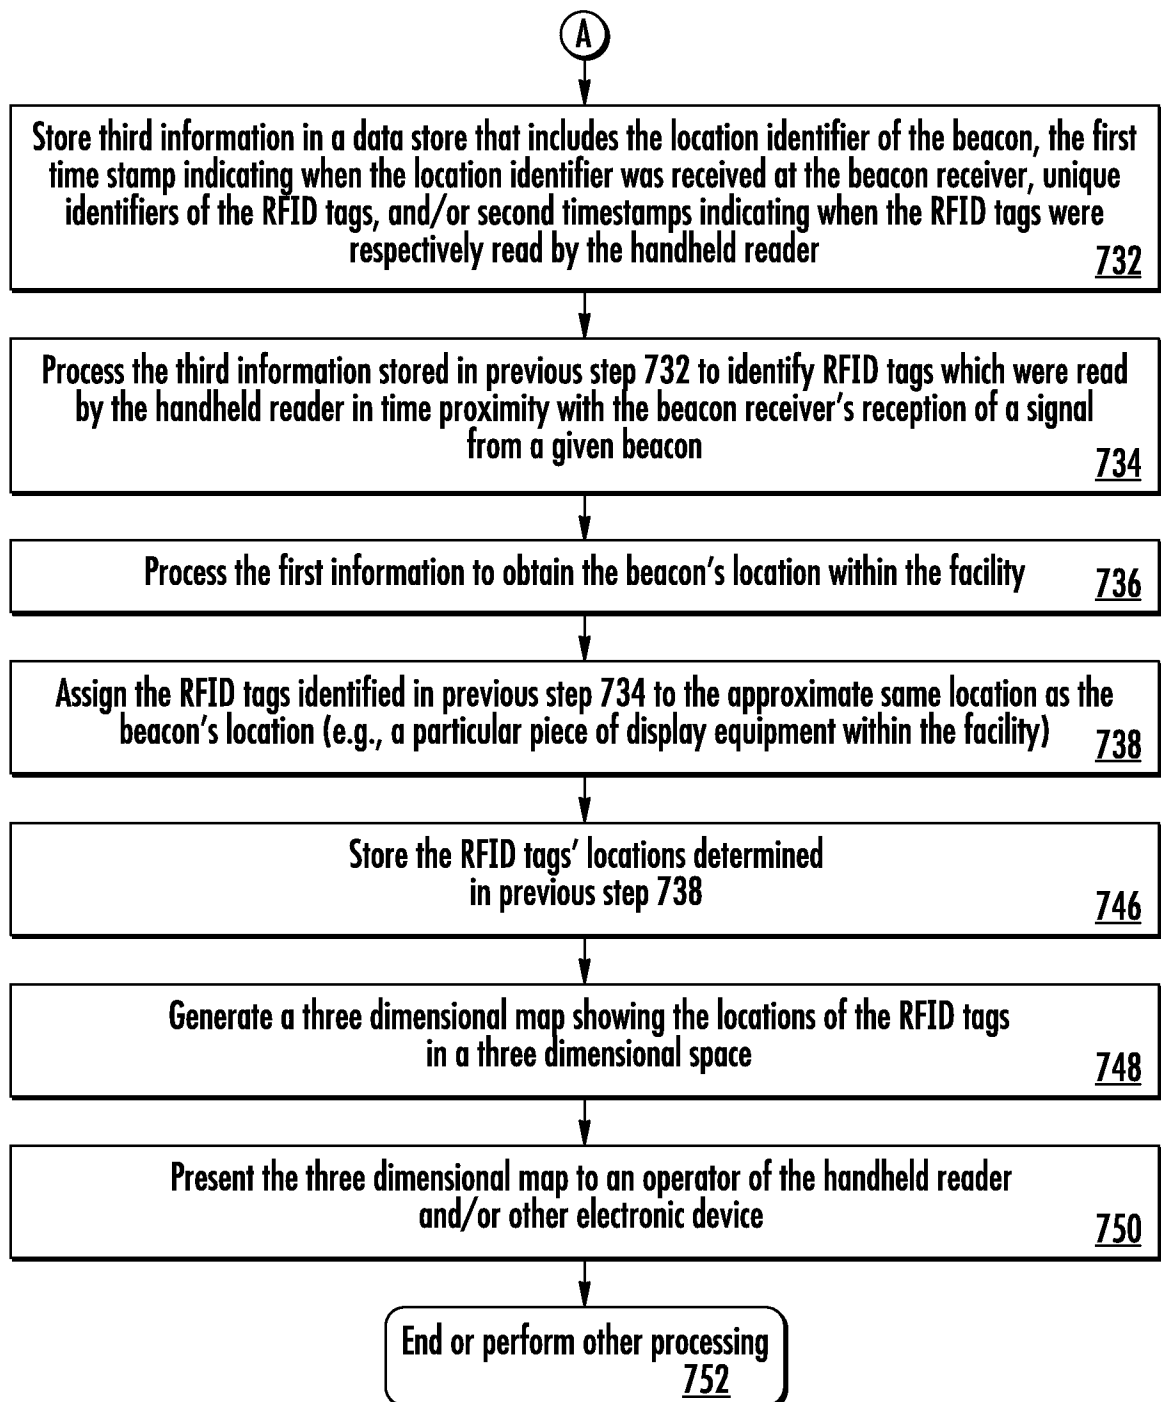**FIG. 7B**

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2016/040430

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04B7/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/009250 A1 (NOKIA SIEMENS NETWORKS OY [FI]) 16 January 2014 (2014-01-16)	1-3,6, 11-13,16
Y	page 4, line 29 - page 5, line 3 page 17, line 28 - page 19, line 14 page 20, lines 28-34 page 22, lines 2-5, 17-25 page 23, lines 1-10 -----	4-10, 14-20
X	US 2005/272472 A1 (GOLDBERG STEVEN J [US] ET AL) 8 December 2005 (2005-12-08)	1,2,4,6, 11,12, 14,16
Y	paragraphs [0006], [0008], [0017] - [0019], [0047] - [0049], [0097], [0100], [0107] - [0111] ----- -/-	3,5, 7-10,13, 15,17-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 September 2016

Date of mailing of the international search report

26/09/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ernst, Christian

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/040430

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/034503 A1 (INTEL CORP [US]; XUE FENG [US]; LI QINGHUA [US]; SAJADIEH MASOUD [US];) 12 March 2015 (2015-03-12)	1,2,6, 11,12,16
Y	page 10, lines 16-24 page 13, line 1 - page 15, line 14 page 16, line 10 - page 17, line 6; figures 6,8,9,14	3-5, 7-10, 13-15, 17-20
X	----- WO 2013/089525 A1 (SAMSUNG ELECTRONICS CO LTD [KR]) 20 June 2013 (2013-06-20) paragraphs [0057], [0058], [0007] - [0084], [0092] - [0100]	1,11
X	----- WO 98/45728 A1 (COMMW SCIENT IND RES ORG [AU]; GLADWIN MICHAEL THOMAS [AU]; DEKKER DAV) 15 October 1998 (1998-10-15)	1,2,11, 12
Y	page 2, line 12 - page 3, line 13 page 8, line 7 - page 9, line 19 page 10, line 5 - page 11, line 1	5,7,15, 17
Y	----- WO 2014/093400 A1 (MARKHOVSKY FELIX [US]; PREVATT TRUMAN [US]) 19 June 2014 (2014-06-19) paragraphs [0377], [0496] - [0498] -----	4-6, 8-10, 14-16, 18-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/040430

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2014009250 A1	16-01-2014	CN 104604300 A EP 2870802 A1 US 2015201368 A1 WO 2014009250 A1	06-05-2015 13-05-2015 16-07-2015 16-01-2014
US 2005272472 A1	08-12-2005	CA 2567985 A1 EP 1757115 A2 JP 2008500777 A KR 20070012728 A TW I285043 B US 2005272472 A1 WO 2005120096 A2	15-12-2005 28-02-2007 10-01-2008 26-01-2007 01-08-2007 08-12-2005 15-12-2005
WO 2015034503 A1	12-03-2015	CN 105474556 A EP 3042456 A1 US 2015131750 A1 WO 2015034503 A1	06-04-2016 13-07-2016 14-05-2015 12-03-2015
WO 2013089525 A1	20-06-2013	CN 103999421 A EP 2792116 A1 JP 2015507398 A KR 20130068868 A US 2015010105 A1 WO 2013089525 A1	20-08-2014 22-10-2014 05-03-2015 26-06-2013 08-01-2015 20-06-2013
WO 9845728 A1	15-10-1998	CA 2289752 A1 US 6339709 B1 WO 9845728 A1	15-10-1998 15-01-2002 15-10-1998
WO 2014093400 A1	19-06-2014	CN 105264920 A EP 2932740 A1 JP 2016508217 A KR 20160006659 A WO 2014093400 A1	20-01-2016 21-10-2015 17-03-2016 19-01-2016 19-06-2014