




(86) Date de dépôt PCT/PCT Filing Date: 2002/06/05
 (87) Date publication PCT/PCT Publication Date: 2002/12/12
 (85) Entrée phase nationale/National Entry: 2003/12/05
 (86) N° demande PCT/PCT Application No.: US 2002/017772
 (87) N° publication PCT/PCT Publication No.: 2002/099462
 (30) Priorité/Priority: 2001/06/05 (09/874,029) US

(51) Cl.Int.⁷/Int.Cl.⁷ G01V 3/00
 (71) Demandeur/Applicant:
HALLIBURTON ENERGY SERVICES, INC., US
 (72) Inventeur/Inventor:
PRAMMER, MANFRED G., US
 (74) Agent: OSLER, HOSKIN & HARCOURT LLP

(54) Titre : SYSTEME ET PROCEDES D'EVALUATION DE FORMATIONS EN COURS DE FORAGE
 (54) Title: SYSTEM AND METHODS FOR FORMATION EVALUATION WHILE DRILLING

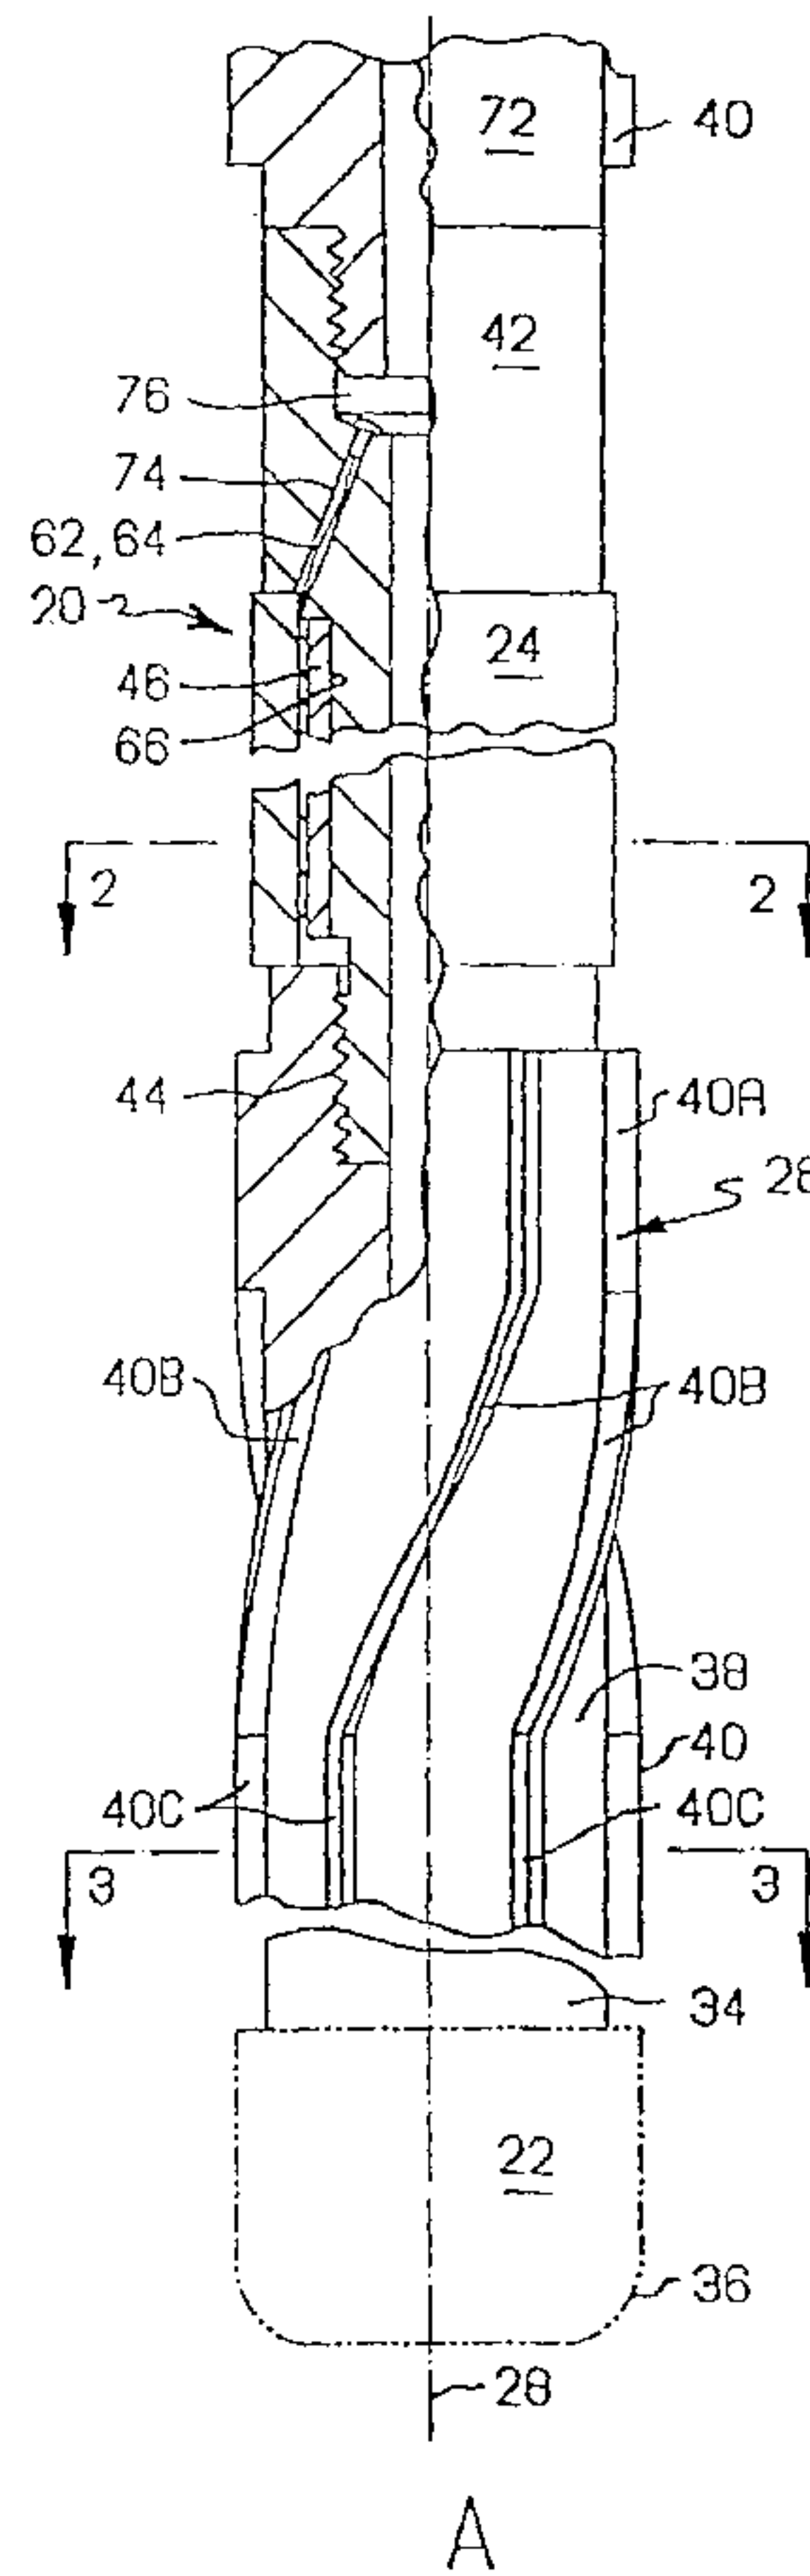

(57) **Abrégé/Abstract:**

A logging while drilling (LWD) and measuring while drilling (MWD) method and device are disclosed for reducing the sensitivity of NMR measurements to tool motions. The invention is based on NMR relaxation measurements determining longitudinal

(57) **Abrégé(suite)/Abstract(continued):**

relaxation times T1 instead of the standard T2 measurements, and involves saturating a relatively wide sensitive region of the formation and processing NMR echo signals which originate approximately from the center of the sensitive region. In another aspect, the invention uses novel pulse sequences and processing algorithms to reduce the time for the relaxation measurement and to provide real-time transfer of data uphole.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
12 December 2002 (12.12.2002)

PCT

(10) International Publication Number
WO 02/099462 A3

- (51) International Patent Classification⁷: G01V 3/00 (74) Agents: MORRIS, Francis, E. et al.; Pennie & Edmonds LLP, 1155 Avenue of the Americas, New York, NY 10036 (US).
- (21) International Application Number: PCT/US02/17772
- (22) International Filing Date: 5 June 2002 (05.06.2002) (81) Designated States (*national*): CA, NO.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 09/874,029 5 June 2001 (05.06.2001) US Published: — with international search report
- (71) Applicant: HALLIBURTON ENERGY SERVICES, INC. [US/US]; 4100 Clinton Drive, Houston, TX 77020-6299 (US). (88) Date of publication of the international search report: 3 April 2003
- (72) Inventor: PRAMMER, Manfred, G.; 291 Hadfield Road, Downingtown, PA 19335 (US). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHODS FOR FORMATION EVALUATION WHILE DRILLING

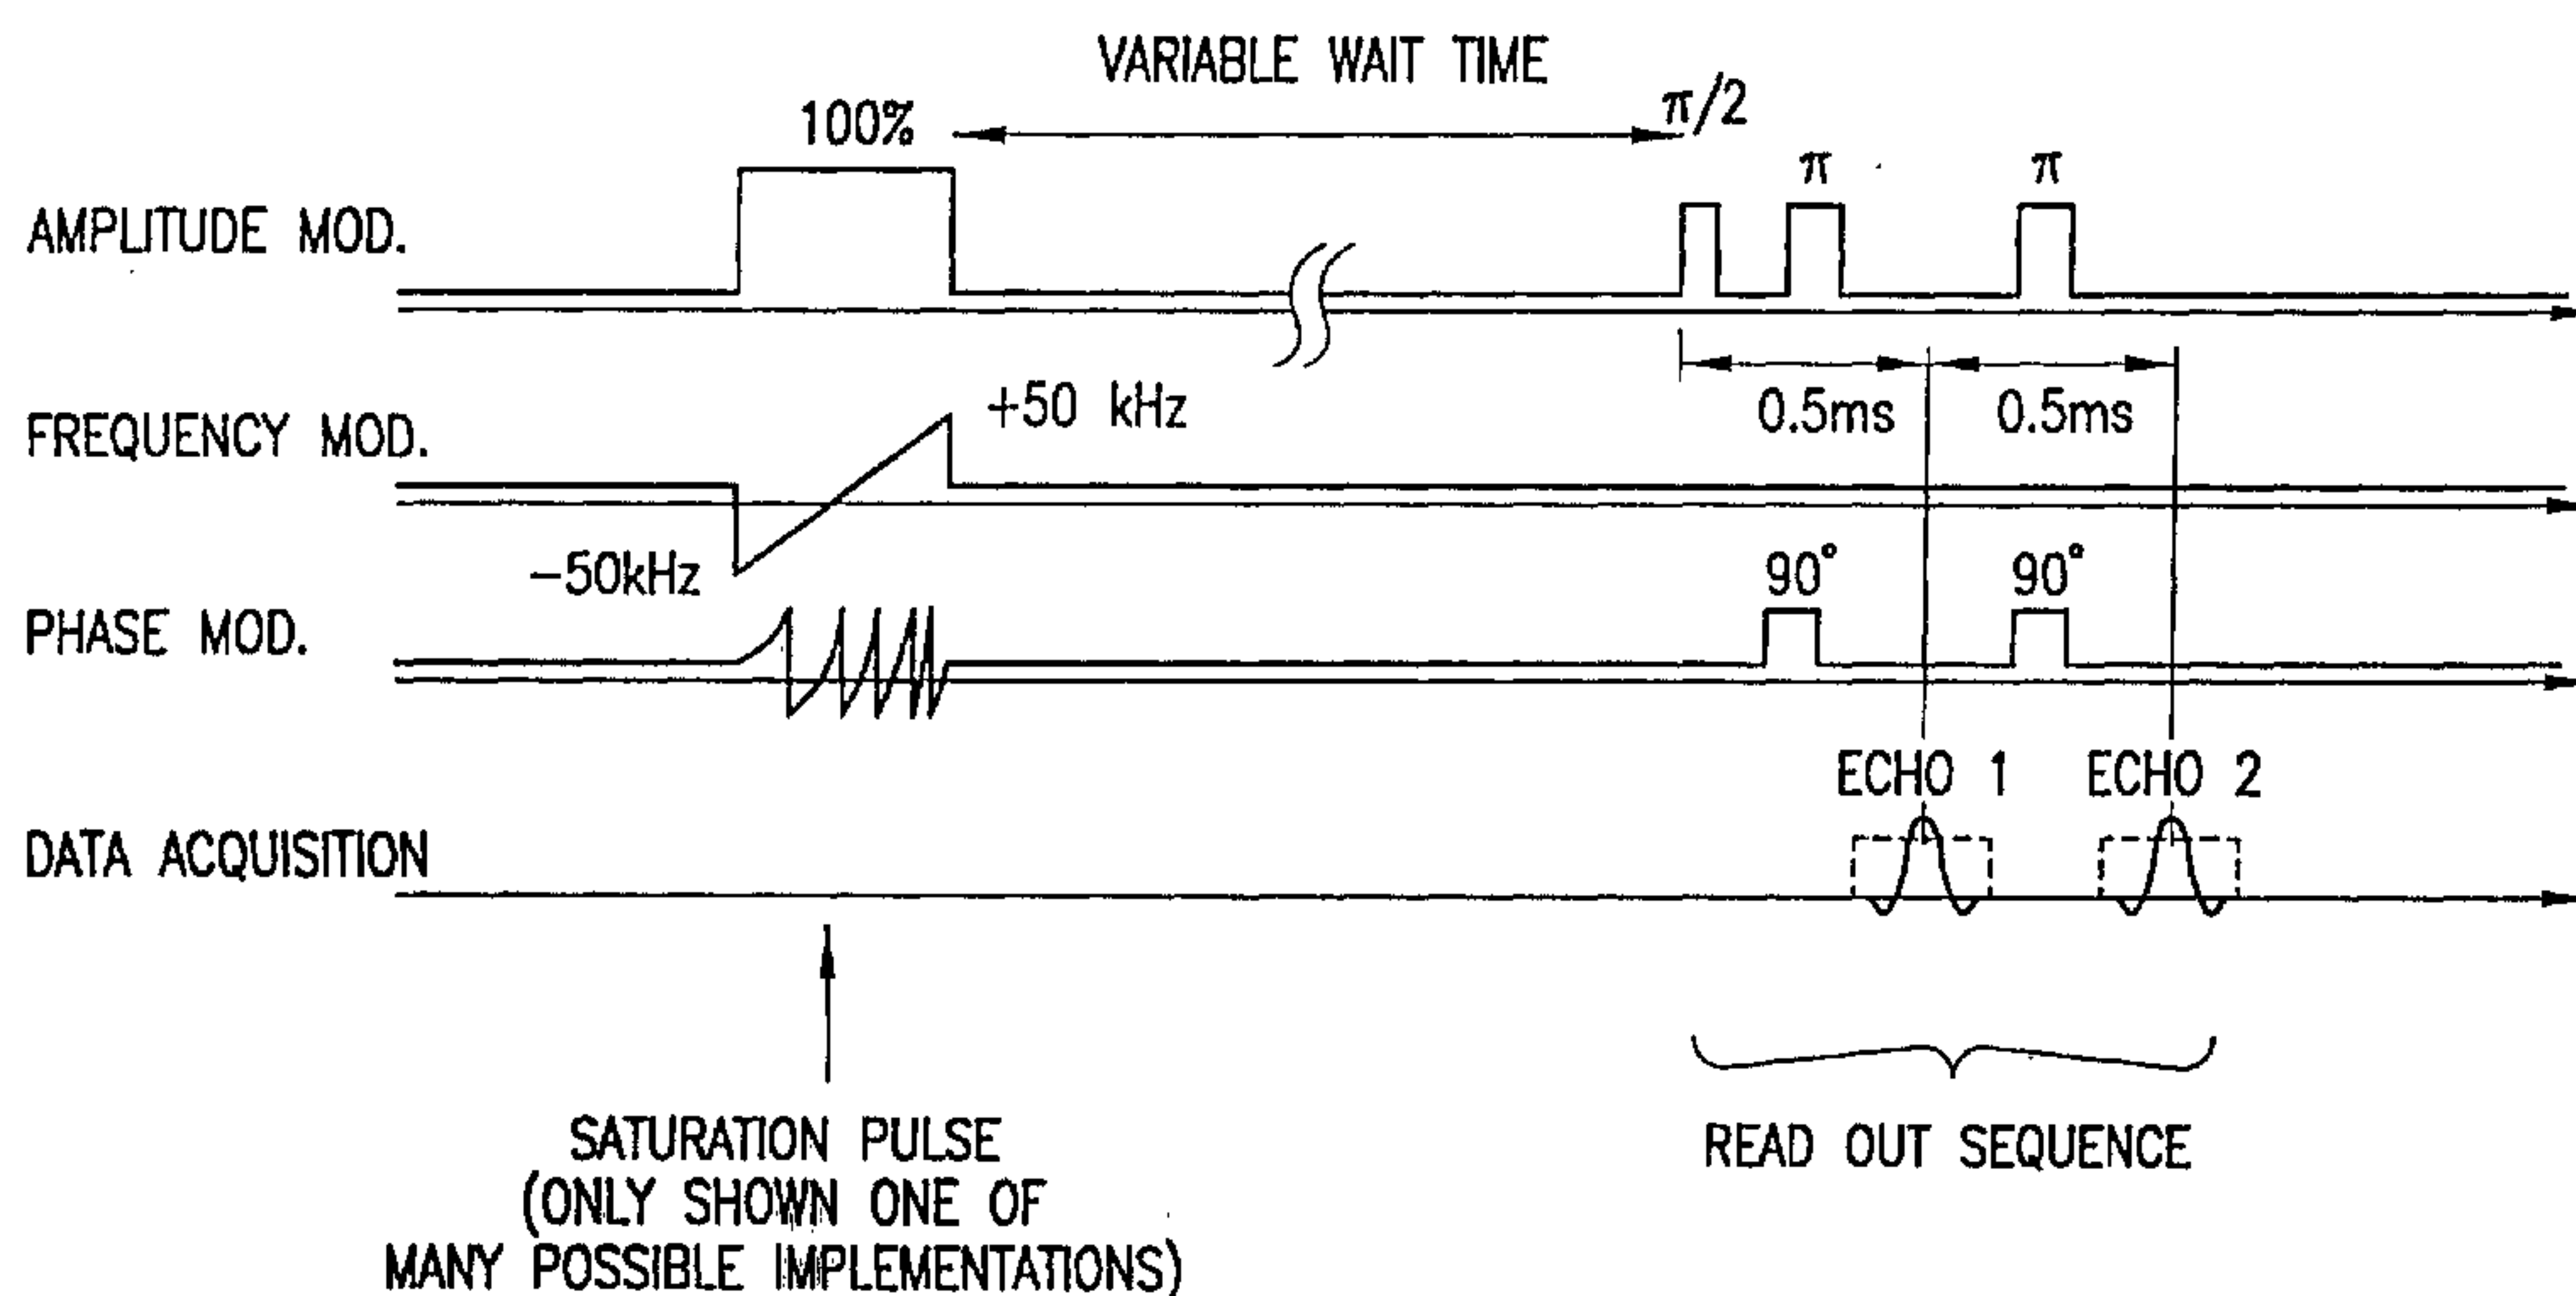

(57) Abstract: A logging while drilling (LWD) and measuring while drilling (MWD) method and device are disclosed for reducing the sensitivity of NMR measurements to tool motions. The invention is based on NMR relaxation measurements determining longitudinal relaxation times T1 instead of the standard T2 measurements, and involves saturating a relatively wide sensitive region of the formation and processing NMR echo signals which originate approximately from the center of the sensitive region. In another aspect, the invention uses novel pulse sequences and processing algorithms to reduce the time for the relaxation measurement and to provide real-time transfer of data uphole.

WO 02/099462 A3

SYSTEM AND METHODS FOR FORMATION EVALUATION WHILE DRILLING

This application is a continuation-in-part of application Ser. No. 09/552,160 filed April 18, 2000, which is a continuation of application Ser. No. 08/996,720 filed December 23, 1997, now U.S. Pat. No. 6,051,973, which is a continuation of provisional application No. 60/033,986 filed December 30, 1996, which are incorporated herein by reference.

FIELD OF THE INVENTION

This invention is directed to a logging-while-drilling (LWD) and measurement-while-drilling (MWD) approach for obtaining nuclear magnetic resonance (NMR) data concerning petrophysical properties of a formation. More specifically, the invention is directed to an improved accuracy method and device for reducing the sensitivity of NMR measurements to tool motions, and real-time transmission over a slow data channel, such as mud pulsing for quick-look results at the surface.

BACKGROUND OF THE INVENTION

LWD and MWD systems are generally known in the art to make downhole measurements while a borehole is being drilled. Such systems measure various parameters and characteristics of the formation, such as its resistivity and the natural gamma ray emissions from the formation. Typically, signals which are representative of these measurements made downhole are relayed to the surface with a mud pulse telemetry device that controls the mud flow, encoding information in pressure pulses inside the drill string. The pulses travel upward through the mud to the surface, where they are detected and decoded so that the downhole measurements are available for observation and interpretation at the surface substantially in real time. In addition, it has also been found useful to provide a downhole computer with sufficient memory for temporarily storing these measurements until such time that the drill string is removed from the borehole.

U.S. Pat. No. 5,280,243 to Miller discloses an NMR apparatus and method of use for geophysical examination of a bore hole as it is being drilled. The patented apparatus is connected to the drill bit and follows it through the bore hole as it is being formed. In operation, the apparatus generates a gradient static magnetic field in a region of the bore

hole adjacent the apparatus. This static field extends radially with respect to the longitudinal axis of the apparatus and has a generally uniform amplitude along the azimuth with respect to that axis. Next, a pulsed radio frequency magnetic field is generated to excite nuclei in a substantially cylindrical shell around the tool that defines in the formation
5 a sensitive region extending along the length of the tool and having thickness of about 1 mm. Due to this relatively narrow sensitive region, standard wireline NMR relaxation time measurements are difficult to perform with this tool because lateral vibrations during the measurement time would reduce the accuracy of the measurement.

10 U.S. Pat. 5,557,201 to Kleinberg et al. discloses a pulsed NMR device in which the accuracy of the measurement with respect to lateral tool vibrations is enhanced by providing a larger sensitive region. This is achieved by a special tool architecture shown in Figs. 2A-
B, using two tubular permanent magnets 22 with same poles facing each other, and an antenna 26 positioned in the recess between the two magnets. In operation, this tool
15 architecture provides a sensitive region in the formation which is larger laterally, but is greatly reduced along the borehole axis, because of the presence of a single stationary point in the formation. It is expected therefore that vertical tool motions would affect the accuracy of the tool measurements.

20 Current NMR LWD and MWD applications also suffer from the drawback that tool operators have no way of determining whether a portion of the formation which is being drilled at a given time is of interest or not. Typically, during the drilling process the measurement tool rotates along with the drill bit and is used in the more robust T_1
measurement mode. On the other hand, due to its better accuracy T_2 measurement mode is
25 preferred for investigations of formation zones that are considered to be of higher interest. Such measurements are conducted while the drilling has been stopped, because the vibrations of the entire assembly during drilling interfere with the accuracy of the T_2 measurements. Thus, if the operator wishes to revisit interesting zones traversed by the borehole in the formation he has to compile a log of such zones in repeat the logging
30 process separately.

Accordingly, it is perceived that there is a need for a system and method with

improved sensitivity with respect to tool motions of pulsed NMR measurements using pulsed NMR tools. It is also perceived that there is a need for a system and method capable of providing real-time data concerning the properties of zones within the formation which are being investigated using LWD and MWD techniques.

5

SUMMARY OF THE INVENTION

The present invention concerns a novel method and device for formation evaluation while drilling a borehole using pulsed NMR tools with magnetic fields that are rotationally symmetric about the longitudinal axis of the borehole.

10

In a preferred embodiment, the method of the present invention is based on NMR relaxation time measurements determining longitudinal relaxation times T_1 . In particular, the method comprises the steps of generating at least one radio frequency pulse covering a relatively wide range of frequencies to saturate the nuclear magnetization in a cylindrical
 15 volume around the tool; transmitting a readout pulse at a frequency near the center of the range of covered frequencies, the readout pulse following a predetermined wait time; applying at least one refocusing pulse following the readout pulse; receiving at least one NMR echo corresponding to the readout pulse; repeating the above steps for a different wait time to produce a plurality of data points on a T_1 relaxation curve; and processing the
 20 produced T_1 relaxation curve to derive petrophysical properties of the formation.

In another aspect, the invention is a method for making nuclear magnetic resonance (NMR) measurements of a geologic formation using a NMR logging tool, comprising the steps of: providing a static magnetic field in a volume of said formation; applying
 25 oscillating magnetic fields according to a pulse sequence

$$\tau_i - \pi/2(+x) - [t_{cp} - \pi - t_{cp} - \text{echo}]_j - t_{cp} - \pi/2(-x)$$

where τ_i is a variable delay, and $i \geq 1$; $j \geq 1$; and $+x$ and $-x$ denote phases of the Larmor frequency of the carrier of the pulse with respect to a continuous wave Larmor frequency signal; t_{cp} is the Carr-Purcell spacing; and measuring the induced NMR echo signals. an
 30 optimized pulse sequence for use in T_1 logging.

In yet another aspect, the invention is a method for real-time processing of downhole logging data, comprising the steps of: a) drilling a borehole into a geologic formation; b) while drilling the borehole, applying a first data acquisition sequence to determine substantially in real time at least one parameter of a zone in the formation being traversed;

5 c) selecting a second data acquisition sequence based upon the at least one determined parameter; and e) applying the selected second data acquisition sequence to determine additional properties of said zone of the formation.

In another aspect, the invention is a method for making nuclear magnetic resonance (NMR) measurements of a geologic formation using an NMR logging tool, comprising the

10 steps of: applying oscillating magnetic fields according to a first pulse sequence

$$\tau_i - \pi/2(+x) - [t_{cp} - \pi - t_{cp} - \text{echo}]_j - t_{cp} - \pi/2(-x)$$

where τ_i is a variable delay, and $i \geq 1$; $j \geq 1$; and $+x$ and $-x$ denote phases of the Larmor frequency of the carrier of the pulse with respect to a continuous wave Larmor frequency

15 signal; t_{cp} is the Carr-Purcell spacing; applying one or more times a chirped pulse sequence, comprising a radio frequency (RF) pulse covering a relatively wide range of frequencies to saturate nuclear magnetization in a volume within the geologic formation and a readout pulse sequence at a frequency within the range of covered frequencies, the readout pulse sequence following a predetermined wait time after the saturation pulse; receiving NMR

20 echo signals corresponding to the first pulse sequence and to the one or more chirped pulse sequence; and processing the received NMR echo signals to determine properties of the geologic formation.

Additional aspect of the invention are described in further detail below.

25

BRIEF DESCRIPTION OF THE DRAWINGS

The advantages of the present invention will become apparent from the following description of the accompanying drawings. It is to be understood that the drawings

30 are to be used for the purpose of illustration only, and not as a definition of the invention.

Fig. 1A shows a side elevational view, partly in section, of the lower end of the apparatus disclosed in U.S. Pat. No. 5,280,243. Fig. 1B is an enlarged sectional view taken along the line 2-2 in Fig. 1A.

Fig. 2A shows a cross-section of a tool for pulsed NMR formation evaluation
5 disclosed in U.S. Pat. No. 5,557,201. Fig. 2B shows a static field in a vertical plane of the same tool.

Fig. 3 illustrates a motion-insensitive pulse sequence used in a specific embodiment in accordance with the present invention.

Fig. 4 is a top view into a borehole with an inserted tool and illustration of the area
10 covered by the saturation pulse and the annulus used for readout portion of the pulse sequence shown in Fig. 3.

Fig. 5 is another top view into a borehole with an inserted tool, illustrating how the random motion of the tool within the borehole can be used advantageously to improve the speed of the measurement.

15 Fig. 6 is an illustration of a forced recovery pulse sequence used in another embodiment of the present invention.

DETAILED DESCRIPTION

The description of the preferred embodiment of the method of the present invention
20 is made with reference to the tool disclosed in U.S. Pat. No. 5,280,243 to Miller, owned by the assignee of the present application. The content of the Miller patent is expressly incorporated herein for all purposes. Figs. 1A and 1B respectively show a side elevational view, partly in section, of the lower end of the Miller tool and an enlarged sectional view taken along the line 2-2 in Fig. 1A. It should be noted, however, that the method of the
25 present invention can also be used with any tool that generates a rotationally symmetric magnetic field including, for example, the tool disclosed in U.S. Pat. No. 5,557,201 to Kleinberg, illustrated in Figs 2A and 2B.

The method of the present invention is based on NMR relaxation time
30 measurements determining longitudinal relaxation times T1, instead of transversal relaxation times T2 that are typically used by a wireline tool. In particular, the method takes advantage of the magnetic field gradient which can be approximated in the proximity

of the sensitive volume as a linear fall-off of the magnetic field strength (and also of NMR resonance frequency) in the radial direction.

In a preferred embodiment, at the start of a measurement, one or more radio
5 frequency pulses covering a relatively wide range of frequencies, or using one or more
pulses which are frequency swept, are transmitted to saturate the nuclear magnetization in a
cylindrical volume around the tool. The range of frequencies can be, for example,
50-100kHz and is covered in a specific embodiment using a rapid succession of short radio
frequency pulses similar to the first pulse in a standard CPMG pulse sequence, or using a
10 single long pulse in a frequency sweep. Changing the range of frequencies used in this step
varies the position and the width of the sensitive region in the formation. In a specific
embodiment using the Miller tool, a frequency range between 50 and 100kHz saturates the
nuclear magnetization in a cylindrical volume around the tool, where the cylinder has a
typical diameter of 14", a height of 24", and thickness of between about 1/2" to 1".

15

Following the step of saturation, which typically takes about 1 ms, in accordance
with the present invention a readout pulse is transmitted at a frequency near the center of the
range of covered frequencies. In alternative embodiments one or more subsequent readout
pulses can also be used. In accordance with the present invention, a readout pulse sequence
20 is comprised of a 90° pulse followed by data acquisition, or of a 90° pulse followed by a
180° pulse, followed by data acquisition, where the steps of applying a 180° pulse and data
acquisition can be repeated. The readout pulse sequence generally follows a predetermined
wait time, as explained in more detail below. In a specific embodiment the readout pulse
sequence is transmitted at a center frequency of about 500kHz, and is followed by one or
25 more refocusing pulses.

Following the readout pulse(s), corresponding NMR echo signals are received,
amplified and stored for further processing. Preferably, only the first, the second echo or a
combination thereof is retained. In accordance with a preferred embodiment, the amplitude
30 of the retained echo signal is interpreted as the level of nuclear magnetization present after
the particular wait time. In the particular example considered above, the center frequency of
the NMR echo signals corresponds to about 14" diameter of investigation.

The measurement process described above is repeated for a series of increasing wait times the values of which can, for example, be equally distributed on a logarithmic scale. In a specific embodiment, wait times are stepped through the values 1ms, 3ms, 10ms, 30ms, 100ms, 300ms, 1000ms and 3000ms, and the measurement results are stacked to produce
5 several data points on a multi-component T1 relaxation curve. A data point corresponding to the longest wait time is obtained by a readout pulse sequence which is not preceded by a saturation pulse.

Finally, in accordance with the present invention the produced T1 relaxation curve is
10 used to derive petrophysical properties of the formation, as known in the art. In particular, the resultant T1 relaxation curve is processed to extract the dominant T1 relaxation modes, from which amounts of bound water, free water and hydrocarbons are estimated. The characteristic T1 times of the surface-wetting phase can also be used to estimate formation pore size distributions and formation permeability.

15

It should be noted that since the readout pulse and the signal acquisition have a much smaller bandwidth, typically 5-10kHz vs. 50-100kHz saturation bandwidth, the measurement results obtained using the above-described method are less sensitive to lateral motions of the tool, and in particular are not affected by lateral displacements during the
20 wait time period which do not exceed 1/4"-1/2". An illustration of a pulse sequence used in a specific embodiment of the present invention is shown in Fig. 3.

In accordance with another preferred embodiment of the present invention, the tool used to make the measurements can be fitted with accelerometers, such as those
25 manufactured by Analog Devices, to monitor peak acceleration values along all three axis during the measurement interval and magnetometers. Measurements, during which the peak accelerations indicate that the tool may have been displaced by more than allowable by the extent of the saturation region, are discarded before stacking to further improve the accuracy of the proposed method.

30

In accordance with another preferred embodiment, the tool is further fitted with hardened steel stand-offs, which, in an in-gauge borehole, allow lateral tool displacements

only within the range given by the saturation width. Naturally, the tool may further be provided with accelerometers, as described above, for further accuracy.

The above method of determination of T_1 in accordance with this invention is based
5 on determining data points on a T_1 polarization recovery curve. The broadband, frequency-
swept chirp pulse shown in Fig. 3 is issued to saturate nuclear magnetization in a wide
annulus around the tool. After a given recovery time, two short pulses are issued to trigger
a spin echo, which is digitized and quantified. Fig. 4 illustrates in a light-gray annulus the
10 volume reached by the chirp pulse, while the dark-gray rings indicate possible positions for
the readout volume. In this figure the tool is shown inside the borehole. As long as the
readout volume falls anywhere within the band prepared by the chirp pulse, a valid reading
is obtained. Although the measurement itself may take seconds, the motion and
displacement of the drill string and the attached NMR tool within this time period is
practically immaterial.

15

As noted above, in a specific embodiment, the recovery times are stepped, for
instance, through the series of 1ms, 3ms, 10ms, 30ms, 100ms, 300ms, 1000ms, and
3000ms. The echo amplitudes from these experiments link up to a magnetization recovery
curve, from which a T_1 time distribution can be derived. As known, the area under the
20 distribution is indicative of the total porosity (subject to variations in hydrogen density) and
the distribution itself is used to quantify the amount of clay-bound water, capillary-bound
water and free fluids (water, gas, oil).

In another aspect, the invention is an improvement allowing the sequence of steps
25 outlined above to be repeated rapidly so as to reduce the overall measurement time and/or
increase the number of data points collected. It will be appreciated that in order to achieve
good measurement statistics, the cycle through all recovery times should be repeated as fast
as possible. Analysis of the measurement sequence shows that most of the time is spent
acquiring data for the longest recovery times. Based on this observation, in accordance with
30 another aspect of the invention, two methods can be used individually or preferably in
combination to speed up the process. Accordingly, in a first embodiment, speeding up of
the process is based on a random selection of a new measurement volume. In a second

embodiment, use is made of a forced magnetization recovery pulse sequence to make maximum use of the existing formation magnetization. The preferred third embodiment uses a combination of the first and second methods in a manner discussed in more detail below.

5

In accordance with the first embodiment, random selection of a new measurement volume is applied. The method makes use of the random lateral motion of the drill string during normal operation. In essence, the method is based on using the undesirable under normal conditions motion of the tool within the borehole in order to change the volume saturated with nuclear magnetization around the tool. Without the use of the chirp pulse discussed above, only a narrow annulus is touched by each measurement. Therefore, within a few hundred milliseconds after each measurement the sensitive volume of the tool moves to a fresh, untouched annulus and the measurement can be repeated much faster than dictated by T_1 recovery alone. The principle is illustrated in Fig. 5, which shows a top view of the borehole without the use of an explicit saturation pulse. In a preferred embodiment, the longest wait-time data points may be acquired using this approach, in which repeated measurements of full magnetization (shown in dark-grey) are possible by letting the sensitive volume randomly wander within the formation. The remaining data points are obtained as discussed above.

15
20

In accordance with the second embodiment, another method can be used, referred to as forced magnetization recovery. This technique is known in the context of MR imaging, but to the best of the applicant's knowledge has not been applied in downhole NMR measurements. The basic forced magnetization recovery pulse sequence used in accordance with the present invention is shown in Fig. 6. In particular, following an initial long delay, that may be set in a typical application to 6 sec., a combination of $(\pi/2)_x$ pulse and $(\pi)_y$ pulse trigger a spin echo. The echo is refocused using a second $(\pi)_y$ pulse. In a preferred embodiment, the following signal acquisition window is replaced by a $(\pi/2)_x$ pulse that performs the opposite function of the initial $(\pi/2)_x$ pulse by flipping back magnetization into the z direction. Experiments have shown that approximately 80%-90% of the initial magnetization can be recovered in practice. This equates to time savings of two T_1 time constants in this preferred embodiment. It will be appreciated that other pulse sequences

25
30

can be used in practice, such as replacing a signal acquisition window with a $(\pi/2)$ -x pulse following the second, or subsequent echos. It will be apparent to a person of skill in the art that different timing can be used in various practical applications as well. The forced magnetization recovery method in accordance with the present invention, makes optimum
5 use of the existing polarization.

Finally, in accordance with a preferred embodiment of the invention, a combination of the above two methods can be applied using a sequence optimized in accordance with the present invention for T_1 logging, described as follows:

- 10 (1) apply an initial long delay to equilibrate the hydrogen magnetization. In a preferred embodiment 6000 ms can be used for the delay;
- (2) apply the forced-recovery sequence as shown in Fig. 6. In a preferred embodiment, the forced-recovery sequence is repeated 8 times every 600ms. It will be appreciated that no chirp pulse is issued at this time;
- 15 (3) repeatedly apply the chirped sequence according to Fig. 3, using different saturation recovery times, as dictated from the desired data points on the T_1 curve.

In a specific embodiment, the chirped sequence is applied as follows:

- 20 (a) a chirped sequence repeated 8 times and using a saturation-recovery time of 300ms;
- (b) a chirped sequence repeated 16 times and using a saturation-recovery time of 100ms;
- (c) a chirped sequence repeated 16 times and using a saturation-recovery time of 30ms;
- 25 (d) a chirped sequence repeated 64 times and using a saturation-recovery time of 10ms; and
- (e) a chirped sequence repeated 64 times and using a saturation-recovery time of 1ms.

30 With the timing illustrated in Figs. 3, 6 and method step (1), this entire sequence takes 16 seconds to execute. CPMG phase cycling (phase alternation) is embedded within the repeats. It will be appreciated that without departing from the spirit of this invention in

practice various modifications may be used of the number of times each sequence is repeated, or the specific recovery times, or the sequence in which data points for different recovery times are acquired.

5 In accordance with another aspect of the invention, the motion of the tool can be used for automatic selection of a T_1 or T_2 measurement mode. As noted above, in a preferred embodiment, the tool contains accelerometers and magnetometers that sense the presence of motion. For example, it is well known that the rotation of the tool in LWD mode can be detected by magnetometers. Acceleration and magnetic induction signals can
10 be obtained in accordance with the present invention from micro-machined silicone accelerometers, as distributed by Silicon Designs with a bandwidth of 5kHz and magnetoresistive sensors (magnetometers) from Honeywell (Model HMC1002). If the sensors detect motion that corresponds to the rotation of the drill bit, in a preferred embodiment of the invention a T_1 measurement mode is activated. If no motion is detected,
15 the tool enters T_2 measurement mode. The automatic selection of the measurement mode can be implemented in a preferred embodiment using the real-time data transfer options described below.

20 Real-Time Data Transfer

As noted above, signals which are representative of measurements made downhole can be relayed to the surface with a mud pulse telemetry device that controls the mud flow, encoding information in pressure pulses inside the drill string. The pulses travel upward through the mud to the surface, where they are detected and decoded so that the downhole
25 measurements are available for observation and interpretation at the surface substantially in real time. As an alternative, it is known in the art to provide a downhole processor with sufficient memory for temporarily storing measurements until such time that the drill string is removed from the borehole. Mud pulse systems of this type are discussed, for example, in U.S. Pat. No. 5,586,083 and U.S. Pat. 5,586,084, both assigned to the assignee of the
30 present application, which are hereby incorporated by reference for all purposes.

The transfer of real-time data to the surface is handicapped by the very slow data channel available as a fraction of the throughput of the mud pulsing system. Rates of several bit/s are typical. In accordance with the present invention, two methods of addressing this issue can be used in different embodiments.

5

Downhole T_1 inversion. In accordance with a first embodiment, data from several complete cycles can be averaged into a small number of data points. In a preferred embodiment, data from 4 complete cycles of the T_1 measurement optimized sequence described above (corresponding to 64 seconds) are averaged into 6 data points. A smaller or larger number of points can be used in alternative embodiment. The data points obtained in the preferred embodiment correspond, for example, to recovery times of 6000, 300, 100, 30, 10 and 1ms. The corresponding saturation-recovery curve is transformed into a series of T_1 components using a fixed set of basis functions. The time constants for these basis functions range from 1ms to 10s. Selected statistics, for example, the total area under the T_1 curve (associated with the porosity of the formation), the geometric mean T_1 time (associated with the permeability of the formation), and others, are transmitted uphole and used for a preview of porosity, estimated bound water and free fluid volumes and permeability.

10

Uphole T_1 inversion. In accordance with a second embodiment, the averaged data points themselves are transmitted uphole and processed there. It will be appreciated that not every data point is equally important. Therefore, in some applications it may be sufficient to use for the uphole fit only the fastest (1ms), a medium-fast, and the slowest data points.

20

A person of skill in the art will appreciate that in different practical applications either downhole or uphole inversions using different numbers of data points may be used.

25

The foregoing description of the preferred embodiments of the present invention has been presented for purposes of illustration and description. It is not intended to be exhaustive nor to limit the invention to the precise form disclosed. Many modifications and variations will be apparent to those skilled in the art. The embodiments were chosen and described in order to best explain the principles of the invention and its practical

applications, thereby enabling others skilled in the art to understand the invention. Various embodiments and modifications that are suited to a particular use are contemplated. It is intended that the scope of the invention be defined by the accompanying claims and their equivalents.

5

10

15

20

25

30

CLAIMS:

1. A method for making nuclear magnetic resonance (NMR) measurements of a geologic formation using a NMR logging tool, comprising the steps of:

- 5 providing a static magnetic field in a volume of said formation;
applying oscillating magnetic fields according to a pulse sequence

$$\tau_i - \pi/2(+x) - [t_{cp} - \pi - t_{cp} - \text{echo}]_j - t_{cp} - \pi/2(-x)$$

10 where τ_i is a variable delay, and $i \geq 1$; $j \geq 1$; and $+x$ and $-x$ denote phases of the Larmor frequency of the carrier of the pulse with respect to a continuous wave Larmor frequency signal; t_{cp} is the Carr-Purcell spacing; and

measuring the induced NMR echo signals.

15 2. The method of claim 1 further comprising the step of processing the induced NMR echo signals to derive petrophysical properties of the formation.

3. The method of claim 2 further comprising the step of monitoring the motion of the tool with respect to the borehole.

20 4. The method of claim 3, wherein the step of processing comprises discarding echo signals obtained during measurement intervals when motion tool acceleration values exceed predetermined threshold.

5. The method of claim 1 further comprising the step of drilling a borehole in said geologic formation concurrently with the steps of providing, applying and measuring.

6. The method of claim 2, wherein the step of processing comprises computation of T_1 relaxation times.

25 7. The method of claim 1, wherein the phase of all π pulses is y .

8. The method of claim 1, wherein the phase of all π pulses is x .

9. The method of claim 1, wherein the phase of the π pulses is alternated between $+y$ and $-y$ for incremental values of the index i .

30 10. A method for real-time processing of downhole logging data, comprising the steps of:

- a) drilling a borehole into a geologic formation;

b) while drilling the borehole, applying a first data acquisition sequence to determine substantially in real time at least one parameter of a zone in the formation being traversed;

c) selecting a second data acquisition sequence based upon the at least one
5 determined parameter; and

e) applying the selected second data acquisition sequence to determine additional properties of said zone of the formation.

11. The method of claim 10, wherein the first data acquisition sequence corresponds to nuclear magnetic resonance (NMR) T_1 relaxation time measurements.

10 12. The method of claim 11, wherein the second data acquisition sequence corresponds to NMR T_2 relaxation time measurements.

13. The method of claim 10, wherein the data acquisition sequence is an NMR data acquisition sequence and the at least one parameter determined in step (b) is one of: the total area under a T_1 relaxation curve, the geometric mean T_1 relaxation time, the bound fluid
15 volume, and the free fluid volume.

14. The method of claim 10, wherein the data acquisition sequence is an NMR data acquisition sequence and the at least one parameter determined in step (b) comprises at least two data points corresponding to T_1 relaxation measurement at different recovery times.

15. The method of claim 14, wherein step (b) further comprises the step of
20 transmitting said at least two data points uphole.

16. The method of claim 13, wherein step (c) comprises estimation of one of: porosity, estimated bound water, free fluid volume(s) and permeability associated with the zone in the formation based on the transmitted at least two data points.

17. The method of claim 15, wherein step (c) comprises estimation of one of:
25 porosity, estimated bound water, free fluid volume(s) and permeability associated with the zone in the formation based on the transmitted at least two data points.

18. The method of claim 10, wherein the at least one parameter of a zone in the formation being traversed is determined from data sent uphole using a mud pulsing system of a logging tool.

30 19. The method of claim 18, wherein the bit rate of the mud pulsing system is between about 0.1 to 10 bits/sec.

20. A method for making nuclear magnetic resonance (NMR) measurements of a geologic formation using an NMR logging tool, comprising the steps of:

applying oscillating magnetic fields according to a first pulse sequence

$$5 \quad \tau_i - \pi/2(+x) - [t_{cp} - \pi - t_{cp} - \text{echo}]_j - t_{cp} - \pi/2(-x)$$

where τ_i is a variable delay, and $i \geq 1; j \geq 1$; and $+x$ and $-x$ denote phases of the Larmor frequency of the carrier of the pulse with respect to a continuous wave Larmor frequency signal; t_{cp} is the Carr-Purcell spacing;

10 applying one or more times a chirped pulse sequence, comprising

a radio frequency (RF) pulse covering a relatively wide range of frequencies to saturate nuclear magnetization in a volume within the geologic formation and a readout pulse sequence at a frequency within the range of covered frequencies, the readout pulse sequence following a predetermined wait time

15 after the saturation pulse;

receiving NMR echo signals corresponding to the first pulse sequence and to the one or more chirped pulse sequence; and

processing the received NMR echo signals to determine properties of the geologic formation.

20 21. The method of claim 20, wherein $\tau_1 \gg \tau_i$, where $i = 2, 3, \dots, N$ and N is some integer.

22. The method of claim 21, wherein $\tau_1 \geq 1$ second.

23. The method of claim 22, wherein τ_1 is about 6000 ms.

24. The method of claim 20, wherein the first sequence is repeated N times.

25 25. The method of claim 20, wherein the chirped sequence is repeated two or more times using different saturation recovery times.

26. The method of claim 25, wherein the selection of different saturation recovery times is made based on desired data points on a T_1 relaxation curve.

27. The method of claim 26, wherein the chirped sequence is repeated using
30 saturation recovery times including two or more of the following: 1 ms, 10 ms, 30 ms, 100 ms, 300 ms.

28. The method of claim 20 wherein the range of frequencies to saturate the nuclear magnetization is between about 50kHz and 100kHz.

29. The method of claim 20, wherein the range of frequencies is covered using a rapid succession of short radio frequency pulses.

5 30. The method of claim 20, wherein the range of frequencies is covered using a single pulse in a frequency sweep.

31. The method of claim 20, wherein said readout pulse sequence is a CPMG pulse sequence.

10 32. The method of claim 20 further comprising the step of drilling a borehole in said geologic formation concurrently with the steps of providing, transmitting and receiving.

33. The method of claim 20, wherein the phase of all π pulses is y.

34. The method of claim 20, wherein the phase of all π pulses is x.


15 35. The method of claim 20, wherein the phase of the π pulses is alternated between +y and -y for incremental values of the index i.

20

25

30

FIG. 1A
PRIOR ART

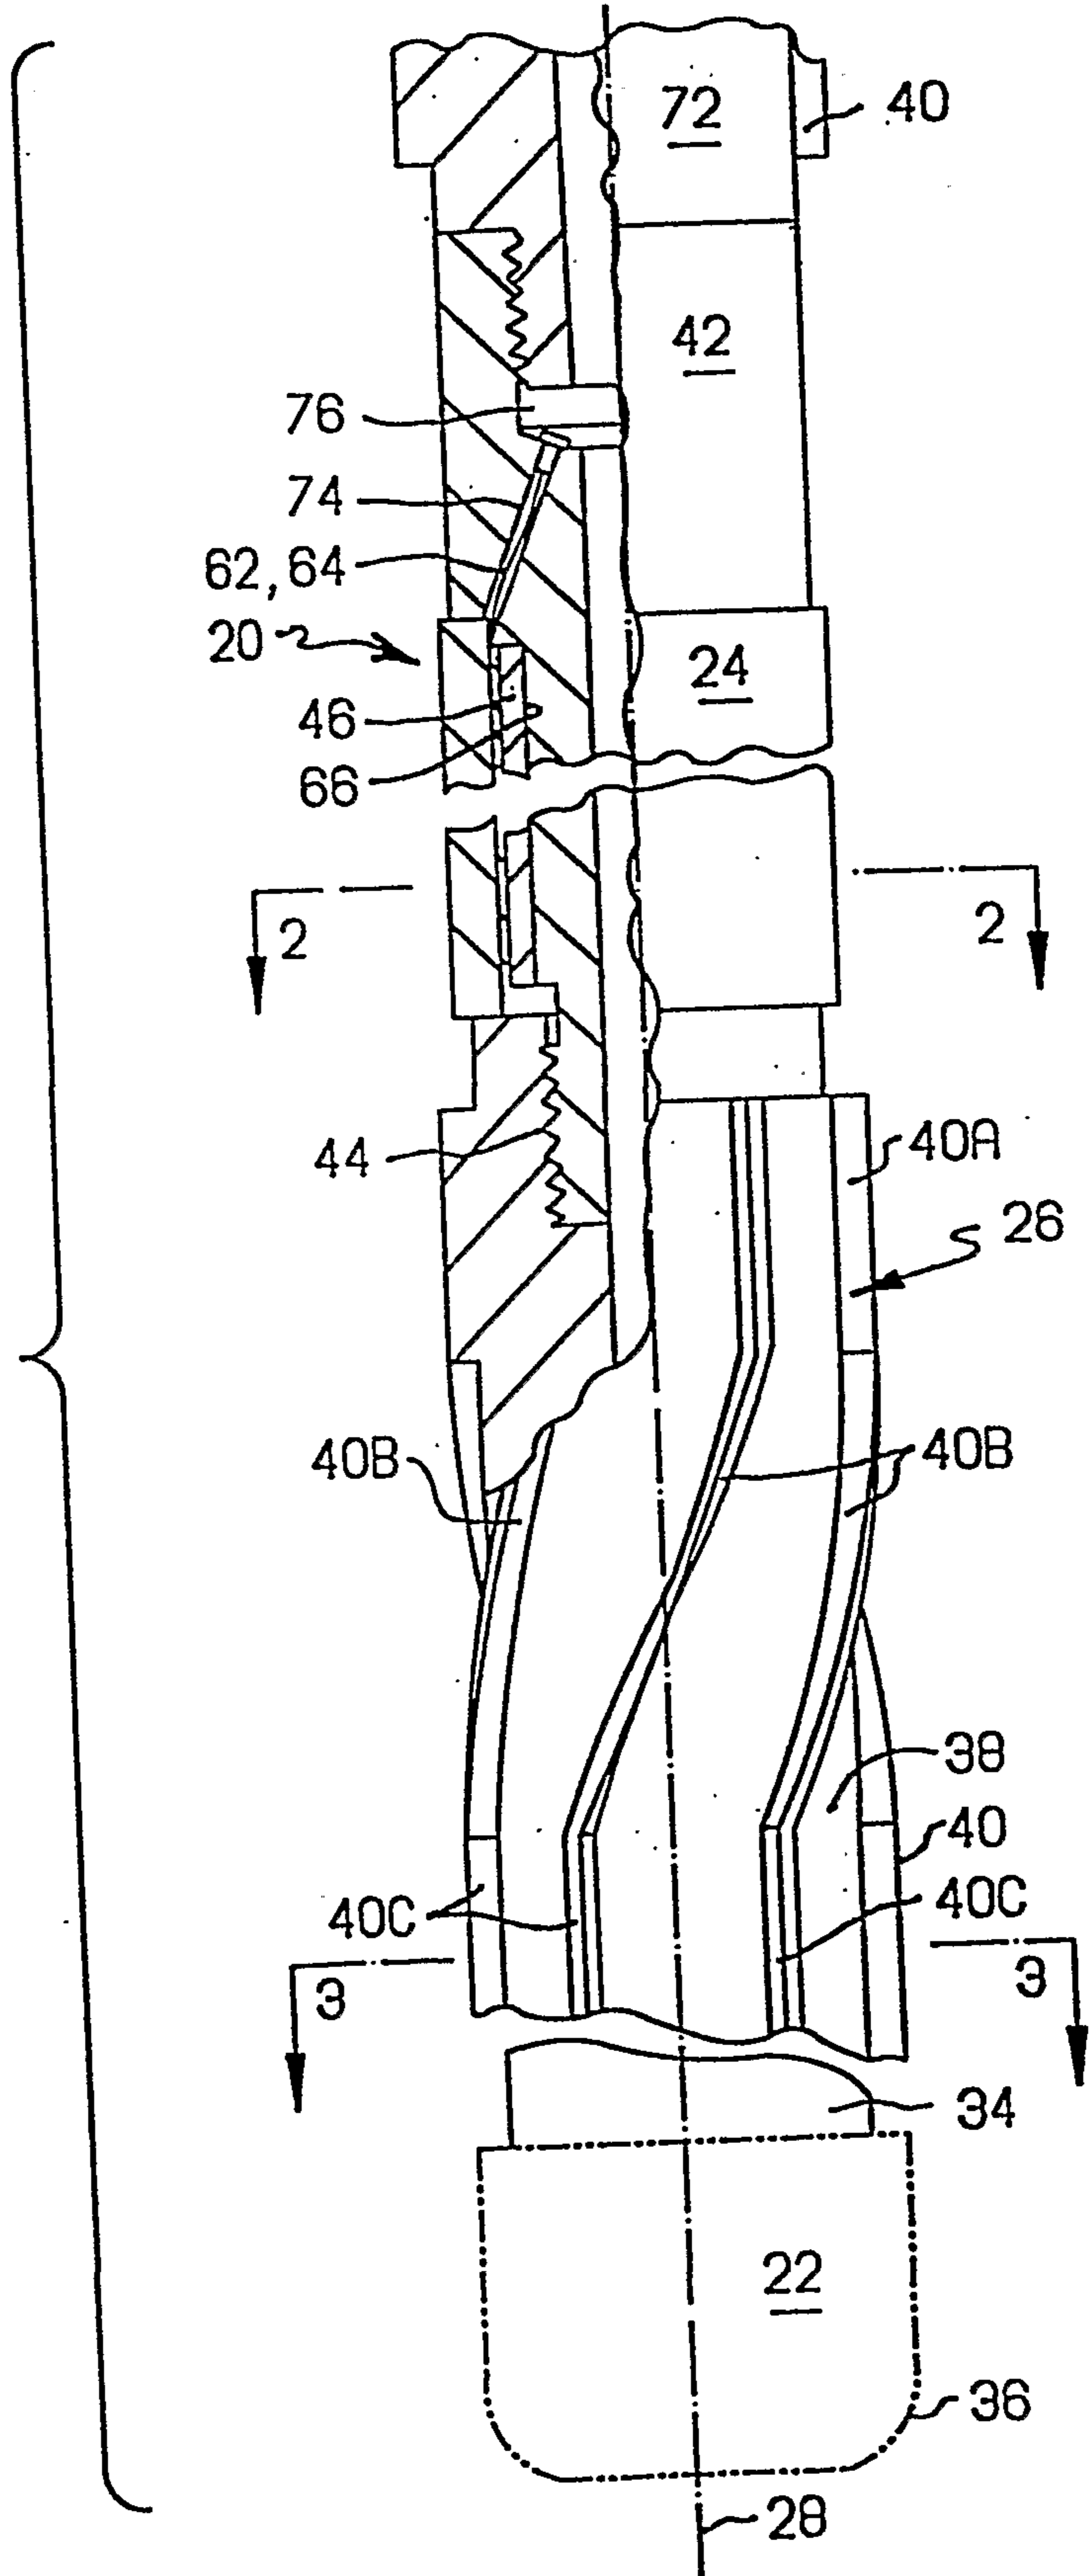

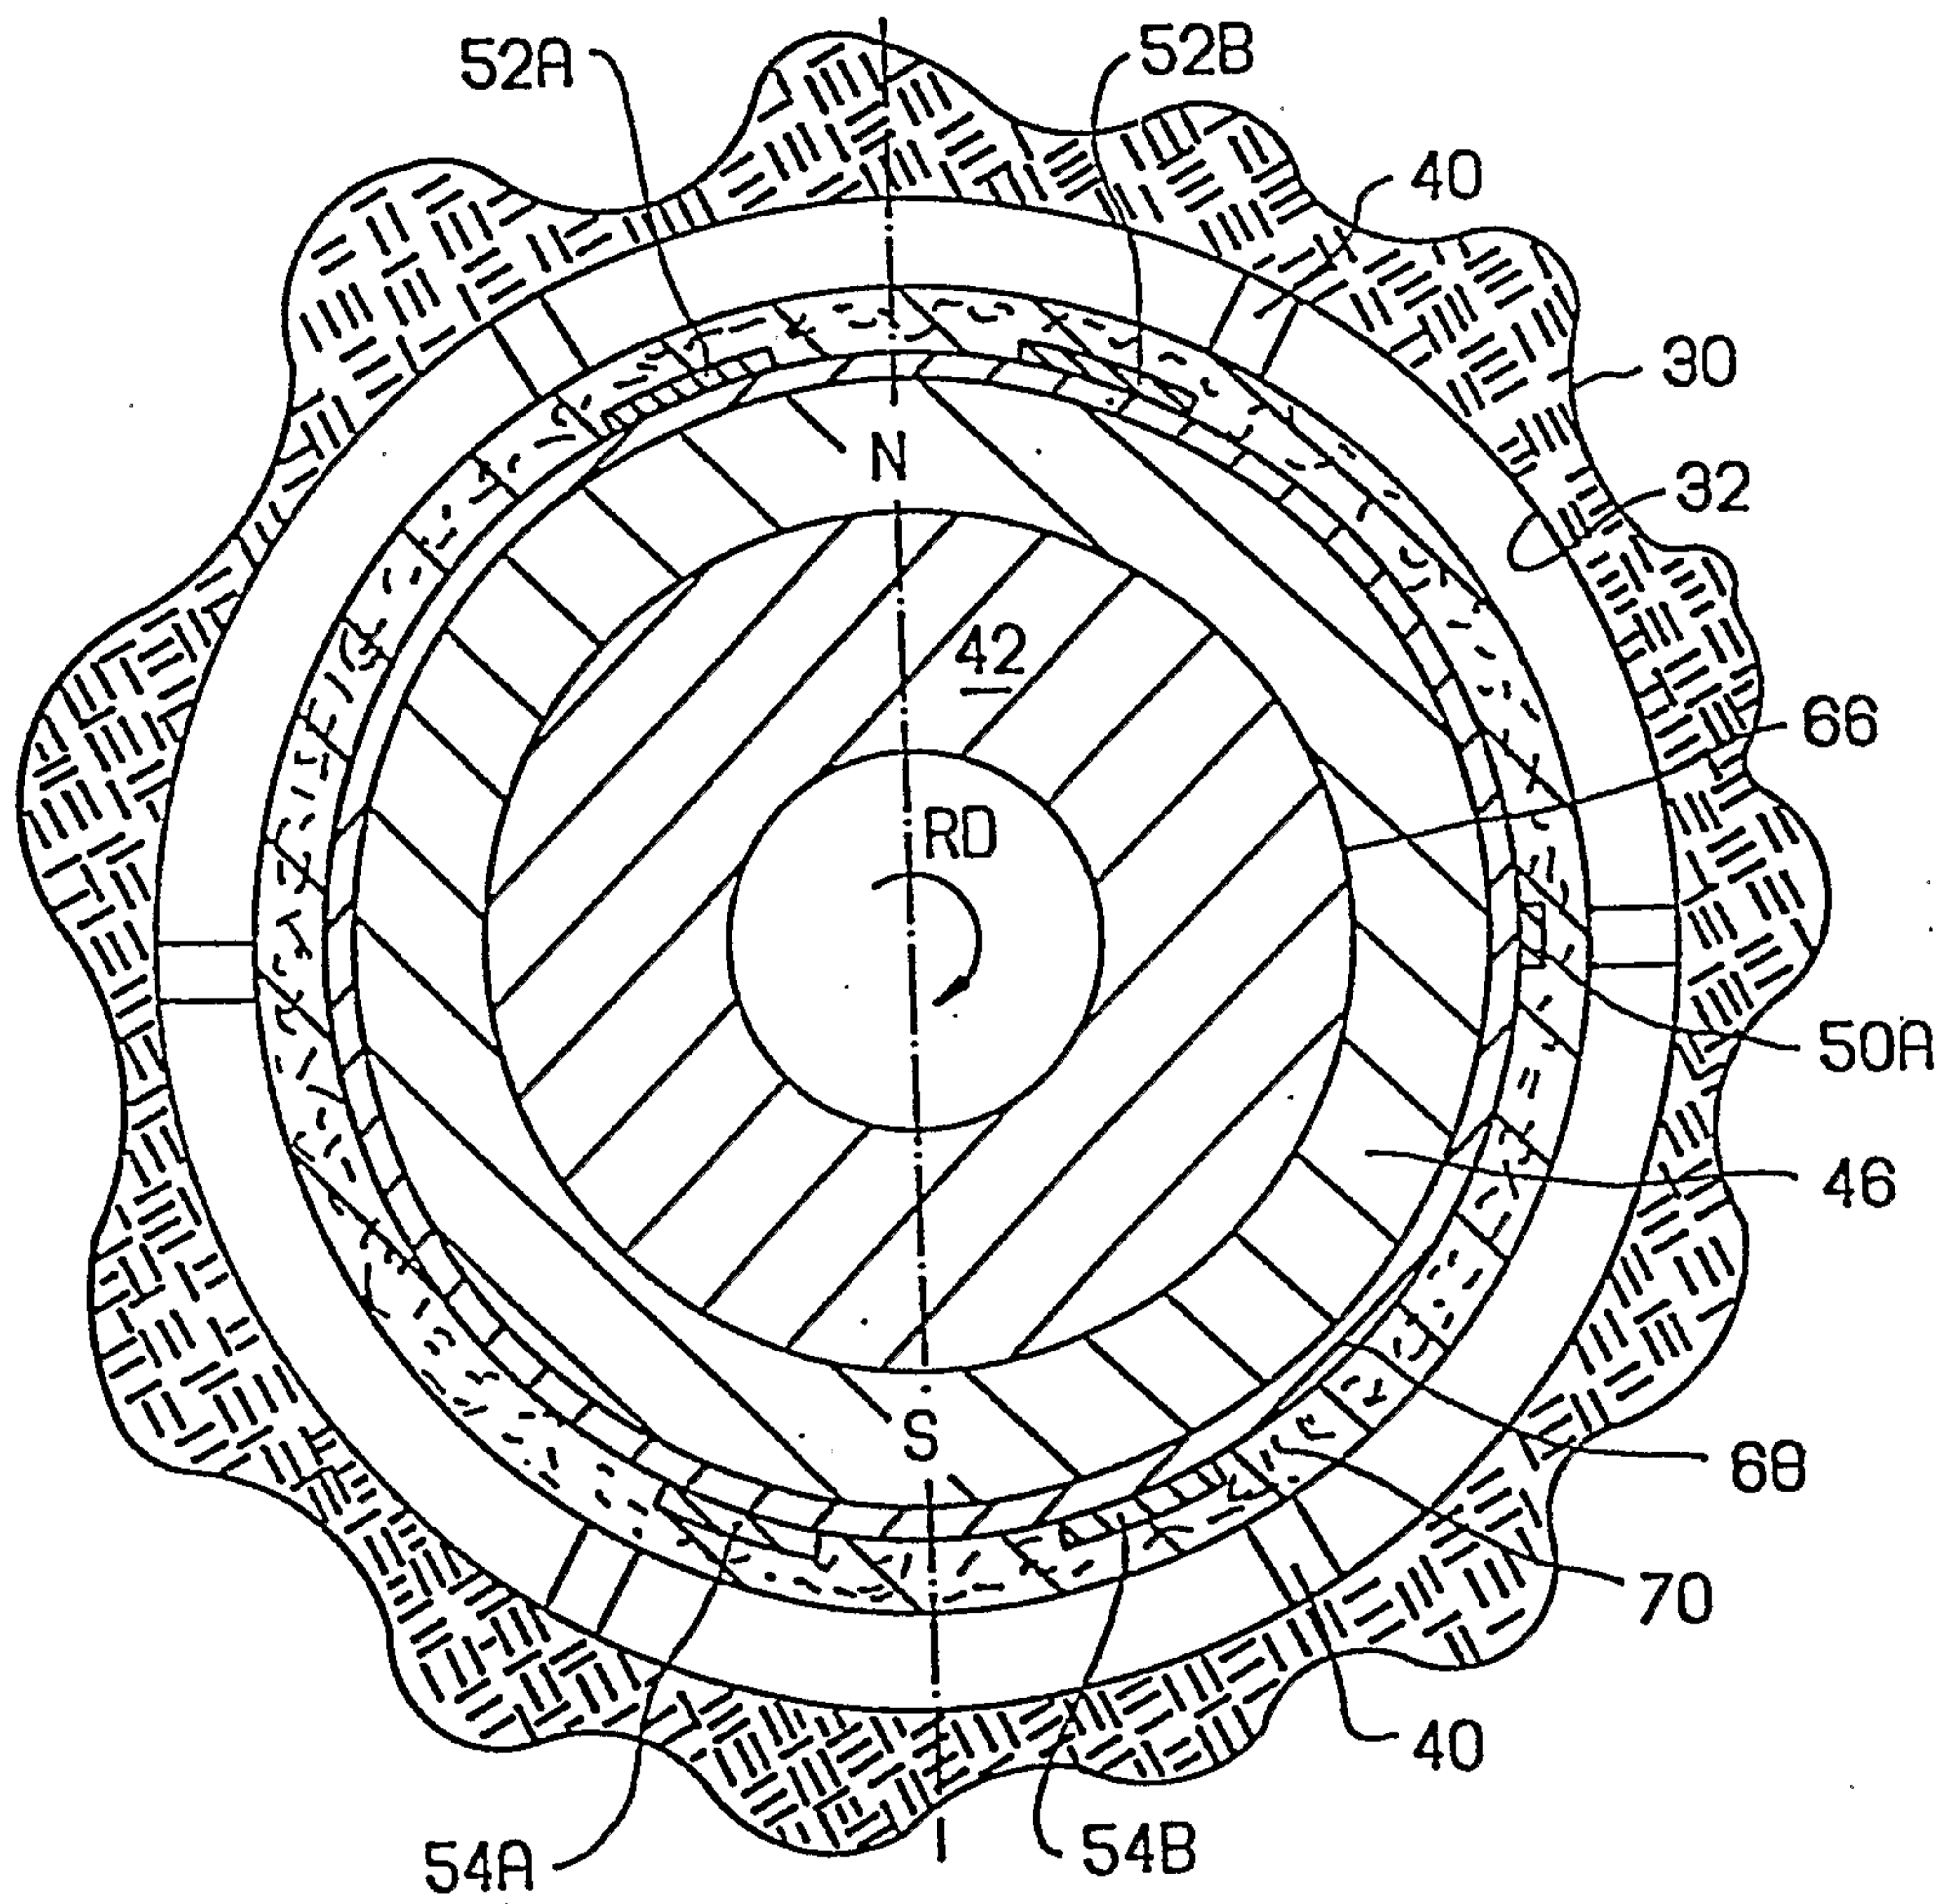


FIG. 1B
PRIOR ART

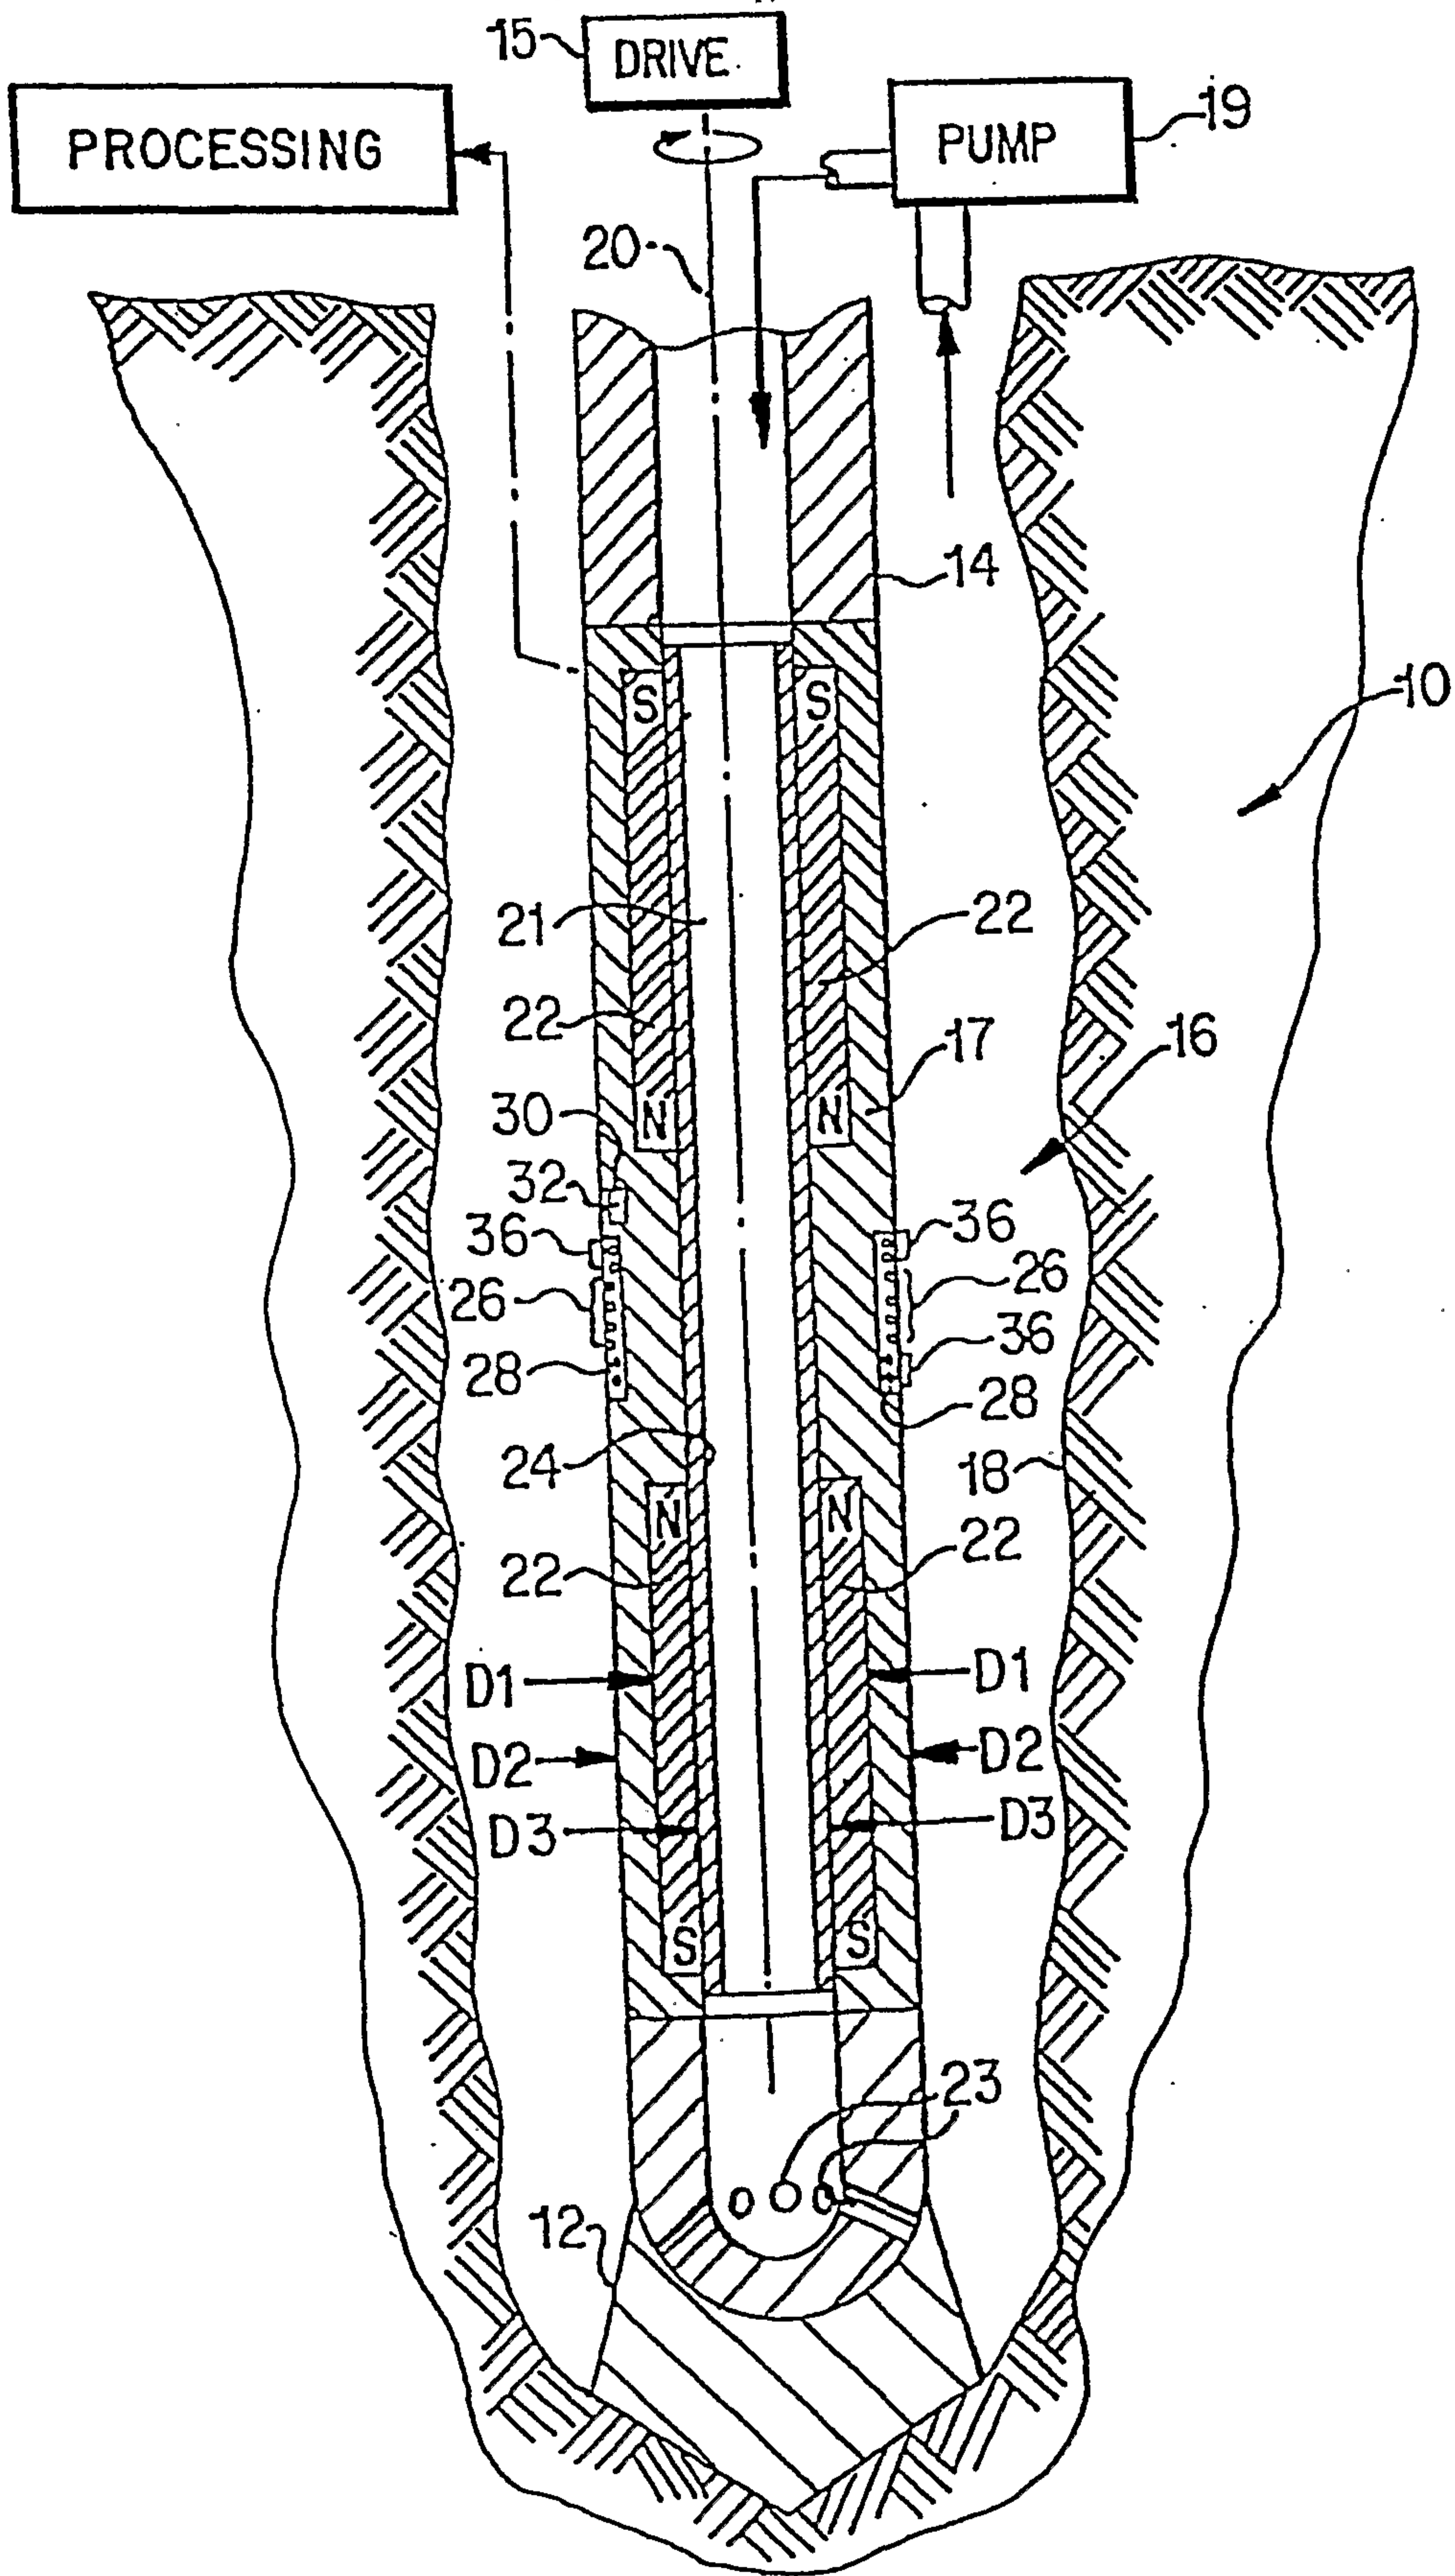


FIG. 2A PRIOR ART

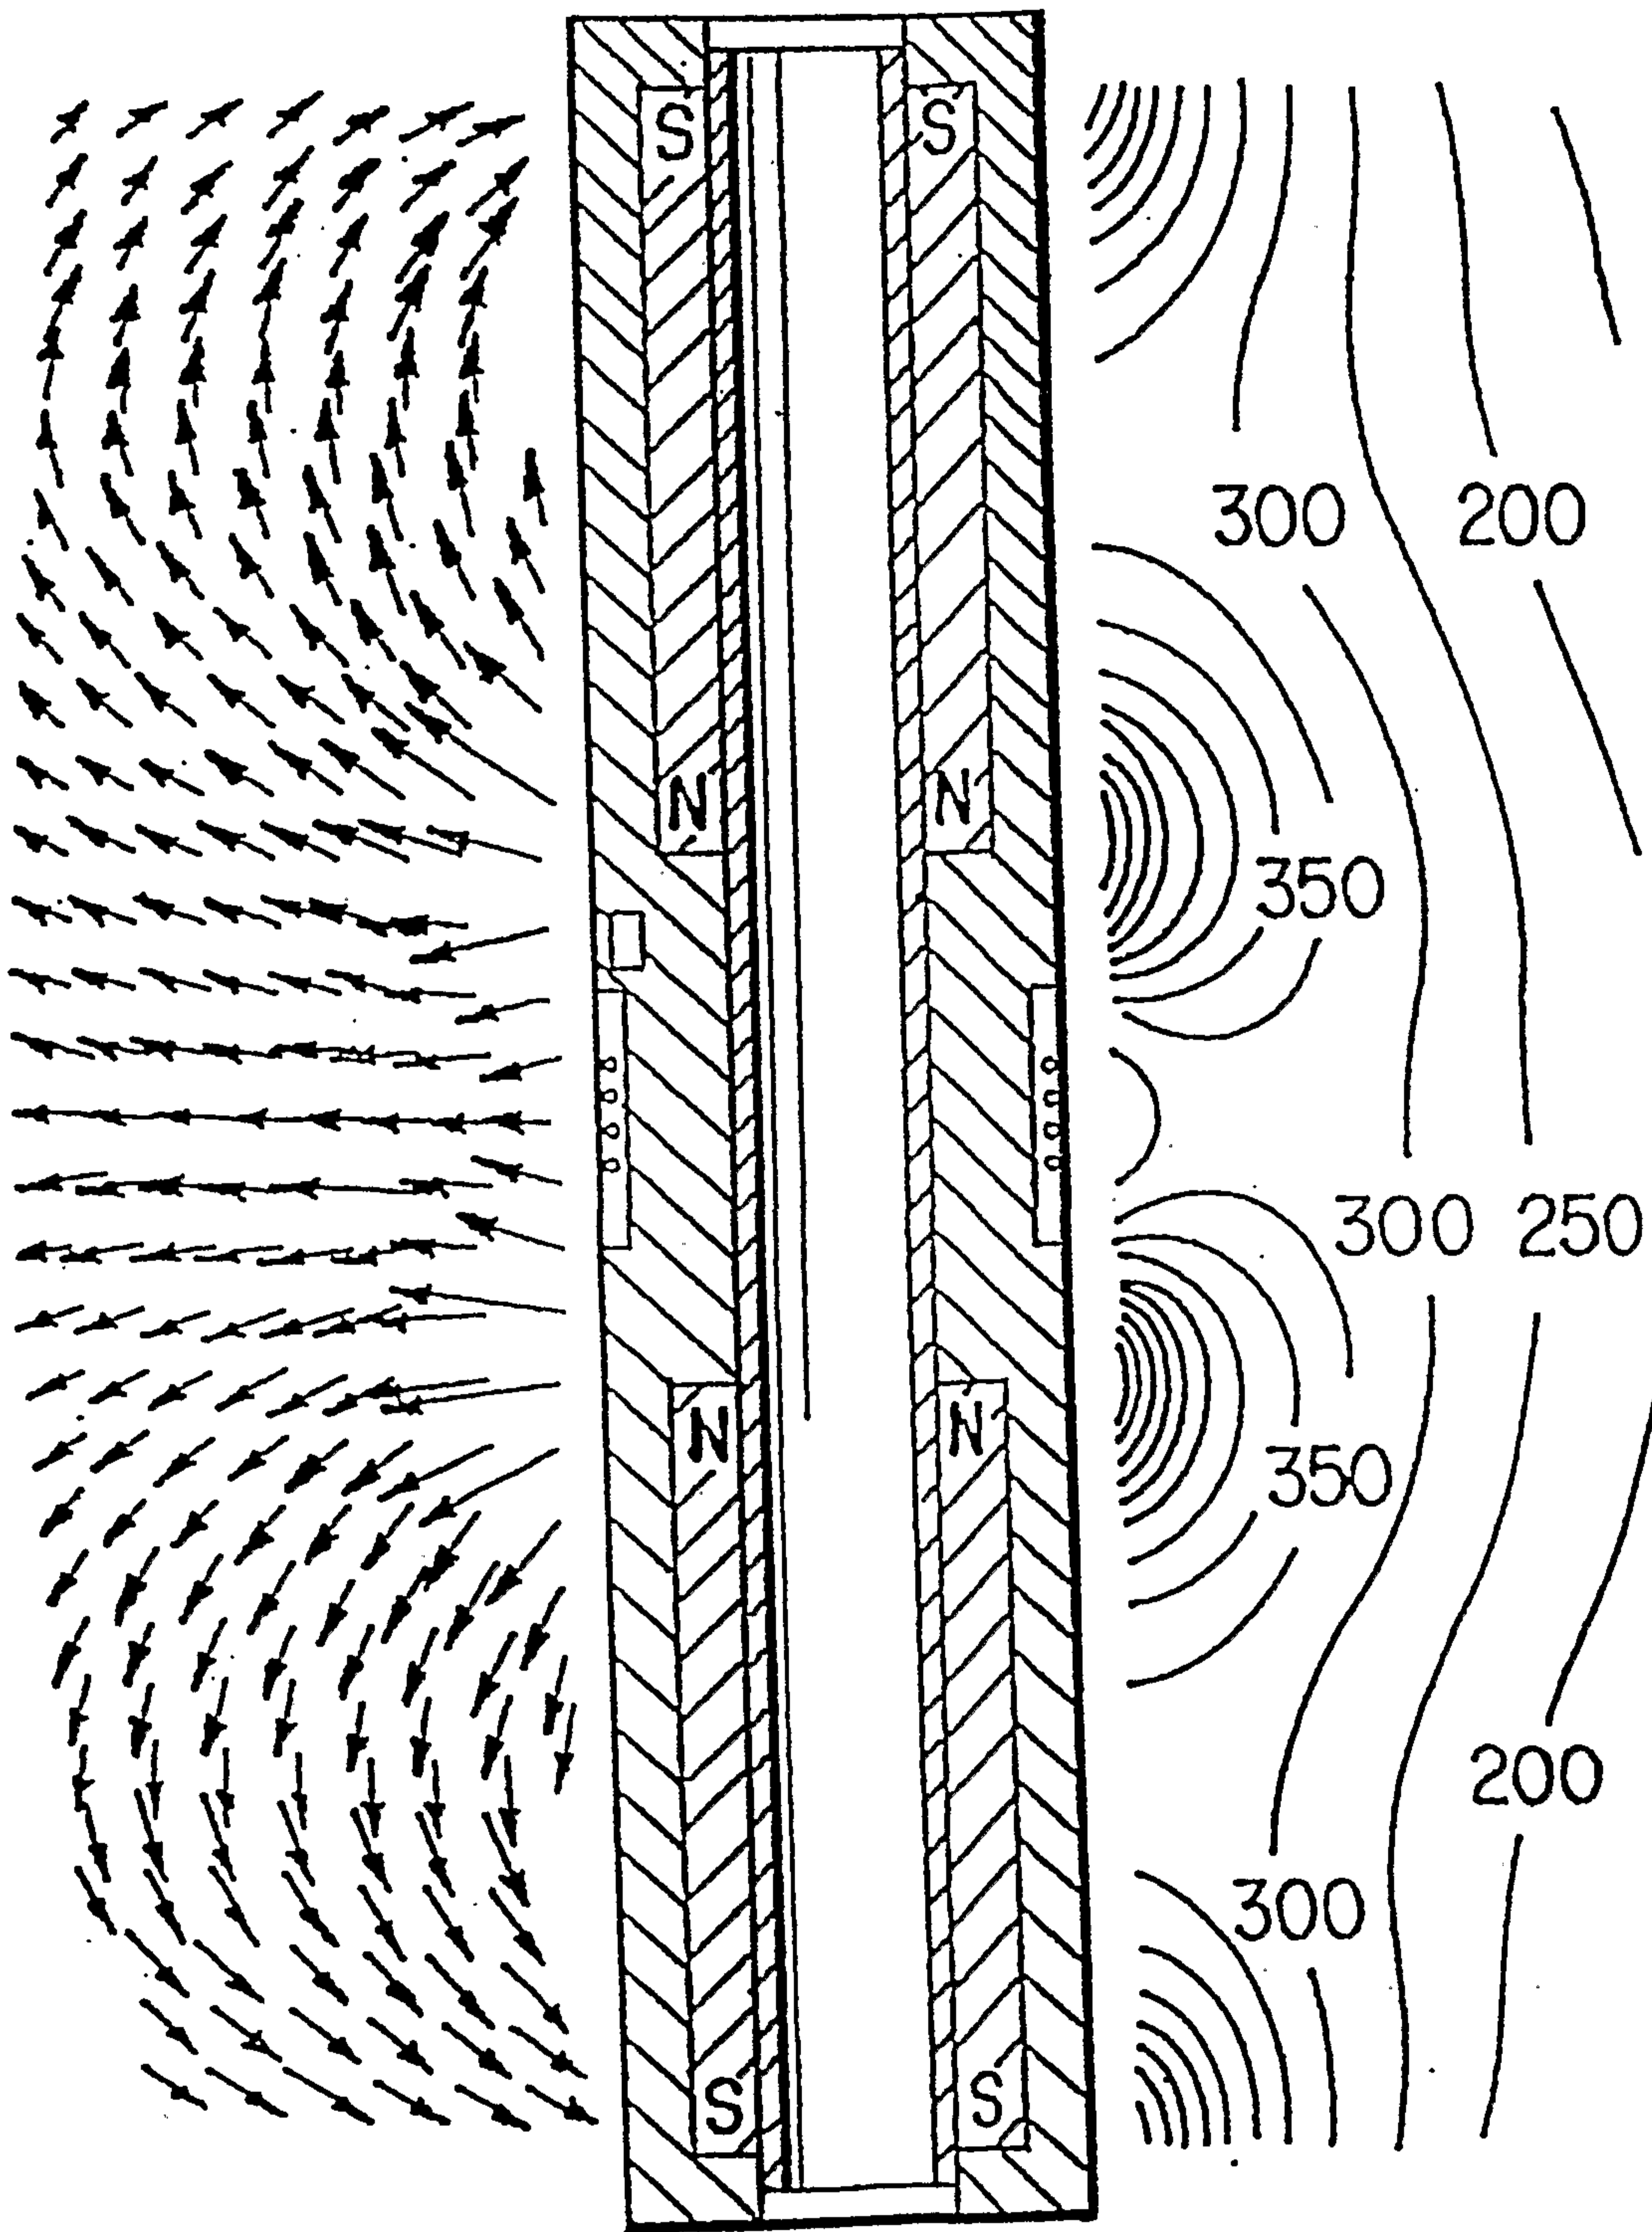


FIG. 2B PRIOR ART

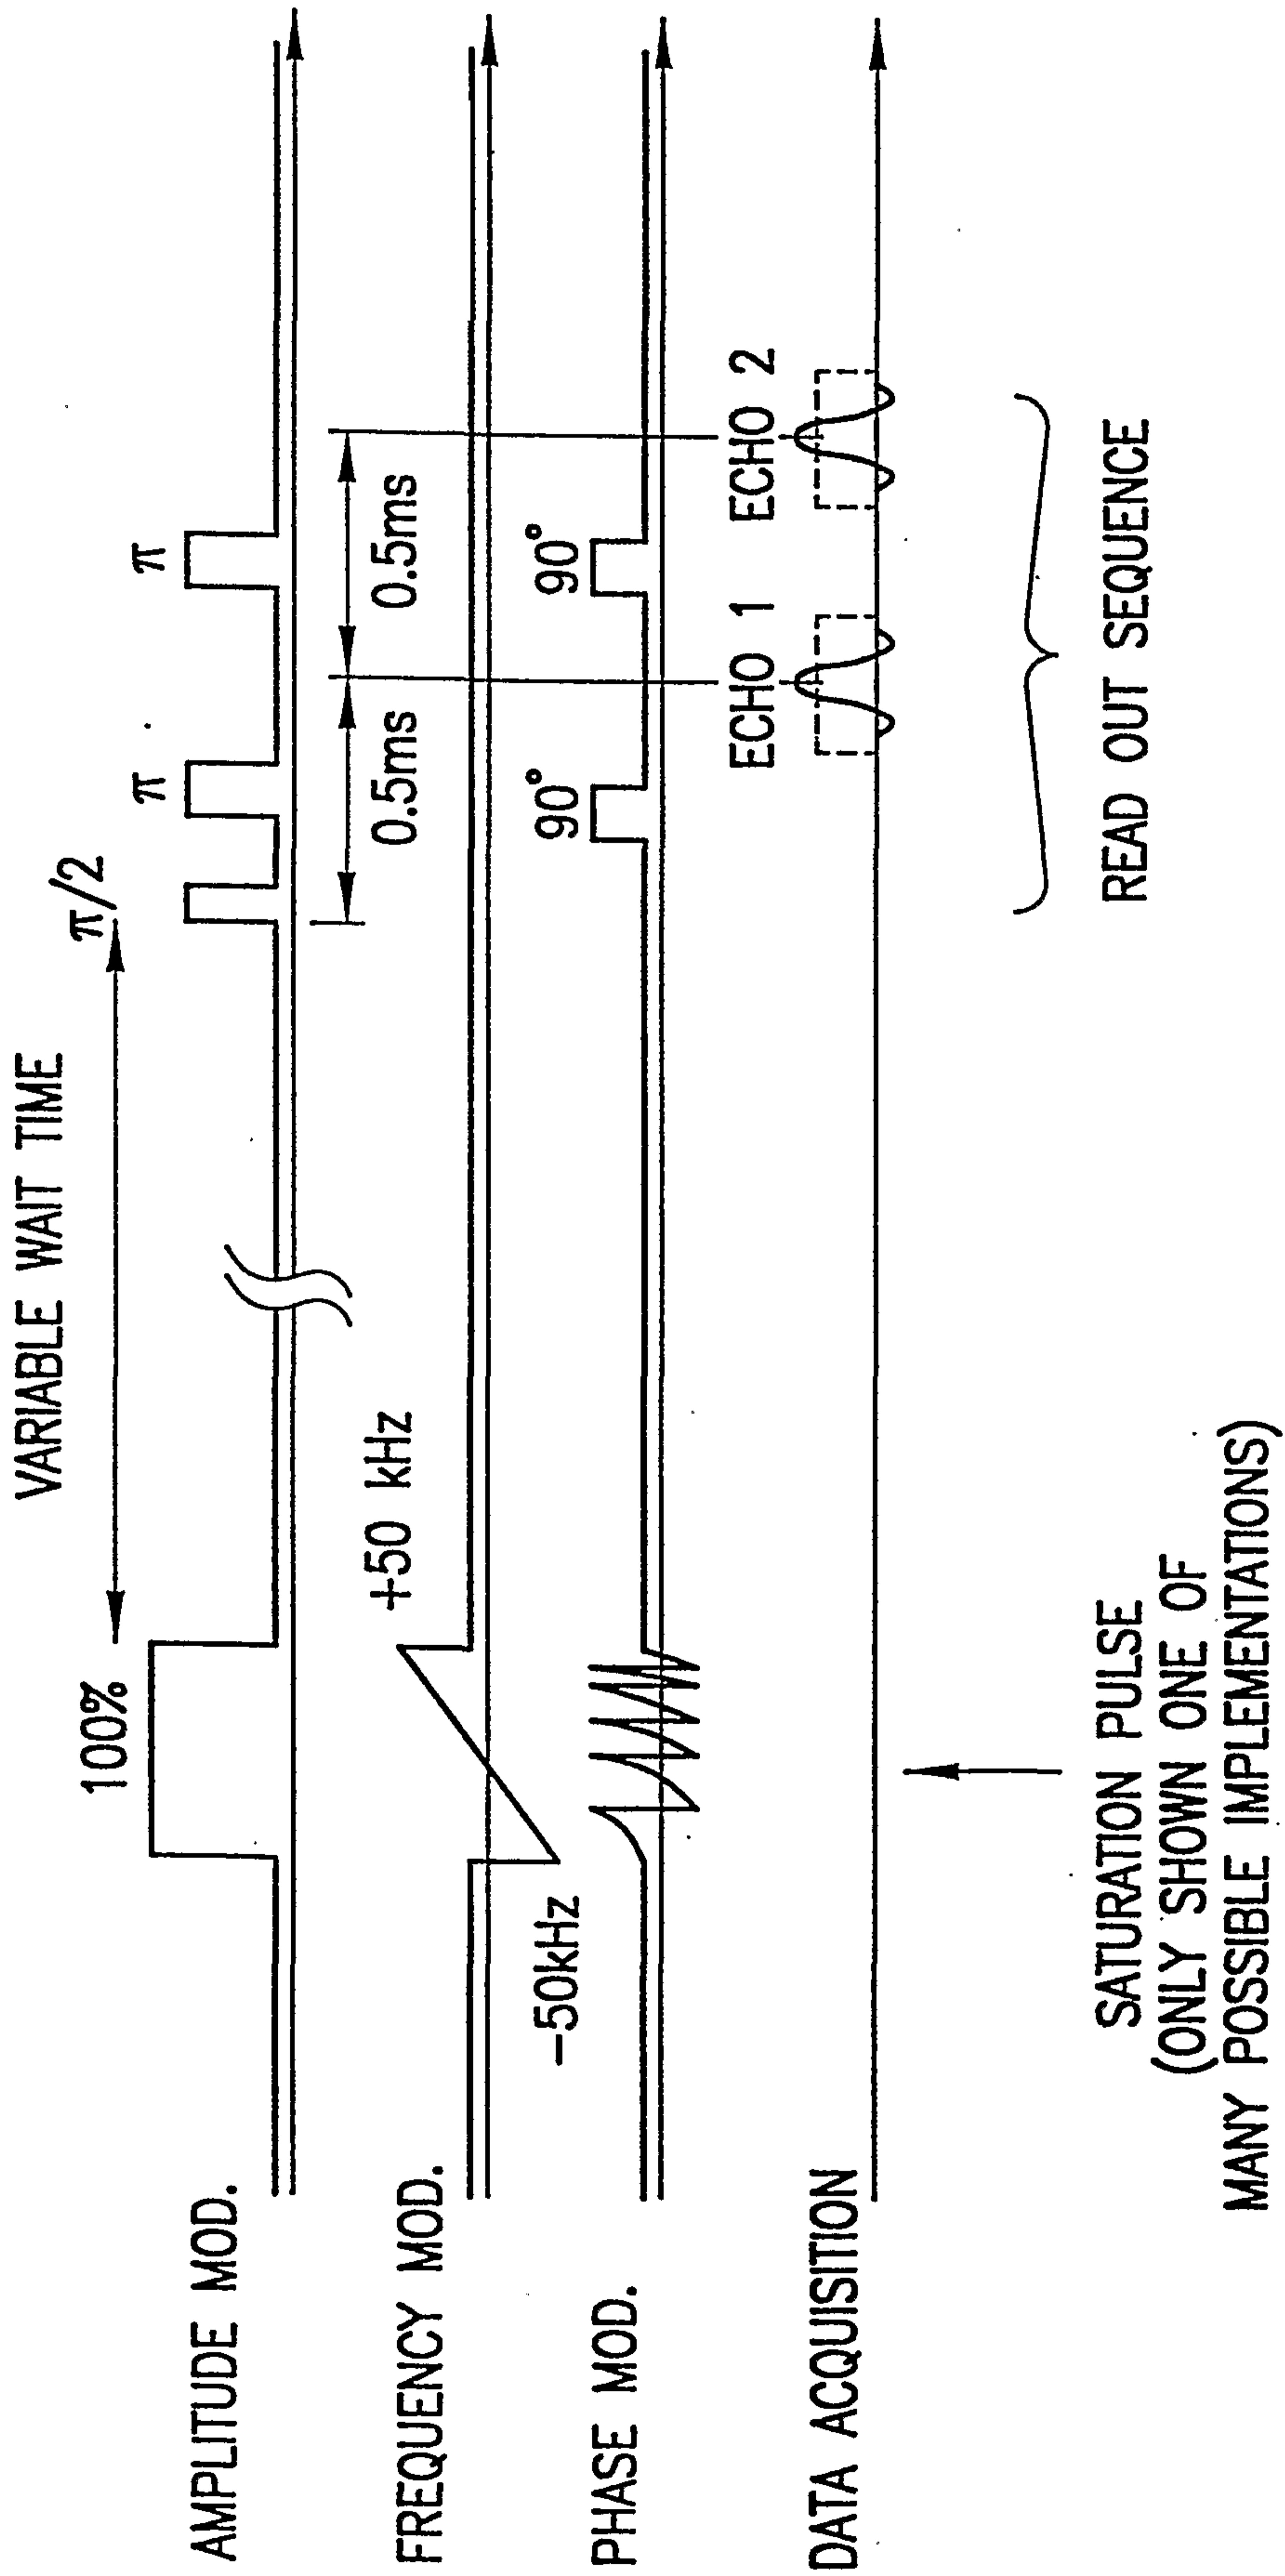


FIG.3

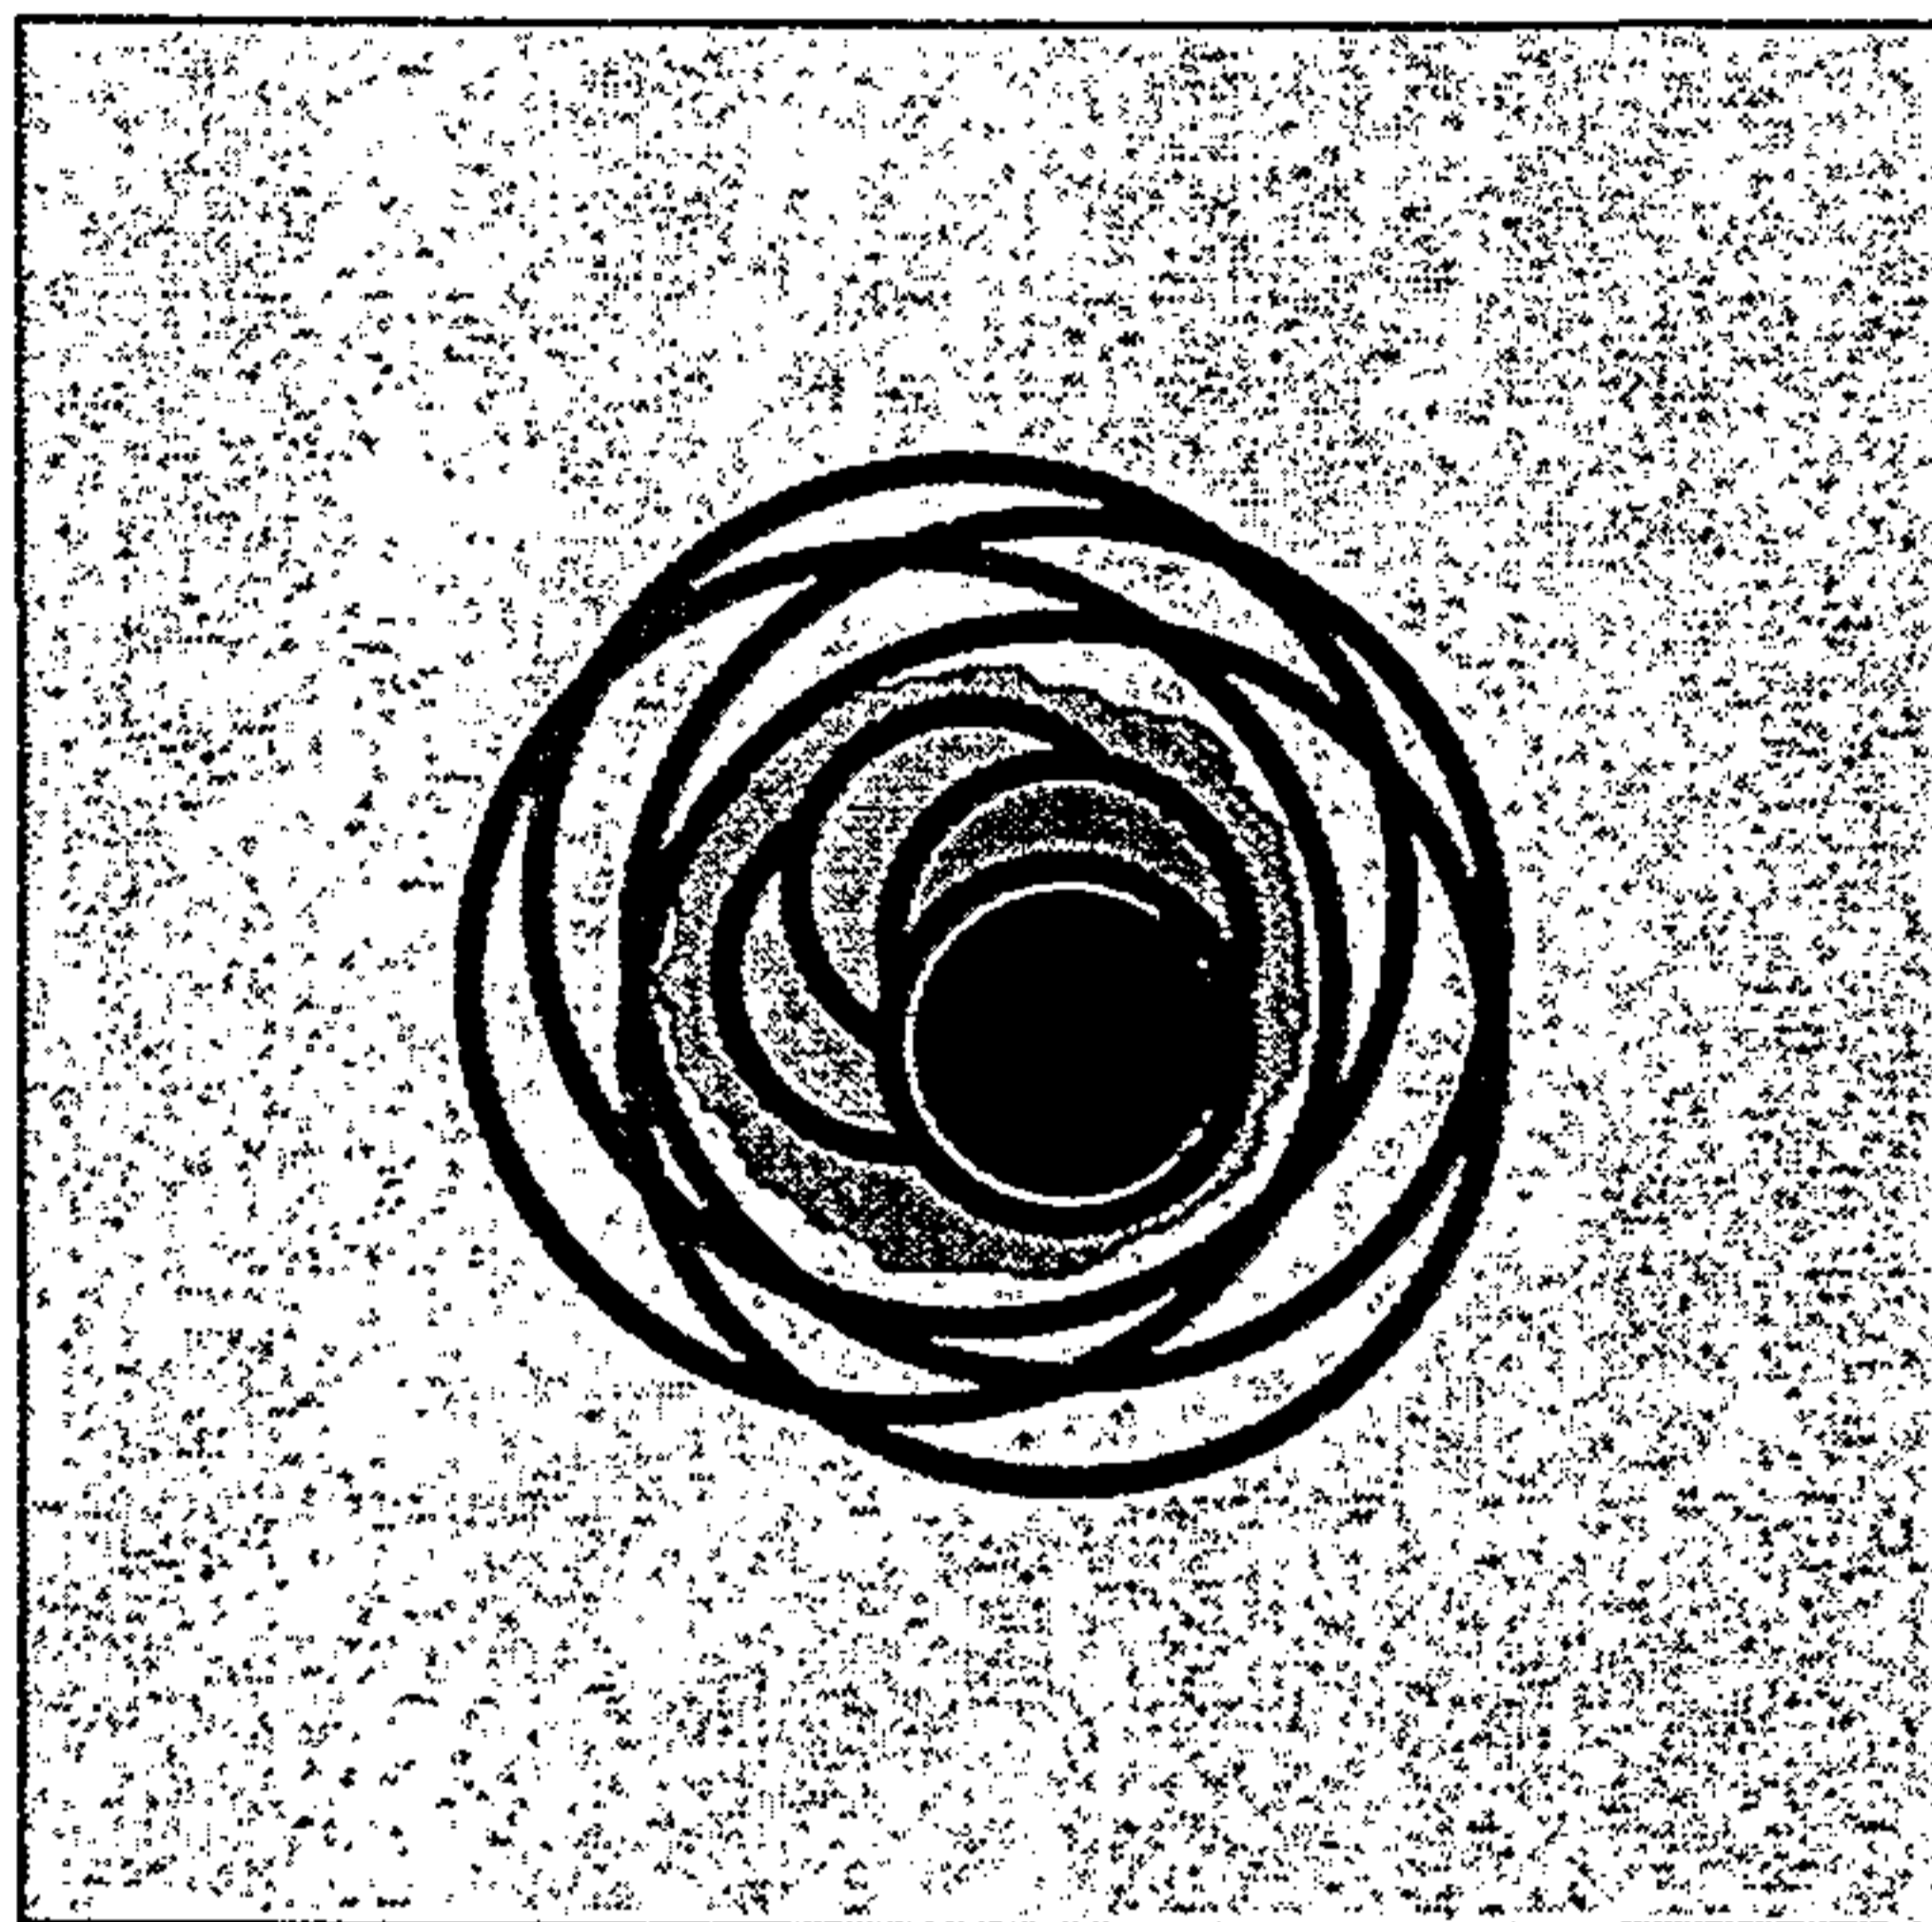


FIG. 5

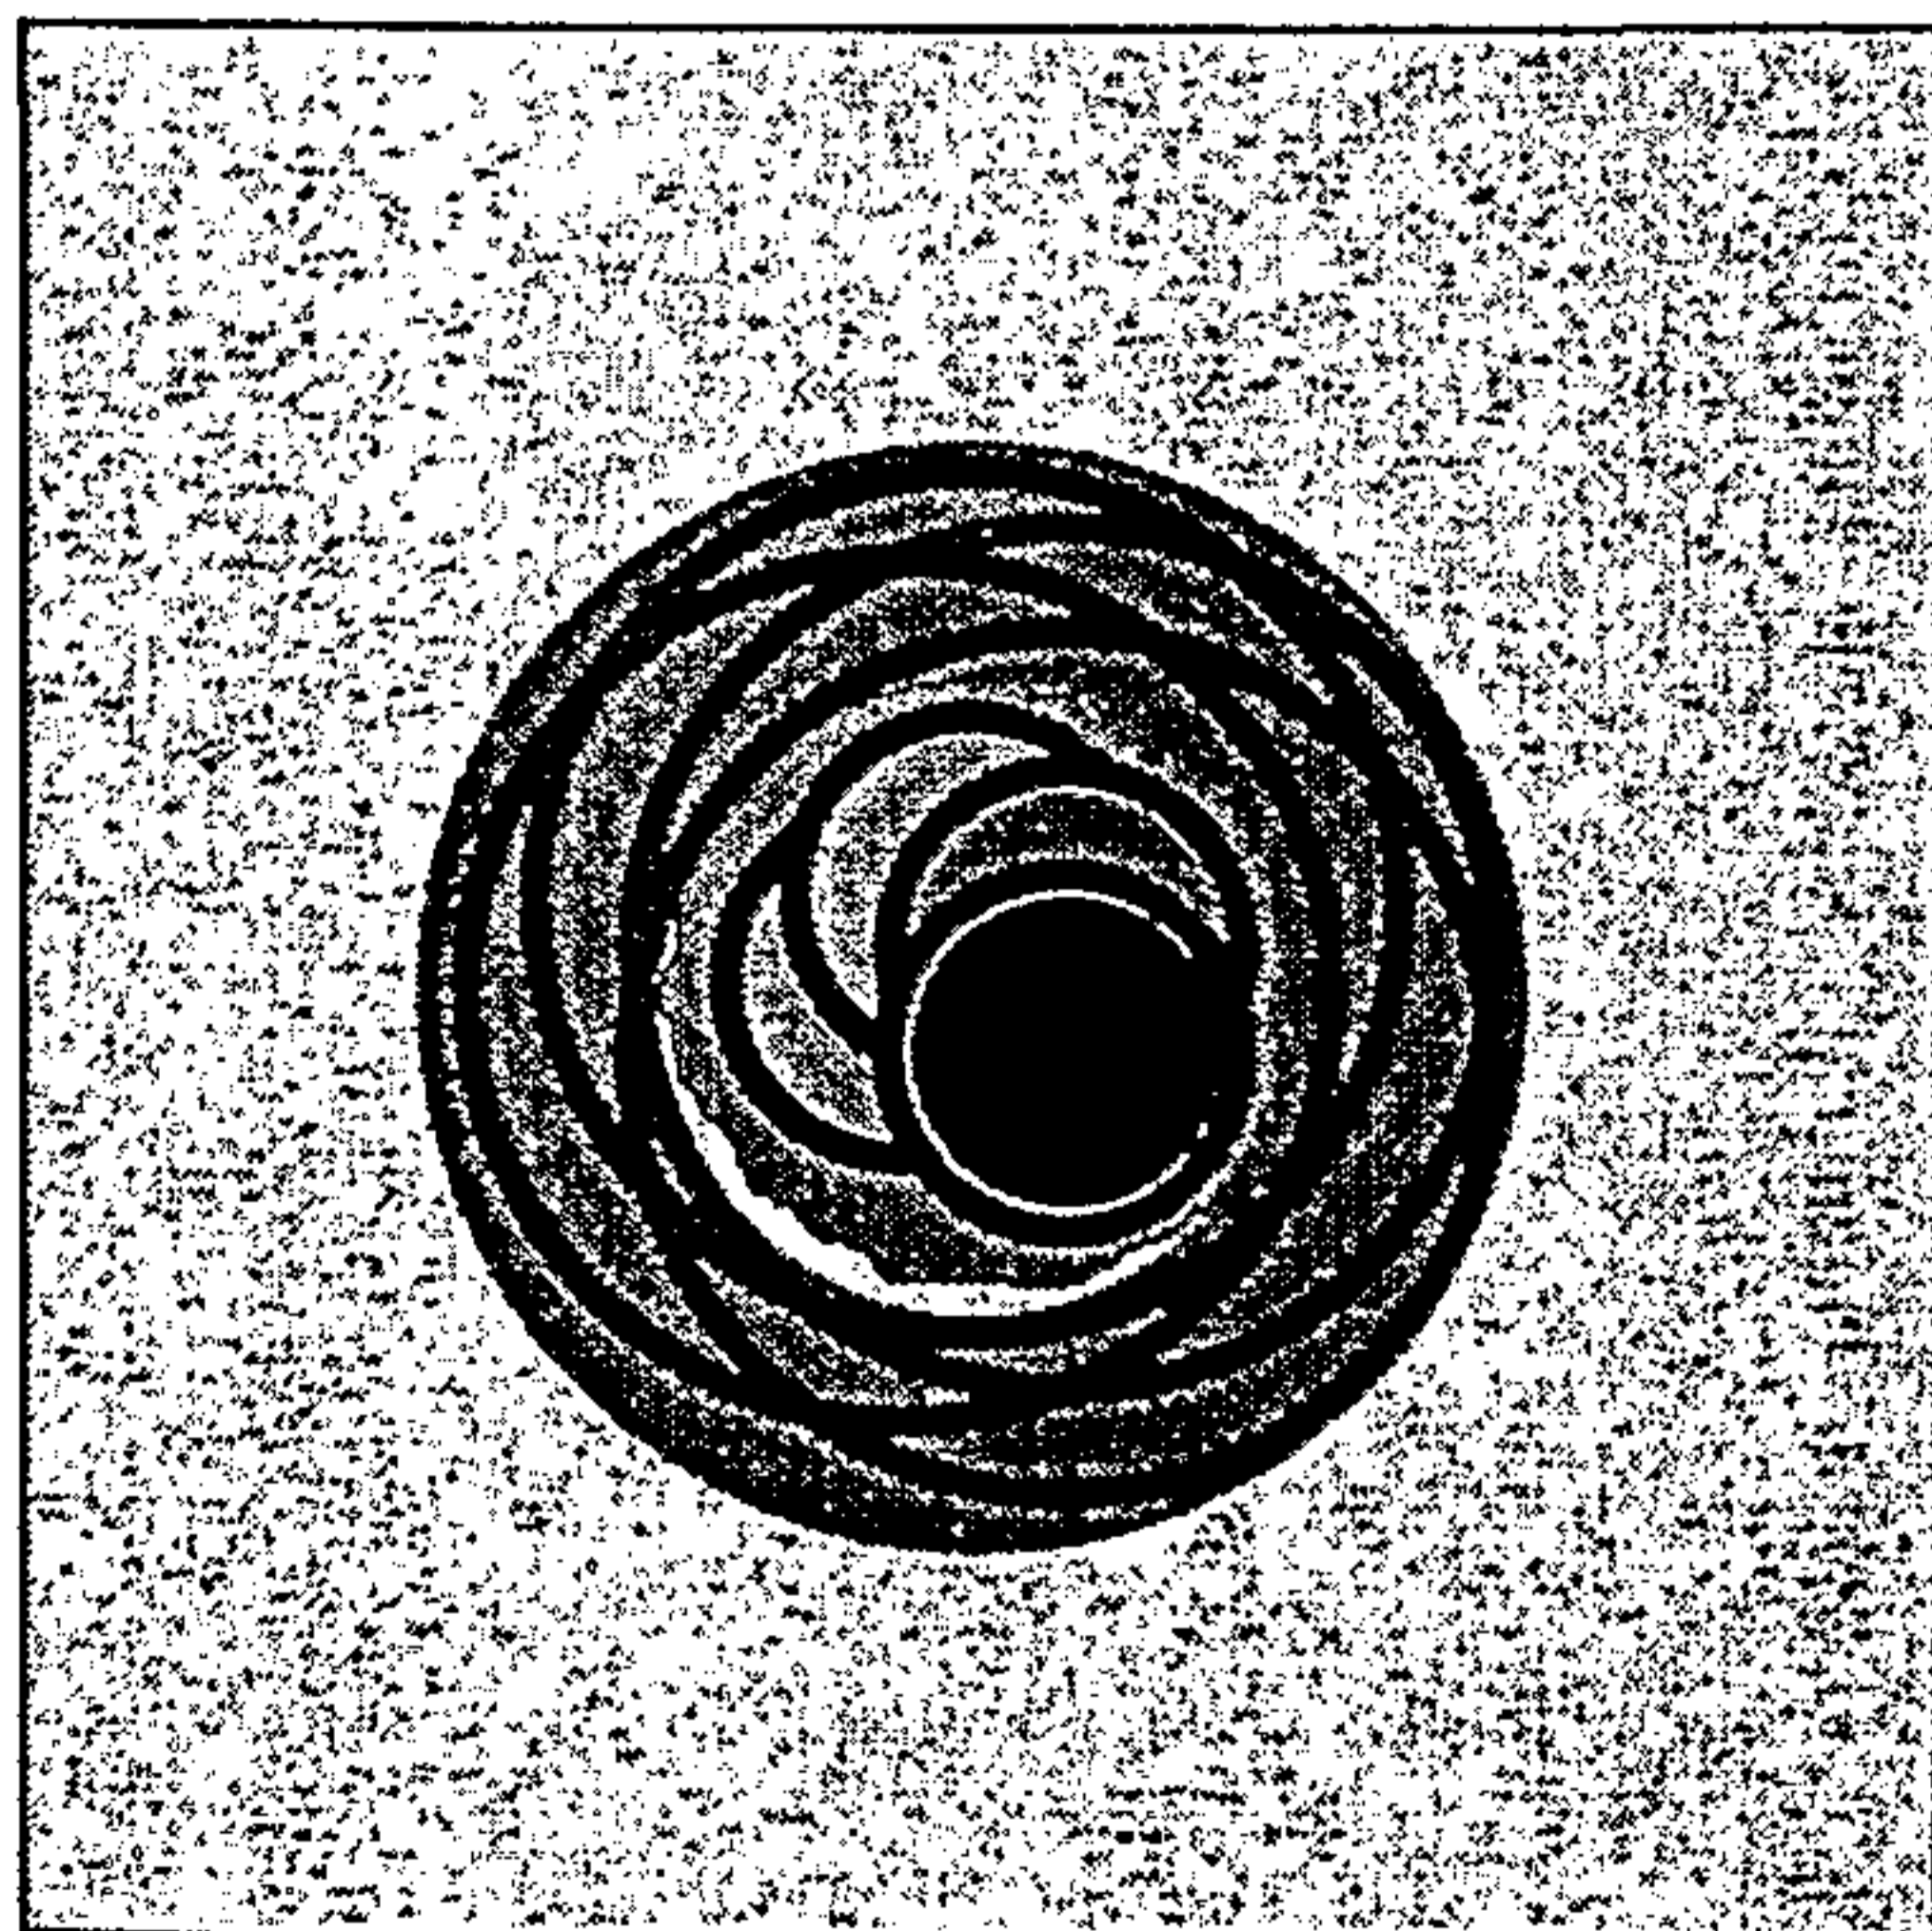


FIG. 4


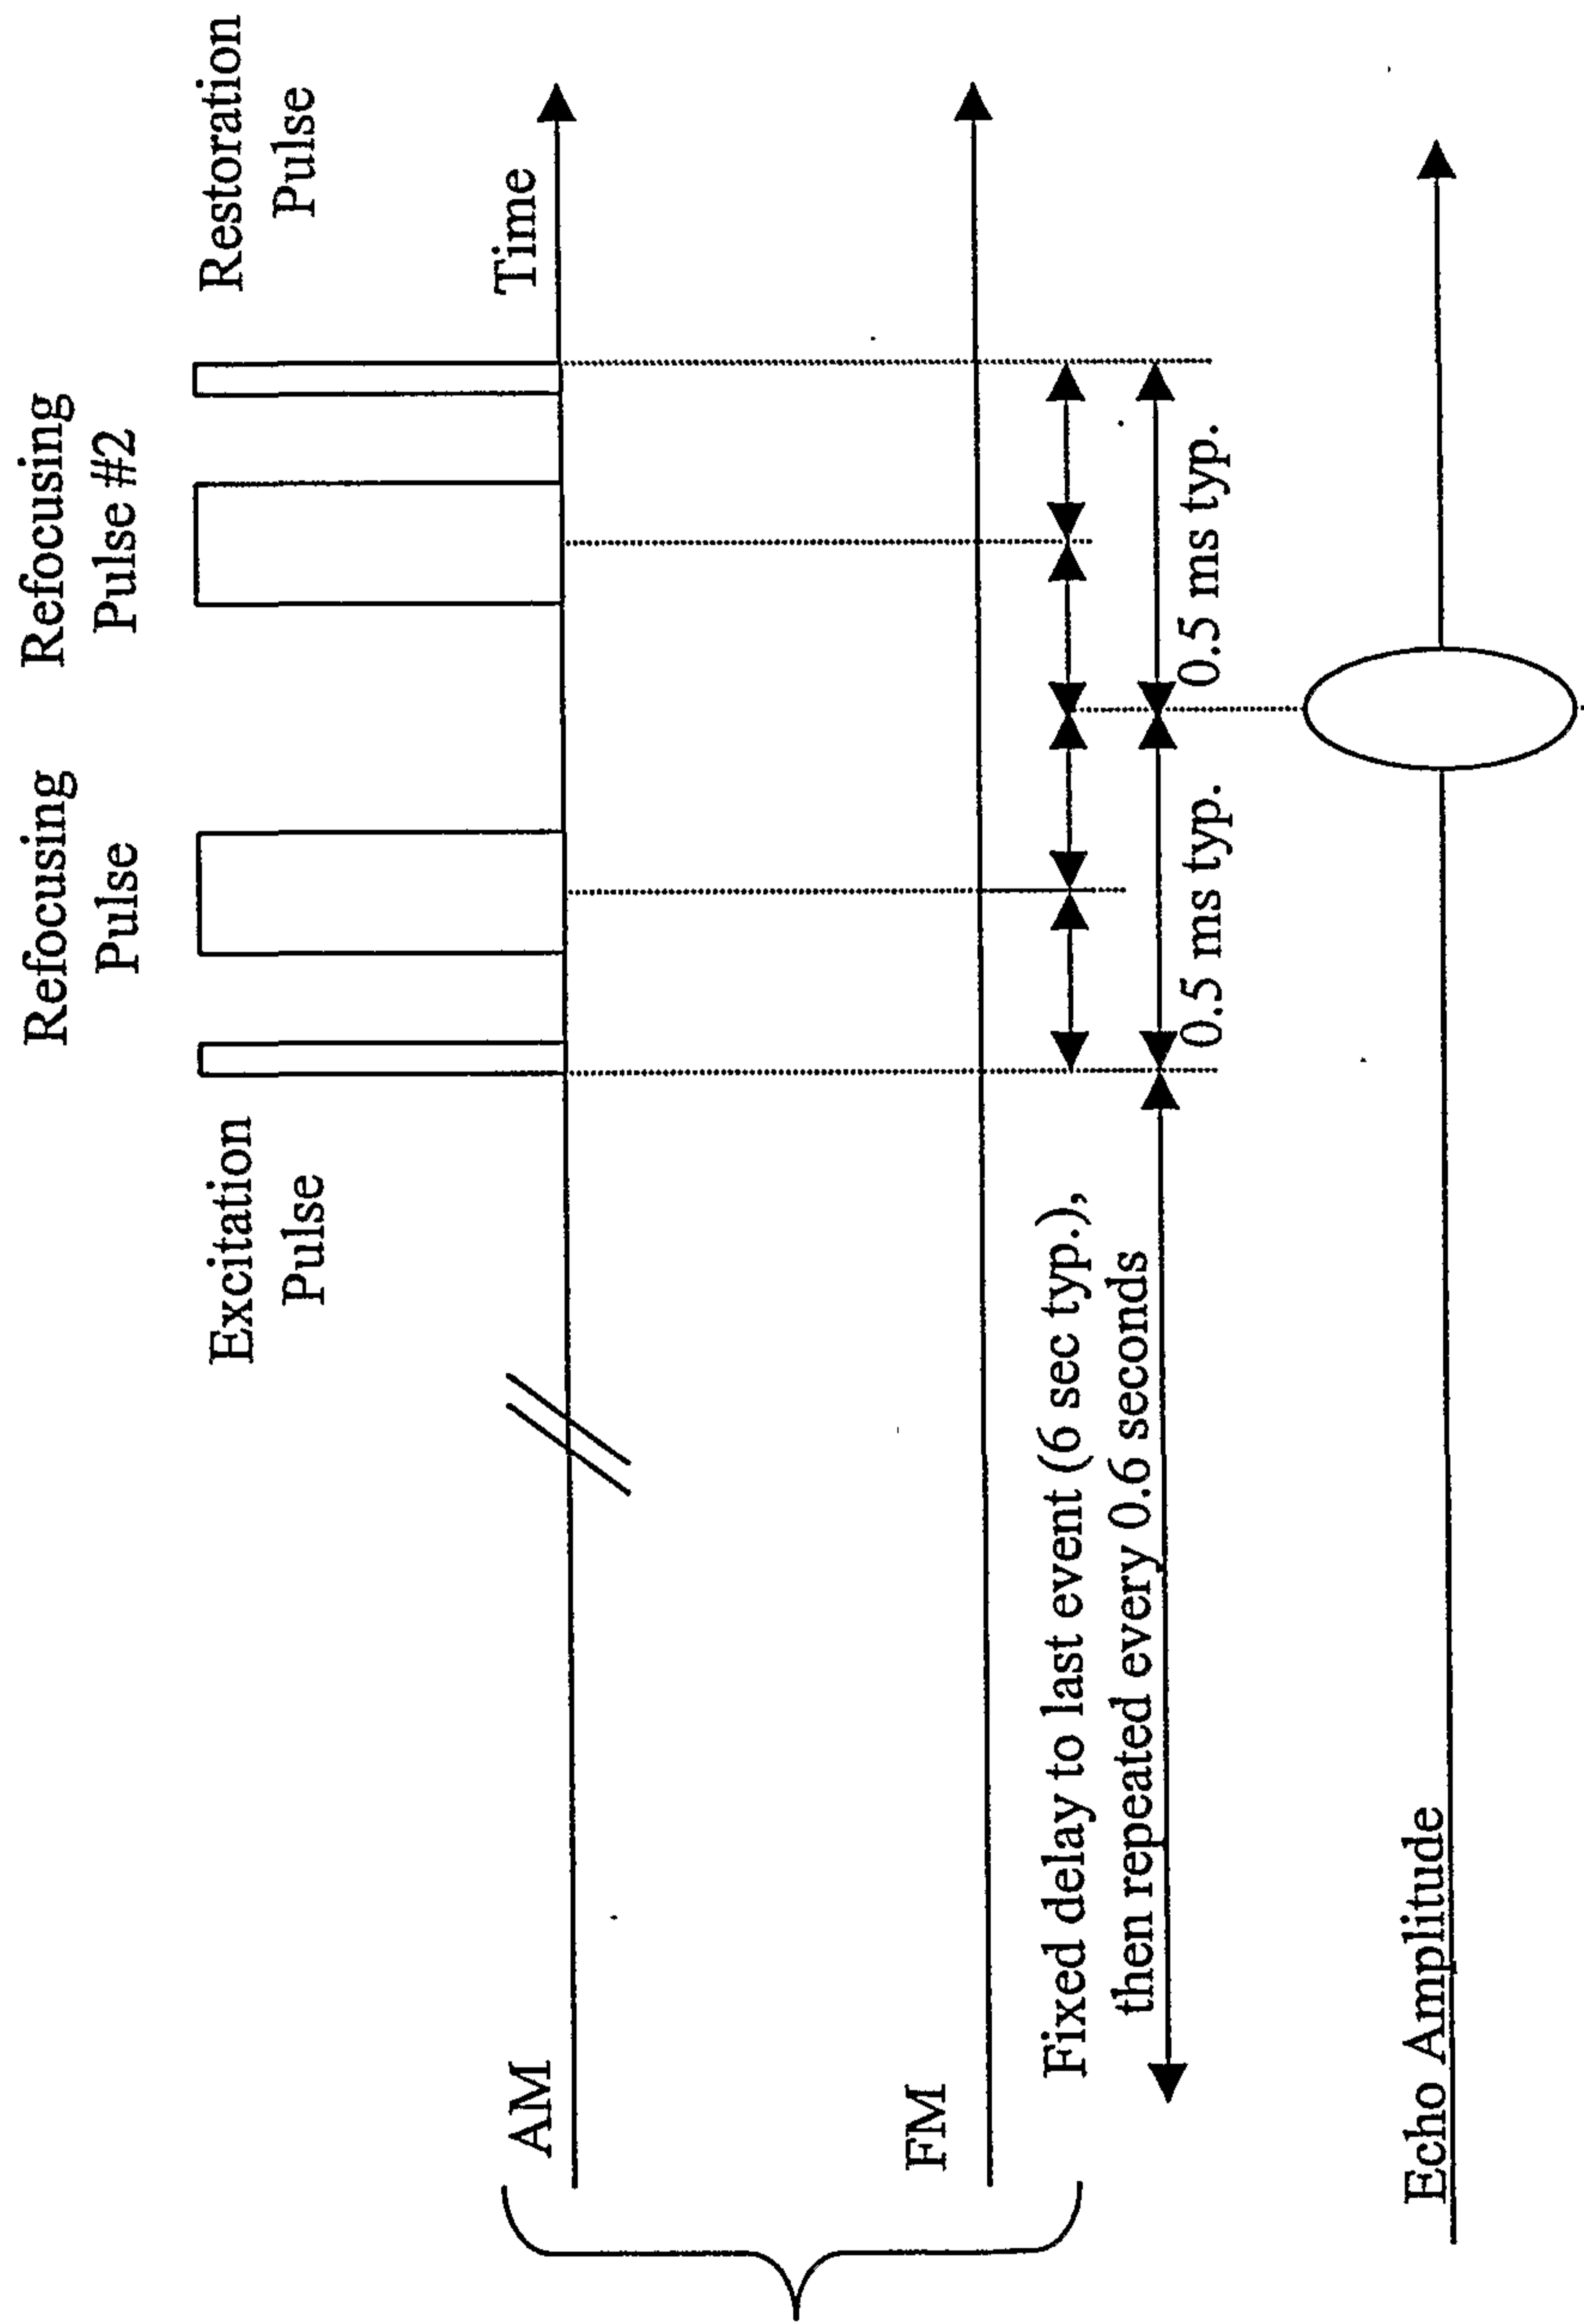


FIG. 6

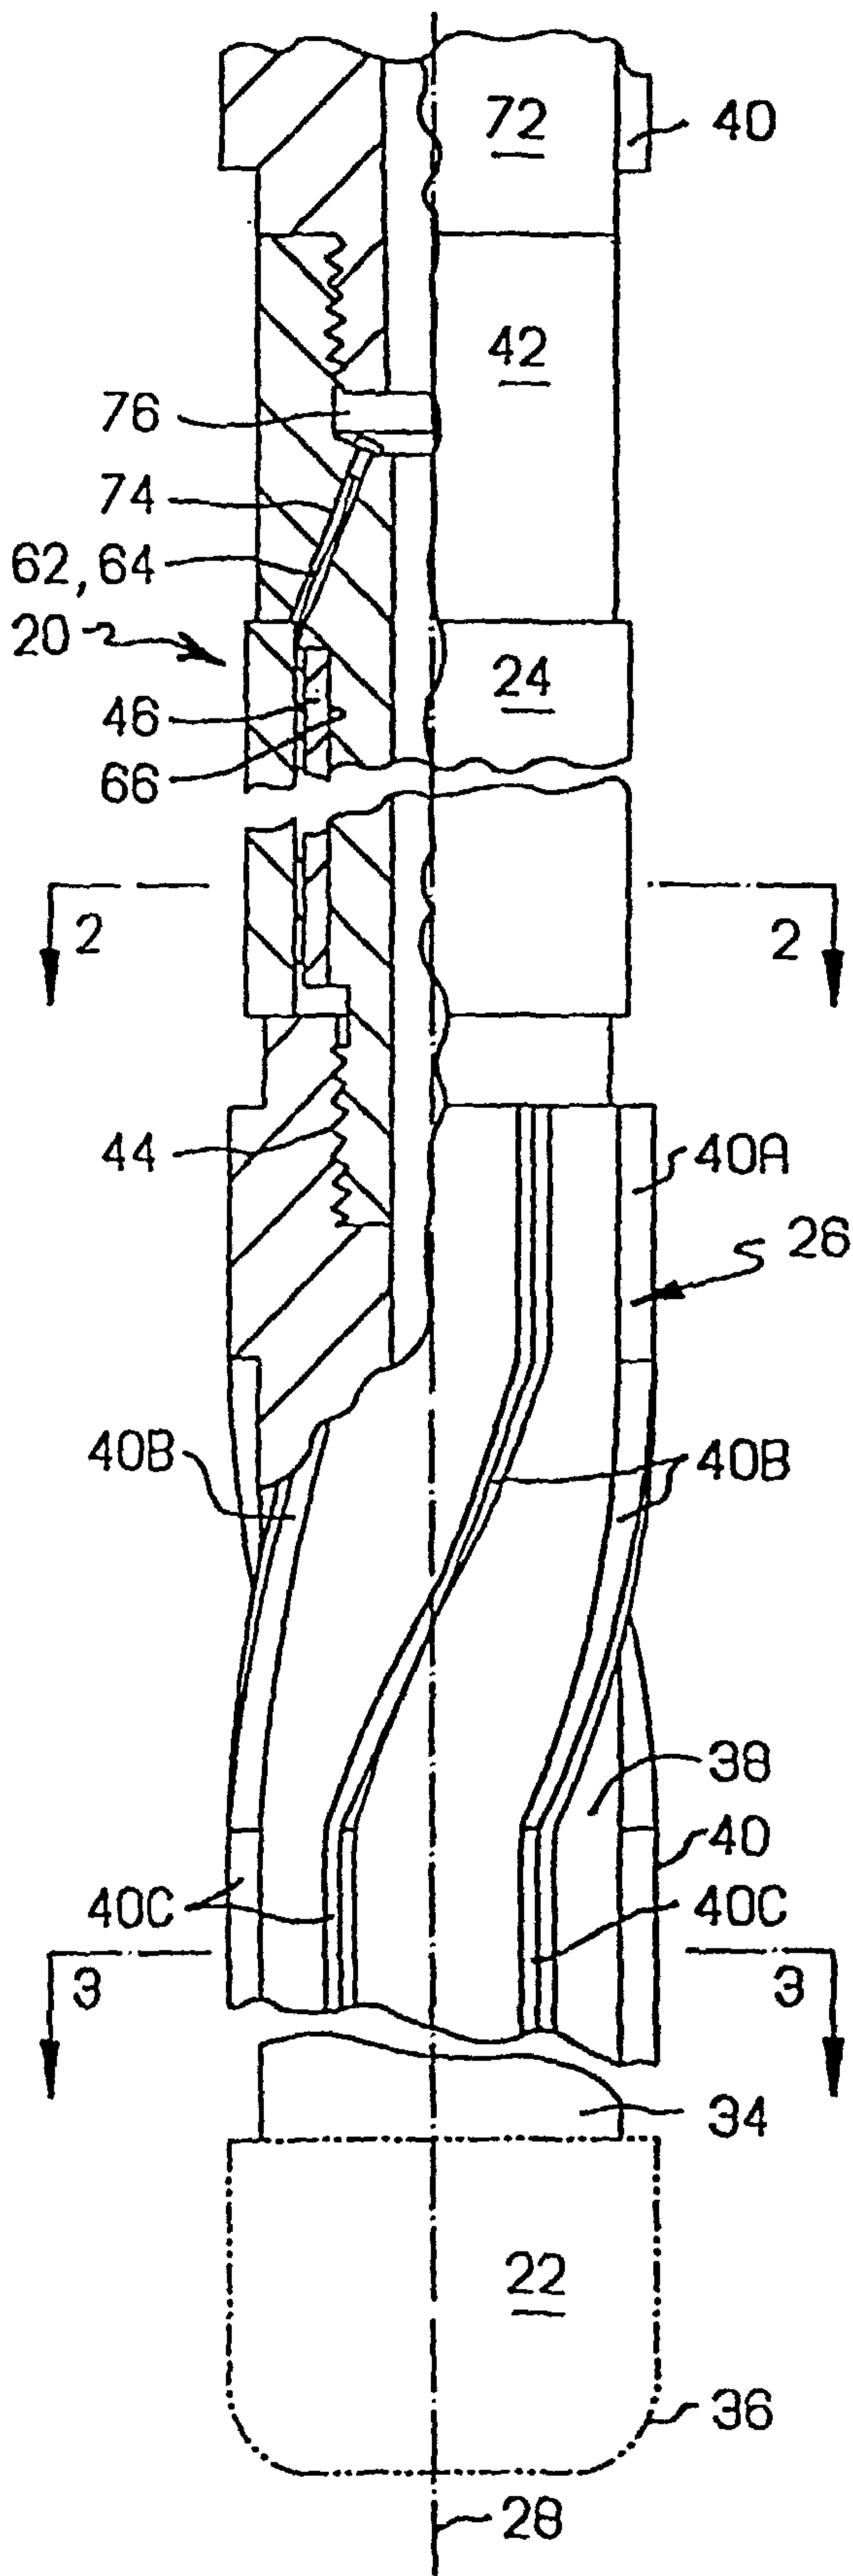

A